RIBA

Chartered Practice

Jade3 Architecture

Architects, Urban Masterplanners, Interiors, Website and Graphic Designers

jade3 ARCHITECTURE



External lighting information as installed

Michael CHOW, BA Arch, Dip.Arch, RIBA, ARB

Managing and Concept Director, Chartered Architect, Urban Masterplanner

www.jade3architecture.co.uk

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY, Cellphone 07535 740097

Updated August MMXXII


1. **A** - Follow Instruction Sheet to ensure safe and reliable operation. Retain for future reference.
2. Products should be installed by a qualified Electrician in accordance with International Wiring Regulations.
   If Terminal block not included. Installation must be performed by a qualified person.
3. **B** - Switch off mains supply before installation. Isolate from mains supply before any maintenance.
4. Concord/Lumiance/Sylvania accepts no responsibility for modified products.
5. Concord/Lumiance/Sylvania Adaptors, Connectors and Track luminaires must only be used with the Track system for which they have been designed.
6. If Dimmer is installed it must be specifically rated as suitable and compatible with the equipment used.
7. Touching a reflective surface must be avoided - always use the gloves provided.
8. Do not handle lamps with bare fingers.
9. Check that the rating on the product label conforms to the mains supply.
10. **C** - For indoor use only.
11. **D** - Indicates the safest minimum distance of lamp from a flammable surface.
12. **E** - Class 1 - This product should be Earthed.
13. **F** - Class 2 - This product does not require Earthing.
14. **G** - Class 3 - SELV Luminaires to be used with Double Insulated, Extra Low Voltage, Safety Isolating Transformers or LED drivers.
15. Do not interconnect Class 3 products with Class 1 or Class 2.
16. Due to the high starting voltage required to ignite lamp, MICC cable must not be used for remote 'box to luminaire' connections. For other applications refer to the manufacturer's MICC guide on uses.
17. To optimise lamp and ballast performance, it is recommended that the luminaire ballast is tapped at the nominal voltage that is within 5 volts of the supply voltage.
18. Metal enclosed, Class 2 and Class 3 products must not be mounted in contact with or close to Earthed metalwork.
19. **H** - Luminaires not suitable for direct mounting on/in normally flammable surfaces.
20. Unless otherwise marked, products are IP20 (ordinary). Do not operate in damp or corrosive situations. If the luminaire is to be exposed to dust or moisture the appropriate IP(XX) rated luminaire should be used.


luminaire should be used.

21. Lamps reach maximum temperature rapidly. Take care when adjusting, re-lamping or cleaning.
22. Use only the correct replacement lamp as indicated on the product label.
23. Discharge lamps - Replace failed lamps promptly to avoid control gear damage.
24. **I** - Class II product earth wire continuity terminal
25. **J** - Replace any cracked protective shield.
26. **K** - Emergency Luminaires - Do not switch off UN-switched mains supply after installation. If interruption is unavoidable, the batteries must be disconnected or damage to the batteries or the lamp may occur. Testing - Switch on the mains supply and check that the charge indicator (LED) is ON. Leave the luminaire on continuous charge for 24 hours. Simulate mains failure and check that the lamp operates for 3 hours. If full duration of 3 hours is NOT achieved, repeat the charge/discharge cycle as battery packs may have discharged in stock and will require conditioning.
27. **L** - Luminaires not suitable for covering with thermally insulating material.
28. Luminaire should be cleaned by using a soft damp soapy cloth. Do not use solvents.
29. **M** - This electrical product MUST be recycled in accordance with WEEE Directive.
30. **N** - Dimmable.
    Dimming Compatibility: It is the responsibility of the Buyer (or its appointed specifier, or qualified electrical installer) to ensure compatibility between Seller's Goods being installed and the dimming switch (or dimming system) intended to control the Goods. Under no circumstances shall the Seller be held responsible for such incompatibility issues.
31. **O** - The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
32. **P** - Flourescent lamps to be dimmed only after 100 hours continuous burning.
33. **Q** - Risk of Electric Shock.
34. **R** - The Light Source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
35. Always maintain supplementary insulation between LV supply and control conductors.

External lighting information on installed

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY, Cellphone 07535 740097

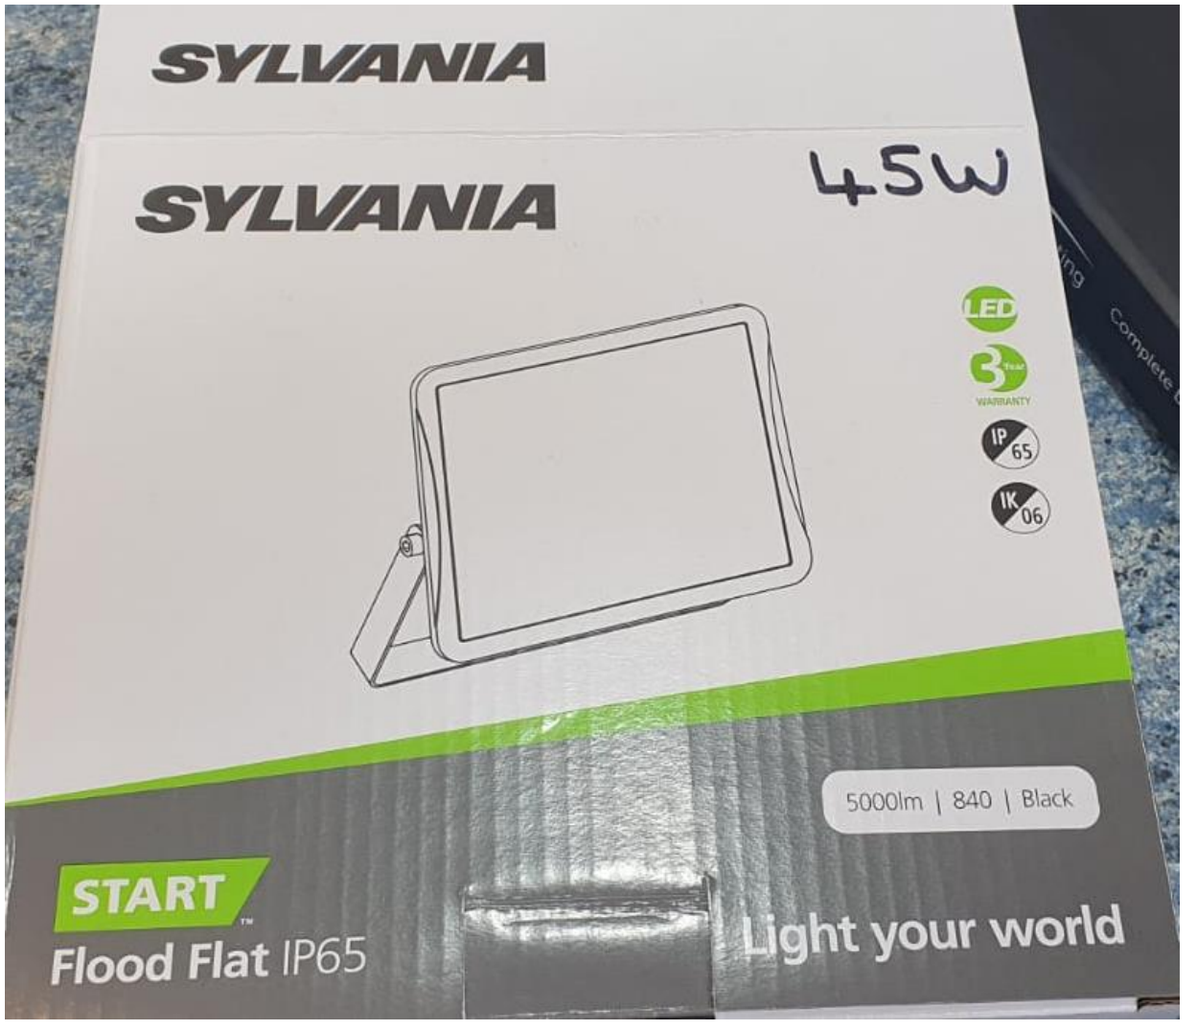

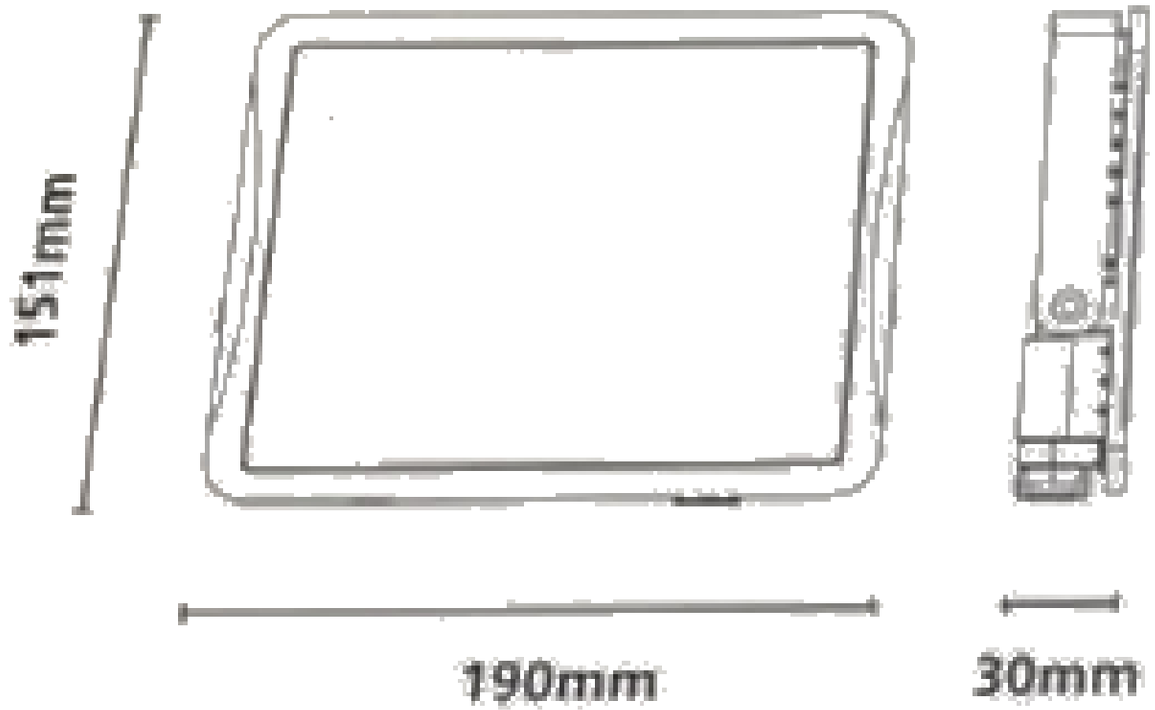

External lighting information as installed


Sylvania 45Watts flood light

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY, Cellphone 07535 740097



External lighting information as installed on the side façade and tilted to illuminate the play area

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY, Cellphone 07535 740097

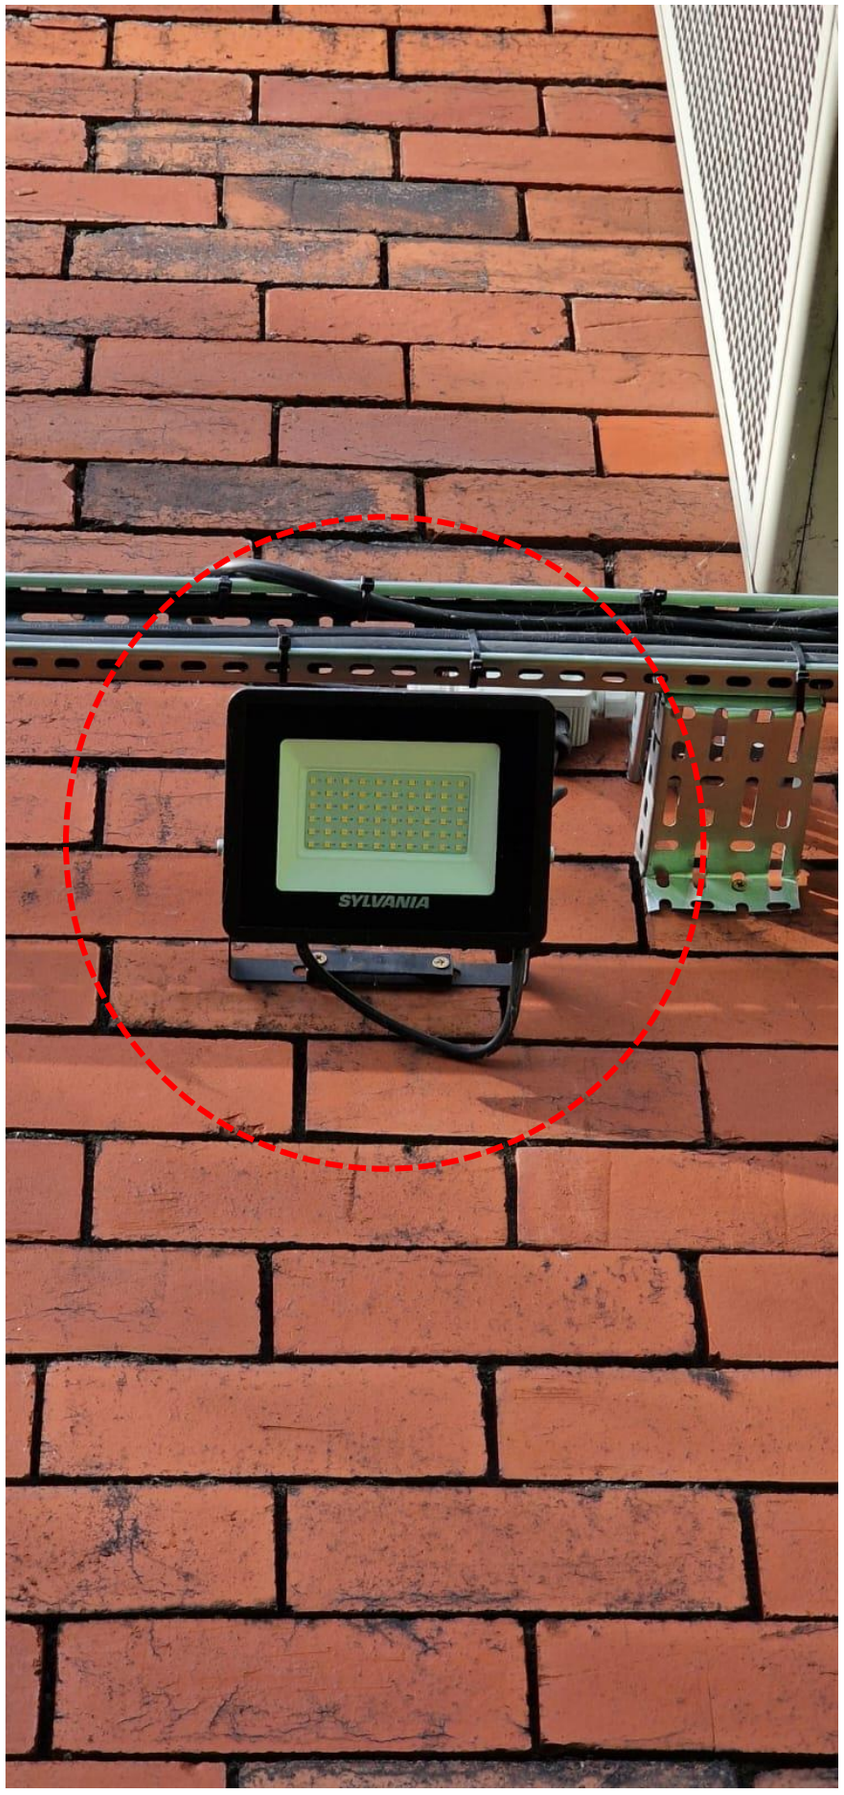



External lighting information as installed

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY, Cellphone 07535 740097

End User Licence Agreement.

3D images, draft design concepts and drawings for the Playworld developments with design are released under a general Rights Managed License. Not Royalty free.

Jade3 Architecture retain the copyrights to all 3D renderings and design concepts produced, but grant Playworld and their investors, site planning, PR, Marketing and sales of this Playworld developments .

Any changes to the 3D renderings or design concepts outside of Jade3 office, any resale for profit, any use by another party not referred to here unless appointed agents carrying out business on behalf of the licencee, any use not stated here or any use relating to other developments for any purpose whatsoever is prohibited without Jade3 written permission and will be subject to an agreed fee.

The copyright notice on the 3D imageries and design concepts should not be removed and any web use or print instance should state the accreditation: "3D Visuals or design concepts copyright www.jade3architecture.co.uk"

www.jade3architecture.co.uk

Misrepresentation Act
All rights reserved. No part of this brochure maybe reproduced, stored in a retrieval system, or transmitted, in any form or by means, electronic, mechanical, photocopy, recording or otherwise without prior written permission of Jade3. This brochure and the descriptions and the measurements contained herein whether written or verbal do not form part of any contract and whilst every effort has been made to ensure accuracy, this cannot be guaranteed. Whilst every precaution has been taken in the preparation of this brochure, Jade3 accept no responsibility for herein and the decisions based on such use. No warranties are made, merchantability, or fitness for a particular purpose. Jade3 shall not be liable for direct, indirect, incidental or consequential damages arising out of the use or inability to use the contents of this brochure.

Brochure produced by Jade3 Architecture Copyright August MMXXII C

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY, Cellphone 07535 740097

RIBA Chartered Practice

Jade3 Architecture Ltd

Architects, Urban Masterplanners, Interiors, Website and Graphic Designers