




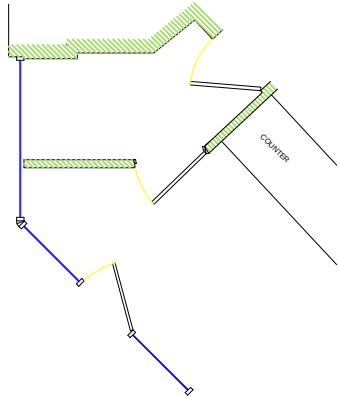


EXISTING (PART) PLAN

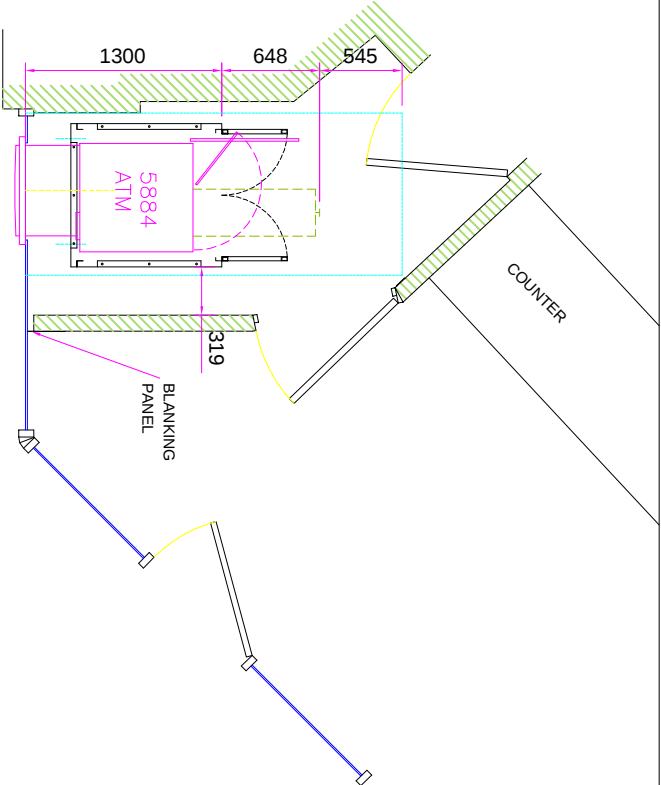


PROPOSED (PART) PLAN

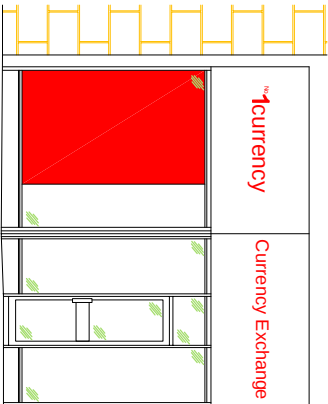


EXISTING ELEVATION

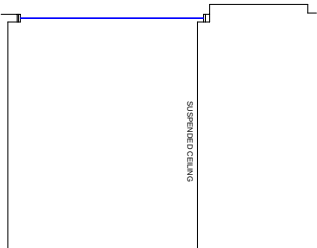

EXISTING SECTION VIEW A-A

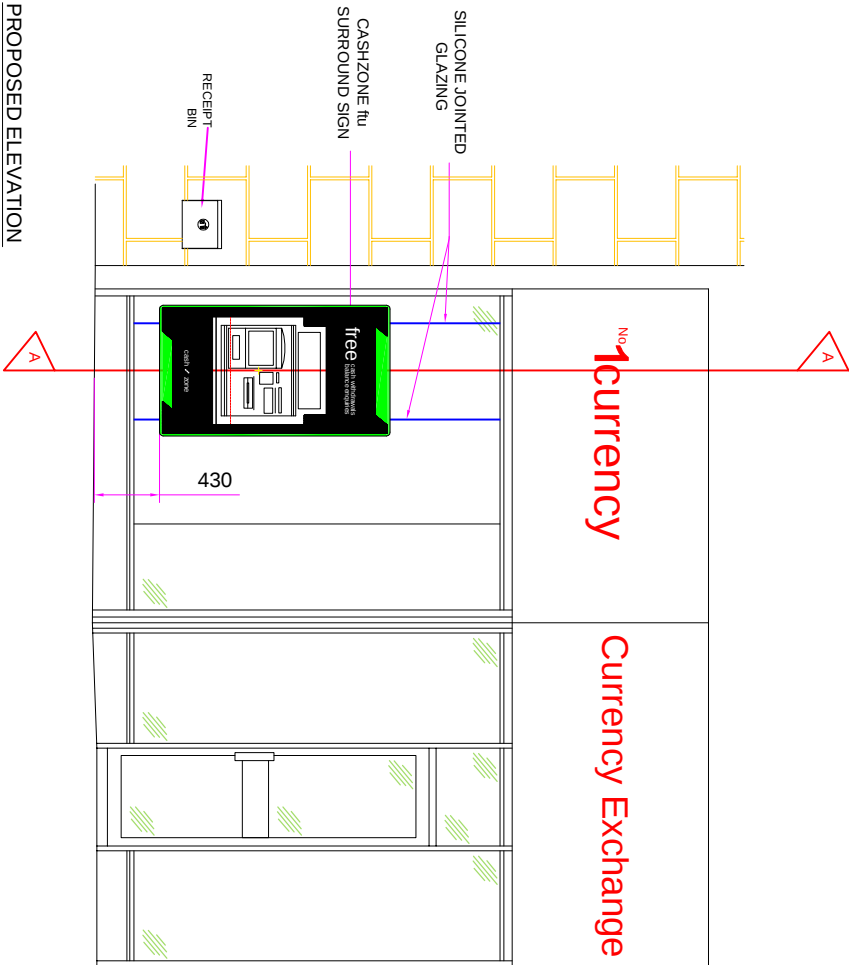

PROPOSED ELEVATION

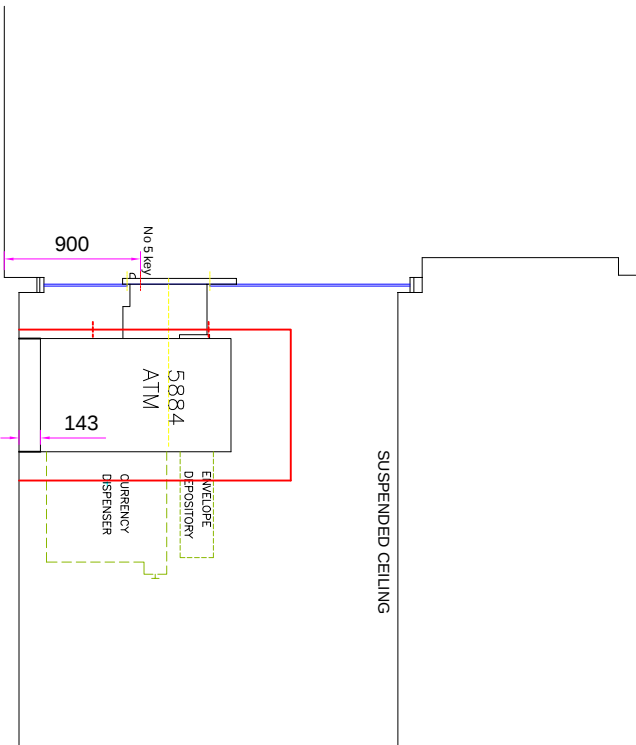

SECTION VIEW A-A

DO NOT SCALE EXCEPT FOR PLANNING AND BUILDING REGULATION PURPOSES

GENERAL NOTES

LIGHTING :-
ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES. GLARE FROM LIGHTING TO BE AVOIDED.
SIGNAGE :-
ALL SIGNAGE TO CONFORM TO BS 8300:2001 SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS & INFORMATION AND 9.2.3 VISUAL SIGNS.
ALL NEW GLAZING CONFORMS TO BS 6206
ALL ELECTRICAL WORK CONFORMS TO BS 7671.

SITE NOTES

FLOOR CONSTRUCTION:
CARPET ON TIMBER FLOORING
REMOVE EXISTING GLAZING PANEL.
INSTALL : NEW SILICONE JOINTED GLAZING PANELS WITH RED DIBOND PANEL BEHIND, FLOOR SUPPORTS, SECURITY ENCLOSURE, ATM, PLINTH, ELECTRICS, RECEIPT BIN AND ILLUMINATED SIGNAGE.

NOTE:
DS & INSTALL WORKS MUST NOT COMMENCE UNTIL CONFIRMATION IS RECEIVED FROM SITE - THE ACM'S HAVE BEEN REMOVED FROM ATM LOCATION IN THE BASEMENT AND GROUND FLOOR CEILINGS
SITE LOCATED IN PEDESTRIAN AREA - NO VEHICLE ACCESS WORKS MAY NEED TO BE OUT OF HOURS

WORK TO BE CARRIED OUT BY OTHERS

PROVIDE ACCESS INTO THE PREMISES
PROVIDE ASBESTOS REPORT , CONFIRMING ACM'S HAVE BEEN REMOVED/REPLACED REMOVE/RELOCATE MISCELLANEOUS SUNDRY ITEMS

SITE ADDRESS No 1 CURRENCY 1 HIGH STREET, HUDDERSFIELD, HD1 2LE.	TITLE PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR CASHZONE		03		
	DRAWN DG	DATE 12/11/15	SCALE VARIOUS @A3	REVISION 01	
	REF:ENG No.	SHEET			
	E017985				
drawing approval			NAME:-	POSITION:-	APPROVED:-
			DATE:-		SIGNED:-