

# North Bierley WWTW Re-development

## Flood Risk Assessment and Outline Drainage Strategy Study

Curtins Ref: 65646-FRA-SB

Revision: 4

Issue Date: 12 October 2017

Curtins, Rose Wharf,  
78-80 East Street,  
Leeds, LS9 8EE  
Tel: 0113 274 8509  
[www.curtins.com](http://www.curtins.com)

STRUCTURES • TRANSPORT PLANNING • ENVIRONMENTAL • CIVILS & INFRASTRUCTURE • EXPERT ADVICE • SUSTAINABILITY

Birmingham • Bristol • Cardiff • Douglas • Dublin • Edinburgh • Glasgow • Kendal • Leeds • Liverpool • London • Manchester • Nottingham



Rev	Description	Issued by	Checked	Date
00	Draft Issue	SB	NP	12/10/2015
01	Planning Issue	SB	NP	11/12/2015
02	Planning Issue – finalised proposed site layout	SB	NP	18/4/2016
03	Minor additions relating to school car park	SB	NP	12/5/2016
04	Update to reflect	SB	RO	12/10/2017

This report has been prepared for the sole benefit, use, and information for the client. The liability of Curtins Consulting Limited with respect to the information contained in the report will not extend to any third party.

Author	Signature	Date
<b>Stuart Baker</b> Associate		12/10/2017

Reviewed	Signature	Date
<b>Richard Osbond</b> Technical Director		12/10/2017

## Table of contents

1.0	Project Background .....	1
2.0	Scope of Flood Risk and Drainage Strategy Study .....	1
3.0	Site Location, Current Use and Development Proposals.....	2
4.0	Flood Risk.....	5
5.0	Surface Water Drainage Impact Assessment .....	19
6.0	Conclusion.....	27
	Appendix.....	29

## Appendices

### Appendix A

Topographical/Drainage Survey

Yorkshire Water Sewer Plans

### Appendix B

Environment Agency Product 4 Flood Mapping

Site Masterplan with Environment Agency Flood Zone Mapping Overlaid - 065636-FRA-101

### Appendix C

Site Specific Flood Modelling Reports (by FRC)

Site Masterplan with Modelled Flood Outlines Overlaid - 065636-FRA-105

### Appendix D

Drainage Area Catchment Plan – 065636-FRA-100

Outline Drainage Strategy Drawings - 065636-FRA-102

065636-FRA-103

065636-FRA-104

---

## 1.0 Project Background

- 1.0.1 Curtins has been appointed by Keyland Developments Ltd to prepare a site specific Flood Risk Assessment and Outline drainage Strategy Study for the proposed redevelopment of the former North Bierley Waste Water Treatment Works.
- 1.0.2 This new commercial development will be constructed on land occupied by the former Yorkshire Water sewage treatment facility.
- 1.0.3 The outcome of the study will be used to support an outline planning application in order to demonstrate the current flood risk status and to ascertain that development of the site area will not increase flood risk either to the site itself or others within the local drainage catchment.

## 2.0 Scope of Flood Risk and Drainage Strategy Study

- 2.0.1 The main aim of this study is to carry out desktop research to establish the flood and drainage constraints of the proposed development site area. The current development proposal is for the construction of commercial properties with associated access roads and landscaping. A new car park will also be provided close to the existing site entrance for the nearby school.
- 2.0.2 On this basis, the study will consider:-
- Primary flood risk from tidal and river sources
  - Surface water flood risk
  - Other secondary flood risks
  - Surface Water disposal hierarchy
  - Outline surface water drainage and outfall requirements
  - Outline foul water drainage and discharge requirements
  - Mitigation measures required to ensure the site is flood safe and does not increase flood risk to others
- 2.0.3 In order to establish the flood risk and outline drainage strategy requirements Curtins have assessed information available from the following Authorities/Bodies:-
- Lead Local Flood Authority (LLFA) – Kirklees M.D.C (WWTW site area)
  - Lead Local Flood Authority (LLFA) – City of Bradford M.D.C. (School car park)
  - Yorkshire Water (STW) – via the pre-development enquiry process
  - The Environment Agency (EA)
- 2.0.4 In order to carry out the assessment the following data will be utilised:-
- Environment Agency online flood mapping
  - Environment Agency detailed flood mapping (no flood levels available)
  - Site specific hydrological and hydraulic modelling of the Hunsworth Beck

- Yorkshire Water pre-development enquiry response and sewer mapping
- Site topographical, gpr and utility survey drawings
- Site geo-environmental Phase 1 and Phase 2 studies

### 3.0 Site Location, Current Use and Development Proposals

#### 3.1 Site Location

3.1.1 The proposed application area is located at the intersection of the M62 and M606 motorways (Junction 26), approximately 5.5 kilometres south of Bradford city centre in a local village area known as Oakenshaw. The site is accessed from Cliff Hollins Lane to the north via Oakenshaw village

3.1.2 The following OS based mapping in figure 1 shows the approximated location of the application area.

**Figure 1. Ordnance Survey Location Plan**



Approximate proposed locations shown outlined **RED**.

- 3.1.3 The northern boundary of the application area is formed by Cliff Hollins Lane and the existing site access road.
- 3.1.4 The eastern boundary of the application area is generally formed by the watercourse known as the Hunsworth Beck, although some of the application area does cross to the eastern banks (for precise application outlines refer to Architects redline plan).
- 3.1.5 The southern boundary of the application area is formed by the landscaped embankments of the M62 Motorway. The southern boundary has been curtailed at this point to allow for future improvement works to the M62/M606 junction.

3.1.6 The western boundary of the application area is formed by the landscaped embankments of the M606 motorway.


### 3.2 Current Use

3.2.1 The former waste water treatment works (WWTW) facility upon the site has been decommissioned for some time, with a new pumping station and transfer main in place to convey sewage onwards to a treatment facility south of the M62 motorway.

3.2.2 Remaining areas of the application area are undeveloped greenfield land some of which is currently farmed.

3.2.3 A GoogleEarth aerial photograph image is shown below in figure 2 showing the approximate area of land being studied (outlined red). The existing site access road from Cliff Hollins Lane can be seen as on the image, as well as the remaining filter beds and areas where demolition has taken place. The new transfer pumping station is located to the north of these redundant filter beds, and the large diameter transfer main runs along the eastern boundary adjacent to the Hunsworth Beck

**Figure 2. GoogleEarth Aerial Photograph**

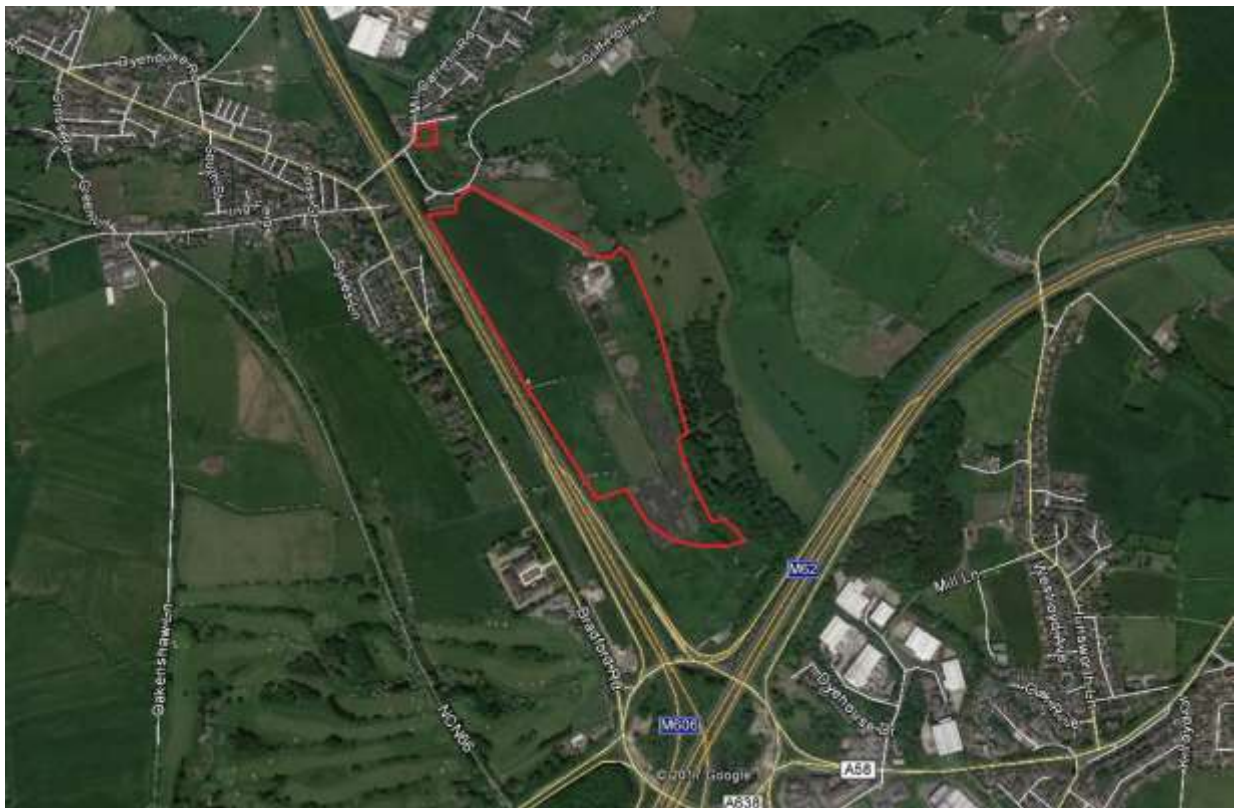

Approximate proposed application area shown outlined **RED**

3.2.4 The WWTW site has an overall area of approximately 18 Hectares. The area of the proposed school car parking area to the north of the site access is approximately 0.12 Hectares.

### **3.3 Development Proposals**

- 3.3.1 Development proposals for the WWTW site consist of commercial development of warehouse type industrial sheds.
- 3.3.2 The existing sewage transfer station and pipework will remain in place but all other remaining structures such as buildings and filter beds associated with the former WWTW will be demolished and removed to allow construction of the new development.
- 3.3.3 A new access road will be formed into the site off Cliff Hollins Lane to service the new commercial development areas and provide access to the remaining Yorkshire Water assets.
- 3.3.4 A new car park will be provided on land to the north for the adjacent school.
- 3.3.5 New foul and surface water drainage facilities will be provided to service the development. Areas of the new landscaping within the development will be needed to provide SuDS features for the new surface water drainage system.
- 3.3.6 The development proposals are shown upon the architect's plans forming part of the planning submission documents as well as the outline drainage strategy drawing contained within the Appendix of this report.
- 3.3.7 On the basis of the proposed development and overall site area, the following sections of this report consider both flood risk and drainage strategy in compliance with the NPPF requirements in order to support a planning application.

---

## 4.0 Flood Risk

### 4.1 Flood Risk - National Planning Policy Framework (NPPF)

4.1.1 In March 2012 the Department of Communities and Local Government superseded PPS 25 with the NPPF. A technical guidance report is provided covering flood risk and minerals policy. The NPPF has been revised as of April 2015 to promote the use of SuDS drainage within schemes.

4.1.2 The NPPF sets out inappropriate development in areas at risk of flooding be avoided by directing development away from areas at highest risk, but where development is necessary, making it safe without increasing flood risk elsewhere. For these purposes:-

- areas at risk of flooding' means land within flood zones 2 and 3; or land within flood zone 1 which has critical drainage problems and which has been notified to the local planning authority by the Environment Agency
- 'flood risk' means risk from all sources of flooding – including from rivers and the sea, directly from rainfall on the ground surface and rising ground water, overwhelmed sewers and drainage systems, and from reservoirs, canals and lakes and other artificial sources.

4.1.3 The Sequential and Exception Test - The aim of the Sequential Test is to steer new development to areas with the lowest probability of flooding. The flood zones are the starting point for the sequential approach. These flood zones refer to the probability of sea and river flooding only, ignoring the presence of existing defences.

4.1.4 Strategic Flood Risk Assessments (SFRA) refine information on the probability of flooding, taking sources of flooding and the impacts of climate change into account. These provide the basis for applying the Sequential Test on the basis of the flood zones in table 1. Where table 1 indicates the need to apply the Exception test, the scope of the SFRA will be widened to consider the impact of the flood risk management infrastructure on the frequency, impact, speed of onset, depth and velocity of flooding within flood zones considering a range of flood risk management maintenance scenarios. Where a SFRA is not available, the Sequential Test will be based on the Environment Agency flood zones.

4.1.5 The overall aim should be to steer new development to Flood Zone 1. Where there are no reasonably available sites in Flood Zone 1, local planning authorities allocating land in local plans or determining planning applications for development at any particular location should take into account the flood risk vulnerability of land uses (see table 2) and consider reasonably available sites in Flood Zone 2, applying the Exception Test if required (see table 3). Only where there are no reasonably available sites in Flood Zones 1 and 2 should the suitability of sites in Flood Zone 3 be considered, taking into account the flood risk vulnerability of land uses and applying the Exception test if required.

## Table 1 Flood Zones

(NOTE: these flood zones refer to the probability of river and sea flooding ignoring the presence of defences)

### Zone 1 Low Probability

#### **Definition**

This zone comprises land assessed as having a less than 1 in 1000 annual probability of river or sea flooding (<0.1%)

#### **Appropriate Uses**

All uses of land are appropriate in this zone

### Zone 2 Medium Probability

#### **Definition**

This zone comprises land assessed as having between a 1 in 100 and 1 in 1000 annual probability of river flooding (1% - 0.1%) or between a 1 in 200 and 1 in 1000 annual probability of sea flooding (0.5% - 0.1%) in any year.

#### **Appropriate uses**

Essential infrastructure and the water-compatible, less vulnerable and more vulnerable uses of land as set out in table 2, are appropriate in this zone. The highly vulnerable uses are only appropriate in this zone if the Exception Test is passed.

### Zone 3a High Probability

#### **Definition**

This zone comprises land assessed as having a 1 in 100 or greater annual probability of river flooding (>1%) or a 1 in 200 or greater annual probability of flooding from the sea (>0.5%) in any year

#### **Appropriate uses**

The water compatible and less vulnerable uses of land (table 2) are appropriate in this zone. The highly vulnerable uses should not be permitted in this zone.

The more vulnerable uses and essential infrastructure should only be permitted in this zone if the Exception Test is passed. Essential infrastructure permitted in this zone should be designed and constructed to remain operational and safe for users in times of flood.

### Zone 3b The Functional Flood Plain

#### **Definition**

This zone comprises land where water has to flow or be stored in times of flood.

Local planning authorities should identify in their SFRA areas of functional flood plain and its boundaries accordingly, in agreement with the Environment Agency. The identification of functional flood plain should take account of local circumstances and not be defined solely on rigid probability parameters. But land which would flood with an annual probability of 1 in 20 (5%) or greater in any year, or is designed to flood in an extreme (0.1%) flood should provide a starting point for consideration and discussion to identify functional flood plain.

#### **Appropriate uses**

Only the water-compatible uses and essential infrastructure listed in table 2 that has to be there should be permitted in this zone. It should be designed and constructed to:

- remain operational and safe for users in times of flood
- result in no net loss of flood plain storage
- not impede water flows, and
- not increase flood risk elsewhere

Essential infrastructure in this zone should not pass the Exception Test.

## Table 2 Flood Risk Vulnerability Classification

### Essential Infrastructure

- Essential transport infrastructure (including mass evacuation routes) which has to cross the area at risk.
- Essential utility infrastructure which has to be located in a flood risk area for operational reasons, including electricity generating power stations and grid and primary substations; and water treatment works that need to remain operational in times of flood.
- Wind turbines.

### Highly Vulnerable

- Police stations, Ambulance stations and Fire stations and command centres and telecommunications required during flooding.
- Emergency dispersal points.
- Basement dwellings,
- caravans, mobile homes and park homes intended for permanent residence.
- Installations requiring hazardous substance consent.

### More Vulnerable

- Hospitals.
- Residential institutions such as residential care homes, children's homes, social services homes, prisons and hostels.
- Buildings used for: dwelling houses; student halls of residence; drinking establishments; nightclubs; and hotels.
- Non-residential uses for health services, nurseries and educational establishments.
- Landfill and sites used for waste management facilities for hazardous waste
- Sites used for holiday or short-let caravans and camping, subject to a specific warning and evacuation plan.

### Less Vulnerable

- Police, ambulance and fire stations which are *not* required to be operational during flooding.
- Buildings used for: shops; financial, professional and other services; restaurants and cafes; hot food takeaways; offices; **general industry; storage and distribution**; non-residential institutions not included in 'more vulnerable'; and assembly and leisure.
- Land and buildings used for agriculture and forestry.
- Waste treatment (except landfill and hazardous waste facilities).
- Minerals working and processing (except for sand and gravel working).
- Water treatment works which do not need to remain operational during times of flood.
- Sewage treatment works (if adequate measures to control pollution and manage sewage during flooding events are in place).

### Water-Compatible Development

- Flood control infrastructure.
- Water transmission infrastructure and pumping stations.
- Sewage transmission infrastructure and pumping stations.
- Sand and gravel workings.
- Docks, marinas and wharves.
- Navigation facilities.
- MOD defence installations.
- Ship building, repairing and dismantling, dockside fish processing and refrigeration and compatible activities requiring a waterside location.
- Water-based recreation (excluding sleeping accommodation).
- Lifeguard and coastguard stations.
- Amenity open space, nature conservation and biodiversity, outdoor sports and recreation and essential facilities such as changing rooms.
- Essential ancillary sleeping or residential accommodation for staff required by uses in this category, subject to specific warning and evacuation plan.

**Table 3 Flood Risk Vulnerability and Flood Zone ‘Compatibility’**

	Flood Risk Vulnerability classification	Essential Infrastructure	Water compatible	Highly Vulnerable	More Vulnerable	Less Vulnerable
Flood Zone	<b>Zone 1</b>	✓	✓	✓	✓	✓
	<b>Zone 2</b>	✓	✓	Exception Test Required	✓	✓
	<b>Zone 3a</b>	Exception Test Required	✓	x	Exception Test Required	✓
	Zone 3b Functional Floodplain	Exception Test Required	✓	x	x	x


✓ Development **is appropriate**x Development **should not be permitted**

- 4.1.6 A site specific flood risk assessment is carried out by, or on behalf of, a developer to assess the risk to a development site and demonstrate how flood risk from all sources will be managed, and taking climate change into account. There should be iteration between the different levels of flood risk assessment, for example the site specific FRA and the local Strategic Flood Risk Assessment (SFRA).
- 4.1.7 Initial observation of the flood mapping with respect to Table 1 suggest that although most of the application area is located in a low risk Zone 1 area, some areas of the site directly adjacent to the Hunsworth Beck fall within the high risk Zone 3 with an intrusion of Zone 2 medium risk into the site around the area of former circular filtration tanks.
- 4.1.8 From Table 2 it can be assumed that the proposed site is considered as: -
- Less Vulnerable - Buildings used for: shops; financial, professional and other services; restaurants and cafes; hot food takeaways; offices; **general industry; storage and distribution**; non-residential institutions not included in ‘more vulnerable’; and assembly and leisure.
- 4.1.9 With the encroachment of Zone 2 and Zone 3 High Risk areas into the western edges of the proposed site potentially triggering Sequential Test and Exception Test requirements, the need for passing these tests and the evidence required is considered further, after the following detailed flood risk zone assessment.

## 4.2 Flood Risk – Environment Agency Online Flood Data

- 4.2.1 To assess the NPPF flood risk classification for the site area the first step is to inspect the Environment Agency web based flood mapping data.
- 4.2.2 An extract of this mapping to be used for planning purposes is shown in Figure 3 below which identifies risk of flooding from rivers and sea.

**Figure 3. Extract of Environment Agency Flood Map for Planning (Risk of Flooding From River and Sea)**

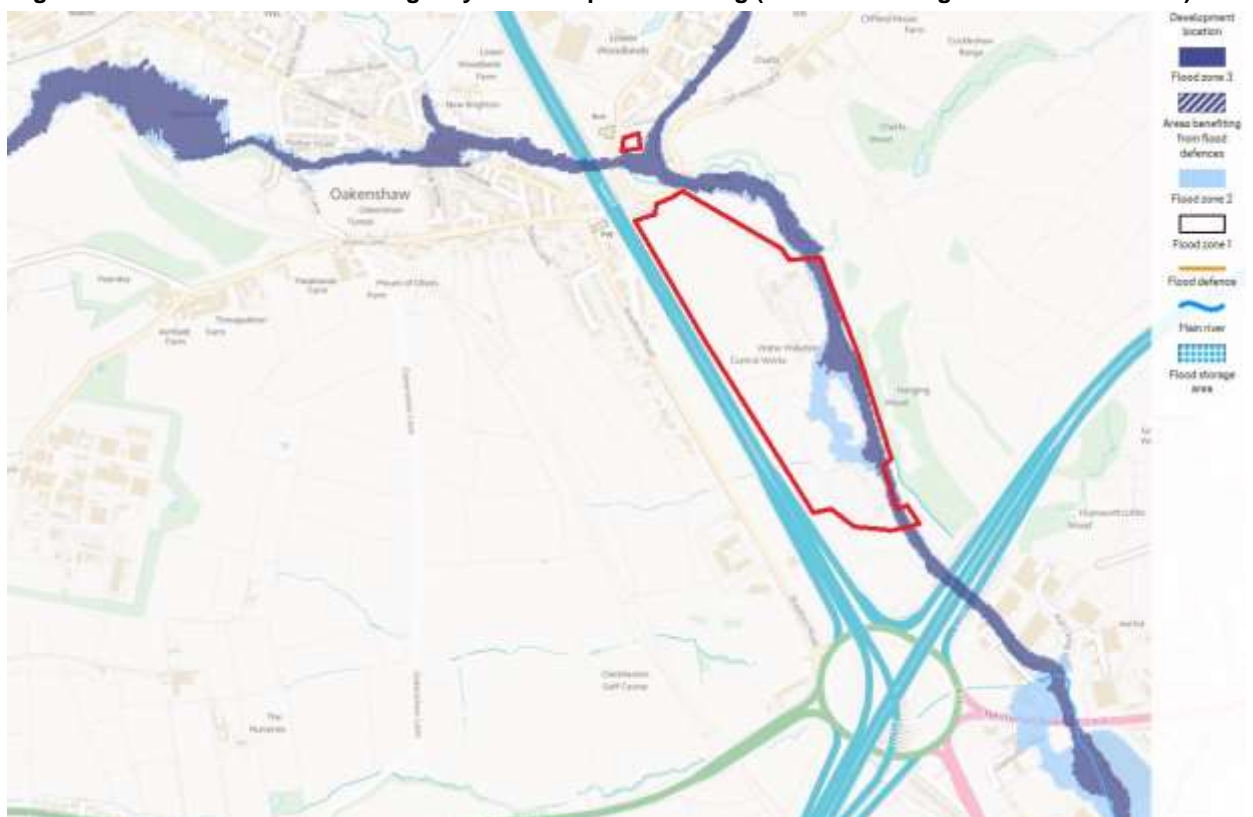

Approximate site extents shown outlined **RED**.

- 4.2.3 It can be seen from this mapping that the application area (shown outlined red) has the Hunsworth Beck either adjacent or within the redline area of the site. The high risk Zone 3 typically follows the route of the watercourse, although an intrusion of Zone 2 occurs around the area of the former settlement tanks. There is also Zone 3 high risk identified around the proposed school car park area at the confluence of High Royds Beck and Low Moor Beck which then forms Hunsworth Beck (shown in more detail on Environment Agency's detailed flood mapping). No risk is identified from the Cockleshaw Beck to the north east, the un-named beck from Oakenshaw and the Sudgen (and Stubs Beck just of the plan) to the south west.
- 4.2.4 On the basis that there are areas of Zone 3 identified within the redline area, the NPPF requires that that Sequential Testing evidence will be provided. Other supporting documents within the planning submission are considered to provide this evidence.

4.2.5 On the assumption that the Sequential Test evidence is satisfactorily demonstrated it will also be necessary to pass the Exception Test.

4.2.6 In order to establish the level of flood risk in more detail, in the first instance Product 4 information and a licence for usage was requested from the Environment Agency. This is considered further below.

### **4.3 Flood Risk – Environment Agency Product 4 Detailed Flood Risk Mapping**

4.3.1 Product 4 flood mapping (and user licence) was obtained from the Environment Agency on the 16<sup>th</sup> of April 2014. An extract of this mapping is contained within the Appendix of this report. It was confirmed by the Environment Agency on issue of the mapping that they had no supporting modelled flood levels.

4.3.2 It can be seen from the detailed mapping that the flood outlines of both Zone 2 and Zone 3 concur with that shown on the current 2017 online maps, with the only difference being the flood outline edges being slightly more defined.

4.3.3 As noted previously, the Zone 3 outline generally follows the channel of the Hunsworth Beck and the incoming Low Moor Beck and High Royds Beck to the north.

4.3.4 At this stage of the assessment it should be noted that it would appear that the mapping does not take into consideration the transfer main structure that has taken place along the western edge of the Hunsworth Beck within the former treatment works site as part of the decommissioning process. This area is defined on the topographical survey contained within the appendix of this report.

4.3.5 Ground profiling for the proposed development units will not be able to encroach into the area of the transfer main and as such the plateauing will have to commence from the security fence around this area. This may well result in most, if not all of the developable areas, being outside of the areas of the high risk Zone 3 flood encroachment.

4.3.6 In order to understand this further an image of the Environment Agency flood mapping has been overlaid onto the site masterplan. An extract is contained within Appendix B of this report. It can be seen that the unit adjacent to the beck may be at risk based on the Environment Agency flood mapping.


4.3.7 This accuracy of the Environment Agency mapping is considered in more detail in Section 4.7.

### **4.4 Flood Risk – Environment Agency Surface Water Flood Risk Mapping**

4.4.1 In January 2014 the Environment Agency published additional flood risk mapping on their website to compliment the Planning Maps (River and Tidal Zoning) with the primary one being surface water flood risk mapping which is generally a conglomeration of risks identified by SFRA modelling and information supplied by the local Sewage Undertaker (Yorkshire Water in this case). This mapping was further updated in 2016 to the current format where 30, 100 and 1000 year probability (high, medium and low risk) can be assessed.

- 4.4.2 An extract of the current 2017 surface water flood risk mapping showing the extent of surface water risk for the combined high (30 year) medium (100 year) and low (1000 year) risk follows in Figure 4)

**Figure 4. Extract of Environment Agency Flood Mapping Risk of Flooding From Surface Water**

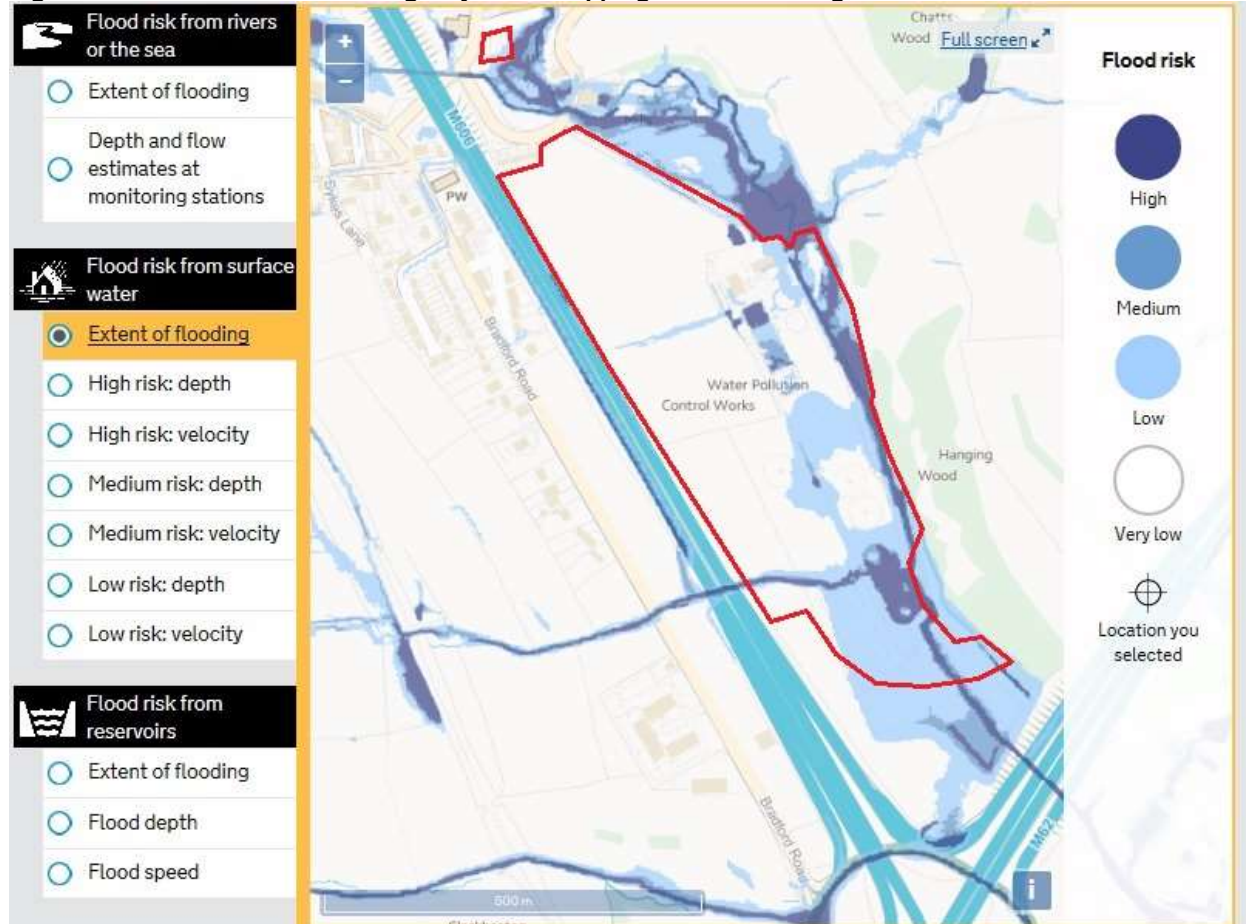

Approximate application area shown outlined **RED**.

- 4.4.3 It can be seen from this mapping that there is potentially more risk associated with surface water flood than there is identified on the 'planning river and tidal flood risk' map. The site area can now be seen to have areas of risk within it associated by the eastern and western Becks:-

Upper tributaries to Hunsworth Beck (Low Moor Beck and High Royds Beck)

Where the Low Moor Beck and High Royds Beck combine to form the Hunsworth Beck, a widespread area of risk is shown to the low lying land to the eastern and western banks of the beck.

Cockleshaw Beck

An area of low risk is identified to the east on the line of the incoming Cockleshaw Beck. There is also an area directly opposite to the west but this is considered to be as a result of the existing road ways within the decommissioned works.

Un-named Beck from Oakenshaw

This watercourse is known to run in culvert below the M606 motorway. After a short section of open channel, the watercourse is further culverted southwards past the linear settlement tanks and then

eastwards through to an outfall into the Hunsworth Beck. This line of risk identified for the watercourse merges into a large areas of risk within the site generally around the southern area of the site.

Sugden and Stubs Becks

Unlike the Planning River and Tidal risk map, the surface water risk map shows potential risk from the Sugden and Stubs Beck. Although the becks are at the southernmost limits of the site and are believed to be culverted below the M62/M606 Junction 26 Roundabout, the mapping would suggest that there is risk that overland flooding will occur around the Junction 26 roundabout which subsequently back flows northwards into the site. Observation of levels on the topographical survey and elevations around the roundabout from GoogleEarth would suggest this may be possible subject to major volumes of flood waters entering the roundabout carriageway. The flood waters are typically looking for the lowest areas of land to flow by gravity towards the Hunsworth Beck.

- 4.4.4 It should also be noted that the motorway roundabout junction is undergoing major improvement works. As the works involve widening of the carriageway it is assumed drainage is improved and thus there being a likely improvement in control of flood routing along the watercourses natural route and not off into adjoining land.
- 4.4.5 Also, as the overall proposed site area has now been curtailed on its southernmost reaches as a result of further planned works with the motorway junction, surface water risk to the site from this area is likely to route to the Hunsworth beck without any impact on the prosed development areas.
- 4.4.6 Methods of mitigating this risk if this risk remains on completion of the highway improvements are considered later in this report.

Continue on next page


#### 4.5 Flood Risk – Environment Agency Risk of Flooding from Reservoirs Mapping

4.5.1 The Environment Agency also provide mapping to show areas potential at risk from reservoir failure. An extract of the their latest (2017) map for reservoir flooding follows.

4.5.2 It can be seen that the areas identified at risk can be seen to follow the general line of the Hunsworth Beck.

4.5.3 Interrogation of earlier mapping (no longer an option on the latest mapping) showed that the risk is related to two reservoirs, located at the northern reaches of the Low Moor Beck. These are the Park Dam and Harold Park reservoirs. Both are under the control of Bradford Council and are thus considered to be maintained to a high standard and therefore present a low risk to the proposed development.

**Figure 5. Extract of Environment Agency Flood Mapping Risk of Flooding From Reservoirs**

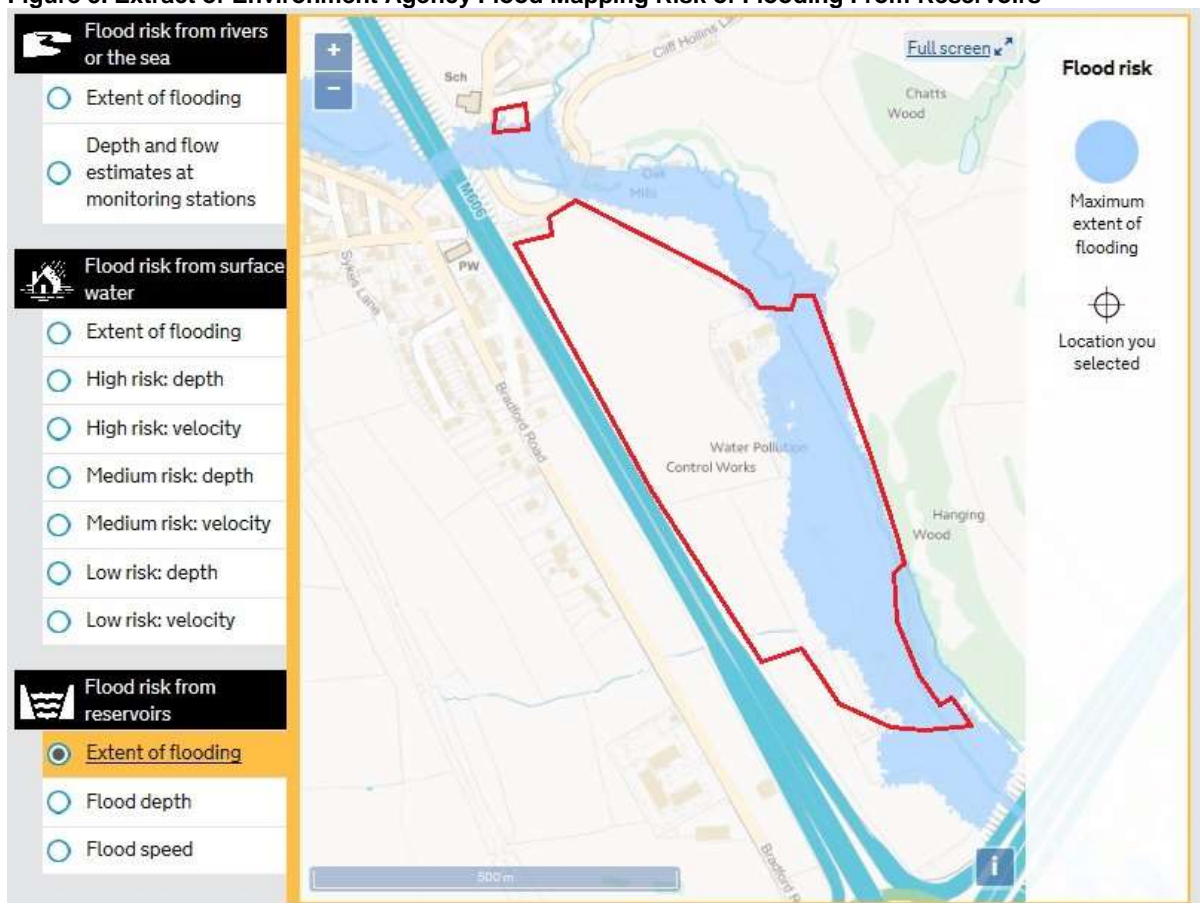


Approximate application area shown outlined **RED**.

Continued on next page-

## 4.6 Flood Risk – Environment Agency Flood Warning and Alert Areas

4.6.1 An extract of the Environment Agency's web based flood warning and flood alert areas follows below in figure 6.

**Figure 6. Extract of Environment Agency Flood Mapping – Flood Warning and Alert Areas**

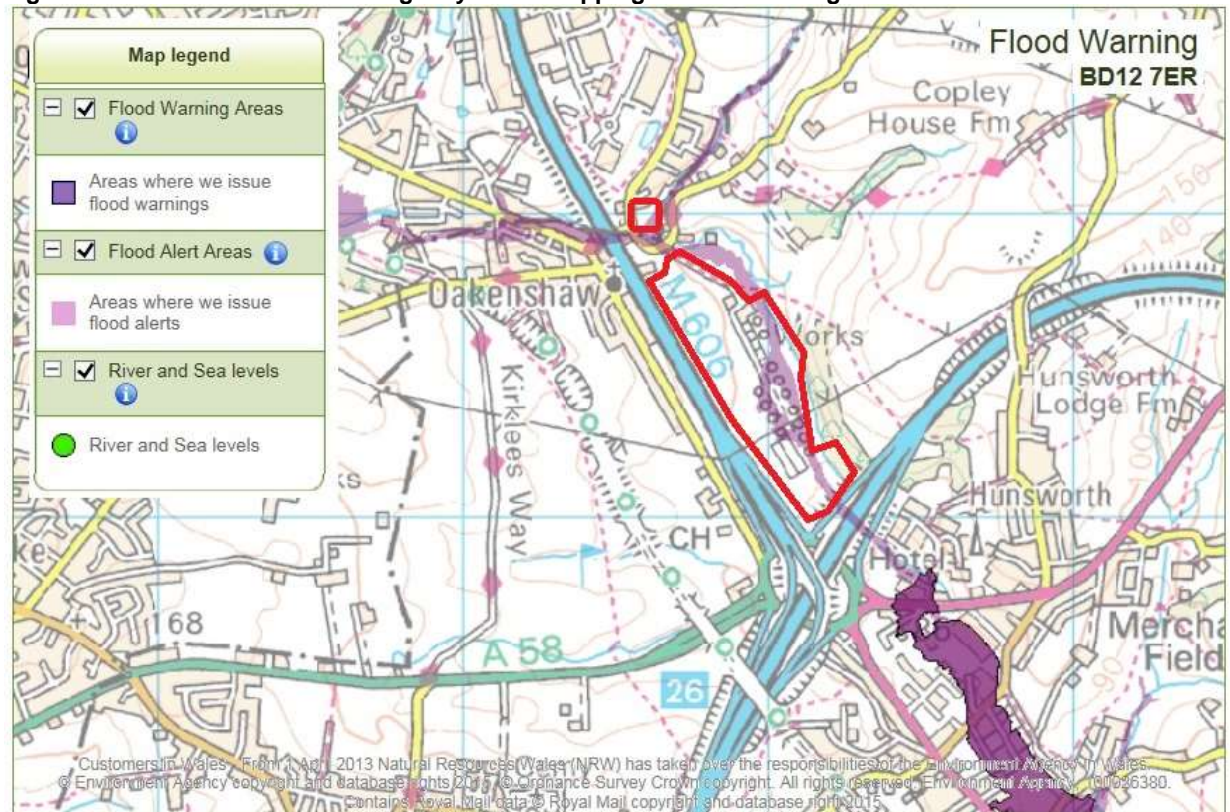

Approximate application area shown outlined **RED**.

4.6.2 The length of Hunsworth Beck through the site is shaded to denote that flood alerts are available. It is not until south of the M62 where the watercourse is classified as a main river, that flood warnings are given.

4.6.3 On the basis that there will be extensive ground modelling to form the level plateaus for the proposed development set at flood safe levels, it is envisaged that it will not be necessary for occupiers to necessarily link into the flood alert system on the basis that finished floor levels will be set to be flood safe, although it may be considered by those directly adjacent to the Beck in order to be aware of when there is potential risk of flooding to external yard and parking areas.

## 4.7 Lead Local Flood Authority (LLFA) & Strategic Flood Risk Assessment (SFRA).

4.7.1 Consultation has been held with both Kirklees and Bradford Councils under their new role as Lead Local Flood Authority (as of April 2015). As the Hunsworth Beck running through the site is not classified as a main river at this point, the Environment Agency have confirmed that the LLFA's will be the main consultees with regard to flood and drainage matters within the planning process.

- 4.7.2 Strategic Flood Risk Assessments (SFRA's) are in place for the Hunsworth Beck and its tributary watercourses. The main former WWTW site, falls within the Calder Valley SFRA jointly commissioned by Kirklees Council and its neighbouring authorities. The proposed car park opposite the school falls just outside of Kirklees Councils control and SFRA, falling under the jurisdiction of Bradford City Council and their supporting SFRA.
- 4.7.3 The flood mapping within the SFRA's has been reviewed and can be confirmed to concur with that of the Environment Agency's mapping available both on line and via the Product 4 information provided.
- 4.7.4 As noted in Section 4.3 the Product 4 information supplied by the Environment Agency does not contain any modelled flood levels which has subsequently been confirmed as being unavailable, albeit it does raise a question as to how the precise flood outlines were generated. A similar question has been asked of Kirklees as to whether any modelled levels were used within the preparation of the SFRA. Again this has been confirmed as negative with detailed information only available for sections of the watercourse further south with 'main river' status.
- 4.7.5 Liaison has taken place with both LLFA's:-

#### City of Bradford Metropolitan District Council LLFA

CBMDC's LLFA officer has advised that they have no particular interest in the car park in terms of flood risk other than they would require a SuDs approach to the drainage to ensure no increase in flood risk to the site or others.

#### Kirklees Council LLFA

Extensive dialogue has taken place with Kirklees Councils LLFA officer after an initial enquiry was made to the Environment Agency's flood risk team, which confirmed that as the main river status of the Hunsworth Beck does not extend north of the M62 motorway that planning application flood matters lie sole with the LLFA.

This has confirmed that no detailed flood level information is available and the only way of determining this in detail given the proposed extensive ground re-profiling works would be to run pre and post development hydraulic models of the Hunsworth Beck.

The scope for this has been agreed with the LLFA officer, and survey works of the beck channel and features such as the M62 culvert have been completed to allow a modelling exercise to be carried out.

The LLFA officer also advised that consideration should be given to re-naturalising the channel of the beck (e.g. removing any man made features where possible) and daylighting any culverts (such as the one currently diverting the watercourse from Oakenshaw around the former settlement tanks)

It was also advised that surface water drainage run off should replicate the original Greenfield rate.

4.7.6 On this basis a hydrological modelling exercise has been commissioned for the Hunsworth Beck and its feeder tributaries to ascertain the site specific flood outlines and levels.

#### **4.8 Site specific hydrological Flood Modelling**

4.8.1 Curtins have employed the services of Flood Risk Consultancy Ltd (FRC) to carry out a hydrological and hydraulic modelling of the Hunsworth Beck through the main site area to gain a more accurate understanding of the potential flood outlines and levels. The documents and flood mapping outcomes of the assessment is contained in Appendix C

4.8.2 The assessment has been scoped in liaison with the LLFA and takes into consideration features along the watercourse such as weirs and bridges together with the risks of increased flood levels due to partial blockages associated with such features.

4.8.3 A 'worst case' 100 and 1000 year events flood outline map is provided as the conclusion of the assessment based on modelled flood levels and actual recorded ground and river channel levels for the topographical survey.

4.8.4 The modelled flood outlines can be seen not to follow those as shown on the Environment Agency Product 4 mapping, and as anticipated, stay within the deep channel of the Beck through the main area of the WWTW with no spill out to the areas of the circular settlement tanks.

4.8.5 As the modelling takes into consideration various part blockage scenarios, areas of flood risk breaking out of the watercourse channel are mapped both to the north and south of the site. The area to the north is as a result of the low lying farm land at this point and the southern area due to the restrictions generated by the modelled blockage scenarios at the M62 Motorway culvert inlet.

4.8.6 On this basis with the modelling showing extreme flood flows retained 'within channel' for the main reach through the site, it is regarded that the proposed development areas that sit close to the watercourse will remain flood safe, particularly when considered that the plateaus will be formed from the fence line of the WWTW pipework area.

4.8.7 The existing access road is slightly overtopped (approx. 130mm) by the northern flood area, but it should be noted that this access road is realigned to the west forming the access to the residential area, thus avoiding the flood outline.

4.8.9 Furthermore, as the flood outline generally remains 'in channel', it can be considered that in raising ground levels in areas to form plot plateaus, that there will be no loss of flood storage area.

#### **4.9 Secondary Flood Risks**

4.9.1 It is an important part of a flood risk assessment to consider any other secondary flood risks not assessed in the preceding paragraphs.

4.9.2 Surface water flooding from the new drainage system can present risk. This can be mitigated by design

to modern standards (Sewers for Adoption and Building Regulations) and will ensure the development of the site does not increase flood risk either to itself or others. Outline proposals are considered in the following outline drainage strategy section of this report.

- 4.9.3 Ground water can present a flood risk both in terms of high ground water when basements are present but also in terms of springs creating flows of water at surface level. A review of the available Phase 2 Geo-environmental study has been carried out by Wardell Armstrong and no potential ground water issues have been identified. As the works involve extensive plateauing for the industrial plots, suitable land drainage features will need to be considered at detail design stage particularly around embankments.
- 4.9.4 Surface water run off from adjacent area can be another secondary flood risk issue. This has been considered in the preceding section regarding surface water flood risk, with the main risk being identified as flooding entering the site from the motorway junction roundabout. Suitable mitigation measures such as protective bunding at the site edge or forming ground levels to route any overland flows away from buildings and towards the beck can be considered at detail design stage.
- 4.9.5 Flooding from existing sewers and culverts can also present secondary flood risk. The transfer main installed following the decommissioning of the treatment works is a very complex facility with a large pumping station and above ground pipework which includes river overflows at critical points along its route adjacent to the Hunsworth Beck. The system is an asset of Yorkshire Water (not a public sewer) and is maintained accordingly, so although constantly transferring a large volume of sewage which could potentially cause serious flooding, can be considered to present a low risk to the development.

#### **4.10 Primary Flood Risk Summary and Mitigation Recommendations**

- 4.10.1 The preceding sections have assessed flood risk from all potential sources, and with the aid of detailed hydrological and hydraulic modelling of the Hunsworth Beck through the main site area has determined that some areas of the site in its current state (i.e. a decommissioned waste water treatment works with transfer facility) are potentially at risk from primary and surface water flooding during extreme weather events.
- 4.10.2 These risks will require mitigation to ensure the proposed development remains flood safe and does not increase flood risk to others either upstream or downstream. These can be summed up as:-
- a) River flooding during the 100 year event (Zone 3) from the Hunsworth Beck, generally confined to within the watercourse bank edges of which a large percentage falls within the fenced off area of the transfer pipework. Some out of bank areas are identified by the modelling exercise. There is also a slightly greater risk of intrusion into the site area during a 1000 year event (Zone 2)
  - b) Risk from surface water flooding from watercourses running from west of the M606 (unnamed watercourse from Oakenshaw and Sugden/Stubs Becks), albeit this appears to be as a result of the M62/M606 roundabout junction acting as a conveyance route.

- 4.10.3 The new car park for the school is not considered in this assessment as a car park is not a sensitive use and is permitted to flood. The parking area does generally fit between the flood outlines of the adjacent becks and finished paving levels will be set at a similar level to the adjoining road for access purposes so will be well above the peak flood levels.
- 4.10.4 It is proposed the following should be considered within the detail design to provide mitigation to the assessed risks:-
- a) River Flooding from Hunsworth Beck
    - i. Ensure all residential and commercial buildings and their servicing access roads are placed outside of the 100 year flood outlines determined by the FRC model.
    - ii. Ensure the proposed development ground model for the new commercial building plateaus adjacent to the Hunsworth Beck will not affect the river profile or the storage provided within the areas to the north and south shown to be within the FRC modelled 100 year flood extents.
  - b) Consider options for re-naturalising the Hunsworth Beck channel profile including removing any weirs and redundant footbridges which may present risk of debris build up/blockages
  - c) Opening up sections of the existing culverted section of Oakenshaw watercourse and routing through the development to ensure that any surface water flooding is contained to parking or landscaped areas at a safe shallow depth
  - d) Providing suitable earthwork bunding and/or cut off channels to the southern end of the site to ensure that should any surface water flooding which may route from the M62/M606 junction roundabout is contained and directed towards the Hunsworth Beck and away from developed areas.
  - e) Providing land drains to all embankments to ensure surface water run off from landscaped areas is suitably contained and routed to the Hunsworth Beck and not into the proposed new adoptable drainage system.
- 4.10.5 In consideration of these risks identified in 4.92 and in following the guidance of 4.93 above the site can be considered to be easily mitigated against the risks, providing a flood safe development that will not increase flood risk to others.
- 4.10.6 The following section considers drainage strategy to also demonstrate that in developing the former waste water treatment works that the new drainage systems will not increase flood risk either to the site or others.

---

## 5.0 Surface Water Drainage Impact Assessment

### 5.1 SuDs Surface Water Disposal Hierarchy

- 5.1.1 The NPPF and Building Regulations is specific on hierarchy for the disposal of surface water sewer from both new (Greenfield) and re-development (Brownfield) sites. Where ground conditions permit disposal should be via infiltration to the ground. Should this not be viable, disposal should be to a watercourse or waterbody, and as a last resort to a sewer.
- 5.1.2 The Wardell Armstrong phase 2 geo-environmental investigation suggests the use of infiltration to be limited. Soakage tests to the west, north and south were completely negative. Two positive BRE365 tests (e.g.  $f > 1 \times 10^{-5} \text{m/s}$ ) were achieved close to the Hunsworth Beck in TP101 and TP103 although in consideration this was as a likely result of the proximity to the watercourse. The southern areas of the site are also recorded to have extensive mining history with shafts recorded. On this basis, it is considered that infiltration as an overall Section 104 Water Industry Act adoptable drainage strategy is not viable, although potential may exist for some localised features such as embankment toe drains. It is therefore proposed that the receptor for surface water disposal from the sites main drainage system will be the Hunsworth Beck.
- 5.1.3 Liaison with the LLFA (Kirklees Councils) has established that in terms of surface water drainage assessment and in line with April 2015 SuDs updates to the NPPF, that run off from the site must replicate the original pre-development run off rate. Therefore the proposed development area will be assessed at greenfield run off rates. Bradford Councils LLFA officer also advised that the proposed school car park area should utilise SuDs and discharge at greenfield rates.

### 5.2 Catchment Analysis

- 5.2.1 Development proposals for the former WWTW site include both commercial 'shed' type units and associated service yards with an area designated for residential development to the north west of the application area.
- 5.2.2 Although it is considered that the proposed residential development will generally follow existing ground levels, it will be necessary to carry out major 'cut and fill' earthworks to form the level plateaus for the commercial units. As a result, earth embankments will be formed between the varying plateaus and also at the interface with undeveloped surrounding ground levels. These slopes will need drainage to ensure run off does not present a flood risk, but as this is usually considered as land drainage by the adopting sewer authority (Yorkshire Water) it should be prevented from entering the main adoptable drainage network. It is proposed that embankment drainage of slopes falling from undeveloped land is collected

by a land drainage system and discharged directly to the watercourses, thus replicating the pre-development run off scenario.

5.2.3 On the basis of the above the catchment area and therefore the area used to calculate greenfield run off from the commercial and residential areas will be only that of the actual areas where buildings, roads and SuDs features are to be placed. All other external landscaped areas will continue to drain via land drainage to the Hunsworth and Oakenshaw Becks.

5.2.4 A catchment area plan is included within the appendix of this report. Areas measured are as follows:-

Area A Commercial Area North	21,300 m <sup>2</sup> Approx	2.13 Ha Approx
Area B Commercial Area South	74,300 m <sup>2</sup> Approx	7.43 Ha Approx
Area C School Car Park	1,200 m <sup>2</sup> Approx	0.12 Ha Approx

### 5.3 Greenfield Run-off Rate Methodology

5.3.1 Typically to assess the allowable greenfield run off rate (Qbar) for the three site areas, Microdrainage 'Source Control' software would be utilised, using the ICPSuds method as the areas are below 50 Hectares.

5.3.2 Discussions with the LLFA officer at Kirklees Council has confirmed that their current guidance is that a standard run off rate of 5 litres/second/hectare (l/s/ha) should be used across the district based on the drained areas of the site. A similar rate is considered appropriate by Bradford Councils LLFA.

### 5.4 Proposed Greenfield Run-off Rate(s)

5.4.1 A copy of the Architects masterplan has been overlaid with catchment outlines broken down into the main commercial area, the residential area and the school car park and the areas measured. A copy of this drawing 064656-FRA-100 is contained within Appendix D.

5.4.2 The measured areas included areas of the open attenuation basins as these are upstream of the flow control device and thus provide an area for catchment of rainfall.

5.4.3 Using the Kirklees standard 5 l/s/ha, the estimated greenfield run off rates (Qbar) for each area are as table below:-

Catchment Reference	Approx Area (m <sup>2</sup> )	Area (Ha)	Qbar Calculation	Qbar
Commercial Area A	21,300	2.13	2.13 Ha x 5 l/s/ha	10.7 l/s
Commercial Area B	74,300	7.43	7.43 Ha x 5 l/s/ha	37.5 l/s
School Car Park	1,200	0.12	0.12Ha x 5 l/s/ha	0.6 l/s***

\*\*\*Assumes a minimum flow of 2 l/s using a Controflow flow control device

## 5.5 Proposed Discharge Points

5.5.1 It is proposed that drainage will be split into three specific areas consisting of the north and south commercial areas, and school car park, all with their own individual discharge points to the Hunsworth Beck.

5.5.2 Survey work carried out on behalf of the client has identified two drains which can potentially be utilised for surface water discharge from the commercial areas as below:-

- The first is close to the former entrance to the works, which runs across the adjacent field to the Hunsworth Beck currently providing drainage to the access road running southwards from Cliff Hollins Lane. It is proposed this is utilised to drain surface water from the northern area of the commercial development.

The overall area of this part of the site is approximately **2.13 hectares**. Assuming **95%** impermeable area, this gives a proposed catchment area of approximately **2.0 hectares** with an allowable discharge rate of **10.7 litres a second**.

- The second is the piped length of Oakenshaw watercourse. With the previous layout it was planned to 'daylight' this culvert and divert through the new commercial development area to the south of the site, but maintain its confluence with the Hunsworth Beck. As development in this area is now curtailed due to the future motorway junction works it is very likely that the development no longer affects this existing culvert and as such for the purpose of this study it is assumed to remain as is. As the existing transfer pipework constrains a direct outfall to the Hunsworth beck in this area it is proposed that surface water from the southern part of the commercial site will discharge to this culverted watercourse at a manhole just before the outfall headwall.

The overall area of this part of the site is approximately **7.43 hectares**. Assuming **95%** impermeable area, this gives a proposed catchment area of approximately **7.0 hectares** with an allowable discharge rate of **10.7 litres a second**.

A copy of the survey is contained in the appendix, and both drains are marked upon the drainage strategy drawings.

5.5.3 It is proposed that the new school car park will have a small diameter piped outfall direct to the adjacent watercourse.

The overall area of the car park is approximately **0.12 hectares**. Assuming **100%** impermeable area, this gives a proposed catchment area of approximately **0.12 hectares** with an allowable discharge rate of **2 litres a second** (based on minimum achievable flow control orifice diameter).

## 5.6 Typical Attenuation Requirements

5.6.1 In order to establish approximate attenuation volumes for outline design purposes Microdrainage 'Quick Storage Estimate' has been used based on the calculated greenfield run off rates for the worst case scenario of a 100 year return period extreme event with 30% climate change allowance.

Figure 8. Microdrainage Quick Storage Estimate Attenuation Assessment – Commercial Area A North



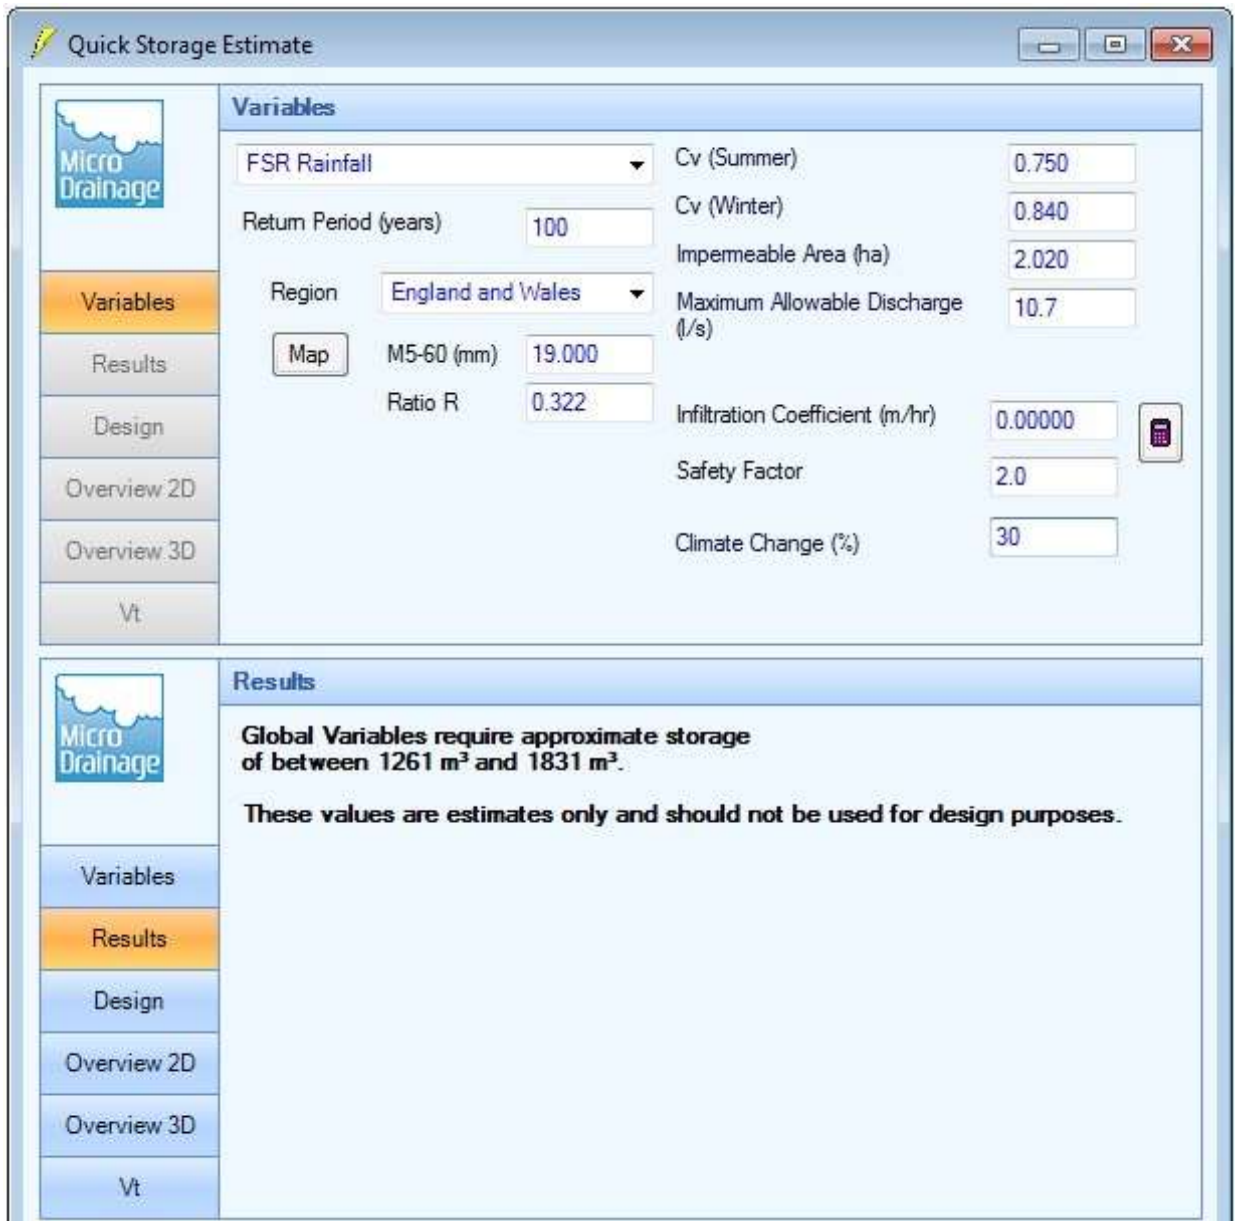


Figure 9. Microdrainage Quick Storage Estimate Attenuation Assessment – Commercial Area B South

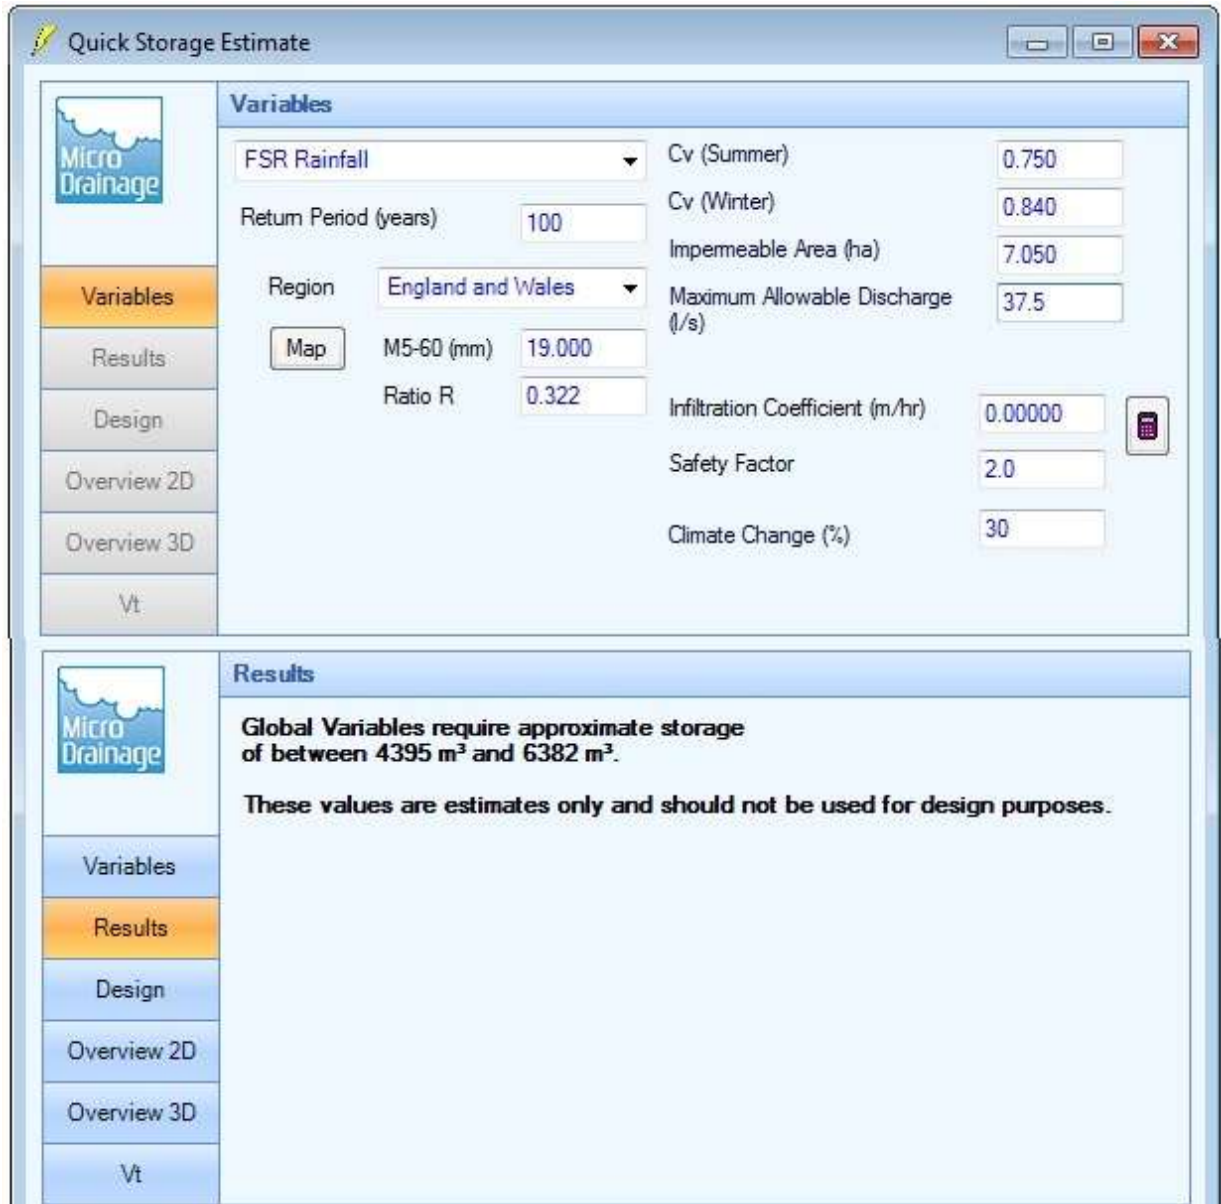

Continued on next page

Figure 10. Microdrainage Quick Storage Estimate Attenuation Assessment – Area C School Car Park

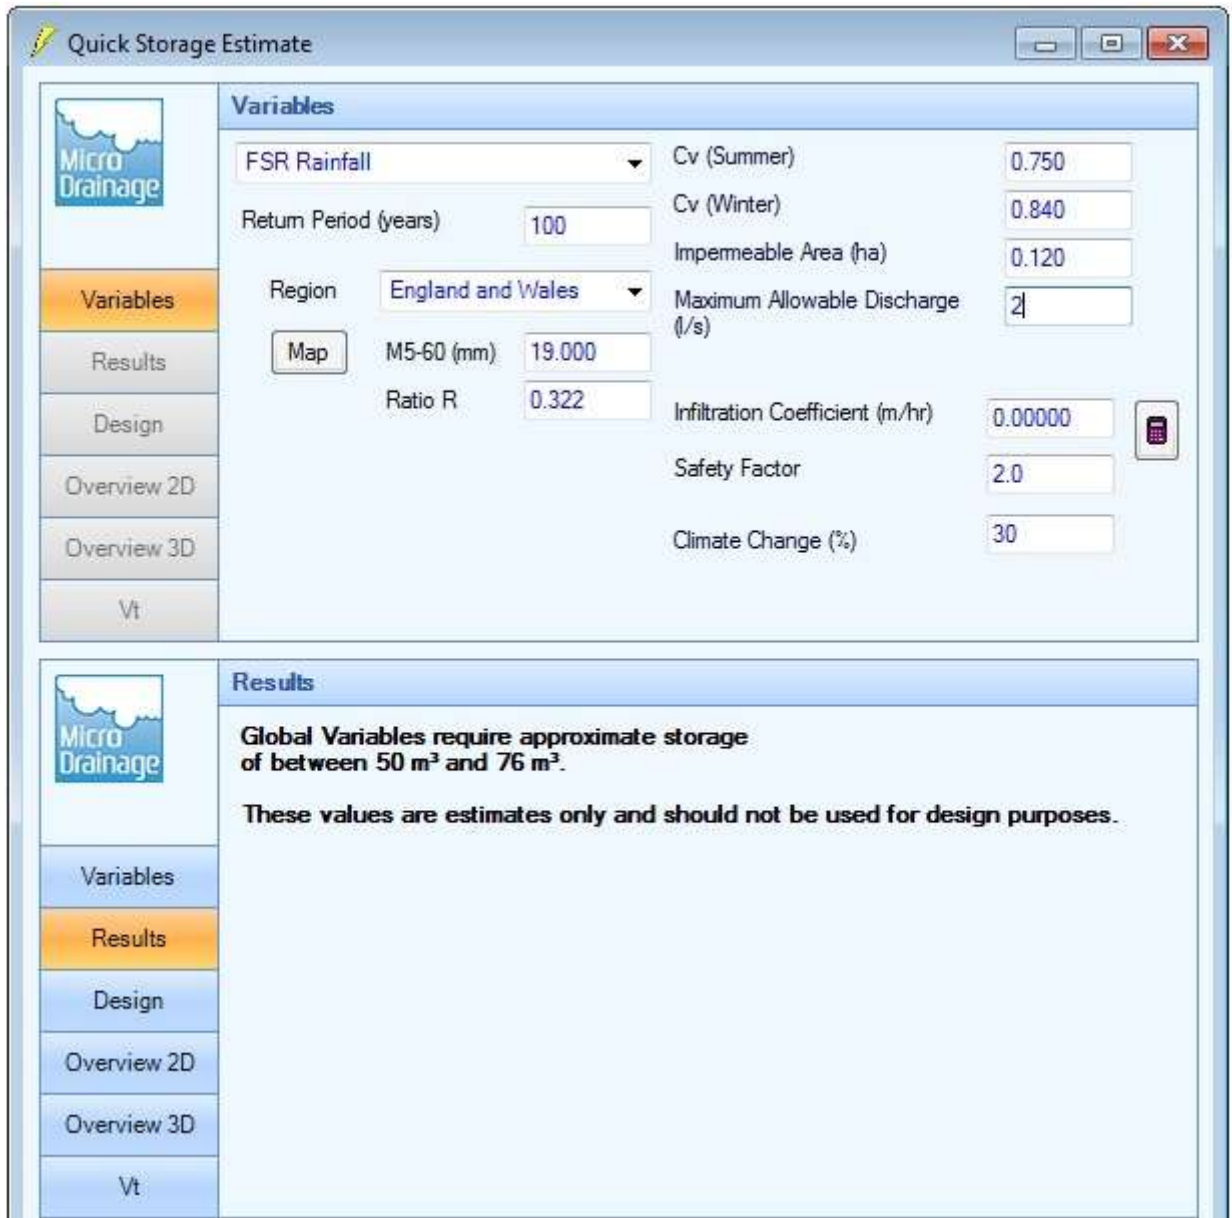

5.6.2 Using a typical rule of thumb guide of midway between the upper and lower limits it is anticipated that attenuation volume requirements will be as tabled below:

Catchment Reference	Lower Volume (m³)	Upper Volume (m³)	Typical 100yr+CC Attenuation volume required (m³)
Commercial Area A	1261	1831	$(1261 + 1831) / 2 = 1550$ Approx.
Commercial Area B	4395	6382	$(4395 + 6382) / 2 = 5400$ Approx.
School Car Park Area C	50	76	$(50 + 76) / 2 = 65$ Approx.

- 5.6.3 With the intention that all main drainage within the commercial development area will be adopted by Yorkshire Water under a Section 104 agreement of the Water Industry Act, current Sewers for Adoption practice is to store at least the 30 year storm volume below ground with the exceedance up to 100 year storm events contained in depressions within the site that do not present flood risk. With the current LLFA push towards a greater use of SuDs within development drainage schemes, for the purpose of the outline drainage strategy, all attenuation volume is shown as open balancing features (e.g. landscaped depressions) at approximately 2 metres maximum depth.
- 5.6.4 Site drainage for the commercial development site area will consist of separate foul and surface water systems designed, constructed and adopted in accordance with Sewers for Adoption and Building Regulations.
- 5.6.5 The volume of attenuation required for the car park will be provide within the 30% void ratio sub-base of the permeable paving system. Assuming the full area of the car park is constructed in permeable paving with an area of 1200m<sup>2</sup> and an approximate sub-base depth of 300mm the attenuation volume provided will be approximately 1200m<sup>2</sup> x 0.3m dp x 0.3 void ratio = **108m<sup>3</sup>** therefore greater than 65m<sup>3</sup> shown by the Microdrainage Quick Storage Estimate. This gives the opportunity if desired to reduce permeable construction by utilising permeable construction for the parking bays only with impermeable hunting lanes or vice versa.

## 5.7 SuDS Features

- 5.7.1 In order to incorporate SuDS into the system in accordance with NPPF April 2015 update requirements dry attenuation basins are proposed within the site as the primary storage feature. Some storage volume will be achieved within the main pipe runs, which will be adopted by Yorkshire Water under a Section 104 Water Industry Act agreement.
- 5.7.2 The drainage systems to the commercial and residential area will require detailed design in accordance with Sewers for Adoption to Yorkshire Waters technical approval.
- 5.7.3 Prior to April 2015 the 30 year plus climate change events, typically would be contained within oversized attenuation pipework and events in excess of this up to the 100 year plus climate change allowed to surcharge out of the system and to fill the landscaped attenuation basin. With the greater emphasis on SuDs post April 2015, for the purpose of this outline drainage strategy it is assumed the bulk of attenuation for both residential and commercial areas will be provided in dry landscaped attenuation basins. Whether these are adopted by Yorkshire Water or maintained by a contracted Facilities Management company will have to be confirmed at detail design stage depending on what SuDS adoption procedures are in place at the time.
- 5.7.4 Where site levels are plateaued to from large level areas for the commercial plots, this will result in large embankments sloping from or to existing ground level. Large steeply sloping embankments are likely to

require some form of land drainage typically at the toe of the slope. These land drainage systems will not be able to enter the publicly adoptable drainage system. Consideration on how this drainage can be connected and discharged to the Hunsworth Beck will be required at detailed design stage, but for the purpose of this study, it is assumed they will be routed around the proposed development areas to the beck network, and not discharge to the new adoptable drainage system.

5.7.5 An outline drainage scheme drawing is contained within the appendix of this report.

## **5.8 Surface Water Drainage Assessment Conclusion**

5.8.1 On the basis that the drainage system will be designed at detail design stage in accordance with Sewers for Adoption and Building Regulations with on site attenuation and an offsite discharge to the existing Hunsworth Beck watercourse mimicking the pre WWTW construction greenfield run off scenarios, it can be considered that in developing and draining the site, as well as building the school car park, that there will be no increase in flood risk either to the site itself or others within the local catchment.

---

## 6.0 Foul Water Drainage Impact Assessment

### 6.1 Existing Foul Water Catchment

6.1.1 The WWTW was decommissioned in recent years. Incoming public sewer flows from the north are piped by public sewer from Cliff Hollins Lane towards a reception chamber in the north west corner of the current boundary. From this structure a large diameter transfer pipe conveys all the incoming sewerage to the east along the western bank of the Hunsworth Beck. To the south another new structure with overflow to the river, drops the flows into a syphonic system which conveys the flows below the M62 motorway and onwards to the current WWTW. Although the incoming pipework is regarded as public sewer, all pipework from the reception chamber (e.g. transfer main and syphon) are not classified as a public sewer, but as a Yorkshire Water Asset.

### 6.2 Pre-Development Enquiry

6.2.1 A pre-development enquiry (PDE) was made to Yorkshire Water's Technical Sewage team. This identified that the transfer pipework and syphon system were not public sewers and that no connection could be made to them.

6.2.2 On this basis it was advised that the most suitable connection point would be upstream of the former works inlet chamber. On the basis that the site falls away in level to the south from this point it was also considered that pumping up to this connection point would be very likely.

### 6.3 Proposed Foul Water Network

6.3.1 As the northern area (Area A) of the commercial development site sits directly to the west of the former site inlet structure it is envisaged that foul water drainage in this area will connect to the public sewer by gravity. This will be confirmed by detail design, but for outline planning purposes it is assumed ground levels shown on the topographical survey promote a direct outfall by gravity.

6.3.2 Foul water from the new commercial units to the south (Area B) will be collected by a Section 104 Adoptable foul sewer within the new access road which will flow southwards following the fall of the ground to the lowest end of the site. In this area it will be necessary to locate an adoptable foul water pump station to lift foul water back to the proposed discharge point upstream of the former inlet structure. An approximate location is identified on the outline drainage proposals.

6.3.3 The new site masterplan takes into account the existing public sewer easements with no structures being placed within 3 metres of the centre line.

6.3.4 On the assumption that all main gravity and pumped drainage including the pump station will be adopted by Yorkshire Water, the risk of flooding from providing new foul water drainage to the site to serve both residential and commercial developments is considered **LOW**.

---

## 7.0 Conclusion

- 7.0.1** The site is shown on Environment Agency mapping to be located generally within a Zone 1 low risk flood zone with some minor encroachment of high risk Zone 3. Detailed hydrological and hydraulic modelling of the Hunsworth Beck has provided clarification of the flood flows through the Hunsworth Beck and confirmed all of the proposed developable area to be within the low risk Zone 1
- 7.0.2** The main area of the site is shown on Environment Agency surface water flood mapping to be at some risk from surface water flooding primarily from flood routing from the nearby motorway junction. This has been assessed as low risk in recognition of ongoing and possible further future highway improvements works.
- 7.0.3** No other secondary flood risks are considered to pose a risk to the site.
- 7.0.4** The new site drainage system will be two separate systems (FW & SW) and surface water will be reduced in to greenfield run off rates and incorporate SuDS measures in accordance with the West Yorkshire and York Region SuDs Guidance (2015).
- 7.0.5** Under the requirements of the NPPF this FRA can be considered suitable to support the outline planning application to demonstrate the low flood risk of flood from rivers and sea, low risk of flooding from surface water and that the foul and surface water drainage proposals will not increase flood risk either on site or off site.
- 7.0.7** It is recommended that a detailed drainage design is developed up for construction based on the outline proposals contained in this report which will ensure that there is no increase in flood risk.

---

## Appendices

### Appendix A

Topographical/Drainage Survey

Yorkshire Water Sewer Plans

### Appendix B

Environment Agency Product 4 Flood Mapping

Site Masterplan with Environment Agency Flood Zone Mapping Overlaid - 065636-FRA-101

### Appendix C

Site Specific Flood Modelling Reports (by FRC)

Site Masterplan with Modelled Flood Outlines Overlaid - 065636-FRA-105

### Appendix D


Drainage Area Catchment Plan – 065636-FRA-100

Outline Drainage Strategy Drawings - 065636-FRA-102


065636-FRA-103




065636-FRA-104

## Appendix A

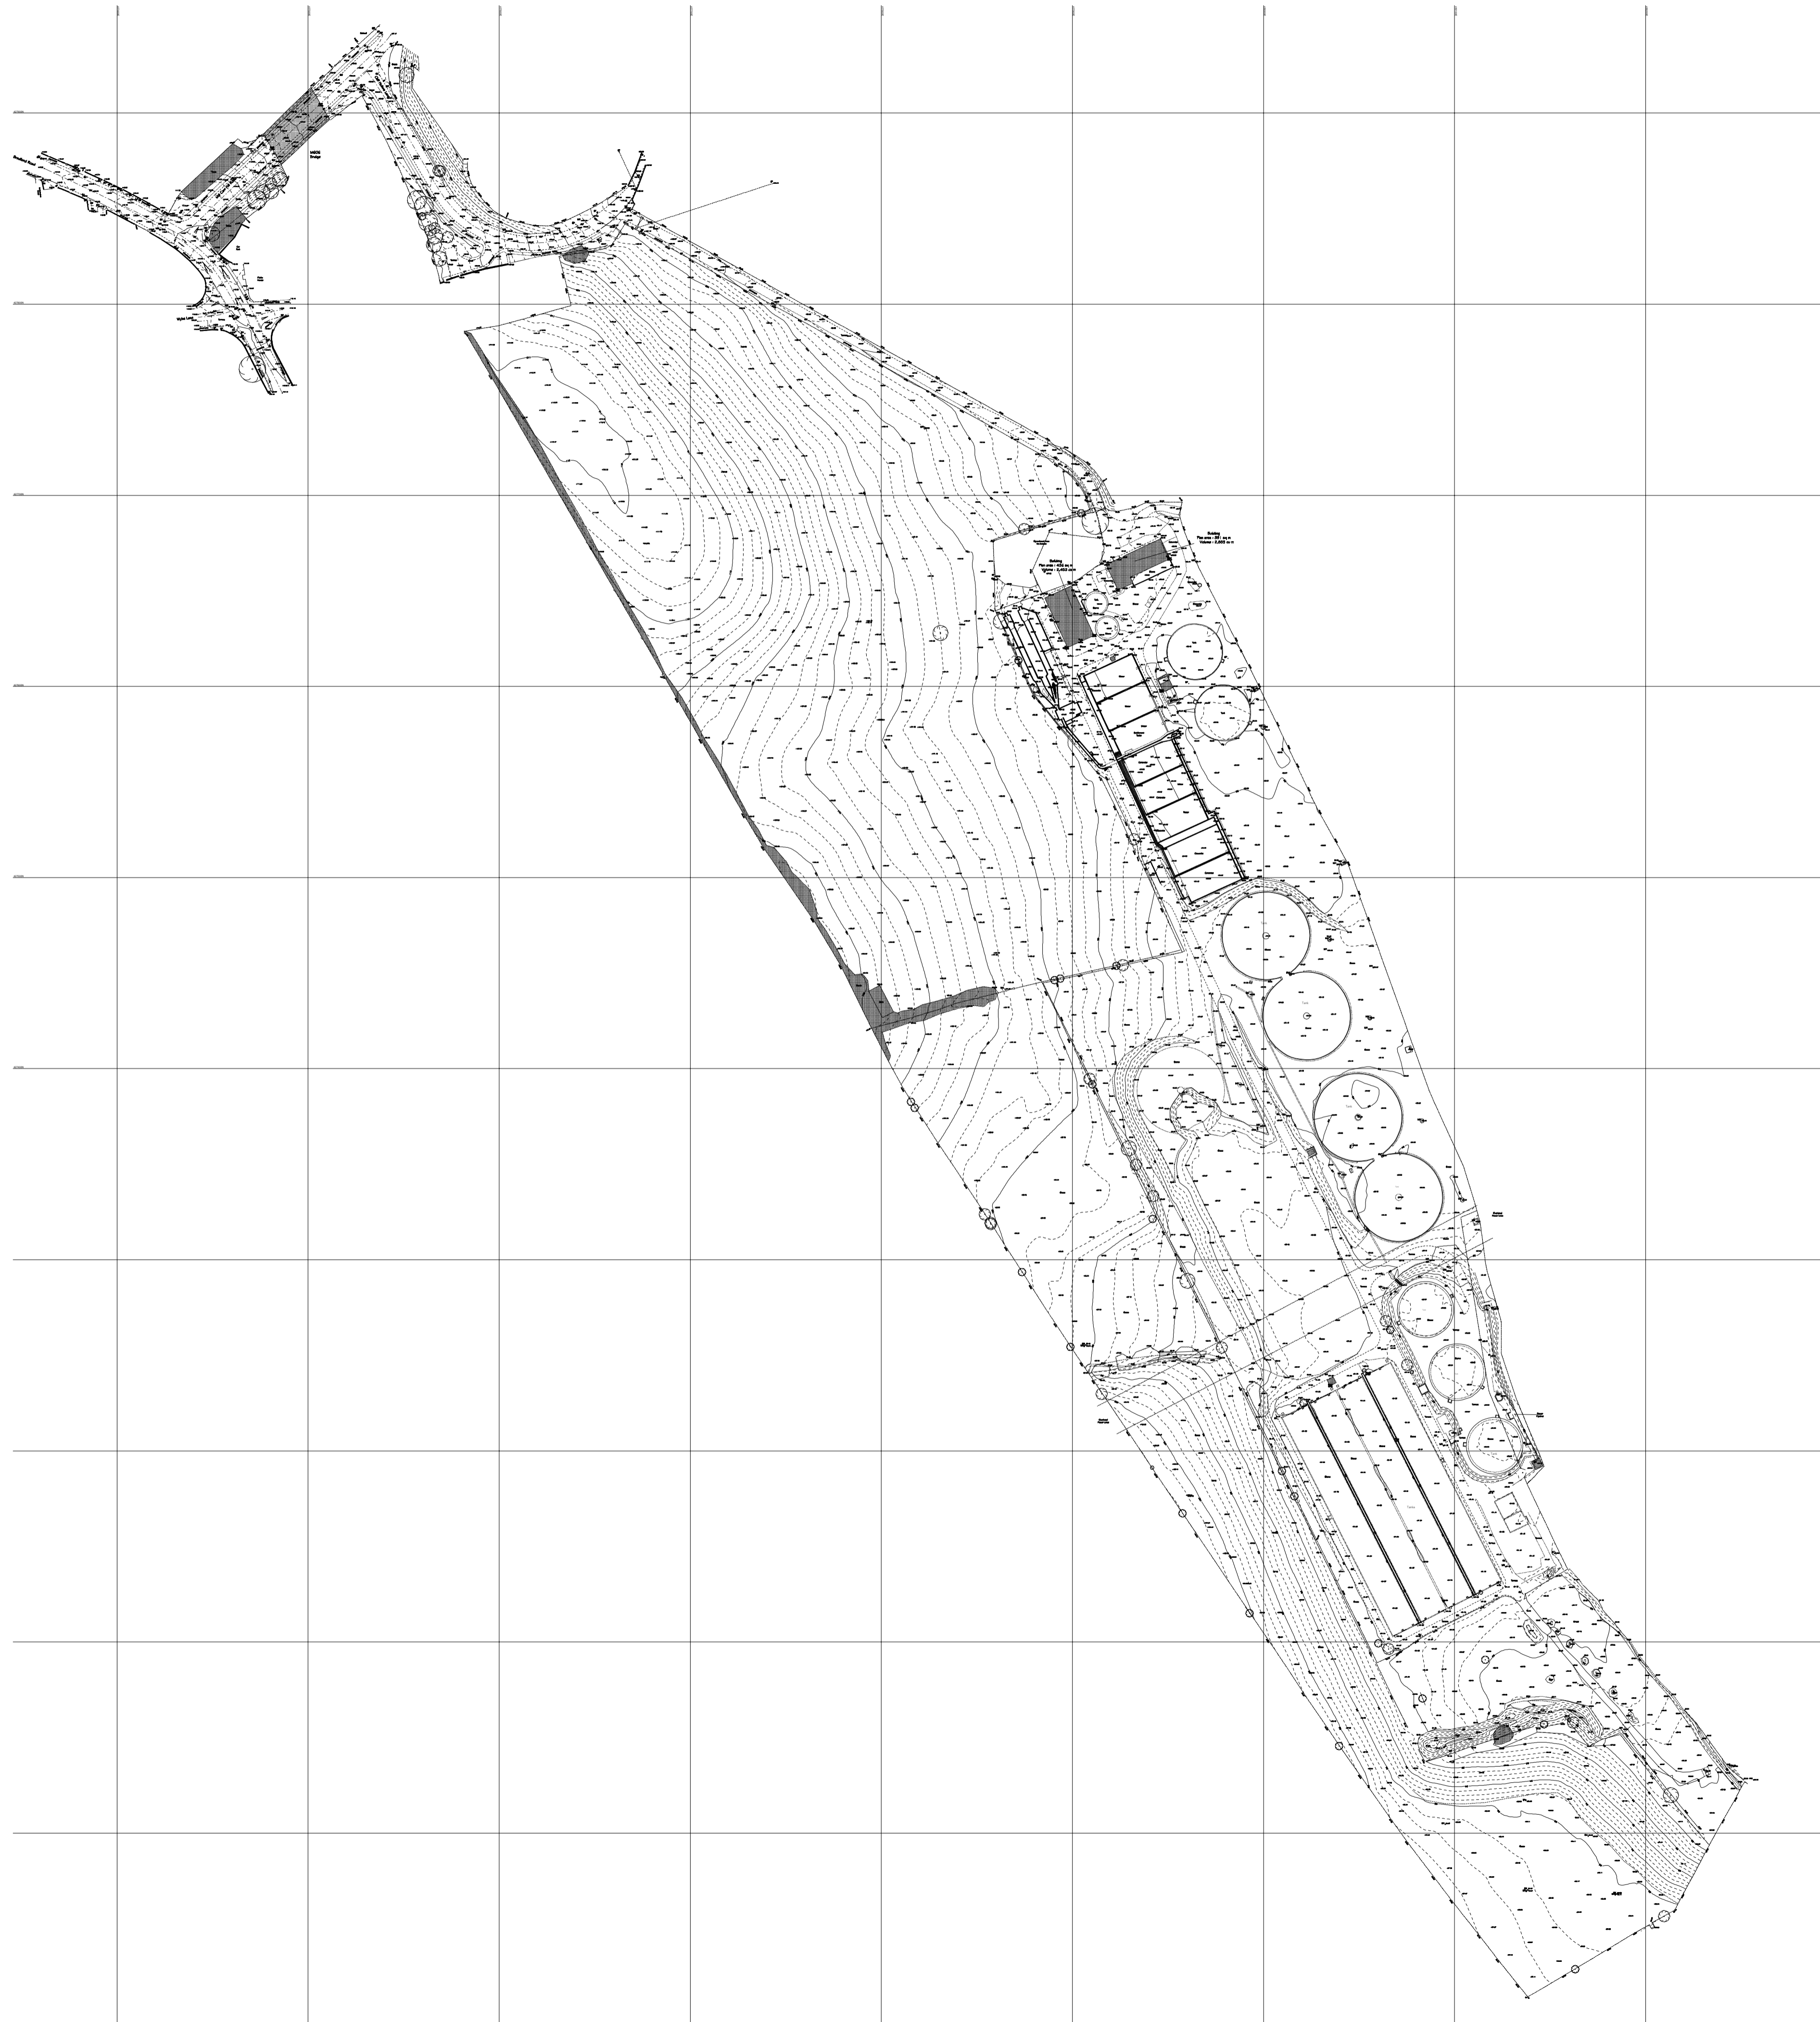


REVISION	DETAILS	DATE	DRAWN	CHECKED	APP'D
A	First Issue	27/03/14	DP	ND	GW
CLIENT KEYLAND DEVELOPMENTS LTD					
PROJECT NORTH BIERLEY WWTW					
DRAWING TITLE TOPOGRAPHICAL SURVEY MARCH 2014 (SHEET 1 OF 2)					
DRG No.	SH10534-004	SCALE	1:1000 @ A1	DATE	18/03/14
DRAWN BY	DP	CHECKED BY	ND	APPROVED BY	GW
<input type="checkbox"/> STOKES-ON-TRENT (HEAD OFFICE)	TEL 0846 111 7777	<input type="checkbox"/> CARDIFF	TEL 029 2072 9191	<input type="checkbox"/> LEIGH	TEL 01942 260101
<input type="checkbox"/> NEWCASTLE UPON TYNE	TEL 0191 232 0943	<input checked="" type="checkbox"/> SHEFFIELD	TEL 0114 246 6344	<input type="checkbox"/> EDINBURGH	TEL 0131 555 3311
<input type="checkbox"/> WEST BROMWICH	TEL 0121 660 0909	<input type="checkbox"/> LIVERPOOL	TEL 0151 484 5431		
<input type="checkbox"/> LONDON	TEL 020 7287 2872				



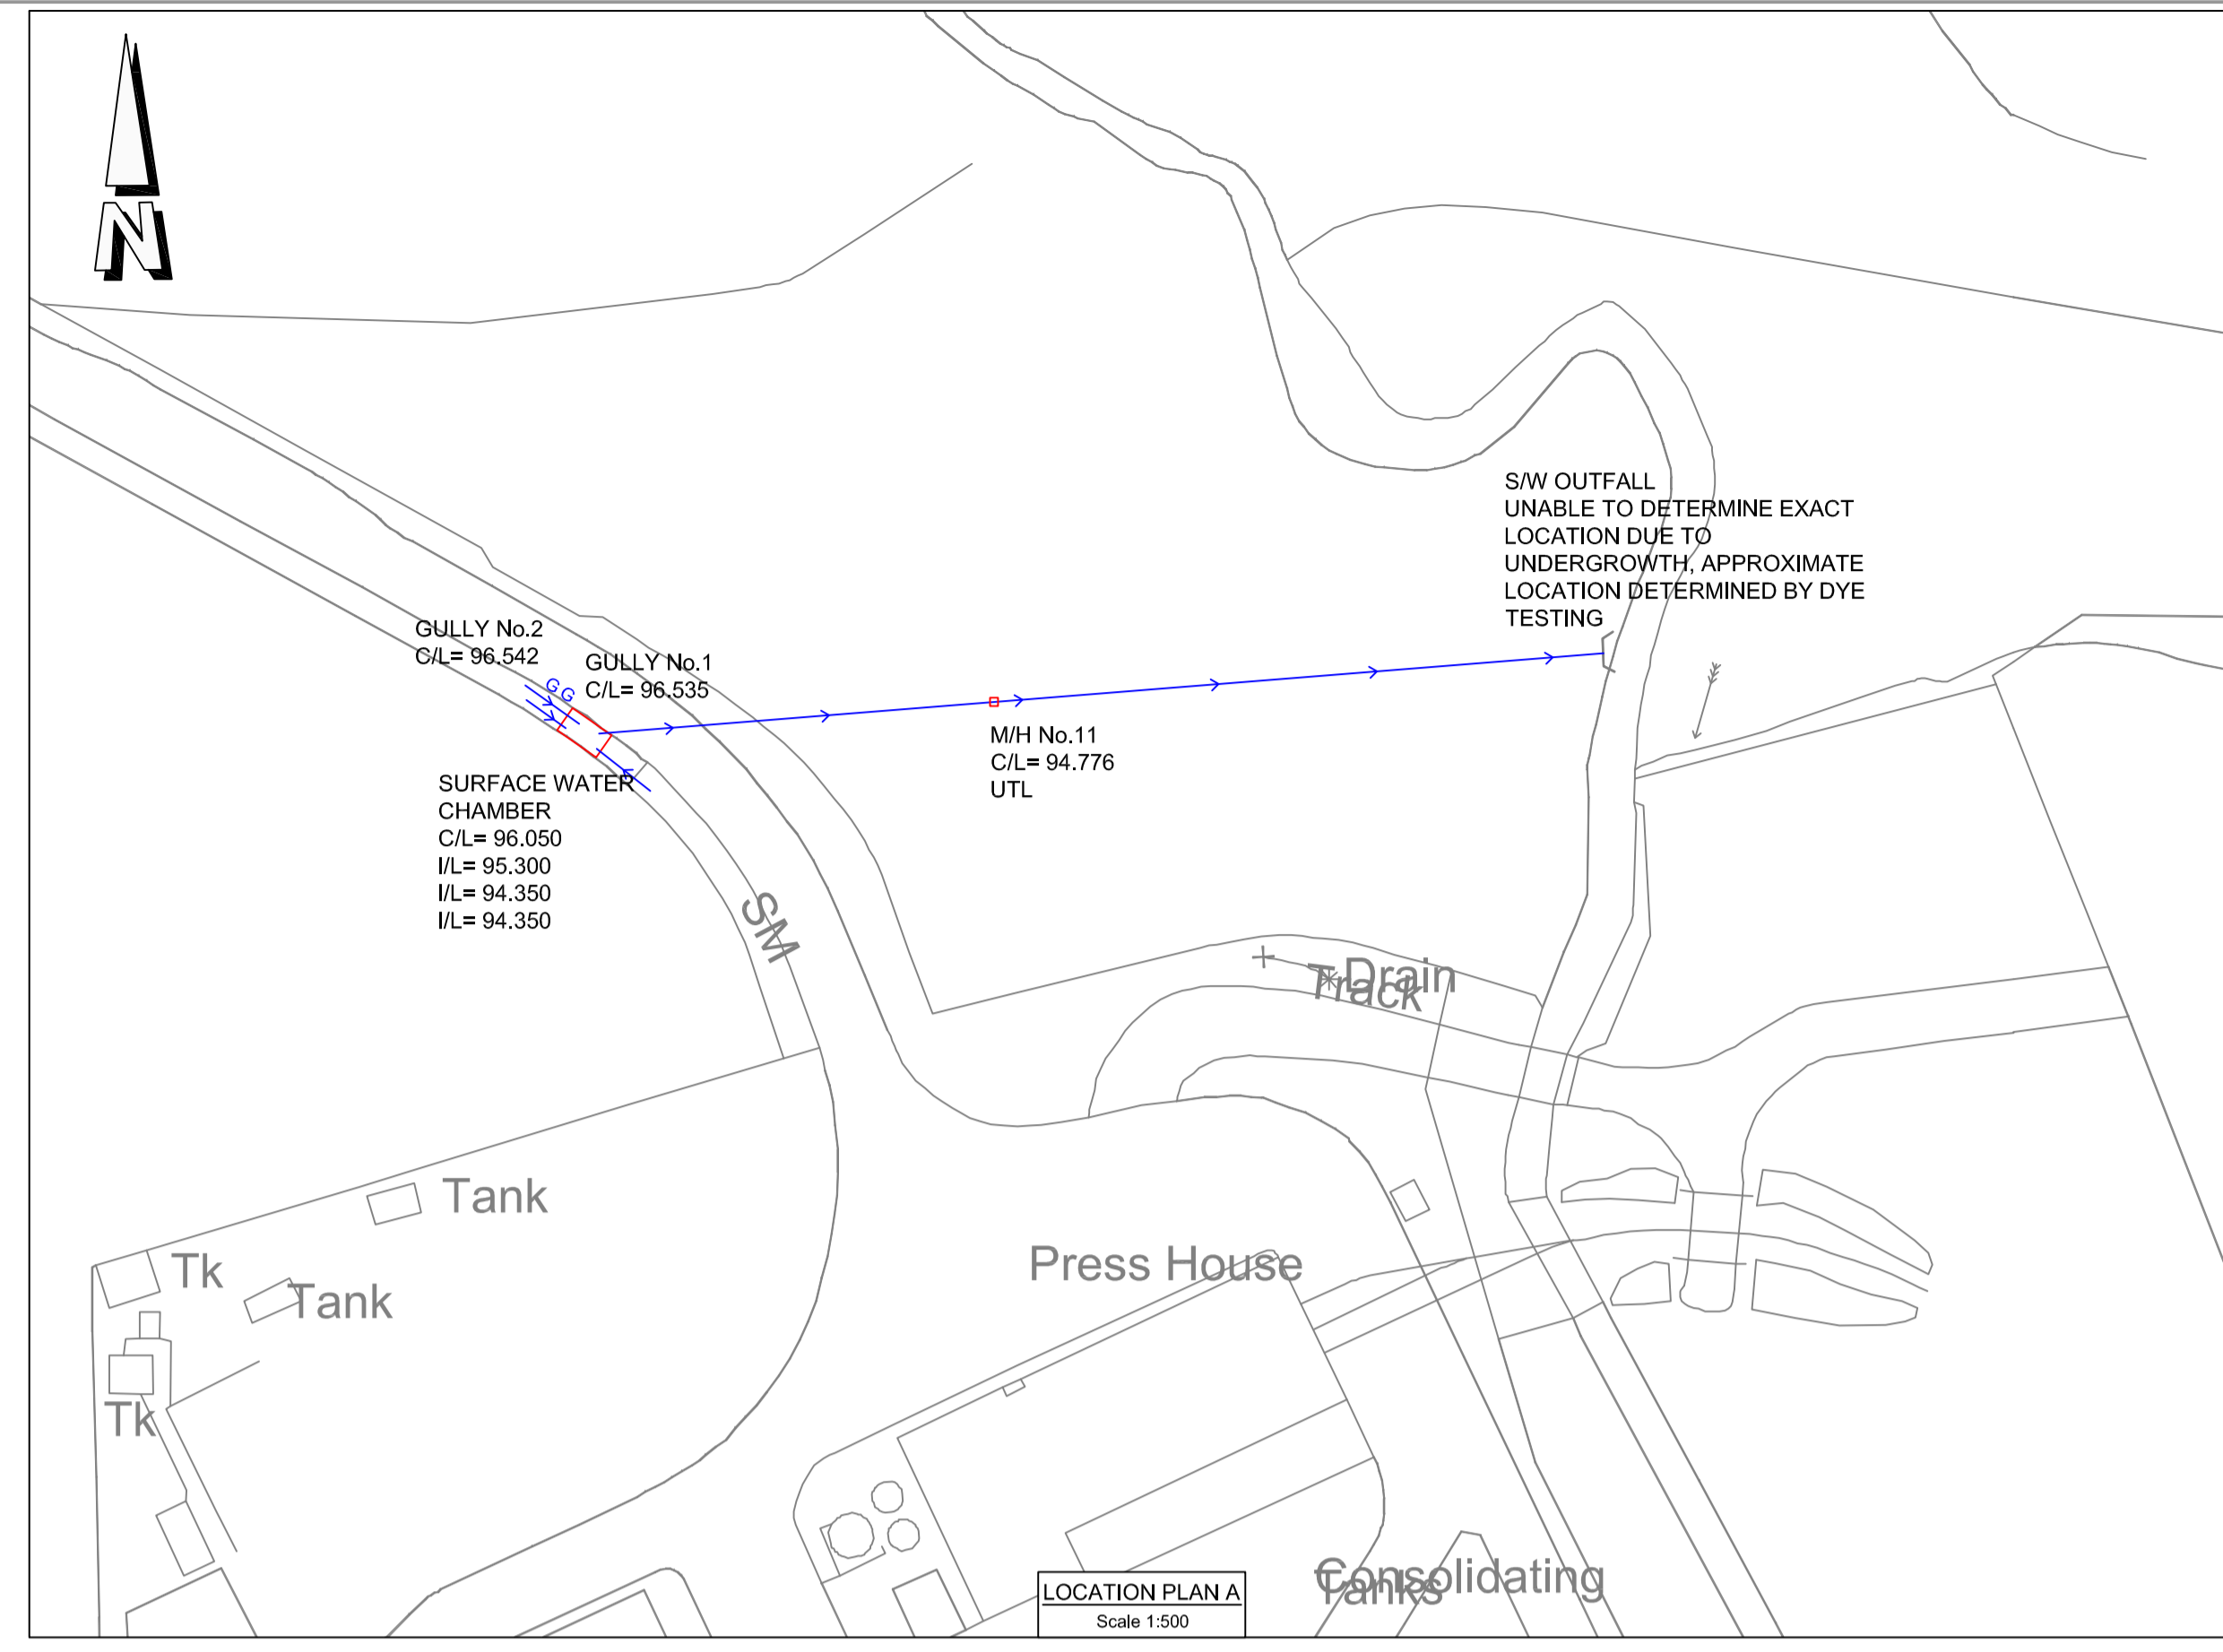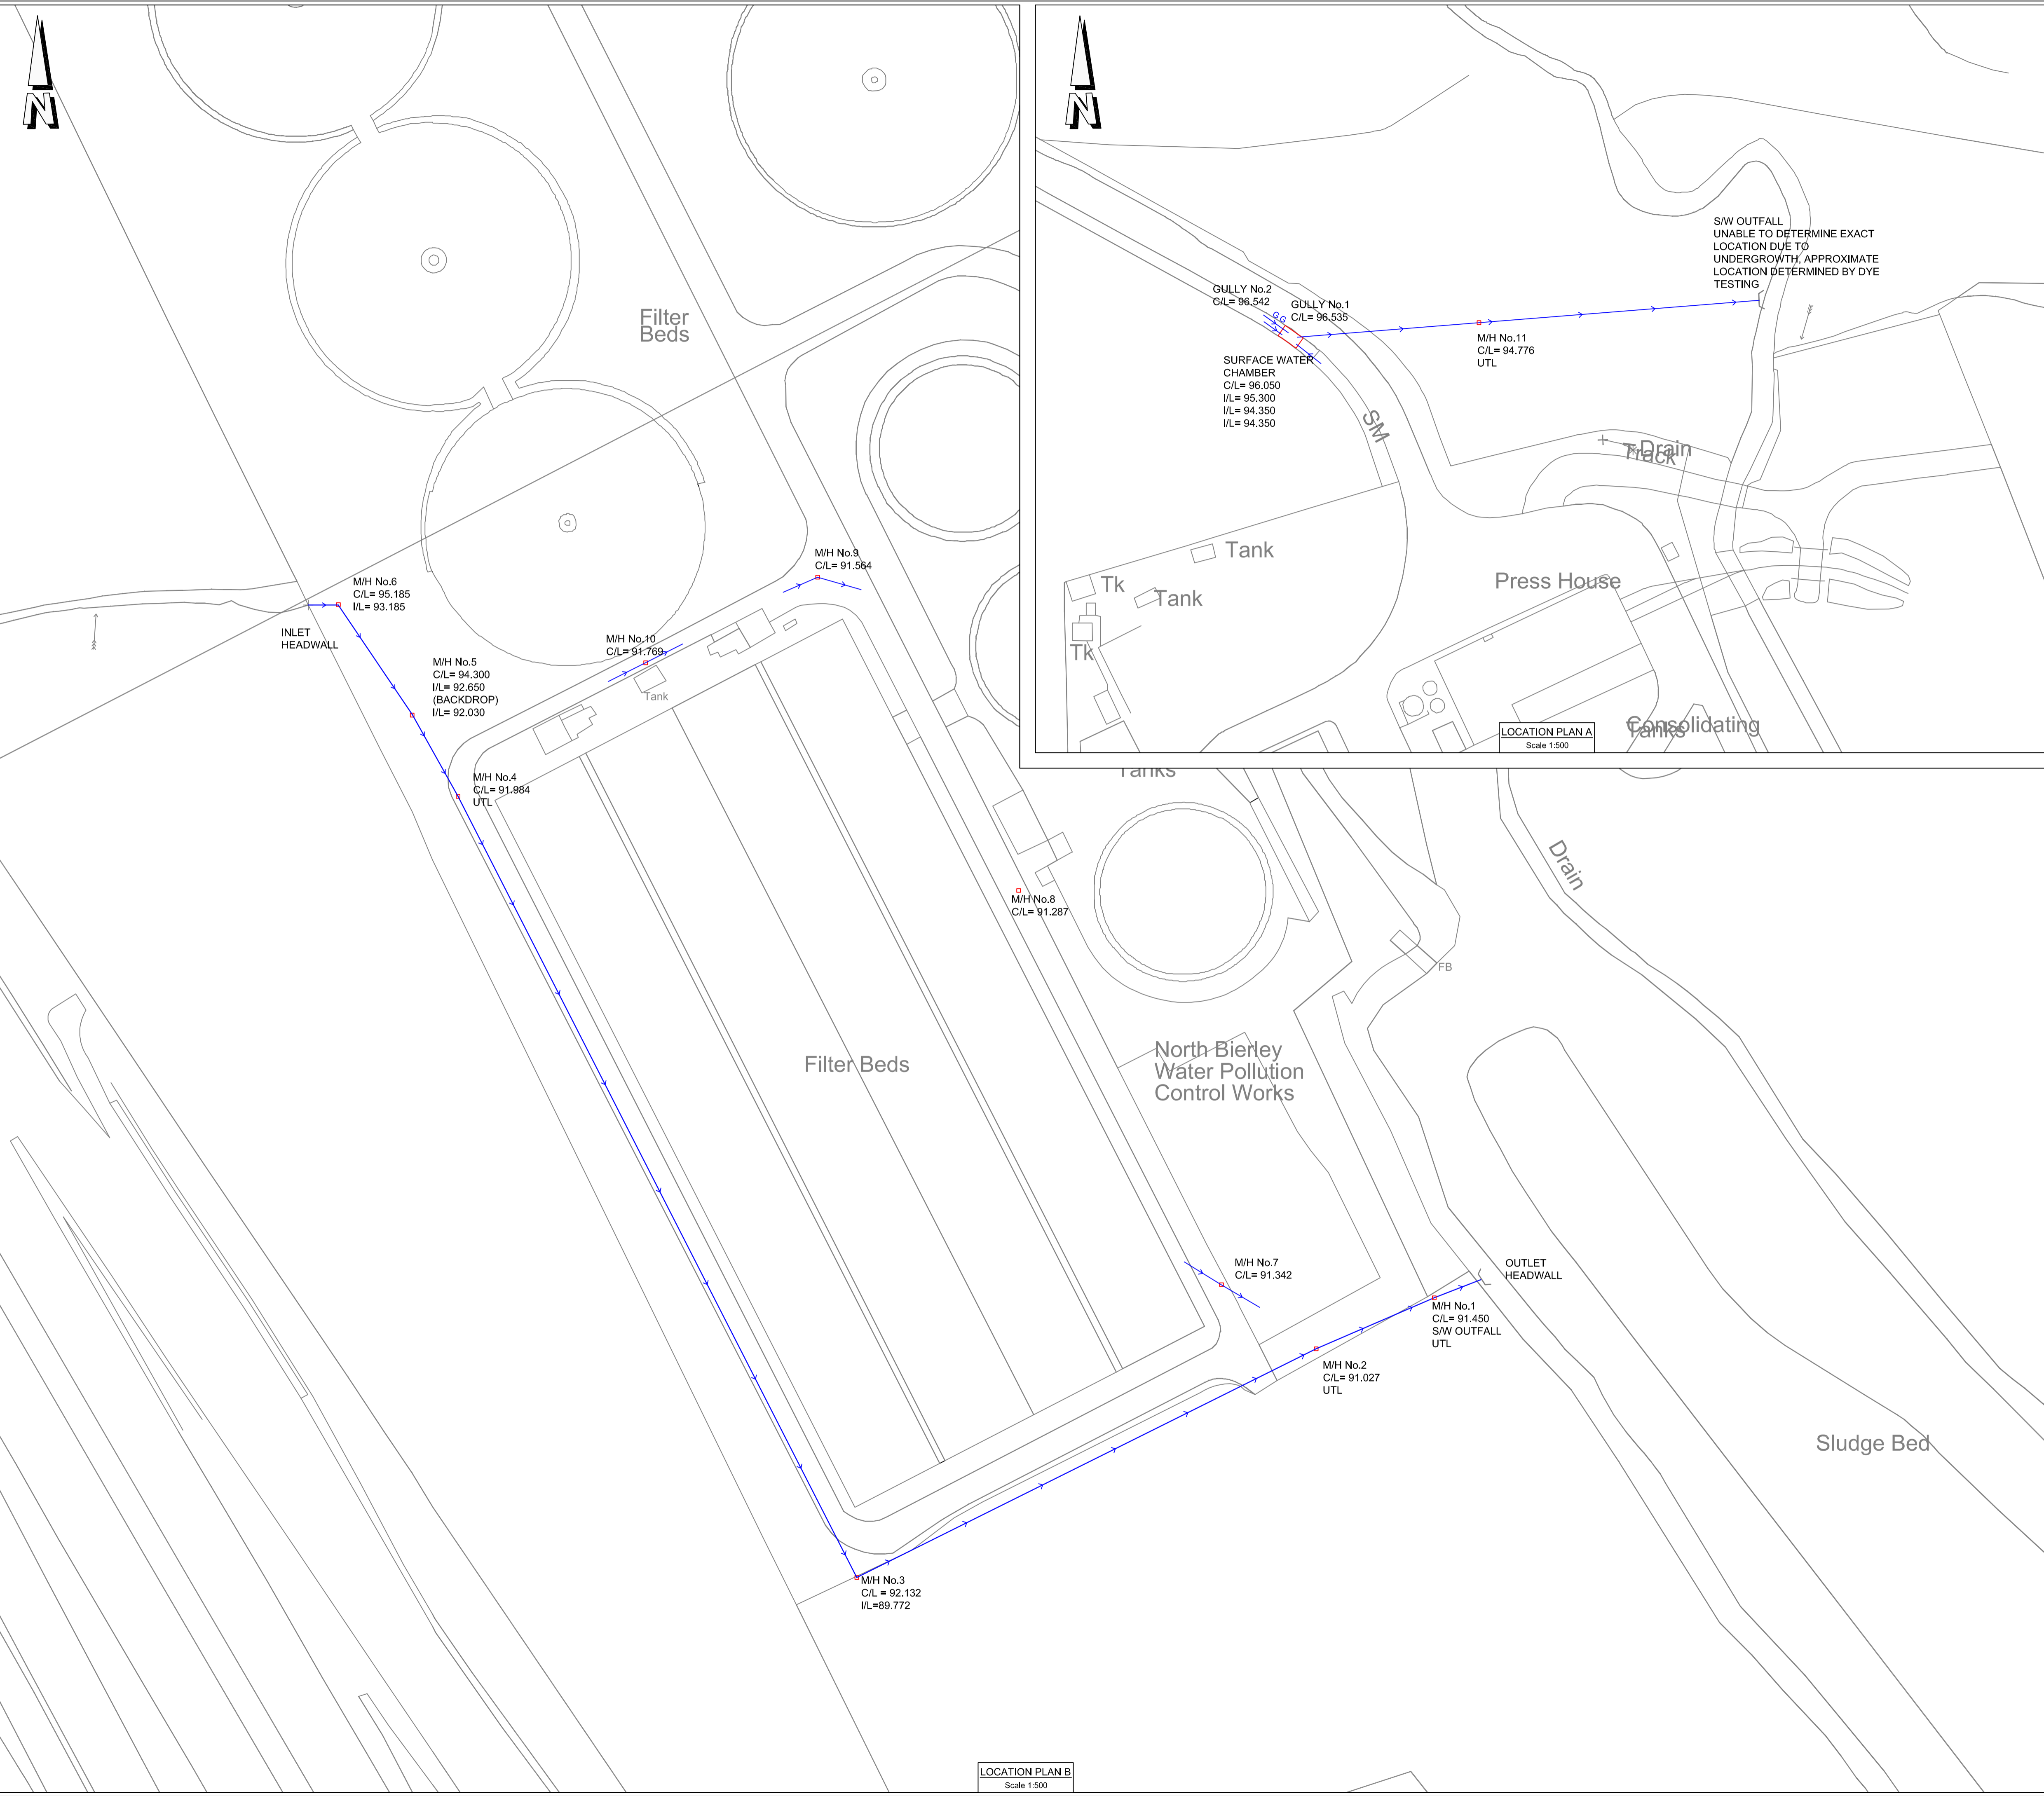


**Notes**  
1 LEVELS ARE RELATIVE TO OS ESTABLISHED BY GPS.

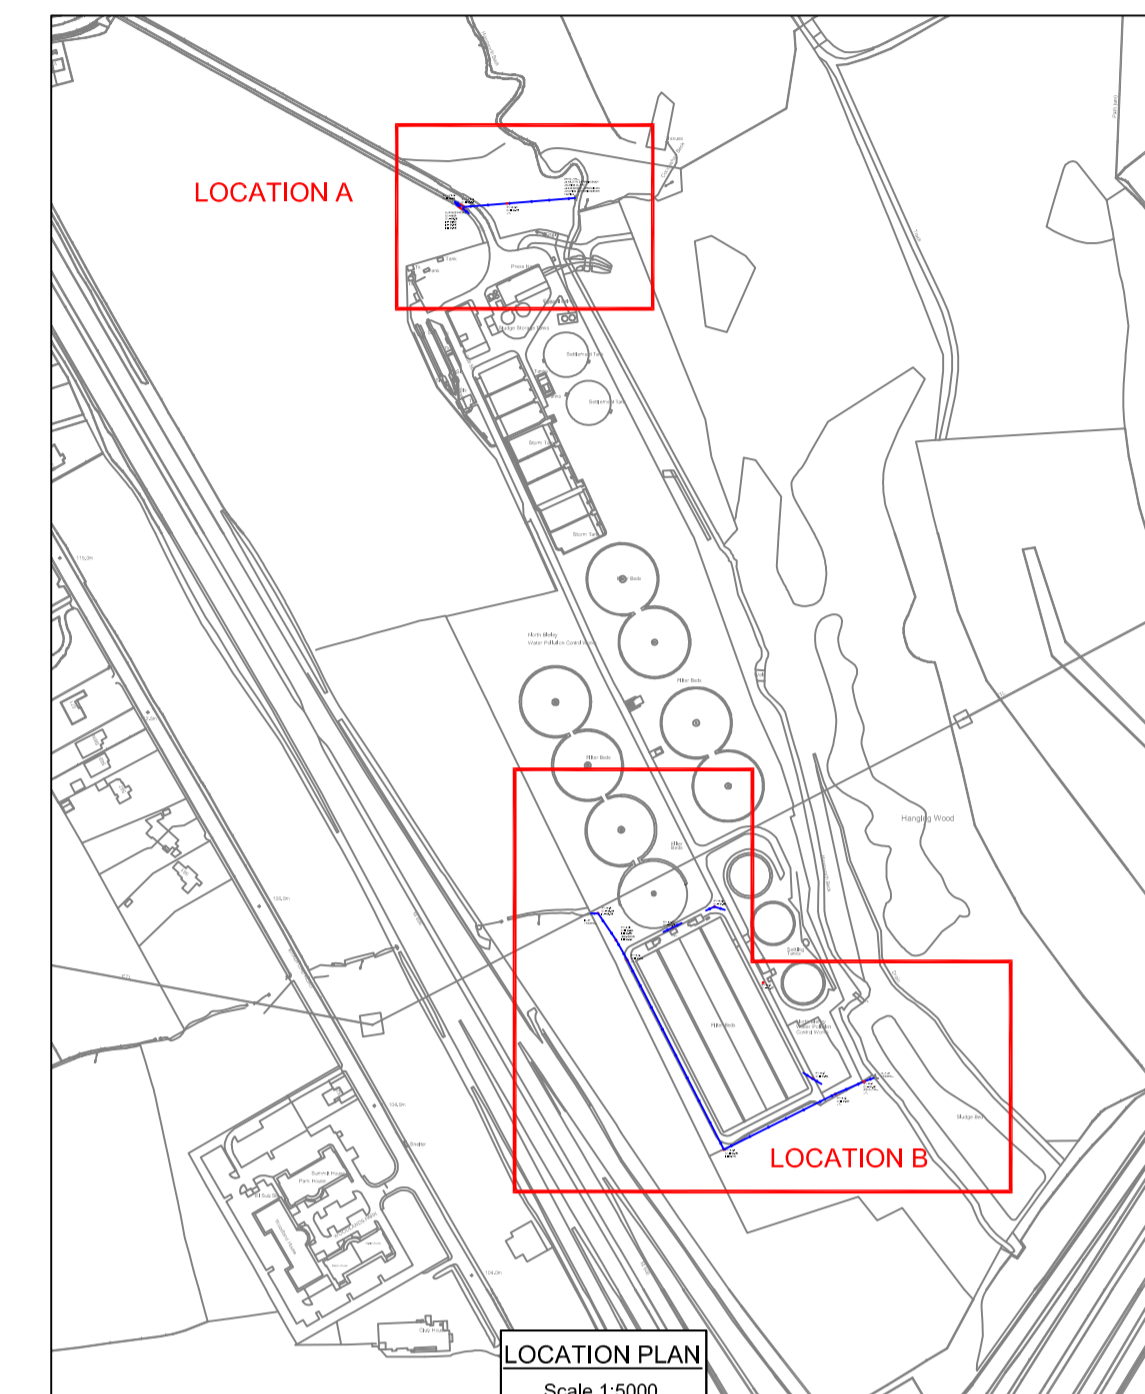


**LEGEND**


- Existing Surface water sewer
- Existing manhole
- UTL Unable to lift

AMENDMENTS	DRAWN	CHECK	DATE
<small>BASED UPON THE ORDNANCE SURVEY DIGITAL DATA WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONARY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS LICENSE NO: WU 100022432</small>			
OS REF: SE1827	CLIENT <b>KEYLAND DEVELOPMENTS</b>		GRID REF: 418000, 427500
SCHEME REFERENCE		DAZ REFERENCE	
PROJECT TITLE <b>NORTH BIERLEY STW, BRADFORD</b>			
DRAWING TITLE <b>SURVEY OF EXISTING SURFACE WATER DRAINS</b>			
		<b>PETER DUFFY LIMITED</b> Connaught House, Park View, Lofthouse Gate, Wakefield, WF3 3HA Telephone : 01924 871100 Fax : 01924 871199 Email : info@peterduffytd.com Internet : www.peterduffytd.com	
DRAWN BY	SCALE	DRAWING NO	
INITIALS DATE	AS SHOWN	<b>3610-01</b>	
A.L. 03/09/15			
AutoCAD BY			
INITIALS DATE			
A.L. 03/09/15	PROJECTION	DATE <b>SEPTEMBER 2015</b>	
CHECKED BY			
INITIALS DATE	ORIGINAL SHEET SIZE	A1	
A.D. 03/09/15			

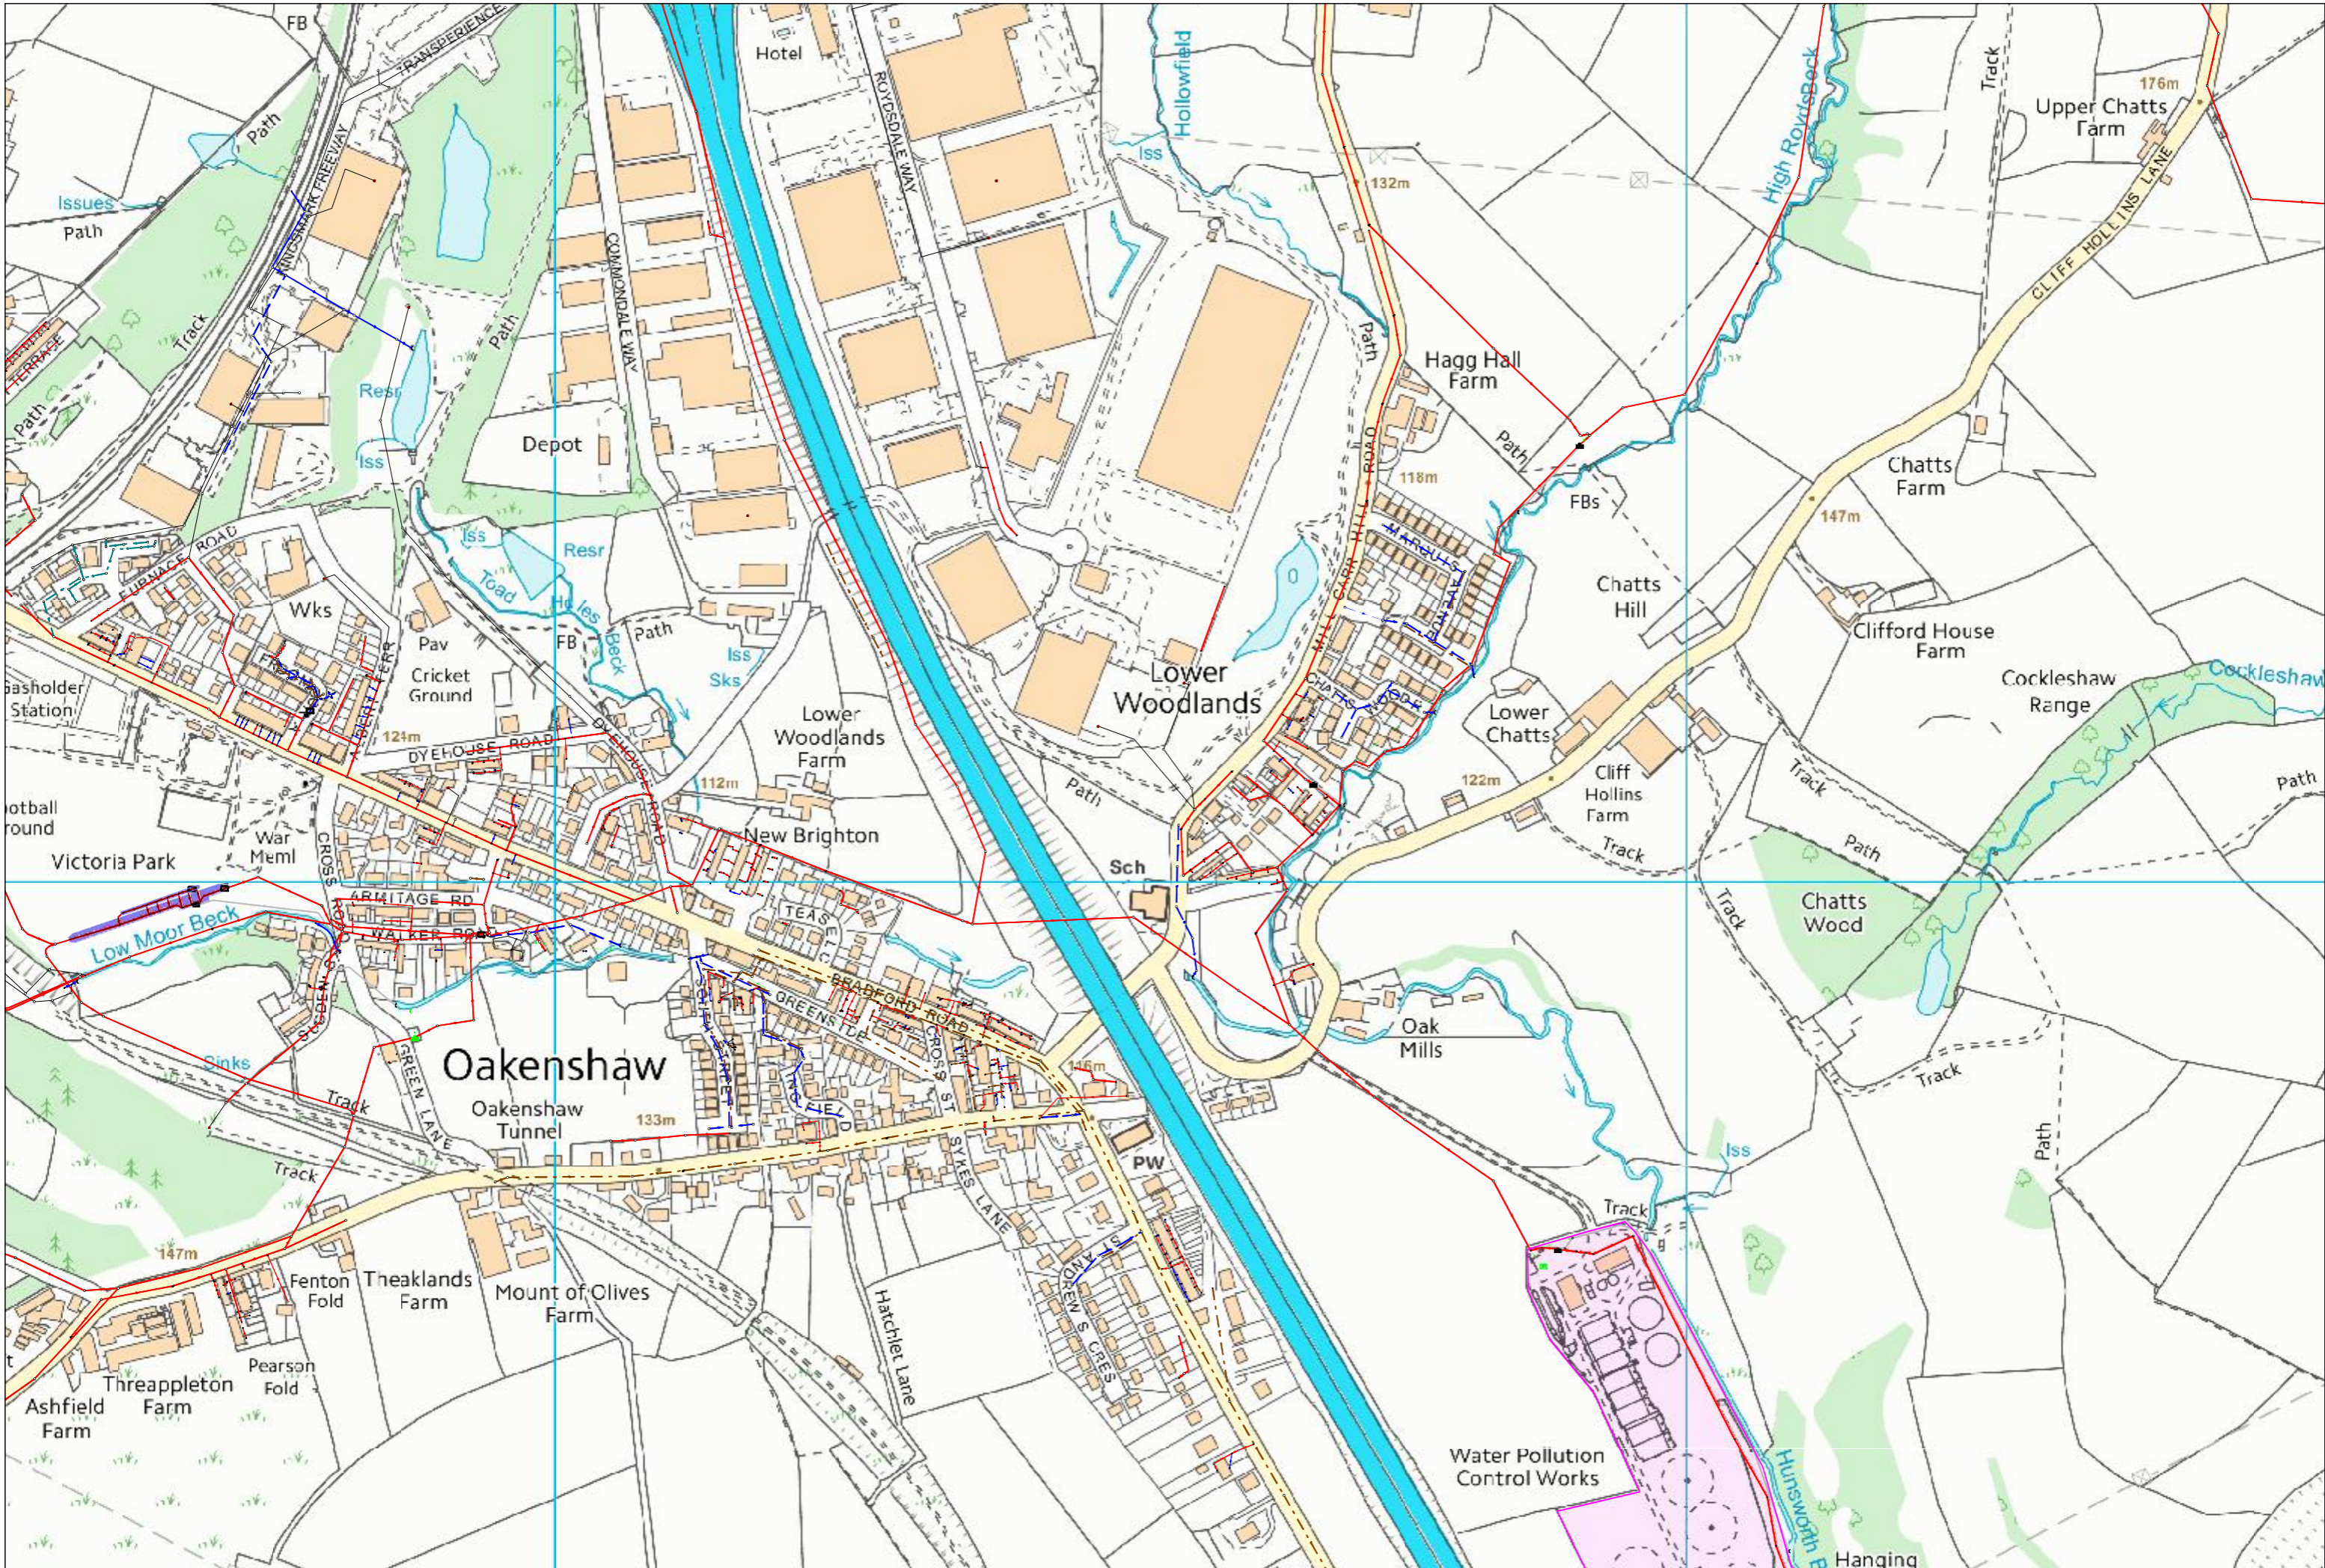

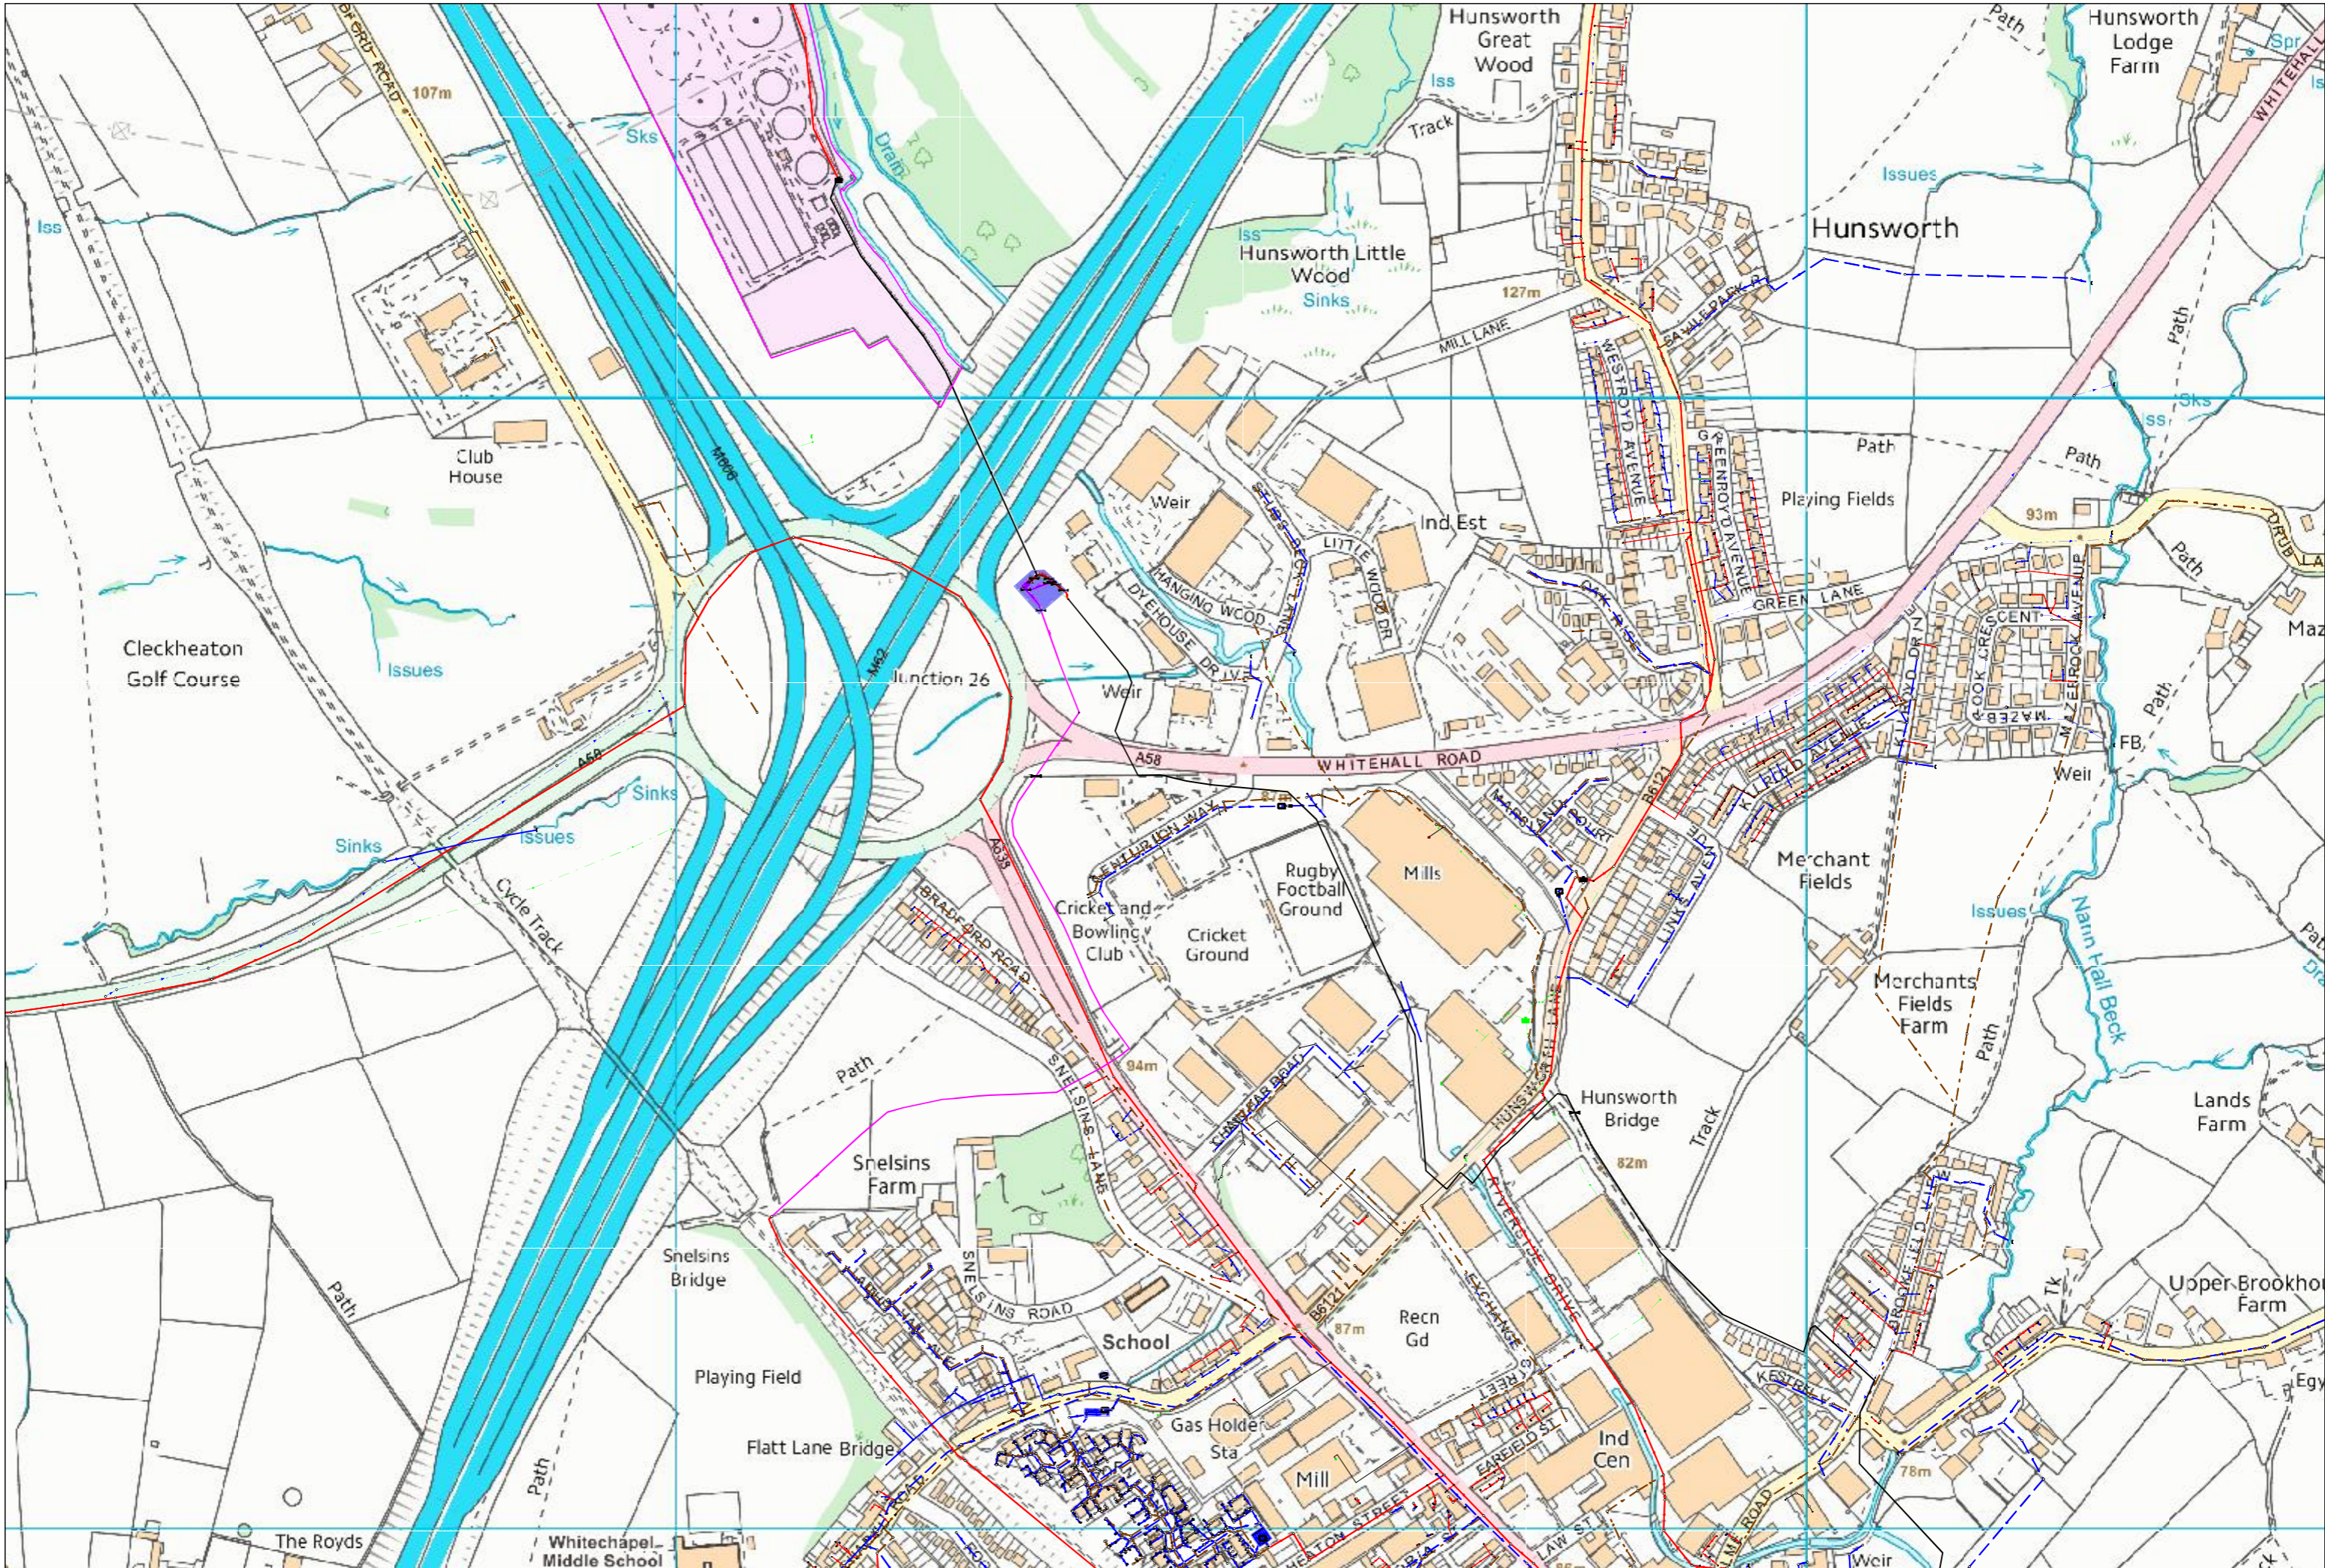

## Appendix B

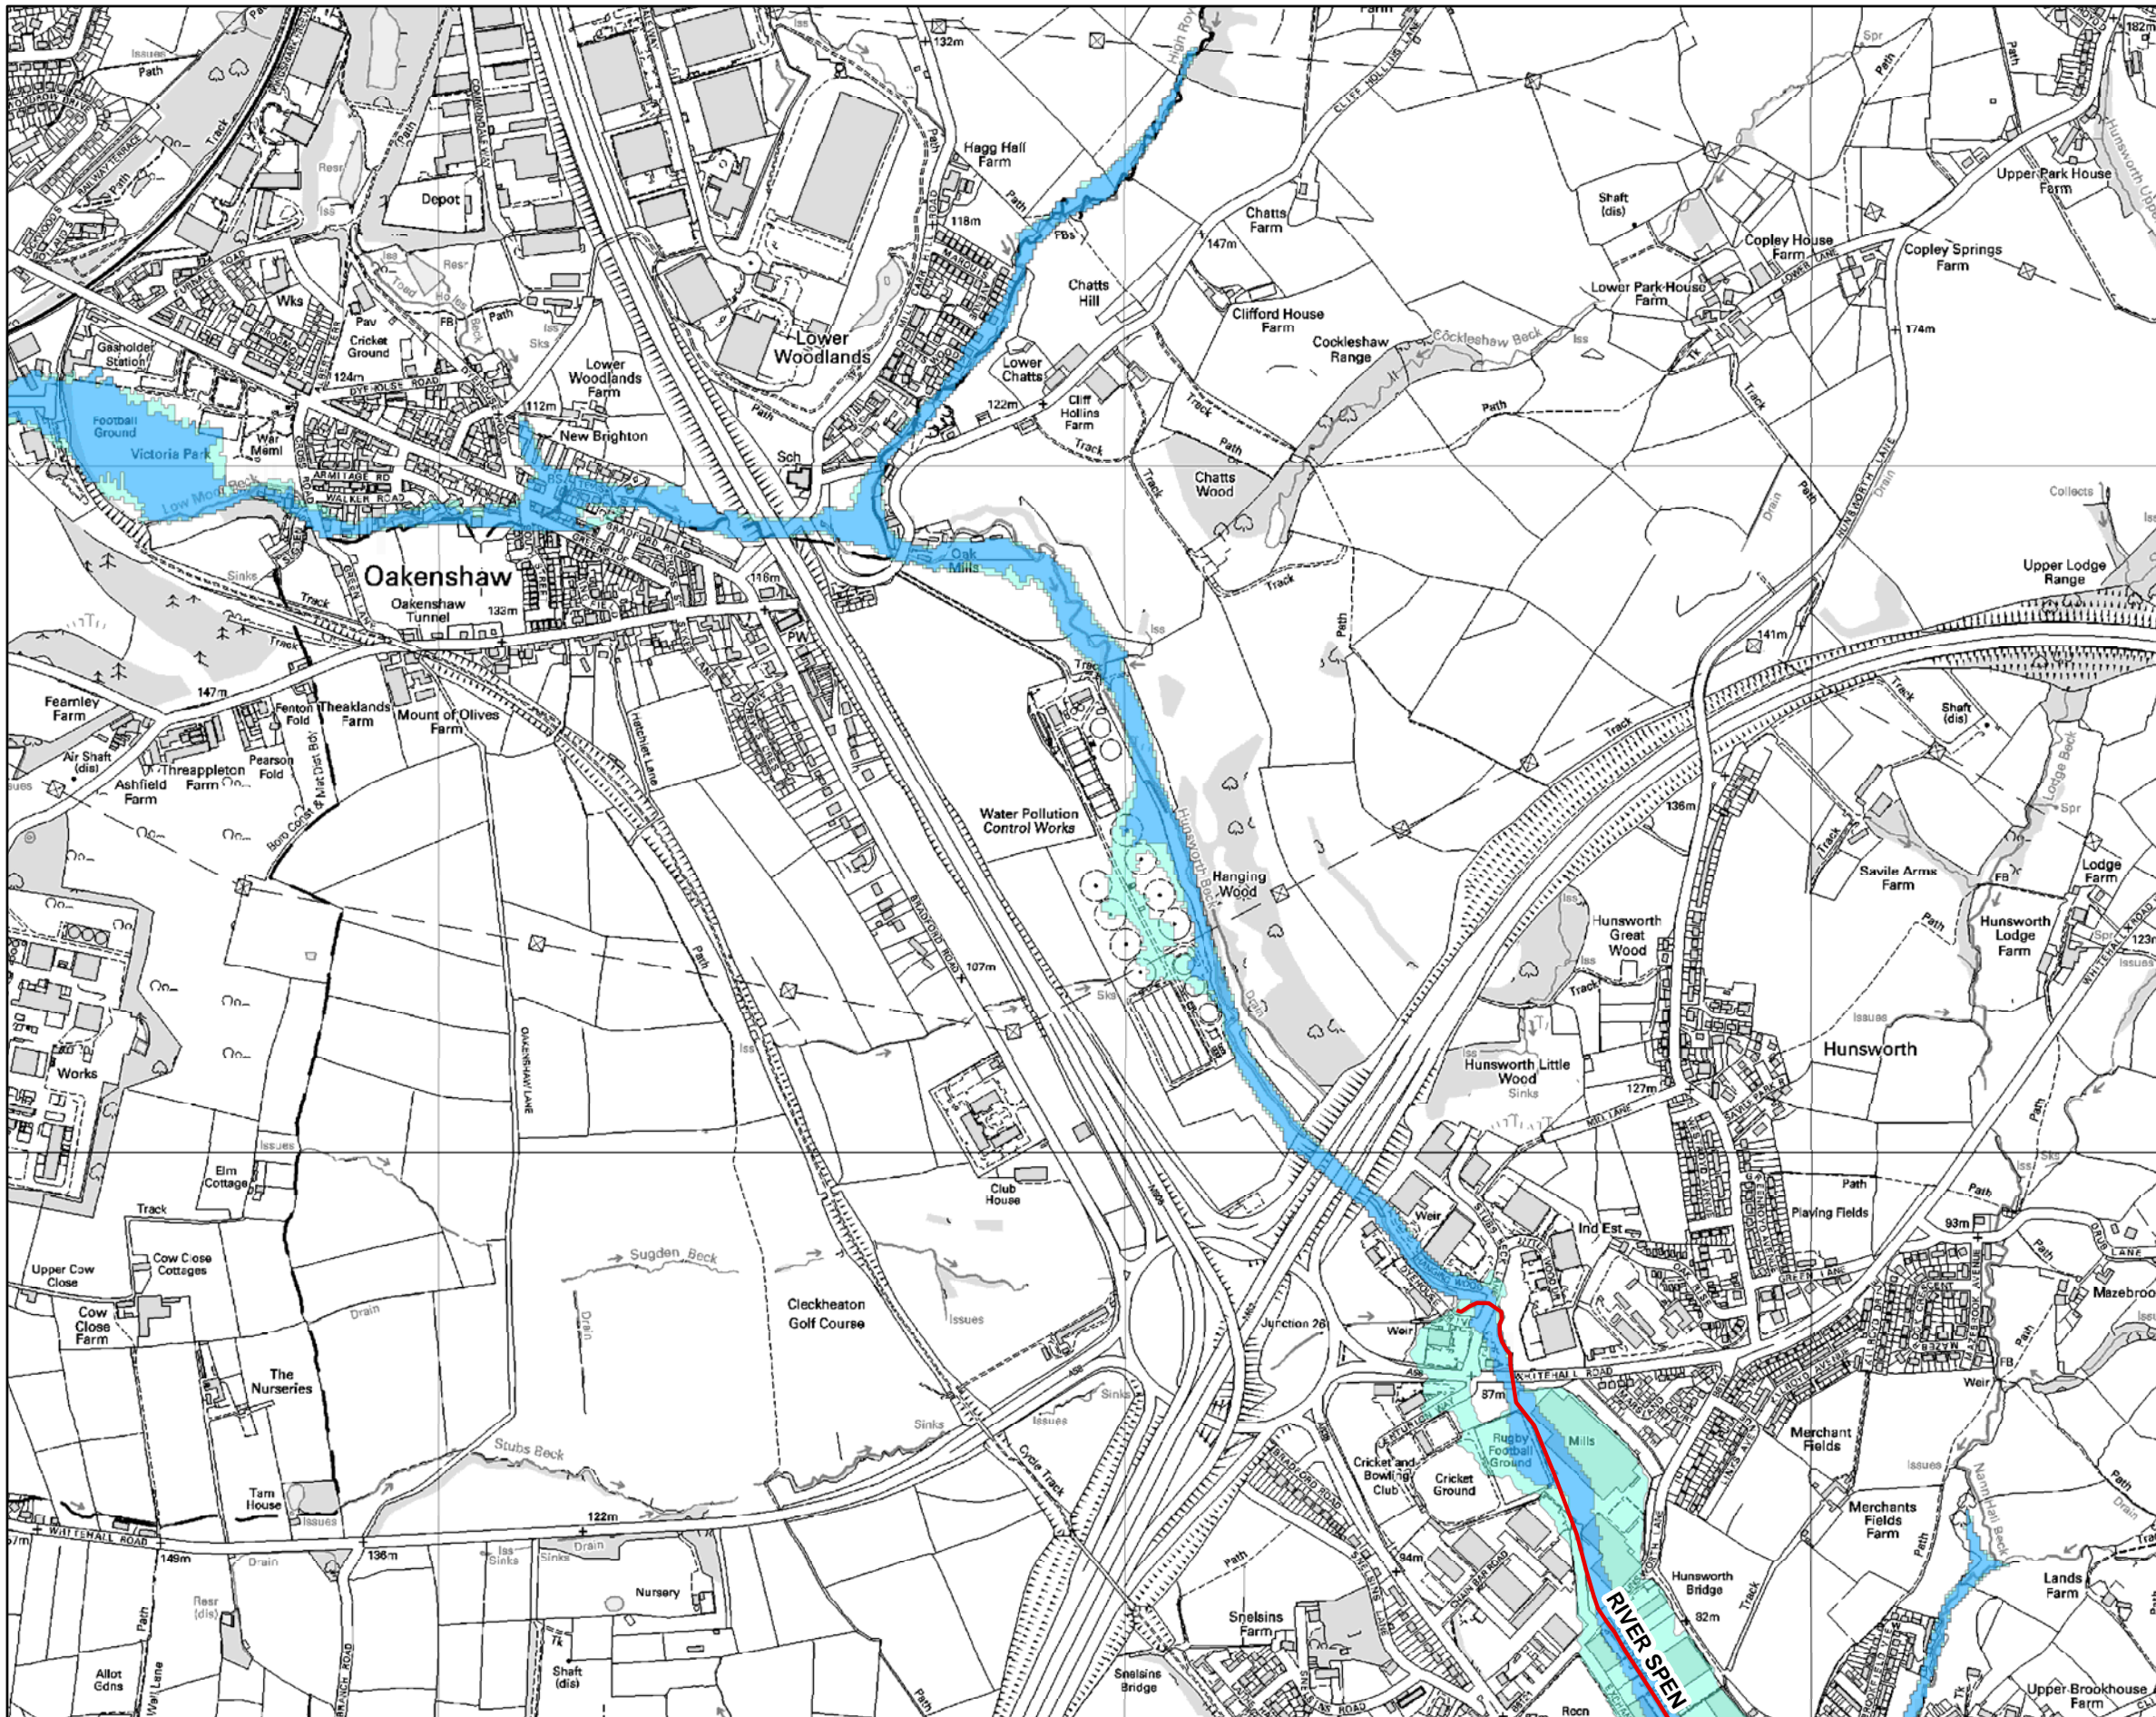

www.environment-agency.gov.uk



Scale: 1:10,000

when reproduced @ A3



### LEGEND

- Main River
- Flood Zone 2 (FZ2)
- Flood Zone 3 (FZ3)

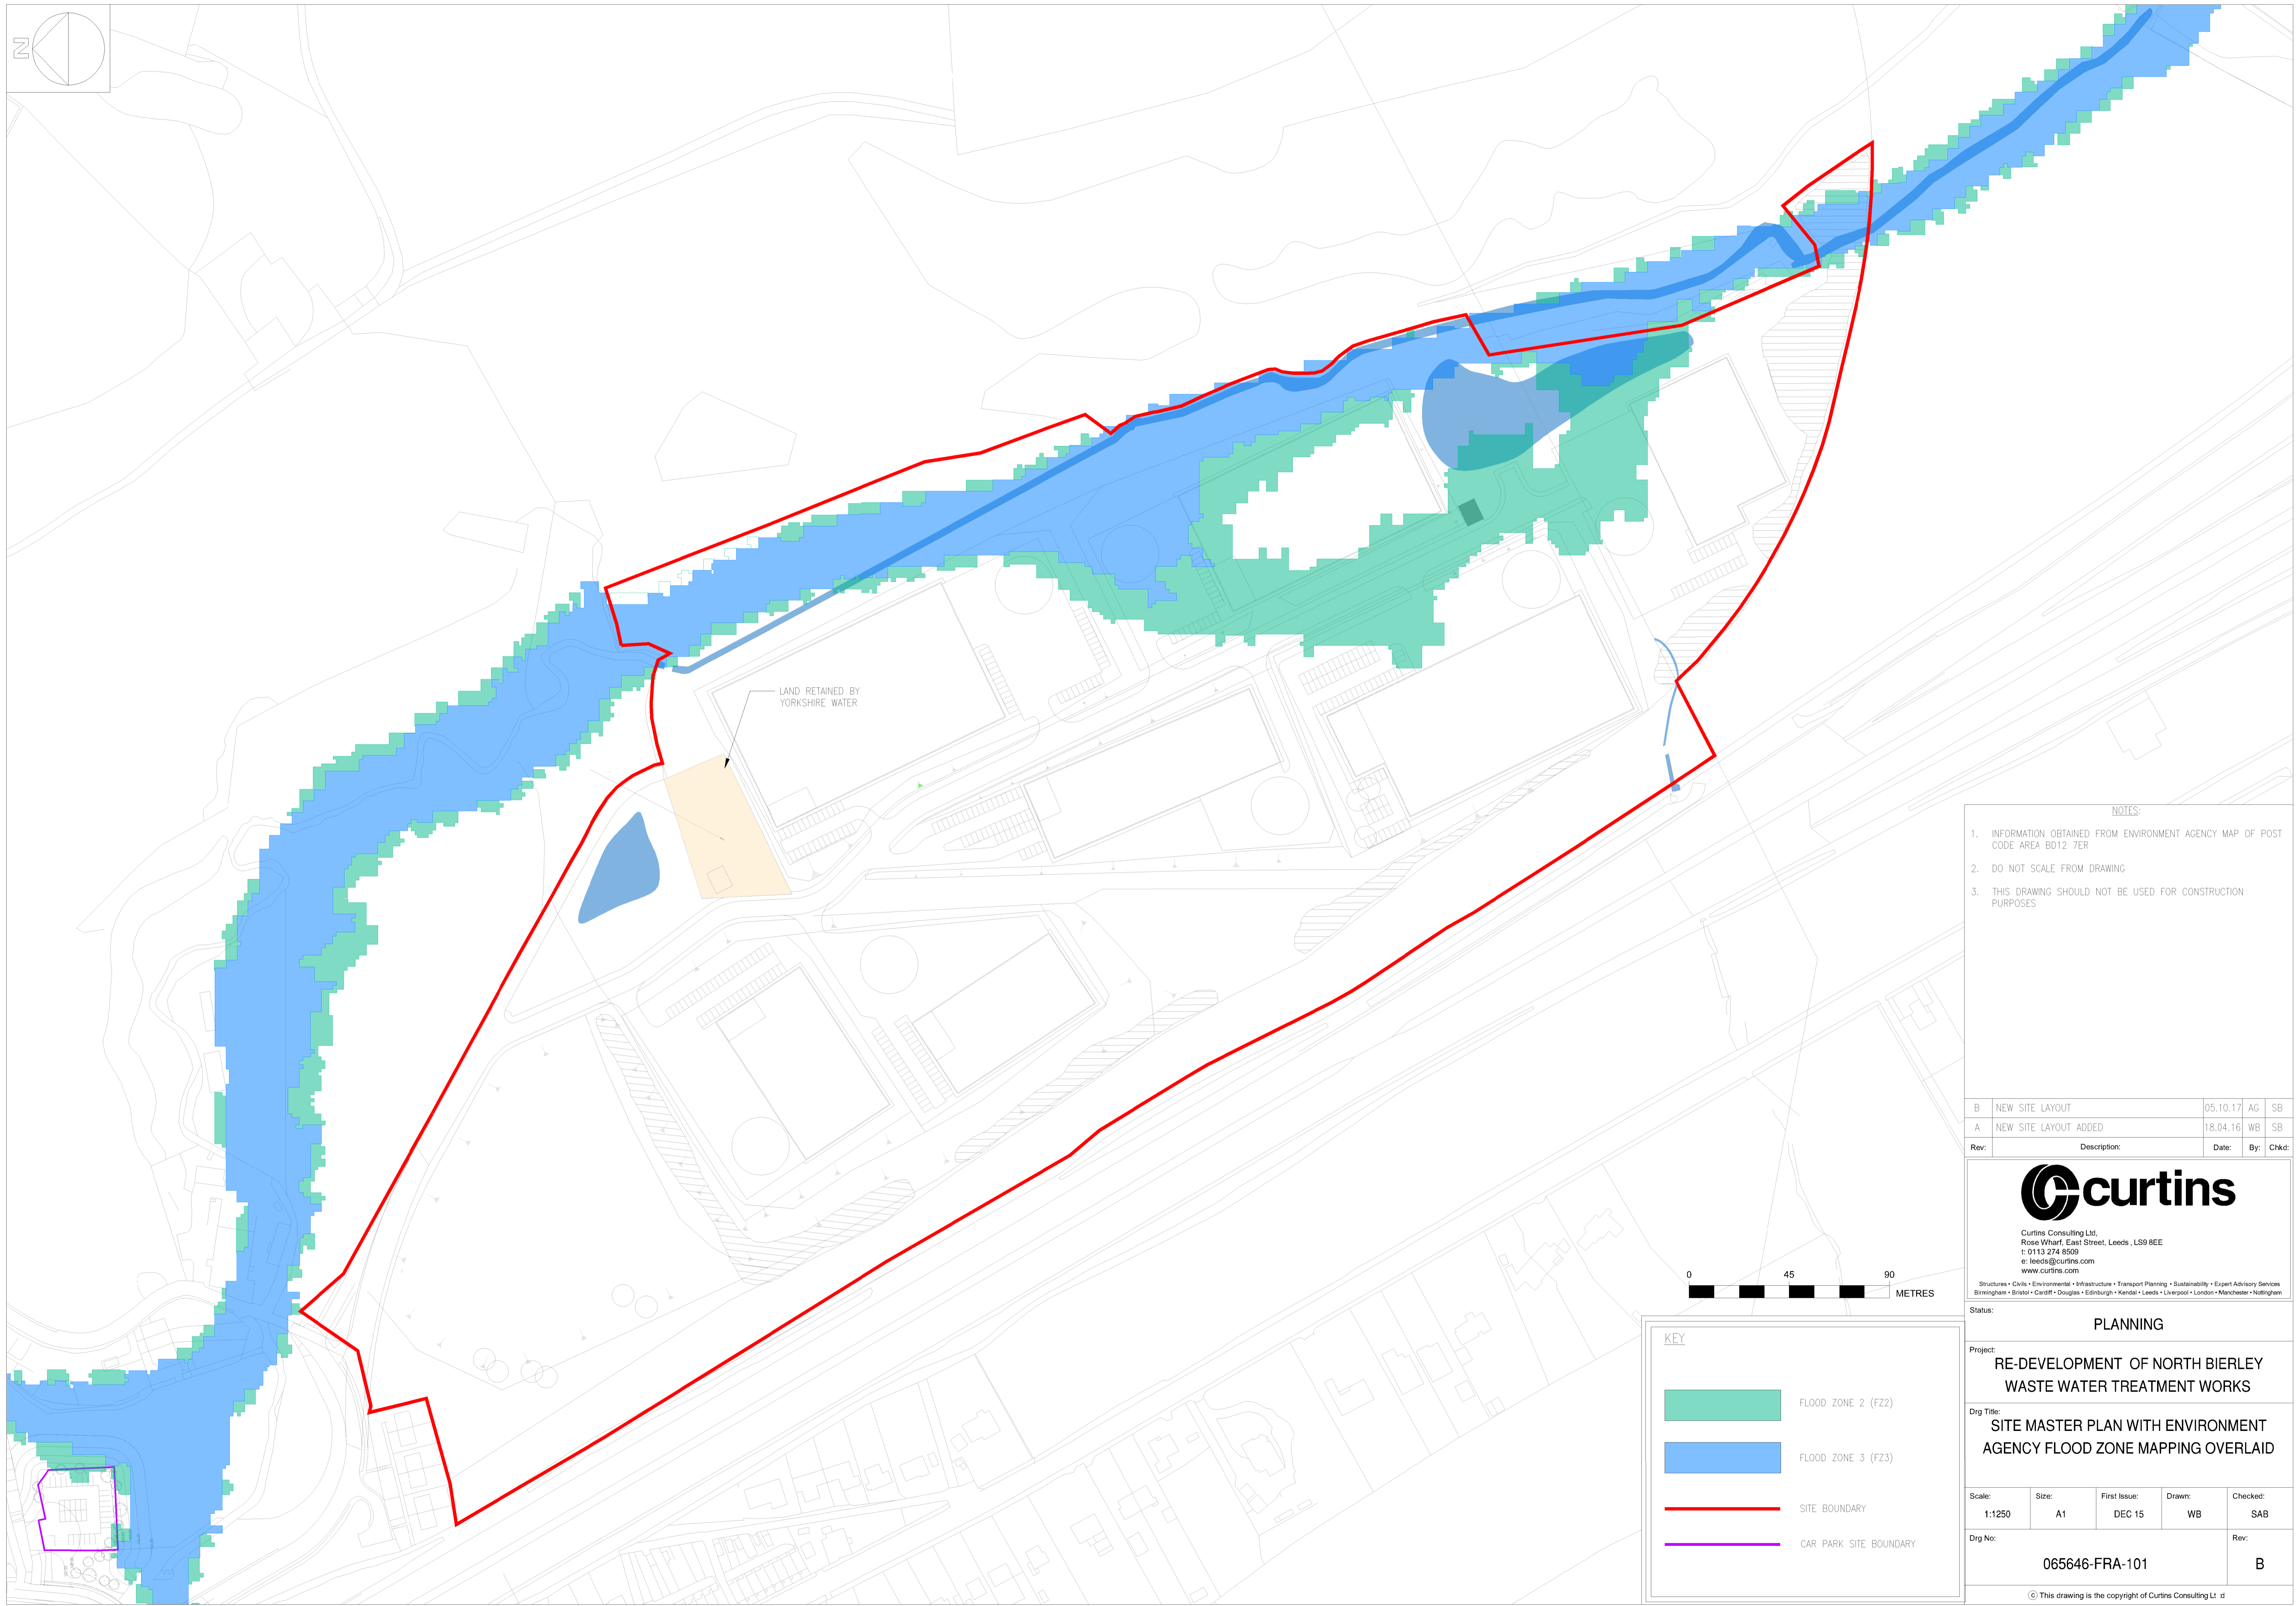

LAND RETAINED BY YORKSHIRE WATER

NOTES:


- 1. INFORMATION OBTAINED FROM ENVIRONMENT AGENCY MAP OF POST CODE AREA BD12 7ER
- 2. DO NOT SCALE FROM DRAWING
- 3. THIS DRAWING SHOULD NOT BE USED FOR CONSTRUCTION PURPOSES





Rev:	Description:	Date:	By:	Chkd:
B	NEW SITE LAYOUT	05.10.17	AG	SB
A	NEW SITE LAYOUT ADDED	18.04.16	WB	SB



Curtins Consulting Ltd,  
 Rose Wharf, East Street, Leeds, LS9 8EE  
 t: 0113 274 8509  
 e: leeds@curtins.com  
 www.curtins.com

Structures • Civils • Environmental • Infrastructure • Transport Planning • Sustainability • Expert Advisory Services  
 Birmingham • Bristol • Cardiff • Douglas • Edinburgh • Kentish • Leeds • Liverpool • London • Manchester • Nottingham



KEY	
	FLOOD_ZONE 2 (FZ2)
	FLOOD_ZONE 3 (FZ3)
	SITE BOUNDARY
	CAR PARK SITE BOUNDARY

Status: **PLANNING**

Project: **RE-DEVELOPMENT OF NORTH BIERLEY WASTE WATER TREATMENT WORKS**

Drq Title: **SITE MASTER PLAN WITH ENVIRONMENT AGENCY FLOOD ZONE MAPPING OVERLAID**

Scale:	Size:	First Issue:	Drawn:	Checked:
1:1250	A1	DEC 15	WB	SAB

Drq No:	Rev:
065646-FRA-101	B

## Appendix C

FLOOD RISK CONSULTANCY LIMITED

# 1D Hydraulic River Model Summary Report

---

Bierley Wastewater Treatment  
Works - Hunsworth Beck

**Client: Curtins Consulting**

**Report No: 2015-059-02**

**Date: 05/10/2015**

OFFICE C54 NORTHBRIDGE HOUSE  
ELM STREET BUSINESS PARK  
BURNLEY  
BB10 1PD  
TEL: 01282 792591  
EMAIL:  
INFO@FLOODRISKCONSULT.COM



# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

## Document Control

Document Title: Hydraulic Report for Hunsworth Beck

Project Number: 2015-059-02

Revision	Date	Issued to	Status	Comments
/	05/10/2015	Stuart Baker (Curtins Consulting)	Final	

## Contract

This report describes work commissioned by Stuart Baker of Curtins Consulting, dated 19<sup>th</sup> May 2015. David Emmott and Donna Metcalf of The Flood Risk Consultancy Ltd carried out the work.

Prepared by.....David Emmott (Flood Risk Consultant)

Reviewed by.....Donna Metcalf (Managing Director)

Approved by.....Donna Metcalf (Managing Director)

## Disclaimer

This document has been prepared solely as a 1D Hydraulic River Model Summary Report for Curtins Consulting. The Flood Risk Consultancy accepts no responsibility or liability for any use that is made of this document other than by the Client for the purposes for which it was originally commissioned and prepared.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

## Executive Summary

The Flood Risk Consultancy Ltd has been commissioned by Curtins Consulting to undertake 1D hydraulic modelling of Hunsworth Beck to inform a flood risk assessment to be completed by Curtins Consulting in support of major redevelopment works at North Bierley Waste Water Treatment Works in Oakenshaw, Bradford.

A hydrological assessment of Hunsworth Beck was completed by the Flood Risk Consultancy Ltd Report Number 2015-059-01.

A steady-state backwater model has been used in this study using HEC-RAS v4.1 software package developed by the US Army Corps of Engineers. In total 43 discrete cross sections through the channel and river banks associated with Hunsworth Beck were surveyed with a number of interpolated cross sections added to the model to ensure distance between discrete surveyed sections was not too large.

There are 8 hydraulically significant structures within the study reach comprised of:

- Foot bridge XS36.55
- Road Bridge XS35.5
- Foot bridge XS15.5
- Stone Arch culvert XS33.5
- Pipe Culvert XS9.5
- 3 Weirs

The model was run for normal unobstructed conditions, sensitivity testing by increasing flows by 20% to simulate the 1 in 100 year plus climate change event, 50% blockages of all bridges and culverts within the model, increasing Manning's n and a convergence test.

The model was shown to be sensitive to changes in flows, blockages of the culverts and bridges and increasing Manning's n with the convergence test indicating convergence of flows downstream of the development site.

The modelled 1 in 100 year water level within Hunsworth Beck adjacent to the development site ranges from 96.45mAOD at Cross Section 36 (XS36) to 88.70mAOD at XS13. It is noted that the 1 in 100 year flood level would remain in bank in all cross sections downstream of XS32 with overtopping occurring at Cross Sections 33, 34 35 and 36 adjacent to the development site.

The modelled 1 in 100 year plus climate change flood level within Hunsworth Beck adjacent to the development ranges from 96.68mAOD at XS36 to 88.54mAOD at XS13. It is noted that the 1 in 100 year plus climate change flood level would have a similar extent of flooding in the northeastern corner of the development site as the 1 in 100 year event with no overtopping in cross sections downstream of XS33.

During the 1 in 1000 year extreme event the banks of Hunsworth Beck adjacent to the site downstream of XS33 are shown to be elevated above the modelled water. With overtopping of the banks shown to occur in cross sections upstream of XS33 i.e. cross sections 33-43.

As such the development site could be considered to be located predominantly within Flood Zone 1 with a small area of Flood Zone 2 and 3 caused by overtopping of the cross sections in the north eastern corner of the development site. The vast majority of the site is therefore located within Flood Zone 1 with Flood Zone 2 and 3 located in the far north eastern corner of the development site.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

Testing of the hydraulic model was completed by increasing the values for Manning's  $n$  by +0.010 at all cross sections and resulted in an increase in modelled water levels.

The model was also tested by introducing a blockage at the 3No bridge structures and 2No culverts within the study reach. A 50% blockage of the bridges and culverts was modelled to determine the impact on water levels adjacent to the development site.

A 50% blockage of the footbridge at XS36.55 resulted in no increase in flood levels within cross sections adjacent to the site due to location of the bridge upstream of the development site. Additionally a 50% blockage of vehicular bridge at XS35.5 did not impact on the cross sections adjacent to the development site due to the location of the bridge upstream of the development site.

A 50% blockage of vehicular bridge XS15.5 resulted in increased water levels adjacent to the development site at the following cross sections XS33-16. There was no increase identified upstream of XS33 of the study reach.

A 50% blockage of the culvert at Cross Section 33.5 results in increased water levels in XS43-34 adjacent to the development site with a 50% blockage of culvert 9.5 shown to increase water levels in XS23-13 adjacent to the development site.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

## Contents

Document Control .....	i
Contract.....	i
Disclaimer.....	i
Executive Summary .....	ii
Appendices.....	v
1.0 Introduction.....	1
1.1 Terms of Reference.....	1
1.2 Objectives .....	1
2.0 Fluvial Hydraulic Modelling of Hunsworth Beck.....	2
2.1 Introduction.....	2
2.2 Topographical Survey .....	2
2.2.1 In Bank Cross Section Survey .....	2
2.2.2 Long Section Configuration .....	2
2.3 Overbank Cross Sections .....	2
2.4 Model Schematisation .....	2
2.5 Boundary Conditions.....	3
2.6 Model Coefficients .....	4
2.7 Structure Data .....	4
2.8 Ineffective Flow .....	5
2.9 Assumptions of the Model .....	5
2.10 Limitations of the Model.....	5
2.11 Level of Confidence in the Modelled Flood Levels.....	5
3.0 Model Simulation.....	6
3.1 Introduction.....	6
3.2 Unobstructed Flow Simulation.....	6
3.3 Model Sensitivity – Sensitivity to Roughness.....	9
3.4 Sensitivity to Downstream Boundary Conditions.....	9
3.5 Sensitivity to Design Flow.....	10
3.6 Sensitivity to Blockage.....	10
4.0 Model Results .....	13
5.0 Conclusions.....	21

## Figures

Figure 3.1: Cross Section 36 – 1 in 100 year plus climate change Unobstructed Flow .....	7
Figure 3.2: Cross Section 30 – 1 in 100 year plus climate change Unobstructed Flow .....	7
Figure 3.3: Cross Section 22 – 1 in 100 year plus climate change Unobstructed Flow .....	8
Figure 3.4: Cross Section 13 – 1 in 100 year plus climate change Unobstructed Flow .....	8

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

Figure 3.5: Long Section of Hunsworth Beck..... 9

Figure 3.6: Long Section showing Convergence of Flow at weir..... 10

## Tables

Table 1: Model Extents ..... 3

Table 2: Estimated Manning's n for Hunsworth Beck ..... 3

Table 3: Design Flows ..... 3

Table 4: Structure Details ..... 4

Table 5: Water Levels at Key Locations..... 6

Table 6: Model Results for all Return Periods and All Cross Sections..... 13

## Appendices

Appendix A: - Cross Section Locations

Appendix B: - HEC-RAS Model Results

Appendix C: - Hunsworth Beck Photographs

Appendix D: - Flood Extents Flood Zones 2 and 3

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

## 1.0 Introduction

### 1.1 Terms of Reference

The Flood Risk Consultancy Ltd has been appointed by Stuart Baker of Curtins Consulting, to provide modelled flood levels for a range of return periods for Hunsworth Beck at Bierley, Bradford. This information will be used to inform a detailed flood risk assessment undertaken by Curtins Consulting to support a large scale redevelopment at Bierley Wastewater Treatment Works.

### 1.2 Objectives

Following liaison with the Environment Agency, it is advised that the current flood map for Hunsworth Beck is derived from National Generalised Modelling; and does not consider river channel shape in sufficient detail, nor does it represent significant level differences along the route of Hunsworth Beck.

The objectives of this study were as follows:

- To establish a hydrologic model to predict flow inputs to the system.
- To construct a hydraulic model of Hunsworth Beck to predict water levels adjacent to the site.
- To produce flood levels based on the hydrological and hydraulic models for existing situation.
- To construct hydraulic models to investigate the impact that the existing structures may have on the flood risk.

## 2.0 Fluvial Hydraulic Modelling of Hunsworth Beck

### 2.1 Introduction

The purpose of the hydraulic modelling exercise has been to produce peak water levels from the derived design flow estimates for the Hunsworth Beck Catchment, in order to establish the capacity of the watercourse adjacent to the development site.

A steady-state (backwater) model has been used for hydraulic modelling in this study. The HEC-RAS v4.1 software package developed by the US Army Corps of Engineers has been used. The advantages of backwater models are that they are inherently conservative, as they do not allow any attenuation of the design discharge.

### 2.2 Topographical Survey

#### 2.2.1 In Bank Cross Section Survey

The geometry of the natural channel within this watercourse is shown in general to be irregular, and cannot be characterised by simple mathematical relationships. Therefore representation in mathematical models requires that the stream geometry, in the form of discrete cross sections, be taken transversely at key locations along the watercourses. The cross sections have been taken from a topographical survey undertaken by Wardell Armstrong. The survey was carried out by GPS with line and level calibrated to Ordnance Datum.

The locations of the cross sections are shown in Appendix A. The positions of the cross sections were based primarily on the location of structures and significant changes in channel and structure geometry. Other factors influencing the final cross section locations were conditions on site (visibility, access and obstructions).

#### 2.2.2 Long Section Configuration

Following input of cross sections into the model the long section of Hunsworth Beck appeared to show an anomaly at the downstream end of the model downstream of the motorway culvert.

It appears that the bed level downstream of the culvert rises before the weir, the topographical survey and photographs of this area were studied and it was determined that the surveyed data at this area is considered to be correct and that the bed level rises before the weir at this location.

### 2.3 Overbank Cross Sections

The in-bank survey described previously is sufficient to estimate water levels provided the flow remain within the confines of the main channel. In order to account for conveyance when flow overtops the main channel banks, the in-bank cross sections should be extended across the full width of the floodplain. Therefore section lines have been extended across the development site.

### 2.4 Model Schematisation

The HEC-RAS model comprises one reach known as Hunsworth Beck. The extent of the model is provided in Table 1 and shown in Appendix A.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

**Table 1: Model Extents**

Watercourse	Upstream Extent	Downstream Extent
Hunsworth Beck	Located approximately 110m north of entrance to Bierley Wastewater Treatment Works	Located approximately 480m south east of the development site

In total 43No cross sections, 6No of which are used to define three bridge structures, with 3No weir structures and 2No culverts have been used to develop the model as shown in Table 2.

Channel roughness parameters, specified as Manning's n, were derived for each model cross section from the application of Cowan's procedure and the comparison of the channel sections with published values (e.g. Chow, 1957). The values were verified by the Flood Risk Consultancy Ltd via photographs of the watercourse taken during the topographical survey. An Engineer attempted to walk along the banks of the channel of the watercourse during the site inspection however access to the watercourse was not available.

**Table 2: Estimated Manning's n for Hunsworth Beck**

Cross Section References	Main Channel Manning's n Value	Floodplain Manning's n Value		Location	Description
		Left	Right		
1-43	0.04	0.01	0.01	All Cross Sections	<p><b>Main Channel:</b> Clean, winding some pools and shoals</p> <p><b>Left Overbank:</b> Medium to dense brush, in summer</p> <p><b>Right Bank:</b> Medium to dense brush, in summer</p>

## 2.5 Boundary Conditions

For the purposes of the study, the downstream boundary was set to normal depth and the model was run as mixed flow. The upstream boundary was also set at normal depth.

The HEC-RAS model was run for all design flows given in Table 3. The design flows for the watercourse was taken to be those derived for the downstream extent of the study reach.

The design flows were obtained from ReFH2 with the Hunsworth Beck Hydrology Report (Report Number: 2015-059-01) to be read in conjunction with this report.

**Table 3: Design Flows**

Site Code	Flood peak (m <sup>3</sup> /s) for the following return periods (in years)								
	2	5	10	25	50	75	100	100 + 20% CC	1000
Hunsworth Beck	4.17	5.53	6.64	8.36	9.77	10.73	11.46	13.75	18.93

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

## 2.6 Model Coefficients

Flow contraction and expansion coefficients were determined using the HEC-RAS User's Manual. Contraction and expansion coefficients are used by the hydraulic model computations to determine the transition losses due to the expansion and constriction of flow, between two adjacent cross sections.

The manual suggests that values of 0.1 (contraction) and 0.3 (expansion) are typical for a gradual transition along an open channel. Typical bridge contraction and expansion coefficients are estimated to vary from 0.1 to 0.6 for contraction and between 0.3 and 0.8 for expansion.

In this instance, coefficients of 0.3 and 0.5 have been applied to the contraction and expansion sections upstream and downstream of the bridges. Values of 0.1 and 0.3 have been adopted for the open channel sections.

## 2.7 Structure Data

Eight structures considered hydraulically significant, have been identified within Hunsworth Beck, including 3No Weirs, 3No Bridges and 2No Culverts and have been modelled using in-line weir structures and the HEC-RAS bridge/culvert routine (see Table 4 below).

**Table 4: Structure Details**

HEC-RAS Reference	Structure	Description	Structure Length (m)	Skew	Piers
36.55	Bridge	Metal and Wooden Footbridge	0.78	0°	None
35.5	Bridge	Vehicle Bridge with concrete banks	5.6	0°	None
33.5	Culvert	Arched stone culvert	9.45	0°	None
23.5	Weir	Stone Weir	0.65	0°	None
15.5	Bridge	Wooden footbridge with high soffit level	2.80	0°	One
10.4	Weir	Stone weir leading to Motorway Culvert	2.18	0°	None
9.5	Culvert	Circular corrugated metal culvert	139	0°	None

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

7.5	Weir	Stone Weir	3.11	0°	None
-----	------	------------	------	----	------

## 2.8 Ineffective Flow

It was apparent from the configuration of the structures that they would present a constriction to high flows. Where appropriate, ineffective flow has been declared on the abutment faces of each structure concerned.

Ineffective flow has also been declared on sections of the floodplain below bank level where water will tend to pond rather than flow.

## 2.9 Assumptions of the Model

The representation of any complex system by a model requires a number of assumptions to be made. In the case of a one dimensional hydraulic model of a river system it must be assumed that:

- The cross sections accurately represent the river.
- The hydrological analysis based on the gauged data (where available) can be extrapolated to other parts of the system.
- The design flows are an accurate representation of flows of a given return period.

## 2.10 Limitations of the Model

Owing to the lack of gauged data for the subject watercourse during flood events in this part of the catchment, the model has not been calibrated against observed flood levels.

Instead, careful consideration has been given to the selection of roughness, structure discharge coefficients and cross sectional data. The theory of these is well understood and the model may be considered appropriate for flows up to bank full capacity and simple flow on the floodplain.

The model is less appropriate for complex out-of-bank flow routes that may not be represented in the schematisation. Also the model will not represent flooding from the drainage system where backing up in the sewers may lead to flooding away from the watercourse.

## 2.11 Level of Confidence in the Modelled Flood Levels

The confidence or accuracy of the levels provided by computational hydraulic models is dependent on several related factors, namely, the accuracy of the flow rate adopted, the friction of the channel and the model schematisation.

The mathematical representation of the hydraulics is also important but in general, errors due to this source are minor compared to the others. To maintain meaningful accuracy figures for water level, these should be quoted for a given flow rate and assumed roughness (in other words ignoring return period which is a major source of uncertainty).

Calibration of the model has not been possible due to the absence of known flow and level data during past events. However it is considered that the model is appropriate for the purpose of this flood risk assessment.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

## 3.0 Model Simulation

### 3.1 Introduction

The primary aim of this study is to assess the capacity of the existing channel adjacent to the development site, and to assess the impact of Hunsworth Beck on the proposed development site.

The HEC-RAS steady state model has been used in conjunction with the design peak flows to determine water levels in the watercourse during the 2, 5, 10, 25, 50, 75, 100 and 1000 year return period flood events. The 1 in 100 year plus 20% to account for climate change has also been considered.

### 3.2 Unobstructed Flow Simulation

Table 5 summarises the water levels (based on HEC-RAS simulation) at key locations along the study reach. These return periods may be used to determine the relative risk for out-of-bank flows at various locations along the model reach.

**Table 5: Water Levels at Key Locations**

Location	Cross Section Reference	Water Level (mAOD)	Return Period (years)
Upstream boundary of model	Cross Section 43	96.82	100 year plus 20% CC
Upstream boundary of development site	Cross Section 36	96.68	100 year plus 20% CC
Northern part of development site	Cross Section 30	94.46	100 year plus 20% CC
Centre of development site	Cross Section 22	90.98	100 year plus 20% CC
Downstream boundary of development site	Cross Section 13	88.94	100 year plus 20% CC
Downstream extent of model	Cross Section 1	84.57	100 year plus 20% CC

During the 1 in 100 year flood the estimated water level within Hunsworth Beck adjacent to the north of the development site (Cross Section 36) is 96.68mAOD with the 1 in 100 year flood level at the downstream boundary of the development site (Cross Section 13) is shown to be 88.94mAOD.

During the 1 in 100 year plus climate change event it is noted that modelled flood levels overtop the banks of Hunsworth Beck in the north of the development site however they remain within bank along the majority of the development site.

The bridges adjacent to the north of the development site (Foot Bridge XS36.55 and Road Bridge XS35.5) are shown to overtop during the 1 in 100 year plus climate change event. As such it is considered that there may be risk to people/vehicles using these bridges during the 1 in 100 year plus climate change event and mitigation may be required to reduce the danger to people using these bridges.

# 1D Hydraulic River Model Summary Report



Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

During the 1 in 1000 year flood event there is some overtopping of the banks in the north of the development site however water remains in channel for the cross sections downstream of cross section 33.

The Bierley Wastewater Treatment works site is located adjacent to Cross Section 36 at its upstream end and Cross Section 13 at the downstream end.

The unobstructed modelling 1 in 100 year plus climate change flood levels for cross sections 30 is depicted below.

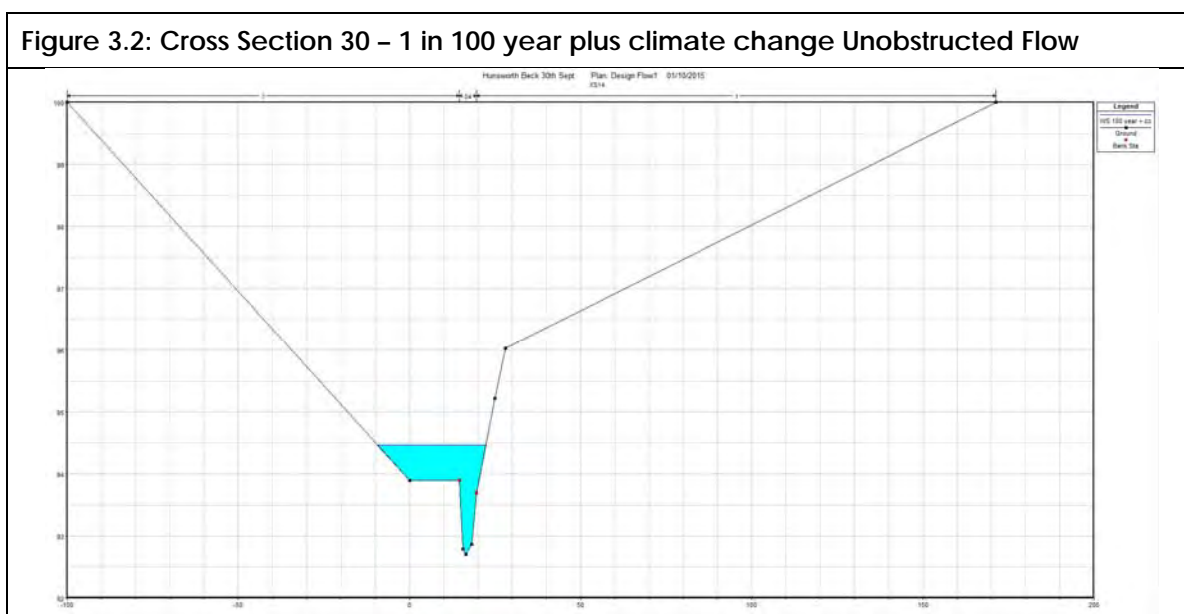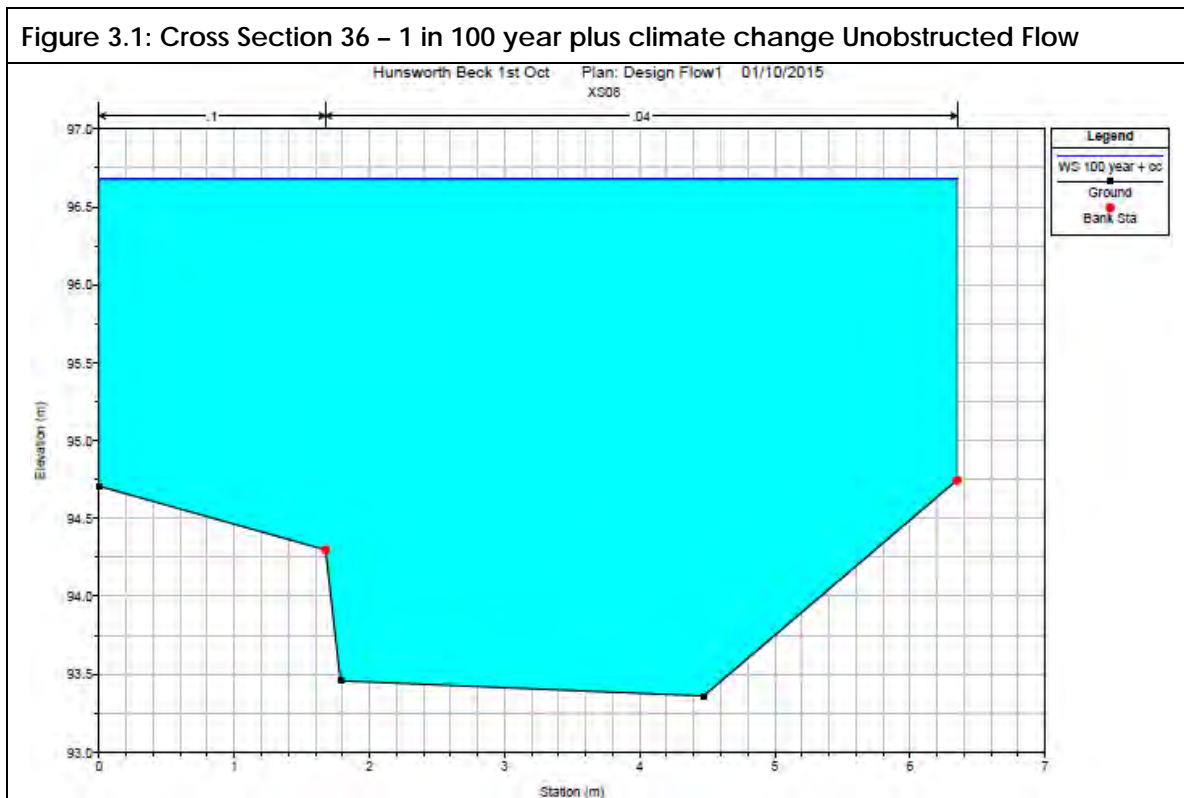

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

Figure 3.3: Cross Section 22 – 1 in 100 year plus climate change Unobstructed Flow


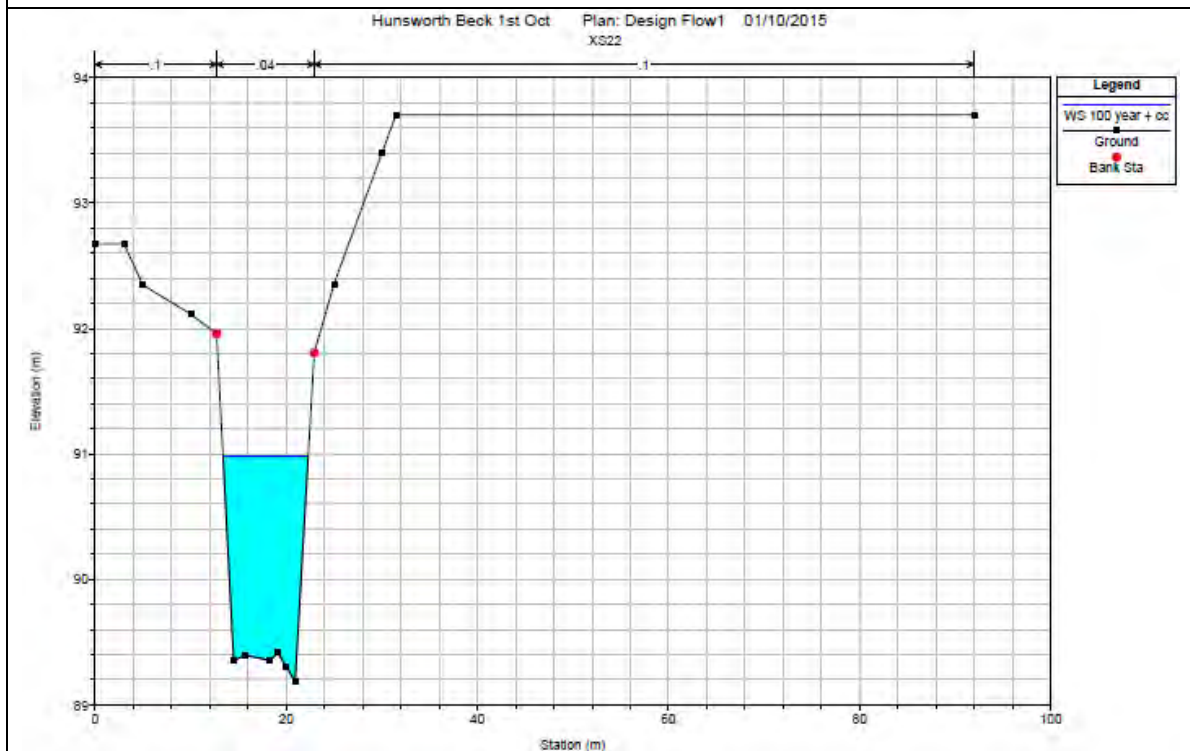


Figure 3.4: Cross Section 13 – 1 in 100 year plus climate change Unobstructed Flow

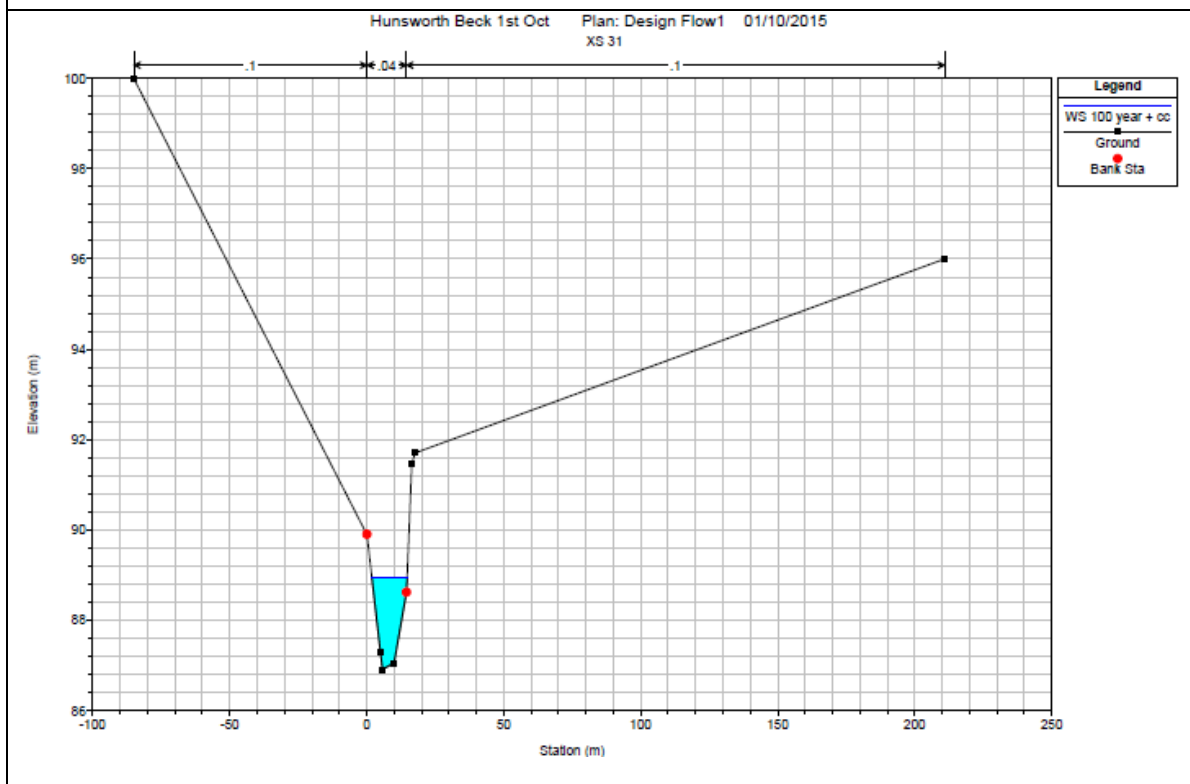


# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

Figure 3.5: Long Section of Hunsworth Beck

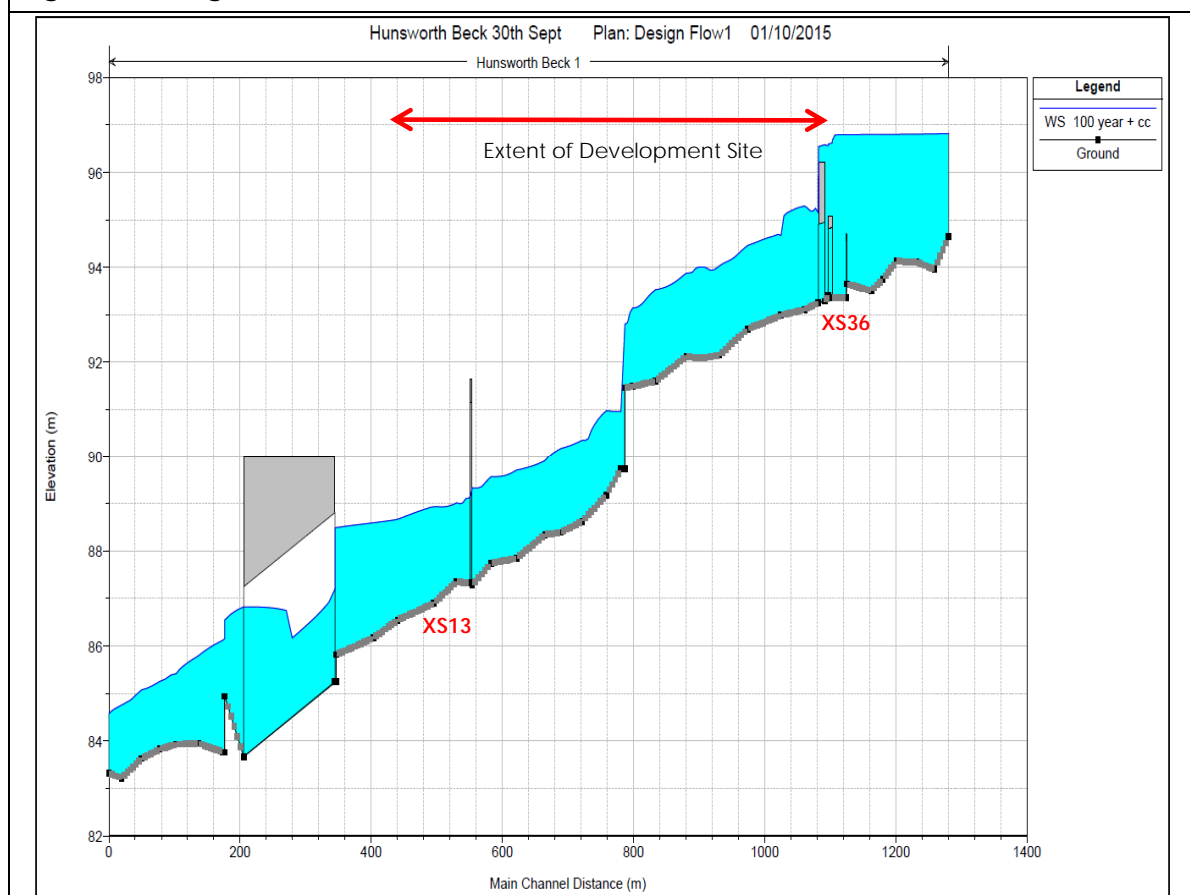

## 3.3 Model Sensitivity – Sensitivity to Roughness

The sensitivity of the modelled water levels to channel and floodplain roughness was checked by varying the standard values of Manning's  $n$  by +0.010 for the 100 year plus climate change return period design event. The result indicated that a 0.010 increase in Manning's  $n$  causes an increase in water level of between 0 and 0.21m for the cross sections adjacent to the development site.

The most marked areas of difference occurred at cross section 21, where water levels increased by 0.21m. The water level at cross sections 23, 20, 19, 15 and 14 also increased by a noticeable margin with an increase of 0.20m for cross sections 23 and 19 and a 0.17m increase at cross sections 20, 15 and 14. The least sensitive cross section was cross section 24 which did not increase the water level.

The study watercourse is therefore considered to be sensitive to roughness within localised areas. However, it is noted that careful consideration has been given to specifying Manning's  $n$ , so there is reasonable confidence in the model results.

## 3.4 Sensitivity to Downstream Boundary Conditions

The downstream boundary has been set at normal depth. The downstream boundary is considered to be sufficiently downstream of the area of interest that the change in downstream boundary will not have an effect on water levels within the area of interest.


# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

The longitudinal gradient of the channel is steep and there is a large weir located downstream of the development site, therefore the backwater length of the reach is unlikely to extend as far back as the development site and in reality would likely to be the weir located at cross section 7.5.

Figure 3.6: Long Section showing Convergence of Flow at weir

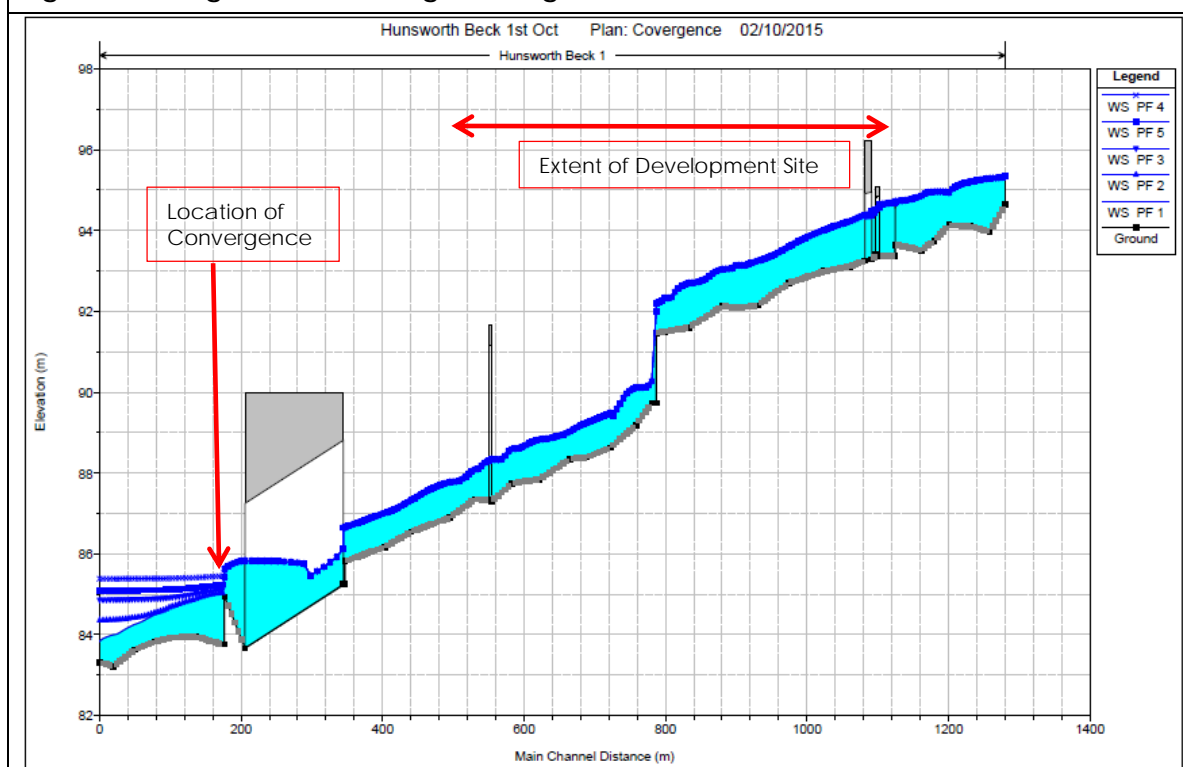

## 3.5 Sensitivity to Design Flow

There are uncertainties associated with the estimated design flows within Hunsworth Beck, as these estimates are based entirely on ungauged procedures. The use of a number of calculation methods to estimate peak flows should reduce this uncertainty with ReFH2 and the Statistical Method producing similar results.

Another method of assessing the effect of uncertainties in the design flood estimates is to increase the 100 year return period flow by 20%, which incorporates the effects of climate change. This 20% increase in flow causes a corresponding increase in water levels with an average difference of 0.15m when compared to the 1 in 100 year estimated flood level.

## 3.6 Sensitivity to Blockage

Where culverts and bridges provide a potential flood risk, the sensitivity of the hydraulic model attributed to blockage must also be examined.

In order to simulate this scenario, the effect on flood levels within Hunsworth Beck due to a blockage at each bridge crossing and culvert in turn, with a reduction in cross sectional area equivalent to 50% has been modelled.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

## Bridge at Cross Section 36.55

The bridge is located approximately 20m north west of the development site and therefore flood water would be anticipated to back up upstream of the bridge and not impact the development site. The water levels downstream of the bridge at XS 36 remain the same as the unobstructed design flow with the water level during the 1 in 100 plus climate change design flow shown to flow over the bridge structure.

## Bridge at Cross Section 35.5

During the 1 in 100 year plus climate change event the flood level at the northern most cross section i.e. XS36 is 96.69mAOD with flow anticipated to overtop the bridge during this event therefore there is no change in flood levels during a blockage of the footbridge during the 1 in 100 year plus climate change event.

There is no increase in flood levels shown at the cross sections adjacent to the development site during a 50% blockage of this bridge.

## Culvert at Cross Section 33.5

During the 1 in 100 year plus climate change modelled flood event, it is observed that water levels within the channel upstream of the site become elevated as a result of the blockage, as would be expected.

The design 1 in 100 year plus climate change flood level immediately upstream of the culvert (XS 34) during normal conditions in 96.58mAOD and 97.28mAOD during a 50% blockage of the arched culvert located at Cross Section 33.5.

The water level is increased at all of the cross sections upstream of the culvert with an average increase of 0.47m and the largest increase of 0.7m at XS 34 and XS 35 with the lowest increase evidenced at XS 43 with an increase of 0.57m.

## Bridge at Cross Section 15.5

During the 1 in 100 year plus climate change modelled flood event, it is observed that water levels within the channel upstream of the site become elevated as a result of the blockage, as would be expected.

The design 1 in 100 year plus climate change flood level immediately upstream of the bridge (XS 16) is 89.34mAOD and 90.74mAOD during a 50% blockage of the bridge; which is an increase of 1.40m in water levels at this location.

The water levels are increased for XS33-16 adjacent to the development site with the water level returning to normal at XS24.

## Culvert at Cross Section 9.5

During the 1 in 100 year plus climate change modelled flood event, it is observed that water levels within the channel upstream of the site become elevated as a result of the blockage, as would be expected.

The design 1 in 100 year plus climate change flood level immediately upstream of the culvert (XS 10) during normal conditions in 88.49mAOD and 90.40mAOD during a 50% blockage of the arched culvert located at Cross Section 9.5. This is an increase of 1.91m during a 50% blockage of the culvert.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

The water levels are increased up to cross 23 with cross sections 13 – 23 located adjacent to the development site. The largest increase is seen as cross section 13 with an increase of 1.5m in the modelled flood levels during the 1 in 100 year plus climate change event. The smallest increase is shown at cross section 23 with a 0.02m difference between the unobstructed flood level and the flood level following a 50% blockage at Culvert 9.5.

It is concluded from the sensitivity analysis that the model is sensitive to changes in roughness, design flows and blockages of the bridges and culverts within the study reach with increases in water levels observed following sensitivity testing.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

## 4.0 Model Results

Table 6: Model Results for all Return Periods and All Cross Sections

HECRAS Reference	Survey Reference	Return Period (years)	Water Level (mAOD)
43	1	2 year	95.53
		5 year	95.68
		10 year	95.81
		25 year	96.03
		50 year	96.3
		75 year	96.47
		100 year	96.57
		100 year + CC	96.82
		1000 year	97.42
42	2	2 year	95.49
		5 year	95.63
		10 year	95.77
		25 year	96
		50 year	96.28
		75 year	96.46
		100 year	96.56
		100 year + CC	96.81
		1000 year	97.42
41	3	2 year	95.4
		5 year	95.57
		10 year	95.74
		25 year	95.99
		50 year	96.27
		75 year	96.45
		100 year	96.56
		100 year + CC	96.81
		1000 year	97.42
40	4	2 year	95.12
		5 year	95.45
		10 year	95.68
		25 year	95.96
		50 year	96.26
		75 year	96.44
		100 year	96.55
		100 year + CC	96.8
		1000 year	97.41
39	5	2 year	95.18
		5 year	95.48
		10 year	95.69
		25 year	95.96
		50 year	96.26
		75 year	96.44
		100 year	96.55
		100 year + CC	96.8
		1000 year	97.41
38	6	2 year	95.08

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

		5 year	95.45
		10 year	95.67
		25 year	95.96
		50 year	96.26
		75 year	96.44
		100 year	96.55
		100 year + CC	96.8
		1000 year	97.41
37	7	2 year	95.02
		5 year	95.43
		10 year	95.66
		25 year	95.95
		50 year	96.25
		75 year	96.43
		100 year	96.54
		100 year + CC	96.79
		1000 year	97.41
36	8	2 year	94.92
		5 year	95.36
		10 year	95.59
		25 year	95.86
		50 year	96.16
		75 year	96.34
		100 year	96.45
		100 year + CC	96.68
		1000 year	97.22
35	9	2 year	94.75
		5 year	94.99
		10 year	95.2
		25 year	95.6
		50 year	96.02
		75 year	96.24
		100 year	96.34
		100 year + CC	96.57
		1000 year	97.11
34	10	2 year	94.76
		5 year	95.03
		10 year	95.24
		25 year	95.64
		50 year	96.04
		75 year	96.25
		100 year	96.36
		100 year + CC	96.59
		1000 year	97.11
33	11	2 year	94.57
		5 year	94.72
		10 year	94.81
		25 year	94.93
		50 year	95.02
		75 year	95.07
		100 year	95.11
		100 year + CC	95.17
		1000 year	95.35

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

32	12	2 year	94.4
		5 year	94.54
		10 year	94.65
		25 year	94.8
		50 year	94.94
		75 year	95.03
		100 year	95.1
		100 year + CC	95.29
		1000 year	95.79
31	13	2 year	94.18
		5 year	94.3
		10 year	94.38
		25 year	94.47
		50 year	94.54
		75 year	94.58
		100 year	94.61
		100 year + CC	94.67
		1000 year	95.04
30	14	2 year	93.77
		5 year	93.91
		10 year	94.01
		25 year	94.14
		50 year	94.24
		75 year	94.3
		100 year	94.35
		100 year + CC	94.46
		1000 year	94.77
29	15	2 year	93.43
		5 year	93.58
		10 year	93.63
		25 year	93.73
		50 year	93.82
		75 year	93.88
		100 year	93.92
		100 year + CC	94.03
		1000 year	94.3
28	16	2 year	93.3
		5 year	93.43
		10 year	93.54
		25 year	93.65
		50 year	93.76
		75 year	93.83
		100 year	93.87
		100 year + CC	94.01
		1000 year	94.35
27	17	2 year	93.19
		5 year	93.31
		10 year	93.39
		25 year	93.53
		50 year	93.63
		75 year	93.7
		100 year	93.75
		100 year + CC	93.88

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

		1000 year	94.22
26	18	2 year	92.85
		5 year	92.98
		10 year	93.06
		25 year	93.18
		50 year	93.28
		75 year	93.35
		100 year	93.4
		100 year + CC	93.53
		1000 year	93.86
25	19	2 year	92.48
		5 year	92.59
		10 year	92.67
		25 year	92.79
		50 year	92.9
		75 year	92.96
		100 year	93.01
		100 year + CC	93.14
		1000 year	93.44
24	20	2 year	92.34
		5 year	92.42
		10 year	92.46
		25 year	92.43
		50 year	92.54
		75 year	92.62
		100 year	92.66
		100 year + CC	92.8
		1000 year	92.98
23	21	2 year	90.37
		5 year	90.47
		10 year	90.54
		25 year	90.65
		50 year	90.74
		75 year	90.8
		100 year	90.85
		100 year + CC	90.97
		1000 year	91.28
22	22	2 year	90.26
		5 year	90.38
		10 year	90.47
		25 year	90.6
		50 year	90.71
		75 year	90.78
		100 year	90.83
		100 year + CC	90.98
		1000 year	91.36
21	23	2 year	89.63
		5 year	89.76
		10 year	89.85
		25 year	89.98
		50 year	90.09
		100 year	90.17
		100 year	90.22

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

		100 year + CC	90.36
		1000 year	90.73
20	24	2 year	89.4
		5 year	89.54
		10 year	89.63
		25 year	89.78
		50 year	89.9
		75 year	89.97
		100 year	90.03
		100 year + CC	90.18
		1000 year	90.58
19	25	2 year	89.17
		5 year	89.3
		10 year	89.4
		25 year	89.53
		50 year	89.64
		75 year	89.71
		100 year	89.77
		100 year + CC	89.91
		1000 year	90.33
18	26	2 year	88.98
		5 year	89.11
		10 year	89.2
		25 year	89.33
		50 year	89.44
		75 year	89.51
		100 year	89.56
		100 year + CC	89.71
		1000 year	90.17
17	27	2 year	88.76
		5 year	88.89
		10 year	88.99
		25 year	89.14
		50 year	89.26
		75 year	89.34
		100 year	89.4
		100 year + CC	89.57
		1000 year	90.11
16	28	2 year	88.5
		5 year	88.65
		10 year	88.75
		25 year	88.89
		50 year	89.01
		75 year	89.1
		100 year	89.16
		100 year + CC	89.34
		1000 year	89.92
15	29	2 year	88.44
		5 year	88.56
		10 year	88.65
		25 year	88.77
		50 year	88.86
		75 year	88.93

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

		100 year	88.98
		100 year + CC	89.12
		1000 year	89.68
14	30	2 year	88.23
		5 year	88.35
		10 year	88.43
		25 year	88.56
		50 year	88.68
		75 year	88.75
		100 year	88.82
		100 year + CC	89.02
		1000 year	89.72
13	31	2 year	87.95
		5 year	88.1
		10 year	88.21
		25 year	88.37
		50 year	88.52
		75 year	88.62
		100 year	88.7
		100 year + CC	88.94
		1000 year	89.7
12	32	2 year	87.49
		5 year	87.65
		10 year	87.77
		25 year	87.97
		50 year	88.15
		75 year	88.28
		100 year	88.38
		100 year + CC	88.67
		1000 year	89.55
11	33	2 year	87.22
		5 year	87.41
		10 year	87.57
		25 year	87.81
		50 year	88.03
		75 year	88.17
		100 year	88.28
		100 year + CC	88.6
		1000 year	89.52
10	34	2 year	86.94
		5 year	87.19
		10 year	87.38
		25 year	87.65
		50 year	87.89
		75 year	88.04
		100 year	88.16
		100 year + CC	88.49
		1000 year	89.45
9	35	2 year	85.97
		5 year	86.12
		10 year	86.24
		25 year	86.39
		50 year	86.52

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

		75 year	86.6
		100 year	86.66
		100 year + CC	86.82
		1000 year	87.22
8	36	2 year	85.8
		5 year	85.93
		10 year	86.04
		25 year	86.18
		50 year	86.29
		75 year	86.36
		100 year	86.41
		100 year + CC	86.55
		1000 year	86.88
7	37	2 year	85.24
		5 year	85.4
		10 year	85.52
		25 year	85.68
		50 year	85.81
		75 year	85.89
		100 year	85.95
		100 year + CC	86.12
		1000 year	86.55
6	38	2 year	85.05
		5 year	85.18
		10 year	85.28
		25 year	85.42
		50 year	85.53
		75 year	85.6
		100 year	85.65
		100 year + CC	85.8
		1000 year	86.16
5	39	2 year	84.82
		5 year	84.94
		10 year	85.02
		25 year	85.13
		50 year	85.22
		75 year	85.27
		100 year	85.31
		100 year + CC	85.42
		1000 year	85.68
4	40	2 year	84.62
		5 year	84.73
		10 year	84.81
		25 year	84.93
		50 year	85.03
		75 year	85.09
		100 year	85.13
		100 year + CC	85.26
		1000 year	85.58
3	41	2 year	84.4
		5 year	84.52
		10 year	84.61
		25 year	84.73

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

		50 year	84.83
		75 year	84.9
		100 year	84.94
		100 year + CC	85.08
		1000 year	85.43
2	42	2 year	84.13
		5 year	84.24
		10 year	84.32
		25 year	84.43
		50 year	84.53
		75 year	84.59
		100 year	84.63
		100 year + CC	84.76
		1000 year	85.08
1	43	2 year	83.98
		5 year	84.08
		10 year	84.15
		25 year	84.26
		50 year	84.35
		75 year	84.41
		100 year	84.46
		100 year + CC	84.57
		1000 year	84.89

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works - Hunsworth Beck

Report No: 2015-059-02

---

## 5.0 Conclusions

The objectives of this study is to determine flood levels for a range of return periods for Hunsworth Beck in order to inform a detailed flood risk assessment for Bierley Waste Water Treatment works, which is to be completed by Curtins Consulting.

At present there are no modelled water levels available for Hunsworth Beck; and therefore a hydrological and hydraulic study of the watercourse has been undertaken to evaluate water levels at the development site; which will facilitate determination of the flood risk posed by Hunsworth Beck on people and property within the site.

Design flows for the 1 in 2 year, 1 in 5 year, 1 in 10 year, 1 in 25 year, 1 in 50 year, 1 in 75 year, 1 in 100 year, 1 in 100 year plus climate change and extreme 1 in 1000 year events were determined using the ReFH2 method with a separate Hydrological Report completed by the Flood Risk Consultancy Ltd (Project number 2015-059-01).

Overtopping of the banks of Hunsworth Beck occurs at cross sections north of the development site i.e. XS43-34. The development site is adjacent to XS36-13 with no overtopping of any cross sections downstream of XS33 during the 1 in 100 year plus climate change event or 1 in 1000 year flood event.

The modelled 1 in 100 year flood level is shown to overtop the banks of Hunsworth Beck to the north of the development site and the bridges adjacent to the north of the development site with overtopping of the cross sections adjacent to the development site occurring at XS37, XS36, XS35 and XS34.

The modelled 1 in 1000 year flood level is also shown to overtop the banks of Hunsworth Beck to the north of the development site and overtop the bridges adjacent to the north of the development site.

There is no overtopping of the banks of Hunsworth Beck during the 1 in 1000 year flood event downstream of XS33 with flooding of the development site restricted to areas adjacent to XS37, XS36, XS35 and XS34.

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works

Report No: 2015-059-02

---

## APPENDICES

---

# 1D Hydraulic River Model Summary Report


Bierley Wastewater Treatment Works

Report No: 2015-059-02


---

## Appendix A: - Cross Section Locations


---

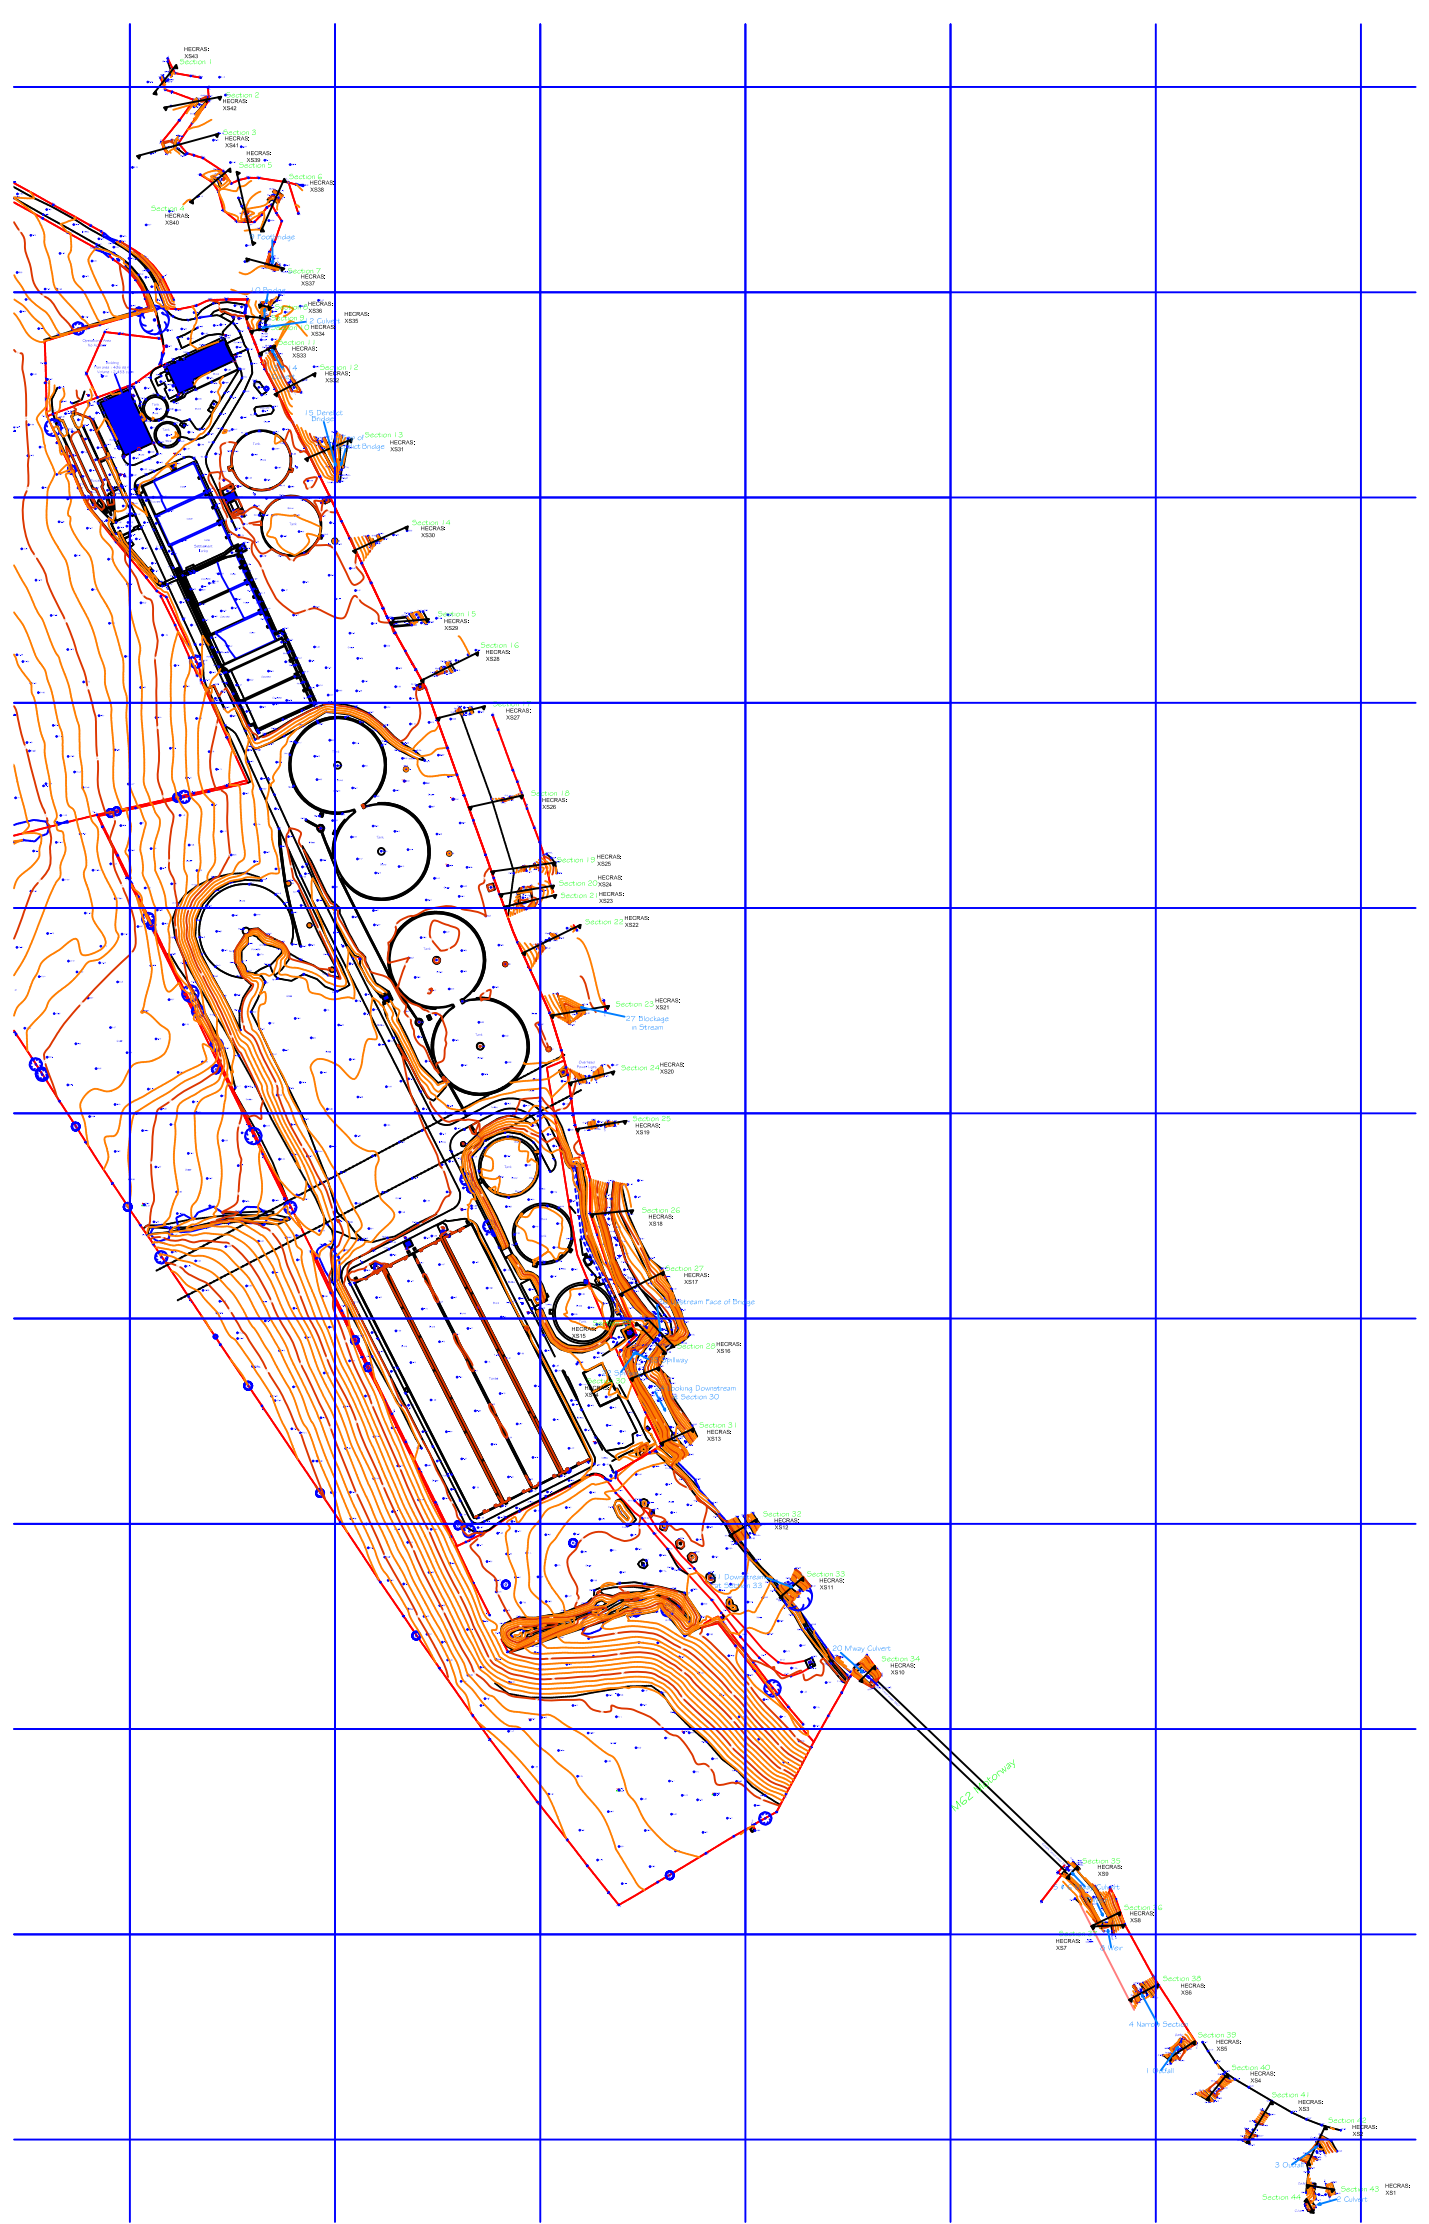


Cross Section 1 HECRAS XS: 43

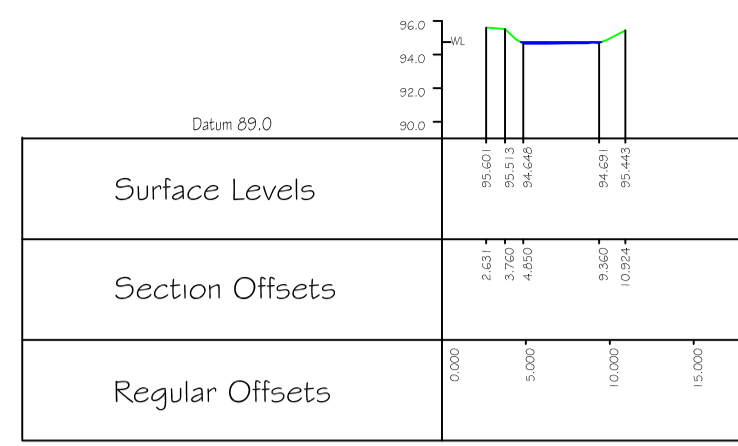


Cross Section 8 HECRAS XS: 36  
Vehicle bridge deck - downstream face, facing downstream

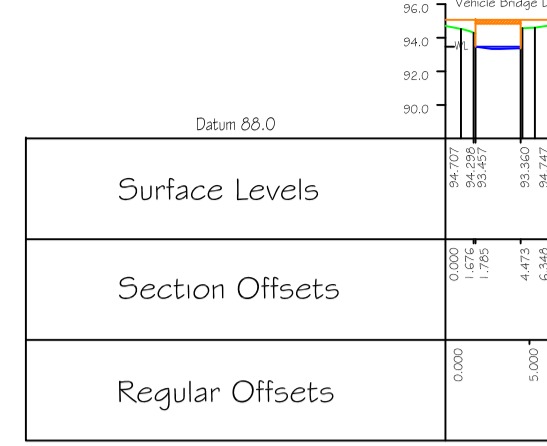


Cross Section 15 HECRAS XS: 29

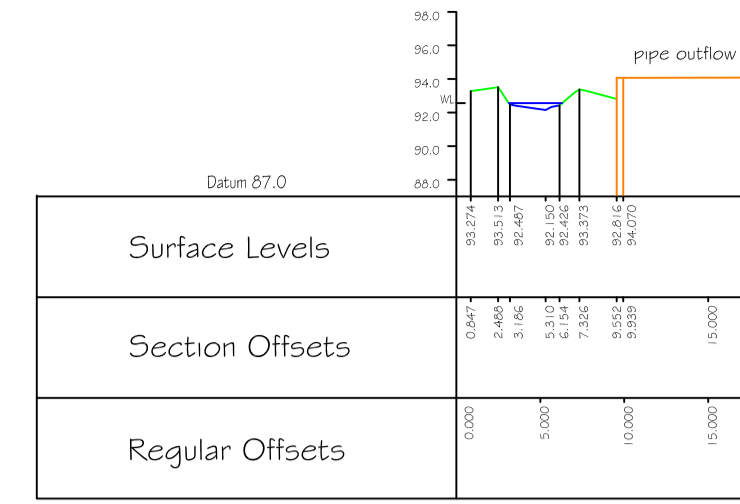


Cross Section 22 HECRAS XS: 22

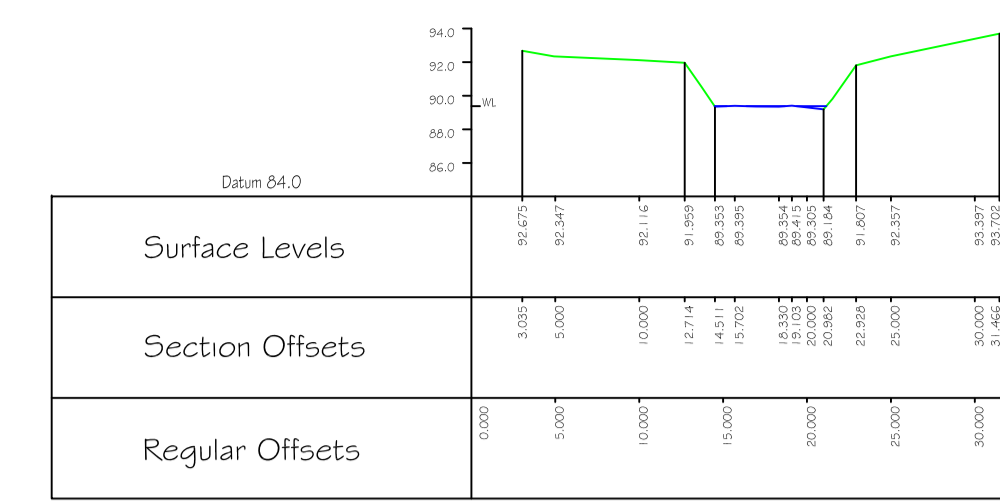


Cross Section 2 HECRAS XS: 42

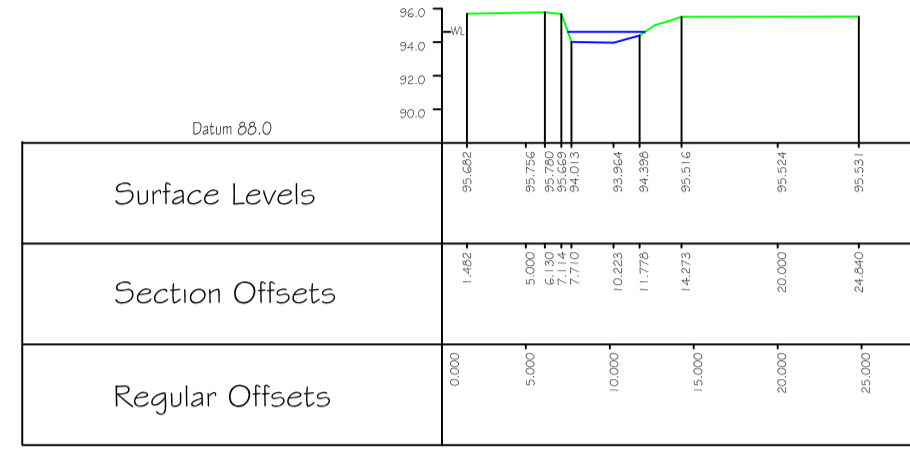


Cross Section 9 HECRAS XS: 35  
Vehicle bridge deck - upstream face, facing downstream

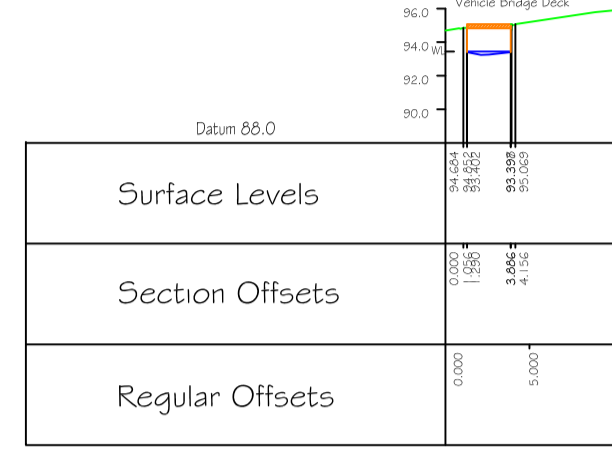


Cross Section 16 HECRAS XS: 28

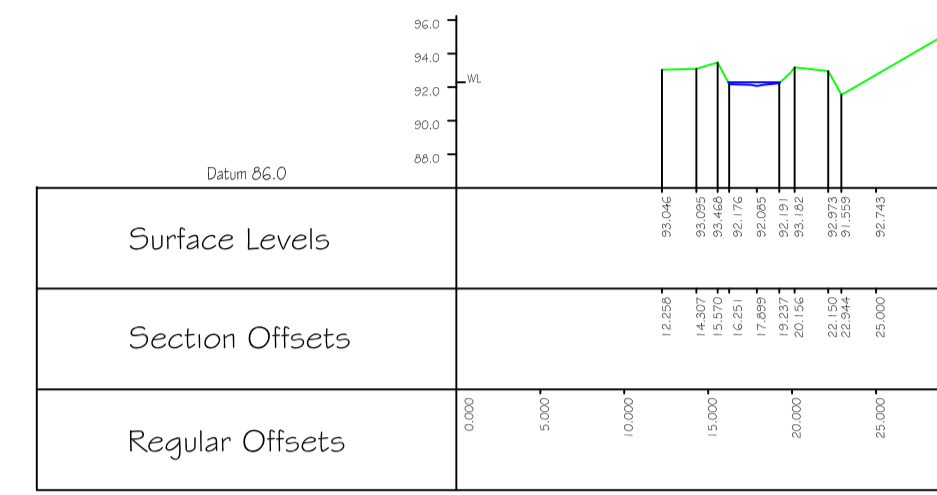


Cross Section 23 HECRAS XS: 21

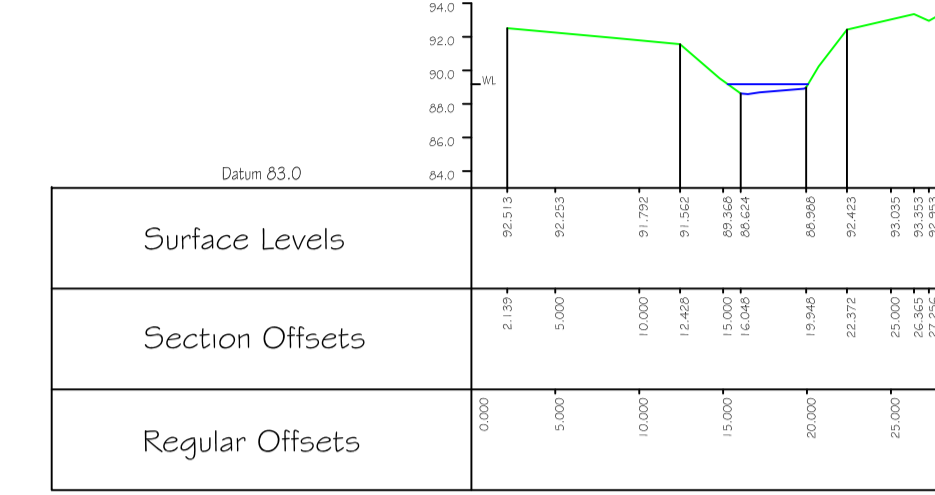

Cross Section 3 HECRAS XS: 41

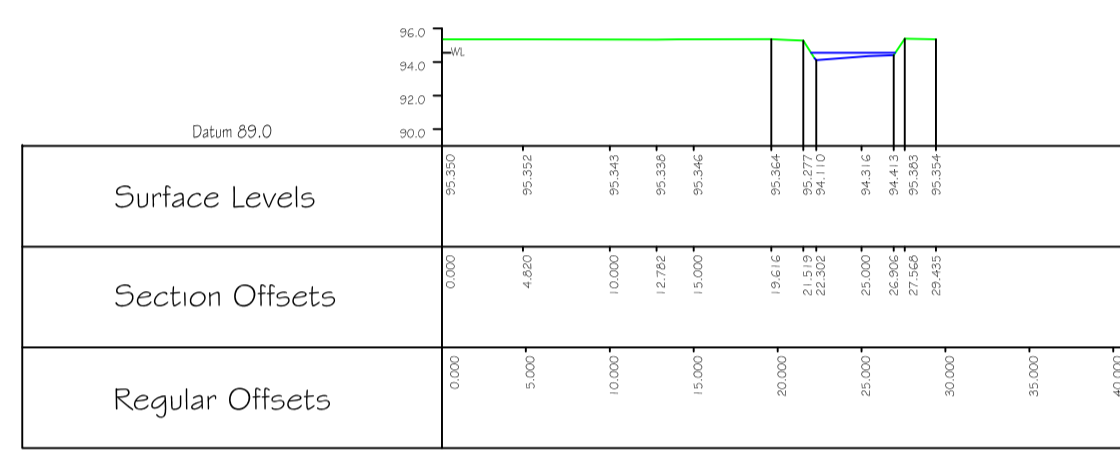


Cross Section 10 HECRAS XS: 34  
Culvert face - downstream face, facing downstream

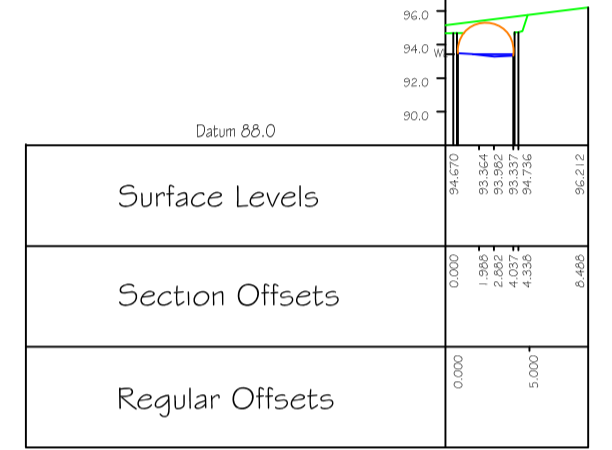

Cross Section 17 HECRAS XS: 27




Cross Section 24 HECRAS XS: 20

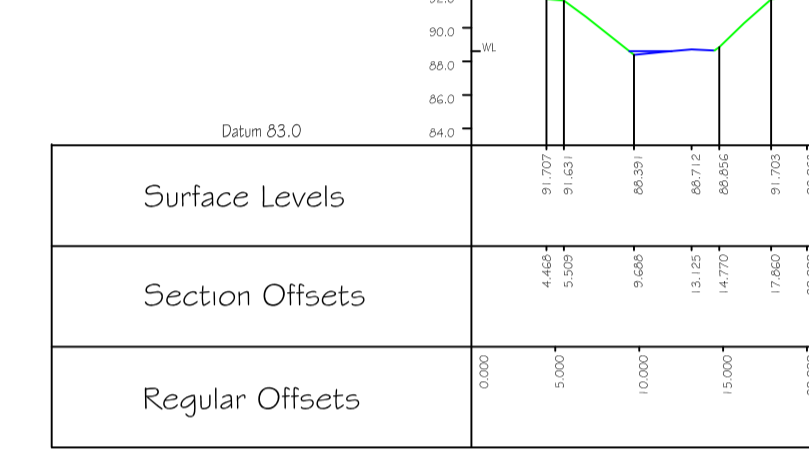


Cross Section 4 HECRAS XS: 40




Cross Section 11 HECRAS XS: 33  
Culvert face - upstream face, facing downstream

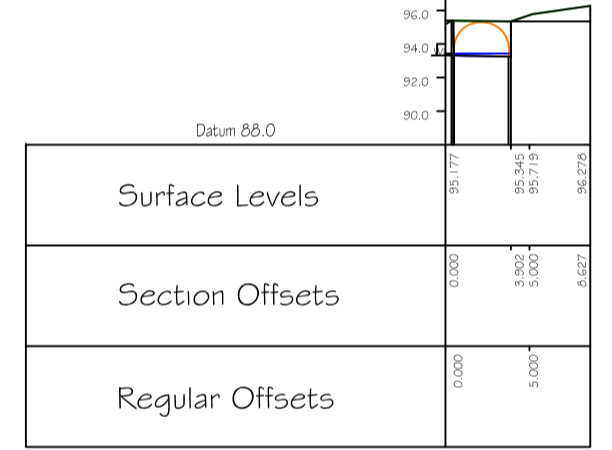


Cross Section 18 HECRAS XS: 26

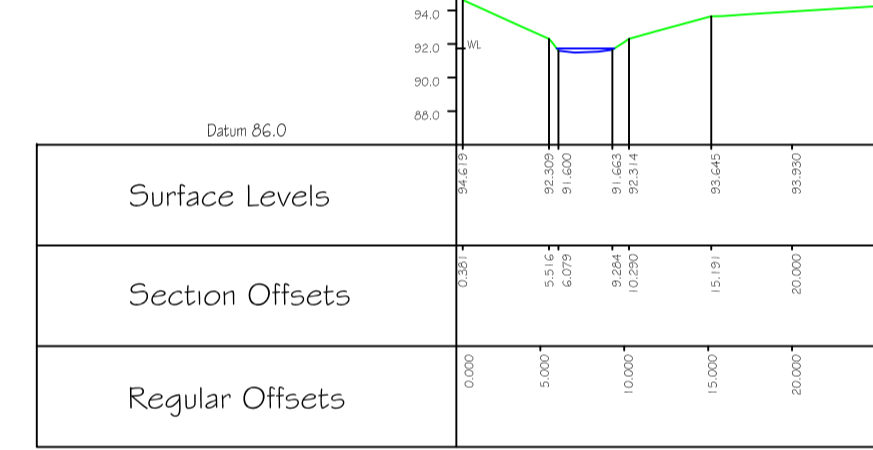


Cross Section 25 HECRAS XS: 19

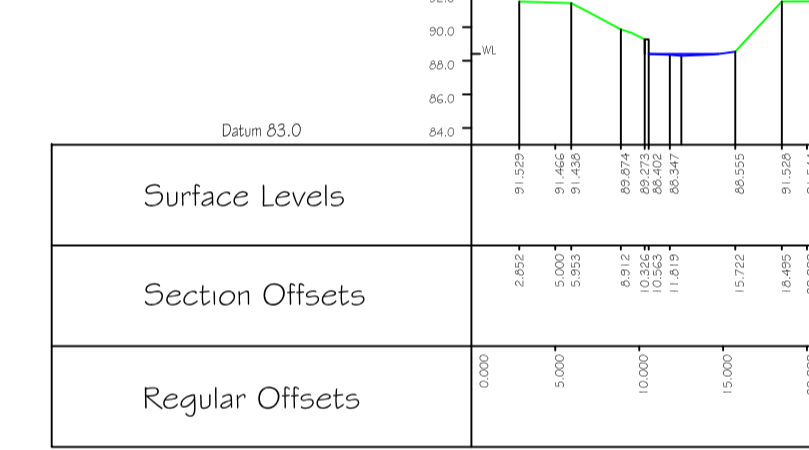


Cross Section 5 HECRAS XS: 39

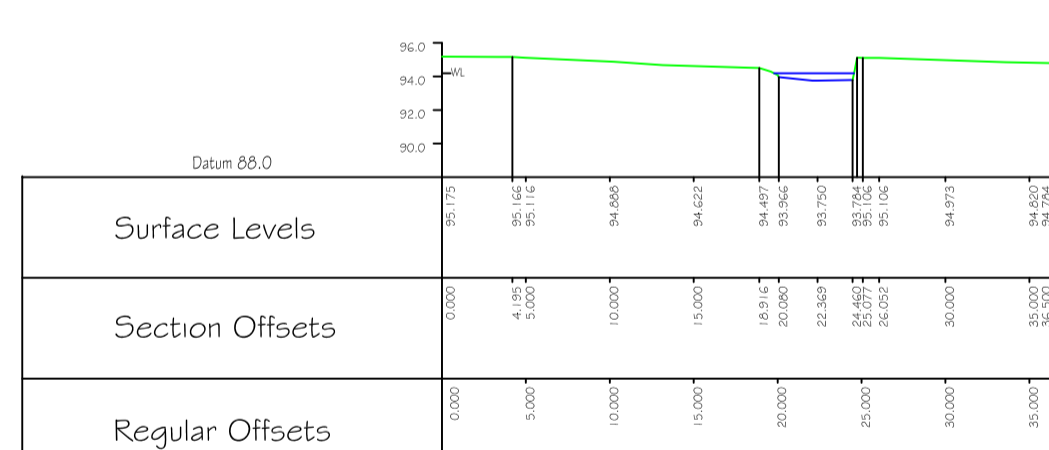


Cross Section 12 HECRAS XS: 32

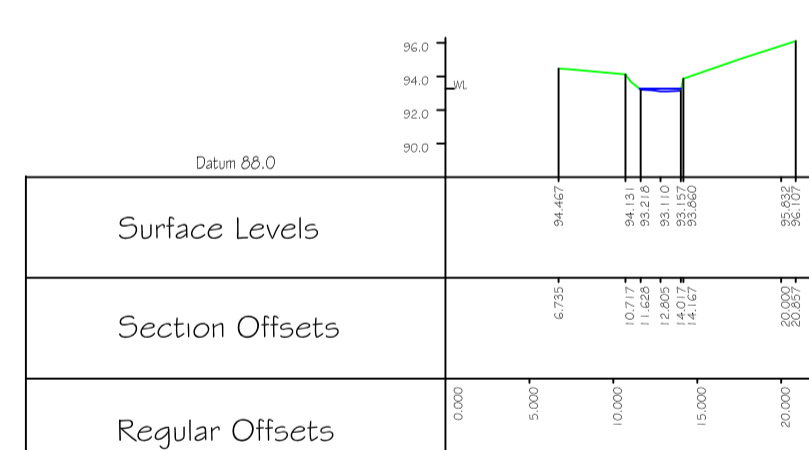


Cross Section 19 HECRAS XS: 25

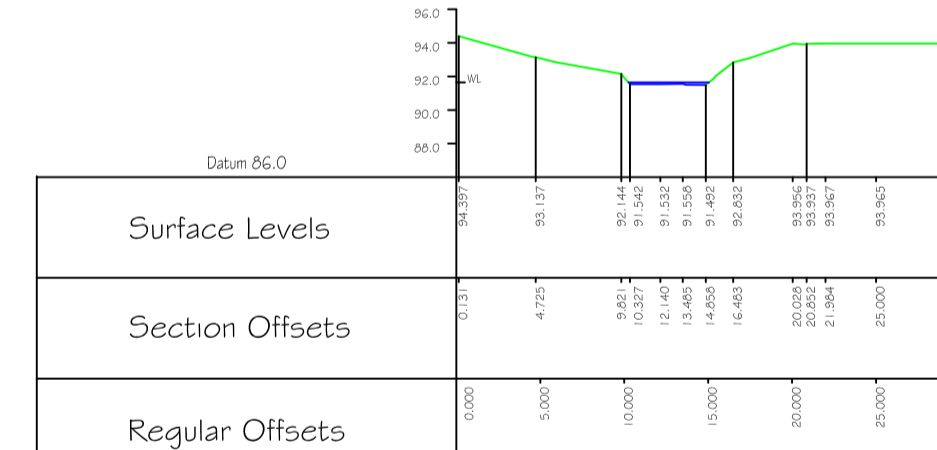


Cross Section 26 HECRAS XS: 18

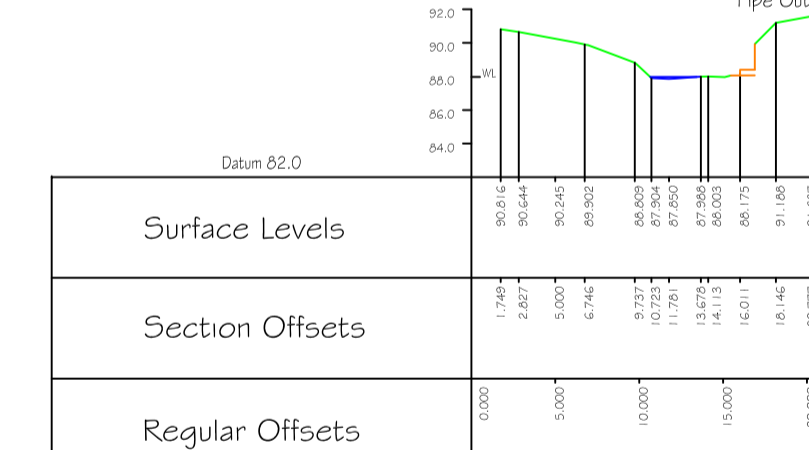


Cross Section 6 HECRAS XS: 38

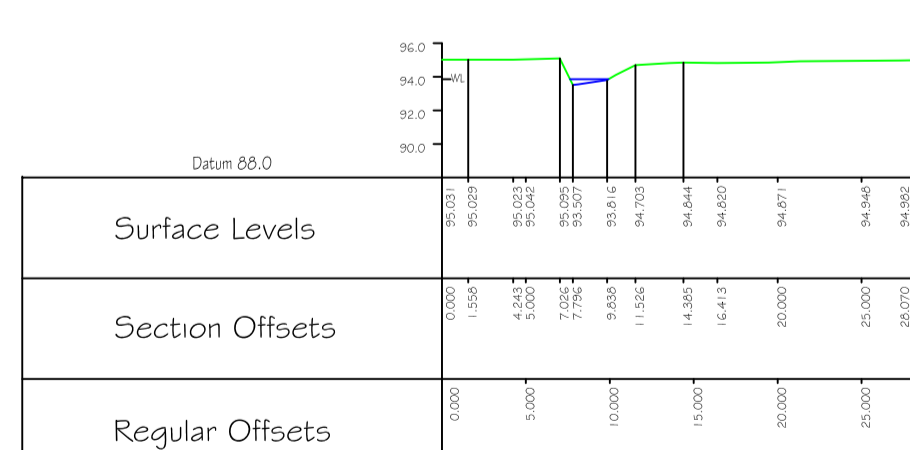


Cross Section 13 HECRAS XS: 31  
Derelict Bridge Downstream of section

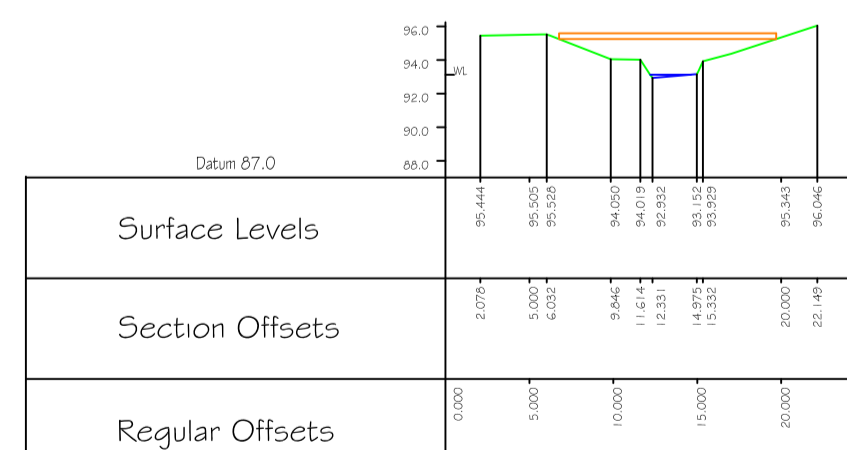


Cross Section 20 HECRAS XS: 24

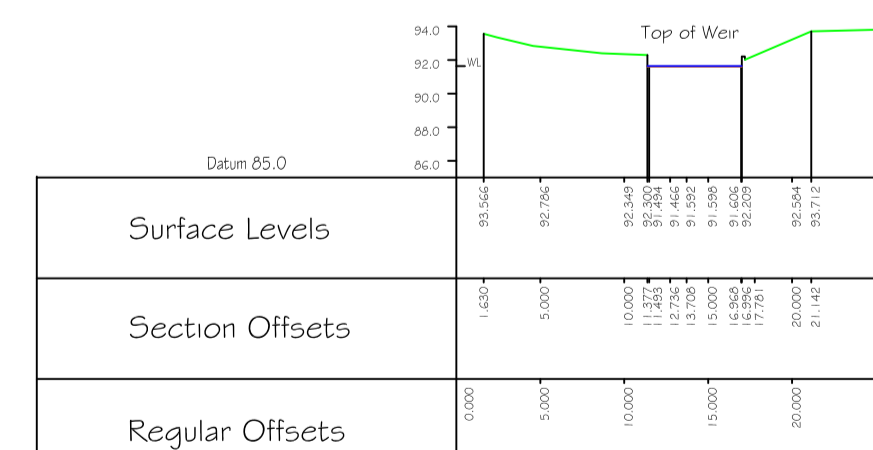


Cross Section 27 HECRAS XS: 17

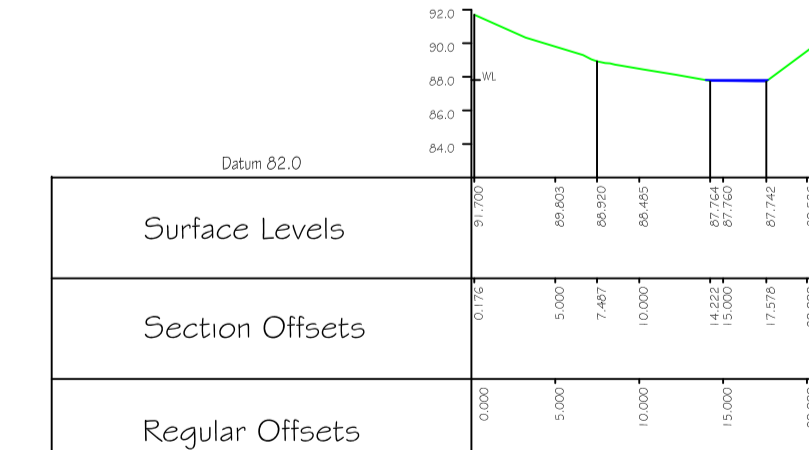


Cross Section 7 HECRAS XS: 37

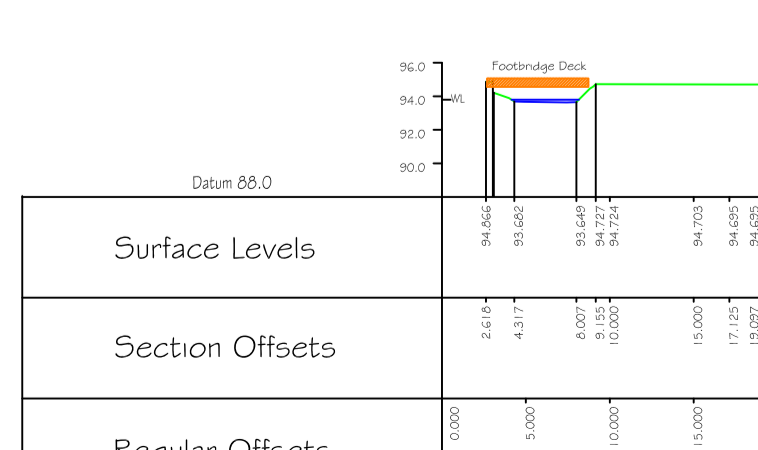


Cross Section 14 HECRAS XS: 30

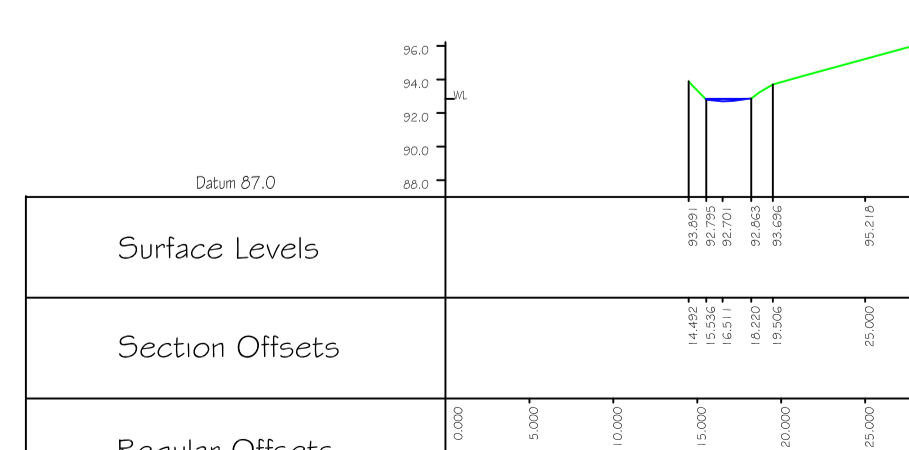

Cross Section 21 HECRAS XS: 23

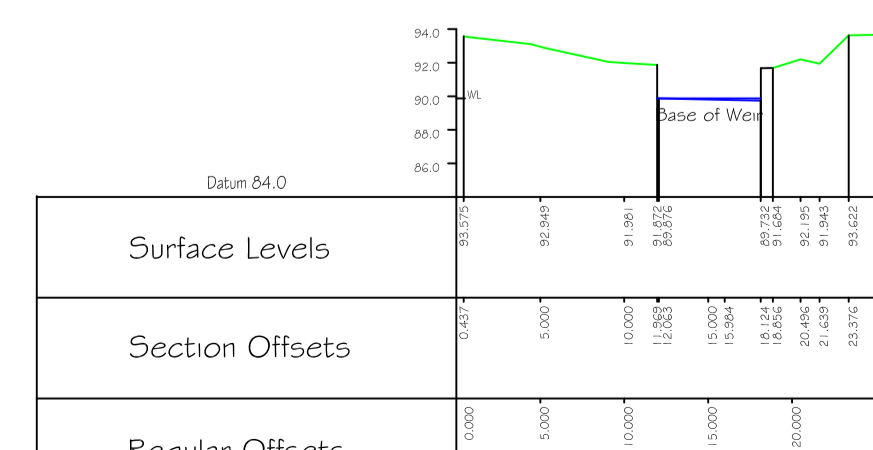

Cross Section 28 HECRAS XS: 16  
Vehicle bridge deck - downstream face, facing downstream

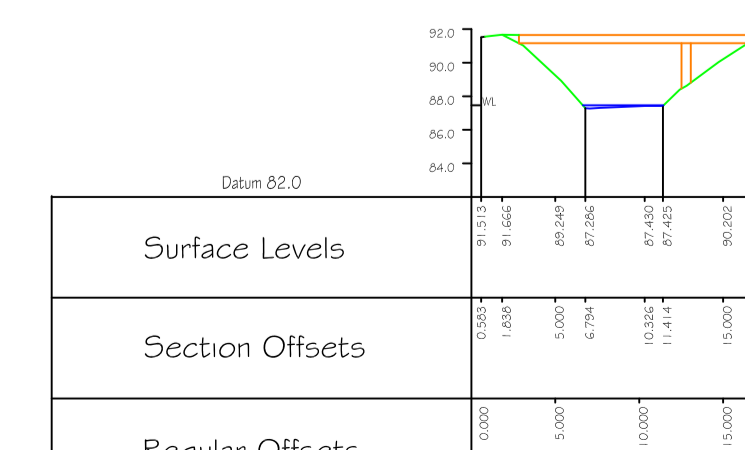



# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works

Report No: 2015-059-02

---

## Appendix B: - HEC-RAS Model Results

---

## Appendix B – Normal Unobstructed Flows

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	95.53	95.25	95.62	0.005315	1.34	5.70	14.47	0.53
1	43	5 year	9.14	94.65	95.68	95.35	95.77	0.004306	1.35	8.47	22.89	0.49
1	43	10 year	10.79	94.65	95.81	95.42	95.89	0.003174	1.29	12.06	28.99	0.43
1	43	25 year	13.38	94.65	96.03	95.55	96.09	0.002003	1.19	19.51	38.68	0.35
1	43	50 year	15.78	94.65	96.30	95.65	96.34	0.001117	1.02	31.22	50.28	0.27
1	43	75 year	17.41	94.65	96.47	95.70	96.50	0.000801	0.93	40.55	57.89	0.24
1	43	100 year	18.68	94.65	96.57	95.74	96.60	0.000689	0.90	46.68	62.37	0.22
1	43	100 year + cc	22.41	94.65	96.82	95.84	96.84	0.000519	0.85	63.38	73.23	0.20
1	43	1000 year	33.63	94.65	97.42	96.07	97.44	0.000309	0.79	115.78	99.90	0.16
1	42	2 year	7.08	93.96	95.49	94.74	95.53	0.001647	0.94	7.50	7.02	0.29
1	42	5 year	9.14	93.96	95.63	94.85	95.69	0.001807	1.06	9.40	16.49	0.31
1	42	10 year	10.79	93.96	95.77	94.94	95.83	0.001669	1.09	12.11	22.11	0.30
1	42	25 year	13.38	93.96	96.00	95.06	96.06	0.001262	1.06	21.06	41.83	0.27
1	42	50 year	15.78	93.96	96.28	95.17	96.32	0.000793	0.93	34.39	55.06	0.22
1	42	75 year	17.41	93.96	96.46	95.23	96.48	0.000599	0.86	44.92	63.59	0.19
1	42	100 year	18.68	93.96	96.56	95.29	96.59	0.000528	0.84	51.76	68.58	0.18
1	42	100 year + cc	22.41	93.96	96.81	95.42	96.83	0.000417	0.80	70.34	80.56	0.17
1	42	1000 year	33.63	93.96	97.42	95.92	97.43	0.000263	0.74	128.33	109.85	0.14
1	41	2 year	7.08	94.11	95.40		95.46	0.003185	1.11	7.51	31.91	0.40
1	41	5 year	9.14	94.11	95.57		95.63	0.002295	1.07	13.63	40.10	0.35
1	41	10 year	10.79	94.11	95.74		95.78	0.001501	0.96	21.06	48.21	0.29
1	41	25 year	13.38	94.11	95.99		96.02	0.000876	0.84	34.55	60.20	0.23
1	41	50 year	15.78	94.11	96.27		96.29	0.000480	0.71	53.60	73.88	0.17
1	41	75 year	17.41	94.11	96.45		96.47	0.000350	0.64	67.65	82.53	0.15
1	41	100 year	18.68	94.11	96.56		96.57	0.000305	0.62	76.51	87.55	0.14
1	41	100 year + cc	22.41	94.11	96.81		96.82	0.000239	0.60	99.90	99.59	0.13
1	41	1000 year	33.63	94.11	97.42		97.42	0.000155	0.57	169.56	128.96	0.11
1	40	2 year	7.08	94.13	95.12	94.95	95.30	0.009619	1.90	4.40	13.30	0.69
1	40	5 year	9.14	94.13	95.45		95.53	0.003381	1.36	12.92	33.78	0.43
1	40	10 year	10.79	94.13	95.68		95.72	0.001770	1.12	21.46	42.48	0.32
1	40	25 year	13.38	94.13	95.96		95.98	0.000983	0.96	34.78	53.28	0.25
1	40	50 year	15.78	94.13	96.26		96.27	0.000546	0.81	52.48	64.92	0.19



HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36.55		Bridge									
1	36.5	2 year	7.08	93.36	94.99		95.03	0.001509	0.92	12.05	32.23	0.28
1	36.5	5 year	9.14	93.36	95.42		95.44	0.000502	0.66	30.62	53.59	0.17
1	36.5	10 year	10.79	93.36	95.66		95.67	0.000331	0.59	44.66	65.25	0.14
1	36.5	25 year	13.38	93.36	95.94		95.95	0.000229	0.54	65.27	79.32	0.12
1	36.5	50 year	15.78	93.36	96.25		96.25	0.000151	0.48	91.68	94.34	0.10
1	36.5	75 year	17.41	93.36	96.43		96.44	0.000121	0.45	110.09	103.52	0.09
1	36.5	100 year	18.68	93.36	96.54		96.54	0.000111	0.45	121.38	108.77	0.09
1	36.5	100 year + cc	22.41	93.36	96.79		96.80	0.000097	0.44	150.49	121.26	0.08
1	36.5	1000 year	33.63	93.36	97.41		97.41	0.000076	0.44	234.22	151.55	0.08
1	36	2 year	7.08	93.36	94.92	94.22	94.99	0.002413	1.19	6.48	6.35	0.34
1	36	5 year	9.14	93.36	95.36	94.36	95.42	0.001534	1.11	9.29	6.35	0.27
1	36	10 year	10.79	93.36	95.59	94.46	95.65	0.001437	1.15	10.76	6.35	0.26
1	36	25 year	13.38	93.36	95.86	94.62	95.94	0.001475	1.24	12.50	6.35	0.27
1	36	50 year	15.78	93.36	96.16	94.75	96.24	0.001403	1.28	14.39	6.35	0.26
1	36	75 year	17.41	93.36	96.34	94.82	96.43	0.001389	1.31	15.54	6.35	0.26
1	36	100 year	18.68	93.36	96.44	94.87	96.53	0.001436	1.35	16.18	6.35	0.26
1	36	100 year + cc	22.41	93.36	96.68	95.01	96.78	0.001639	1.50	17.65	6.35	0.28
1	36	1000 year	33.63	93.36	97.22	95.39	97.39	0.002304	1.89	21.10	6.35	0.32
1	35.5		Bridge									
1	35	2 year	7.08	93.40	94.75	94.29	94.93	0.008768	1.87	3.79	3.03	0.53
1	35	5 year	9.14	93.40	94.99	94.46	95.19	0.008690	2.00	4.78	4.14	0.53
1	35	10 year	10.79	93.40	95.20	94.58	95.41	0.007756	2.04	5.71	5.14	0.50
1	35	25 year	13.38	93.40	95.60	94.75	95.79	0.005459	1.98	8.34	8.10	0.44
1	35	50 year	15.78	93.40	96.02	94.94	96.17	0.003601	1.81	12.40	11.07	0.37
1	35	75 year	17.41	93.40	96.24	95.03	96.37	0.003022	1.76	14.80	11.07	0.34
1	35	100 year	18.68	93.40	96.34	95.10	96.48	0.002944	1.78	15.95	11.07	0.34
1	35	100 year + cc	22.41	93.40	96.57	95.34	96.72	0.002990	1.89	18.52	11.07	0.35
1	35	1000 year	33.63	93.40	97.11	95.95	97.30	0.003353	2.23	24.49	11.07	0.38
1	34	2 year	7.08	93.29	94.76	94.01	94.85	0.003830	1.29	5.51	4.42	0.36

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	34	5 year	9.14	93.29	95.03	94.14	95.12	0.003561	1.37	6.77	5.16	0.35
1	34	10 year	10.79	93.29	95.24	94.24	95.34	0.003284	1.41	7.95	5.76	0.34
1	34	25 year	13.38	93.29	95.64	94.39	95.74	0.002639	1.40	10.45	6.88	0.31
1	34	50 year	15.78	93.29	96.04	94.51	96.13	0.002083	1.35	13.47	8.02	0.27
1	34	75 year	17.41	93.29	96.25	94.60	96.34	0.001946	1.36	15.21	8.49	0.26
1	34	100 year	18.68	93.29	96.36	94.72	96.45	0.001977	1.39	16.08	8.49	0.26
1	34	100 year + cc	22.41	93.29	96.59	94.89	96.69	0.002186	1.51	18.02	8.49	0.27
1	34	1000 year	33.63	93.29	97.11	95.37	97.27	0.002899	1.87	22.52	8.49	0.31
1	33.5		Culvert									
1	33	2 year	7.08	93.25	94.57		94.68	0.003913	1.52	4.97	4.09	0.43
1	33	5 year	9.14	93.25	94.72		94.87	0.004734	1.76	5.58	4.17	0.47
1	33	10 year	10.79	93.25	94.81		95.00	0.005470	1.95	5.97	4.21	0.50
1	33	25 year	13.38	93.25	94.93		95.18	0.006729	2.24	6.48	4.27	0.56
1	33	50 year	15.78	93.25	95.02		95.33	0.008082	2.51	6.85	4.32	0.61
1	33	75 year	17.41	93.25	95.07		95.43	0.008995	2.69	7.08	4.34	0.64
1	33	100 year	18.68	93.25	95.11		95.50	0.009776	2.82	7.24	4.36	0.67
1	33	100 year + cc	22.41	93.25	95.17		95.70	0.012754	3.27	7.51	4.39	0.76
1	33	1000 year	33.63	93.25	95.35	95.35	96.34	0.020952	4.46	8.40	4.84	0.99
1	32	2 year	7.08	93.11	94.40	94.06	94.56	0.006312	1.80	4.77	12.08	0.55
1	32	5 year	9.14	93.11	94.54	94.22	94.72	0.006348	1.96	7.21	20.25	0.56
1	32	10 year	10.79	93.11	94.65	94.33	94.83	0.006000	2.01	9.44	22.83	0.55
1	32	25 year	13.38	93.11	94.80		94.97	0.005269	2.02	13.28	26.70	0.53
1	32	50 year	15.78	93.11	94.94		95.09	0.004642	2.01	17.11	30.06	0.50
1	32	75 year	17.41	93.11	95.03		95.17	0.004228	1.99	19.92	32.32	0.48
1	32	100 year	18.68	93.11	95.10		95.23	0.003952	1.97	22.15	33.99	0.47
1	32	100 year + cc	22.41	93.11	95.29		95.40	0.003202	1.90	29.36	38.92	0.43
1	32	1000 year	33.63	93.11	95.79		95.87	0.002107	1.79	51.57	51.22	0.36
1	31	2 year	7.08	92.99	94.18		94.34	0.006722	1.75	4.39	7.12	0.58
1	31	5 year	9.14	92.99	94.30		94.50	0.007279	1.97	5.29	7.77	0.61
1	31	10 year	10.79	92.99	94.38		94.61	0.007920	2.15	5.88	8.18	0.64
1	31	25 year	13.38	92.99	94.47	94.28	94.76	0.009133	2.43	6.67	8.69	0.70

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	31	50 year	15.78	92.99	94.54	94.40	94.89	0.010335	2.69	7.29	9.08	0.75
1	31	75 year	17.41	92.99	94.58	94.47	94.97	0.011227	2.86	7.66	9.30	0.79
1	31	100 year	18.68	92.99	94.61	94.52	95.04	0.012045	3.00	7.90	9.44	0.82
1	31	100 year + cc	22.41	92.99	94.67	94.67	95.22	0.014627	3.41	8.51	9.78	0.91
1	31	1000 year	33.63	92.99	95.04	95.04	95.71	0.013633	3.84	12.55	11.82	0.91
1	30	2 year	7.08	92.70	93.77		93.95	0.009458	1.87	3.79	5.17	0.68
1	30	5 year	9.14	92.70	93.91	93.70	94.12	0.009267	2.04	4.85	20.61	0.69
1	30	10 year	10.79	92.70	94.01	93.79	94.22	0.008300	2.07	7.07	22.67	0.66
1	30	25 year	13.38	92.70	94.14	94.05	94.35	0.007388	2.12	10.17	25.25	0.64
1	30	50 year	15.78	92.70	94.24	94.14	94.45	0.006962	2.18	12.73	27.20	0.63
1	30	75 year	17.41	92.70	94.30	94.19	94.51	0.006718	2.21	14.44	28.42	0.62
1	30	100 year	18.68	92.70	94.35	94.23	94.55	0.006582	2.24	15.71	29.31	0.62
1	30	100 year + cc	22.41	92.70	94.46		94.67	0.006299	2.32	19.30	31.66	0.62
1	30	1000 year	33.63	92.70	94.77		94.98	0.005588	2.48	29.98	37.80	0.60
1	29	2 year	7.08	92.15	93.43	93.11	93.55	0.006145	1.61	5.03	7.19	0.55
1	29	5 year	9.14	92.15	93.58	93.25	93.72	0.005497	1.68	7.36	13.72	0.53
1	29	10 year	10.79	92.15	93.63	93.35	93.79	0.006440	1.87	8.02	14.32	0.58
1	29	25 year	13.38	92.15	93.73	93.47	93.93	0.006940	2.06	9.54	15.63	0.61
1	29	50 year	15.78	92.15	93.82	93.60	94.04	0.007199	2.21	10.99	16.79	0.63
1	29	75 year	17.41	92.15	93.88	93.67	94.11	0.007374	2.30	11.93	17.50	0.64
1	29	100 year	18.68	92.15	93.92	93.72	94.16	0.007533	2.37	12.63	18.01	0.65
1	29	100 year + cc	22.41	92.15	94.03	93.83	94.30	0.007856	2.55	14.71	19.45	0.67
1	29	1000 year	33.63	92.15	94.30	94.12	94.66	0.008667	3.00	20.66	23.71	0.72
1	28	2 year	7.08	92.08	93.30	92.74	93.36	0.003580	1.27	8.25	10.30	0.41
1	28	5 year	9.14	92.08	93.43	92.86	93.51	0.003910	1.41	9.60	10.59	0.43
1	28	10 year	10.79	92.08	93.54	92.95	93.59	0.002336	1.16	19.54	31.53	0.34
1	28	25 year	13.38	92.08	93.65	93.04	93.70	0.002391	1.25	23.06	32.86	0.35
1	28	50 year	15.78	92.08	93.76	93.24	93.81	0.002326	1.30	26.59	34.13	0.35
1	28	75 year	17.41	92.08	93.83	93.29	93.88	0.002294	1.33	28.89	34.93	0.35
1	28	100 year	18.68	92.08	93.87	93.33	93.93	0.002273	1.35	30.63	35.53	0.35
1	28	100 year + cc	22.41	92.08	94.01	93.47	94.06	0.002247	1.42	35.43	37.13	0.35
1	28	1000 year	33.63	92.08	94.35	93.62	94.41	0.002189	1.59	48.85	41.26	0.36

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	27	2 year	7.08	92.13	93.19	92.74	93.24	0.002813	1.13	8.57	11.12	0.38
1	27	5 year	9.14	92.13	93.31	92.83	93.38	0.003101	1.27	9.94	11.63	0.41
1	27	10 year	10.79	92.13	93.39	92.90	93.47	0.003316	1.38	10.93	11.99	0.43
1	27	25 year	13.38	92.13	93.53	93.00	93.61	0.003030	1.42	15.59	22.89	0.42
1	27	50 year	15.78	92.13	93.63	93.08	93.72	0.003022	1.50	18.02	24.05	0.42
1	27	75 year	17.41	92.13	93.70	93.14	93.79	0.003023	1.55	19.61	24.77	0.43
1	27	100 year	18.68	92.13	93.75	93.18	93.84	0.003023	1.59	20.83	25.31	0.43
1	27	100 year + cc	22.41	92.13	93.88	93.28	93.98	0.003025	1.69	24.27	26.76	0.43
1	27	1000 year	33.63	92.13	94.22	93.60	94.34	0.003019	1.93	33.92	30.24	0.45
1	26	2 year	7.08	91.60	92.85		92.92	0.003373	1.15	6.14	7.97	0.42
1	26	5 year	9.14	91.60	92.98		93.06	0.003751	1.27	7.18	8.70	0.45
1	26	10 year	10.79	91.60	93.06		93.16	0.004004	1.36	7.95	9.21	0.47
1	26	25 year	13.38	91.60	93.18		93.29	0.004321	1.47	9.10	9.92	0.49
1	26	50 year	15.78	91.60	93.28		93.41	0.004538	1.56	10.13	10.52	0.51
1	26	75 year	17.41	91.60	93.35		93.48	0.004655	1.61	10.81	10.89	0.52
1	26	100 year	18.68	91.60	93.40		93.53	0.004732	1.65	11.33	11.17	0.52
1	26	100 year + cc	22.41	91.60	93.53		93.68	0.004908	1.75	12.83	11.94	0.54
1	26	1000 year	33.63	91.60	93.86		94.05	0.004876	1.97	17.38	16.66	0.55
1	25	2 year	7.08	91.49	92.48		92.57	0.004310	1.36	5.45	7.94	0.48
1	25	5 year	9.14	91.49	92.59		92.71	0.004760	1.53	6.40	8.66	0.51
1	25	10 year	10.79	91.49	92.67		92.81	0.005087	1.65	7.11	9.17	0.53
1	25	25 year	13.38	91.49	92.79		92.96	0.005352	1.80	8.30	9.95	0.55
1	25	50 year	15.78	91.49	92.90		93.08	0.005485	1.93	9.35	10.73	0.57
1	25	75 year	17.41	91.49	92.96		93.16	0.005563	2.01	10.05	11.25	0.57
1	25	100 year	18.68	91.49	93.01		93.22	0.005556	2.06	10.63	11.67	0.58
1	25	100 year + cc	22.41	91.49	93.14		93.38	0.005674	2.22	12.23	12.75	0.59
1	25	1000 year	33.63	91.49	93.44		93.78	0.006416	2.68	16.31	14.77	0.65
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.007987	1.64	4.41	7.71	0.60
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.009451	1.90	5.11	9.46	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.011307	2.14	5.48	10.20	0.73
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.019562	2.75	5.19	9.63	0.95

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	24	50 year	15.78	91.47	92.54	92.54	92.94	0.017446	2.82	6.41	11.84	0.91
1	24	75 year	17.41	91.47	92.62	92.62	93.02	0.016095	2.85	7.35	13.08	0.89
1	24	100 year	18.68	91.47	92.66	92.66	93.07	0.015657	2.90	7.99	13.68	0.88
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.22	0.014298	2.99	9.97	15.28	0.86
1	24	1000 year	33.63	91.47	92.98	93.09	93.62	0.018707	3.75	12.79	16.23	1.01
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.37	90.32	90.58	0.017369	2.03	3.49	6.32	0.87
1	23	5 year	9.14	89.73	90.47	90.41	90.72	0.017267	2.22	4.12	6.36	0.88
1	23	10 year	10.79	89.73	90.54	90.48	90.82	0.017209	2.35	4.60	6.40	0.88
1	23	25 year	13.38	89.73	90.65	90.59	90.97	0.017260	2.53	5.29	6.44	0.89
1	23	50 year	15.78	89.73	90.74	90.68	91.11	0.017219	2.68	5.90	6.48	0.90
1	23	75 year	17.41	89.73	90.80	90.74	91.19	0.017297	2.77	6.29	6.51	0.90
1	23	100 year	18.68	89.73	90.85	90.78	91.26	0.017406	2.84	6.58	6.52	0.90
1	23	100 year + cc	22.41	89.73	90.97	90.90	91.44	0.017895	3.04	7.36	6.58	0.92
1	23	1000 year	33.63	89.73	91.28	91.24	91.93	0.019522	3.57	9.42	6.71	0.96
1	22	2 year	7.08	89.18	90.26		90.32	0.002860	1.09	6.51	7.86	0.38
1	22	5 year	9.14	89.18	90.38		90.46	0.003102	1.22	7.51	8.04	0.40
1	22	10 year	10.79	89.18	90.47		90.56	0.003277	1.31	8.24	8.17	0.42
1	22	25 year	13.38	89.18	90.60		90.71	0.003532	1.44	9.29	8.36	0.44
1	22	50 year	15.78	89.18	90.71		90.83	0.003710	1.54	10.22	8.52	0.45
1	22	75 year	17.41	89.18	90.78		90.91	0.003811	1.61	10.83	8.62	0.46
1	22	100 year	18.68	89.18	90.83		90.97	0.003892	1.66	11.28	8.70	0.46
1	22	100 year + cc	22.41	89.18	90.98		91.14	0.004091	1.78	12.57	8.91	0.48
1	22	1000 year	33.63	89.18	91.36		91.59	0.004533	2.09	16.08	9.46	0.51
1	21	2 year	7.08	88.62	89.63	89.44	89.79	0.008839	1.74	4.07	5.71	0.66
1	21	5 year	9.14	88.62	89.76	89.55	89.94	0.009048	1.90	4.81	5.95	0.67
1	21	10 year	10.79	88.62	89.85	89.63	90.06	0.009241	2.01	5.36	6.12	0.69
1	21	25 year	13.38	88.62	89.98		90.22	0.009422	2.16	6.19	6.37	0.70
1	21	50 year	15.78	88.62	90.09		90.36	0.009572	2.28	6.92	6.58	0.71
1	21	75 year	17.41	88.62	90.17		90.45	0.009674	2.36	7.39	6.71	0.72
1	21	100 year	18.68	88.62	90.22		90.51	0.009795	2.42	7.73	6.81	0.72

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	21	100 year + cc	22.41	88.62	90.36		90.69	0.010089	2.57	8.71	7.07	0.74
1	21	1000 year	33.63	88.62	90.73		91.17	0.010554	2.93	11.49	7.78	0.77
1	20	2 year	7.08	88.39	89.40		89.51	0.006639	1.49	4.74	6.97	0.58
1	20	5 year	9.14	88.39	89.54		89.67	0.006398	1.60	5.71	7.29	0.58
1	20	10 year	10.79	88.39	89.63		89.78	0.006252	1.67	6.45	7.53	0.58
1	20	25 year	13.38	88.39	89.78		89.94	0.006099	1.77	7.55	7.87	0.58
1	20	50 year	15.78	88.39	89.90		90.07	0.006032	1.86	8.50	8.15	0.58
1	20	75 year	17.41	88.39	89.97		90.16	0.006014	1.91	9.12	8.33	0.58
1	20	100 year	18.68	88.39	90.03		90.22	0.006008	1.95	9.58	8.46	0.58
1	20	100 year + cc	22.41	88.39	90.18		90.40	0.005993	2.05	10.91	8.83	0.59
1	20	1000 year	33.63	88.39	90.58		90.85	0.005909	2.30	14.65	9.78	0.60
1	19	2 year	7.08	88.35	89.17		89.33	0.009492	1.73	4.09	5.95	0.67
1	19	5 year	9.14	88.35	89.30		89.48	0.009526	1.88	4.85	6.16	0.68
1	19	10 year	10.79	88.35	89.40		89.60	0.009629	1.98	5.46	6.47	0.69
1	19	25 year	13.38	88.35	89.53		89.76	0.009765	2.11	6.35	6.91	0.70
1	19	50 year	15.78	88.35	89.64		89.89	0.009845	2.21	7.14	7.28	0.71
1	19	75 year	17.41	88.35	89.71		89.98	0.009882	2.27	7.67	7.51	0.72
1	19	100 year	18.68	88.35	89.77		90.04	0.009901	2.32	8.07	7.68	0.72
1	19	100 year + cc	22.41	88.35	89.91		90.21	0.009892	2.43	9.22	8.15	0.73
1	19	1000 year	33.63	88.35	90.33		90.68	0.008866	2.61	12.87	9.33	0.71
1	18	2 year	7.08	87.85	88.98		89.05	0.003014	1.14	6.19	7.31	0.40
1	18	5 year	9.14	87.85	89.11		89.19	0.003375	1.28	7.15	7.75	0.42
1	18	10 year	10.79	87.85	89.20		89.30	0.003614	1.37	7.87	8.07	0.44
1	18	25 year	13.38	87.85	89.33		89.44	0.003923	1.50	8.94	8.51	0.47
1	18	50 year	15.78	87.85	89.44		89.57	0.004138	1.59	9.90	8.89	0.48
1	18	75 year	17.41	87.85	89.51		89.65	0.004255	1.65	10.53	9.13	0.49
1	18	100 year	18.68	87.85	89.56		89.71	0.004331	1.70	11.02	9.32	0.50
1	18	100 year + cc	22.41	87.85	89.71		89.87	0.004494	1.80	12.43	9.82	0.51
1	18	1000 year	33.63	87.85	90.17		90.36	0.004313	1.93	17.42	12.05	0.51
1	17	2 year	7.08	87.74	88.76		88.81	0.003069	1.02	6.93	10.51	0.40
1	17	5 year	9.14	87.74	88.89		88.95	0.002991	1.08	8.44	11.49	0.40

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	17	10 year	10.79	87.74	88.99		89.06	0.002858	1.12	9.62	11.99	0.40
1	17	25 year	13.38	87.74	89.14		89.21	0.002678	1.17	11.40	12.59	0.39
1	17	50 year	15.78	87.74	89.26		89.34	0.002565	1.22	12.96	13.10	0.39
1	17	75 year	17.41	87.74	89.34		89.42	0.002490	1.24	14.02	13.43	0.39
1	17	100 year	18.68	87.74	89.40		89.48	0.002433	1.26	14.85	13.68	0.39
1	17	100 year + cc	22.41	87.74	89.57		89.66	0.002274	1.30	17.24	14.39	0.38
1	17	1000 year	33.63	87.74	90.11		90.20	0.001534	1.33	25.52	16.53	0.33
1	16	2 year	7.08	87.29	88.50	87.96	88.56	0.002333	1.06	6.65	7.13	0.35
1	16	5 year	9.14	87.29	88.65	88.07	88.72	0.002575	1.19	7.68	7.44	0.37
1	16	10 year	10.79	87.29	88.75	88.14	88.83	0.002739	1.28	8.45	7.66	0.39
1	16	25 year	13.38	87.29	88.89	88.25	88.99	0.002952	1.40	9.58	7.98	0.41
1	16	50 year	15.78	87.29	89.01	88.35	89.13	0.003114	1.49	10.58	8.25	0.42
1	16	75 year	17.41	87.29	89.10	88.41	89.22	0.003182	1.55	11.26	8.43	0.43
1	16	100 year	18.68	87.29	89.16	88.45	89.29	0.003225	1.59	11.79	8.57	0.43
1	16	100 year + cc	22.41	87.29	89.34	88.58	89.48	0.003296	1.68	13.35	9.00	0.44
1	16	1000 year	33.63	87.29	89.92	88.91	90.08	0.002833	1.77	19.05	10.52	0.42
1	15.5	Bridge										
1	15	2 year	7.08	87.32	88.44		88.54	0.004180	1.38	5.14	5.40	0.45
1	15	5 year	9.14	87.32	88.56		88.69	0.004917	1.57	5.81	5.57	0.49
1	15	10 year	10.79	87.32	88.65		88.80	0.005475	1.72	6.29	5.69	0.52
1	15	25 year	13.38	87.32	88.77		88.95	0.006314	1.92	6.97	5.86	0.56
1	15	50 year	15.78	87.32	88.86		89.09	0.007051	2.09	7.54	6.00	0.60
1	15	75 year	17.41	87.32	88.93		89.17	0.007457	2.20	7.93	6.08	0.61
1	15	100 year	18.68	87.32	88.98		89.24	0.007740	2.27	8.23	6.15	0.63
1	15	100 year + cc	22.41	87.32	89.12		89.43	0.008395	2.46	9.11	6.34	0.66
1	15	1000 year	33.63	87.32	89.68		90.03	0.007296	2.61	12.89	7.10	0.62
1	14	2 year	7.08	87.36	88.23		88.36	0.008396	1.59	4.45	7.23	0.65
1	14	5 year	9.14	87.36	88.35		88.50	0.008287	1.71	5.34	7.66	0.65
1	14	10 year	10.79	87.36	88.43		88.60	0.008199	1.79	6.03	7.98	0.66
1	14	25 year	13.38	87.36	88.56		88.74	0.008000	1.89	7.08	8.45	0.66
1	14	50 year	15.78	87.36	88.68		88.87	0.007703	1.95	8.07	8.86	0.65



HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	10.5	2 year	7.08	85.82	86.94	86.53	87.04	0.004482	1.40	5.04	5.59	0.47
1	10.5	5 year	9.14	85.82	87.19	86.65	87.29	0.003640	1.40	6.51	6.06	0.43
1	10.5	10 year	10.79	85.82	87.38	86.73	87.48	0.003215	1.41	7.67	6.40	0.41
1	10.5	25 year	13.38	85.82	87.65	86.86	87.75	0.002745	1.41	9.50	6.90	0.38
1	10.5	50 year	15.78	85.82	87.89	86.97	87.99	0.002440	1.41	11.18	7.34	0.36
1	10.5	75 year	17.41	85.82	88.04	87.04	88.14	0.002272	1.41	12.34	7.62	0.35
1	10.5	100 year	18.68	85.82	88.16	87.09	88.26	0.002156	1.41	13.25	7.84	0.35
1	10.5	100 year + cc	22.41	85.82	88.50	87.23	88.60	0.001872	1.40	15.98	8.45	0.33
1	10.5	1000 year	33.63	85.82	89.45	87.61	89.54	0.001122	1.33	29.30	20.06	0.26
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	86.94	85.96	86.97	0.001036	0.83	8.52	6.64	0.23
1	10	5 year	9.14	85.25	87.19	86.08	87.23	0.001039	0.89	10.25	7.10	0.24
1	10	10 year	10.79	85.25	87.38	86.16	87.42	0.001032	0.93	11.60	7.44	0.24
1	10	25 year	13.38	85.25	87.65	86.29	87.70	0.001010	0.98	13.70	7.94	0.24
1	10	50 year	15.78	85.25	87.89	86.40	87.94	0.000983	1.01	15.64	8.38	0.24
1	10	75 year	17.41	85.25	88.04	86.47	88.09	0.000961	1.03	16.96	8.63	0.23
1	10	100 year	18.68	85.25	88.16	86.52	88.21	0.000942	1.04	17.98	8.77	0.23
1	10	100 year + cc	22.41	85.25	88.49	86.66	88.55	0.000892	1.07	20.98	9.14	0.23
1	10	1000 year	33.63	85.25	89.45	87.04	89.51	0.000725	1.12	30.19	9.96	0.20
1	9.5		Culvert									
1	9	2 year	7.08	83.67	85.97		85.98	0.000407	0.60	11.90	7.05	0.15
1	9	5 year	9.14	83.67	86.12		86.15	0.000532	0.70	13.02	7.30	0.17
1	9	10 year	10.79	83.67	86.24		86.27	0.000627	0.78	13.85	7.48	0.18
1	9	25 year	13.38	83.67	86.39		86.43	0.000771	0.89	15.05	7.70	0.20
1	9	50 year	15.78	83.67	86.52		86.57	0.000897	0.98	16.03	7.73	0.22
1	9	75 year	17.41	83.67	86.60		86.66	0.000980	1.04	16.66	7.73	0.23
1	9	100 year	18.68	83.67	86.66		86.72	0.001046	1.09	17.12	7.73	0.23
1	9	100 year + cc	22.41	83.67	86.82		86.90	0.001237	1.22	18.37	7.73	0.25
1	9	1000 year	33.63	83.67	87.22		87.35	0.001814	1.57	21.48	7.73	0.30
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.006345	1.50	4.71	6.58	0.57

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.006268	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.006152	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.005990	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.006016	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.006018	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.005993	2.05	9.34	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.005962	2.20	10.61	9.34	0.60
1	8	1000 year	33.63	84.94	86.88	86.48	87.23	0.006336	2.62	13.97	10.80	0.64
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.24		85.31	0.002776	1.20	5.90	5.14	0.36
1	7	5 year	9.14	83.76	85.40		85.50	0.003154	1.35	6.75	5.22	0.38
1	7	10 year	10.79	83.76	85.52		85.63	0.003391	1.47	7.38	5.80	0.40
1	7	25 year	13.38	83.76	85.68		85.81	0.003742	1.63	8.36	6.38	0.42
1	7	50 year	15.78	83.76	85.81		85.97	0.004040	1.77	9.22	6.67	0.43
1	7	75 year	17.41	83.76	85.89		86.07	0.004233	1.86	9.78	6.85	0.44
1	7	100 year	18.68	83.76	85.95		86.14	0.004370	1.92	10.21	7.57	0.45
1	7	100 year + cc	22.41	83.76	86.12		86.34	0.004637	2.10	11.55	8.31	0.47
1	7	1000 year	33.63	83.76	86.55		86.86	0.005212	2.53	15.52	10.25	0.52
1	6	2 year	7.08	83.95	85.05		85.17	0.005395	1.56	4.72	5.92	0.51
1	6	5 year	9.14	83.95	85.18		85.34	0.005821	1.74	5.56	6.37	0.54
1	6	10 year	10.79	83.95	85.28		85.46	0.006122	1.87	6.20	6.64	0.56
1	6	25 year	13.38	83.95	85.42		85.63	0.006516	2.06	7.12	7.07	0.59
1	6	50 year	15.78	83.95	85.53		85.77	0.006739	2.21	7.94	7.52	0.60
1	6	75 year	17.41	83.95	85.60		85.86	0.006878	2.31	8.48	7.80	0.62
1	6	100 year	18.68	83.95	85.65		85.93	0.006979	2.39	8.90	8.02	0.62
1	6	100 year + cc	22.41	83.95	85.80		86.12	0.007256	2.59	10.10	8.60	0.65
1	6	1000 year	33.63	83.95	86.16		86.62	0.007925	3.10	13.52	10.08	0.70
1	5	2 year	7.08	83.93	84.82		84.97	0.007056	1.68	4.48	6.43	0.59
1	5	5 year	9.14	83.93	84.94		85.12	0.007827	1.90	5.22	6.82	0.63
1	5	10 year	10.79	83.93	85.02		85.23	0.008203	2.05	5.78	7.30	0.65
1	5	25 year	13.38	83.93	85.13		85.38	0.008837	2.28	6.62	7.94	0.69


HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	5	50 year	15.78	83.93	85.22		85.52	0.009392	2.48	7.35	8.46	0.72
1	5	75 year	17.41	83.93	85.27	85.07	85.60	0.009783	2.60	7.82	8.79	0.74
1	5	100 year	18.68	83.93	85.31	85.12	85.66	0.010088	2.70	8.18	9.02	0.75
1	5	100 year + cc	22.41	83.93	85.42	85.27	85.84	0.010895	2.96	9.19	9.49	0.79
1	5	1000 year	33.63	83.93	85.68	85.63	86.31	0.013340	3.66	11.78	10.46	0.90
1	4	2 year	7.08	83.83	84.62		84.74	0.007425	1.54	4.59	6.89	0.60
1	4	5 year	9.14	83.83	84.73		84.88	0.007786	1.70	5.38	7.14	0.63
1	4	10 year	10.79	83.83	84.81		84.98	0.008001	1.81	5.96	7.31	0.64
1	4	25 year	13.38	83.83	84.93		85.13	0.008295	1.96	6.82	7.56	0.66
1	4	50 year	15.78	83.83	85.03		85.25	0.008445	2.09	7.59	8.29	0.67
1	4	75 year	17.41	83.83	85.09		85.33	0.008560	2.17	8.10	8.75	0.68
1	4	100 year	18.68	83.83	85.13		85.38	0.008646	2.23	8.50	9.09	0.69
1	4	100 year + cc	22.41	83.83	85.26		85.54	0.008816	2.38	9.69	9.88	0.71
1	4	1000 year	33.63	83.83	85.58		85.96	0.009055	2.74	13.06	10.82	0.74
1	3	2 year	7.08	83.63	84.40		84.51	0.006761	1.44	4.91	7.81	0.58
1	3	5 year	9.14	83.63	84.52		84.64	0.006665	1.56	5.86	8.15	0.59
1	3	10 year	10.79	83.63	84.61		84.74	0.006609	1.64	6.59	8.41	0.59
1	3	25 year	13.38	83.63	84.73		84.89	0.006617	1.75	7.64	8.76	0.60
1	3	50 year	15.78	83.63	84.83		85.01	0.006651	1.85	8.55	9.06	0.61
1	3	75 year	17.41	83.63	84.90		85.08	0.006631	1.91	9.14	9.36	0.61
1	3	100 year	18.68	83.63	84.94		85.14	0.006623	1.95	9.59	9.59	0.61
1	3	100 year + cc	22.41	83.63	85.08		85.29	0.006568	2.07	10.91	10.21	0.62
1	3	1000 year	33.63	83.63	85.43		85.70	0.006388	2.34	14.77	11.80	0.63
1	2	2 year	7.08	83.22	84.13		84.23	0.006341	1.40	5.05	7.47	0.54
1	2	5 year	9.14	83.22	84.24		84.36	0.006633	1.56	5.87	7.50	0.56
1	2	10 year	10.79	83.22	84.32		84.46	0.006837	1.67	6.47	7.53	0.57
1	2	25 year	13.38	83.22	84.43		84.60	0.007066	1.82	7.35	7.78	0.59
1	2	50 year	15.78	83.22	84.53		84.72	0.007303	1.96	8.10	8.06	0.61
1	2	75 year	17.41	83.22	84.59		84.80	0.007460	2.04	8.59	8.24	0.62
1	2	100 year	18.68	83.22	84.63		84.86	0.007562	2.11	8.97	8.38	0.62
1	2	100 year + cc	22.41	83.22	84.76		85.02	0.007907	2.28	10.02	8.74	0.64
1	2	1000 year	33.63	83.22	85.08		85.45	0.008484	2.72	13.02	10.01	0.68

HEC-RAS Plan: Des flow 1 River: Hunsworth Beck Reach: 1 (Continued)


Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	1	2 year	7.08	83.32	83.98	83.83	84.10	0.008901	1.55	4.56	7.87	0.65
1	1	5 year	9.14	83.32	84.08	83.91	84.23	0.008907	1.70	5.37	7.92	0.66
1	1	10 year	10.79	83.32	84.15	83.97	84.32	0.008903	1.81	5.98	7.96	0.66
1	1	25 year	13.38	83.32	84.26	84.06	84.46	0.008901	1.95	6.86	8.09	0.67
1	1	50 year	15.78	83.32	84.35	84.14	84.58	0.008904	2.08	7.60	8.38	0.68
1	1	75 year	17.41	83.32	84.41	84.19	84.65	0.008902	2.16	8.09	8.59	0.69
1	1	100 year	18.68	83.32	84.46	84.23	84.71	0.008902	2.22	8.46	8.74	0.69
1	1	100 year + cc	22.41	83.32	84.57	84.33	84.87	0.008914	2.39	9.53	9.18	0.71
1	1	1000 year	33.63	83.32	84.89	84.63	85.29	0.008904	2.81	12.61	10.32	0.74

Hunsworth Beck 1st Oct Plan: Design Flow1 02/10/2015

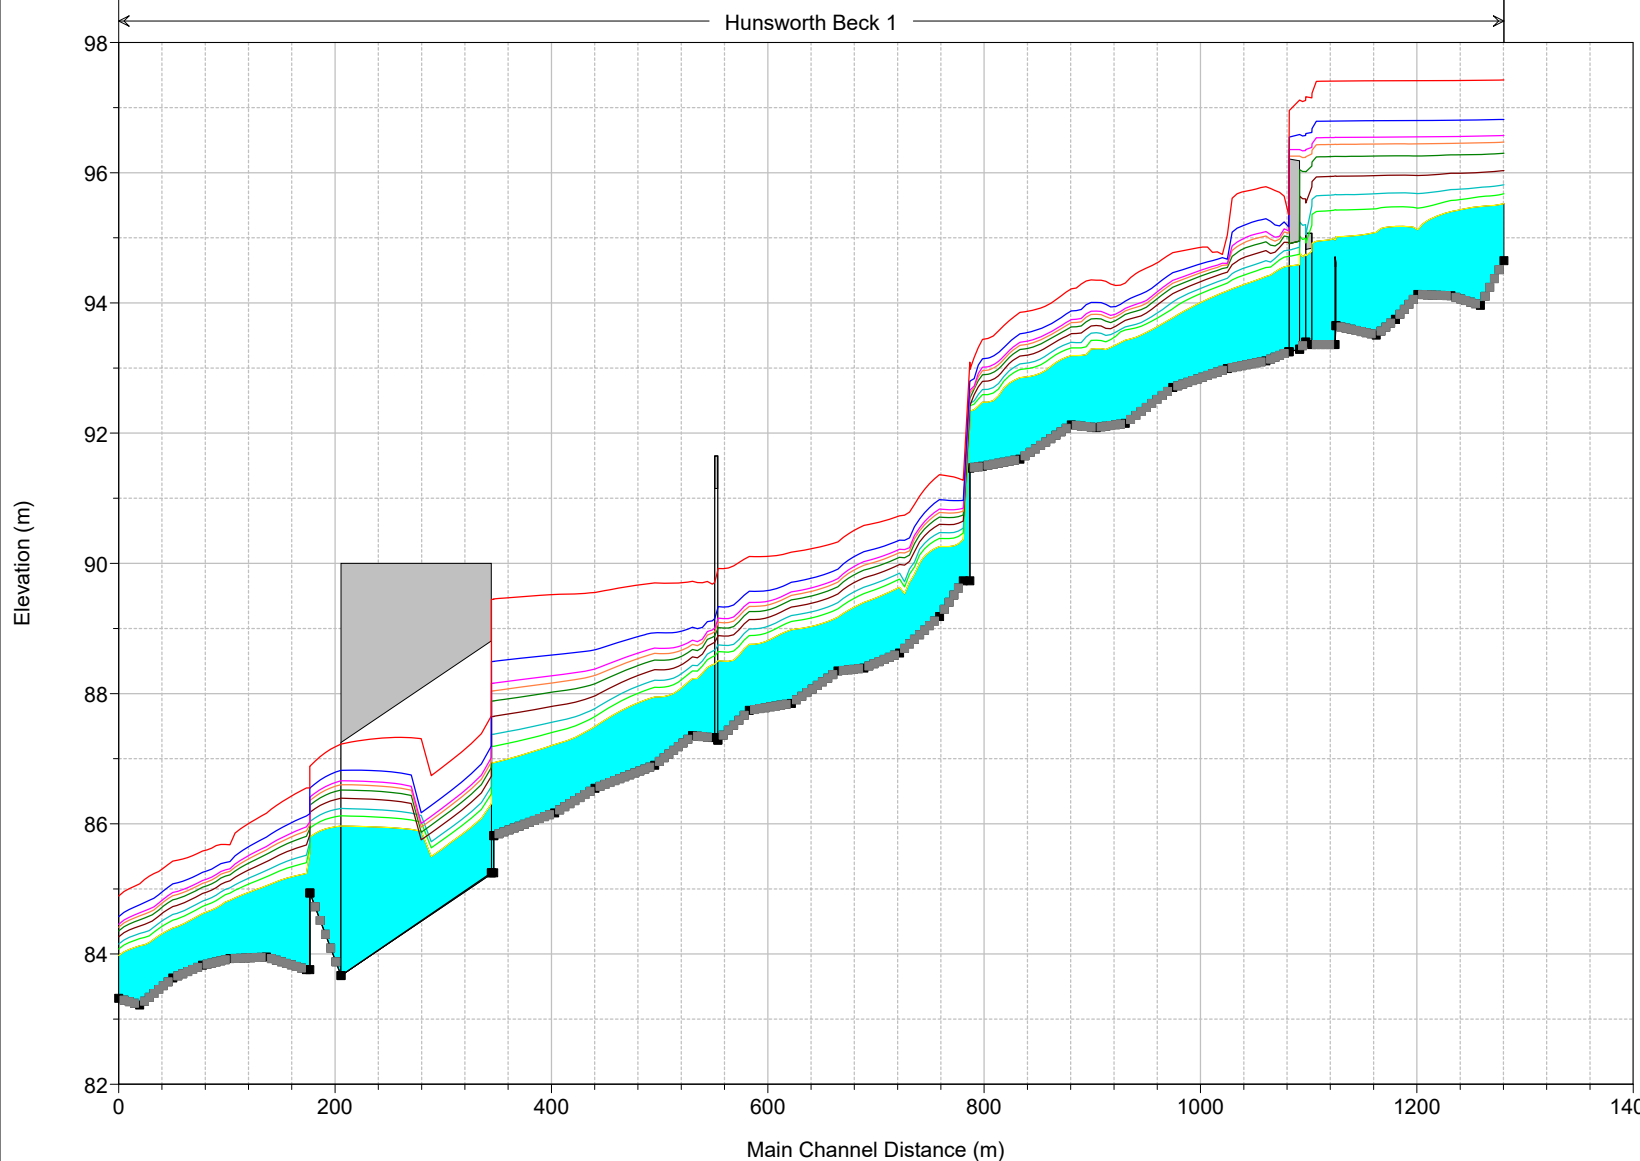


Legend	
WS 1000 year	(Red line)
WS 100 year + cc	(Blue line)
WS 100 year	(Magenta line)
WS 75 year	(Orange line)
WS 50 year	(Green line)
WS 25 year	(Brown line)
WS 10 year	(Cyan line)
WS 5 year	(Light Green line)
WS 2 year	(Yellow line)
Ground	(Black line with square markers)

Hunsworth Beck 1st Oct Plan: Design Flow1 02/10/2015  
XS08

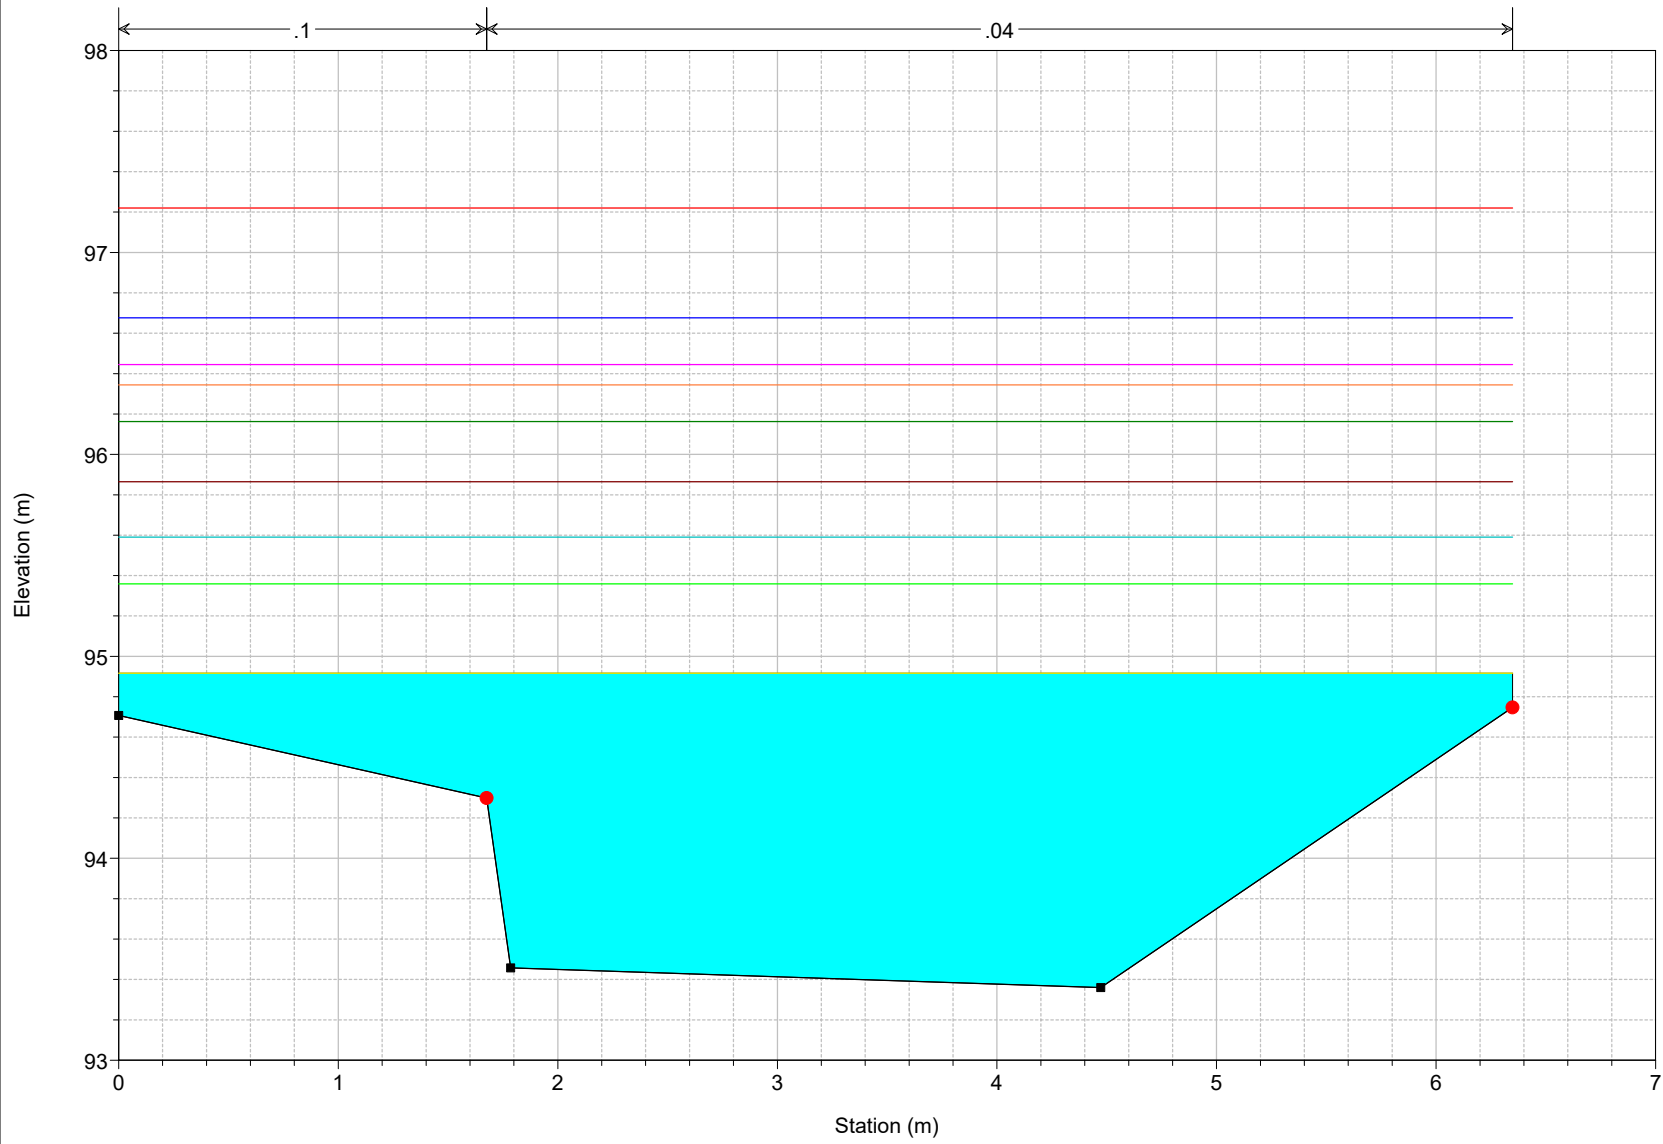


Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

Hunsworth Beck 1st Oct Plan: Design Flow1 02/10/2015  
XS14

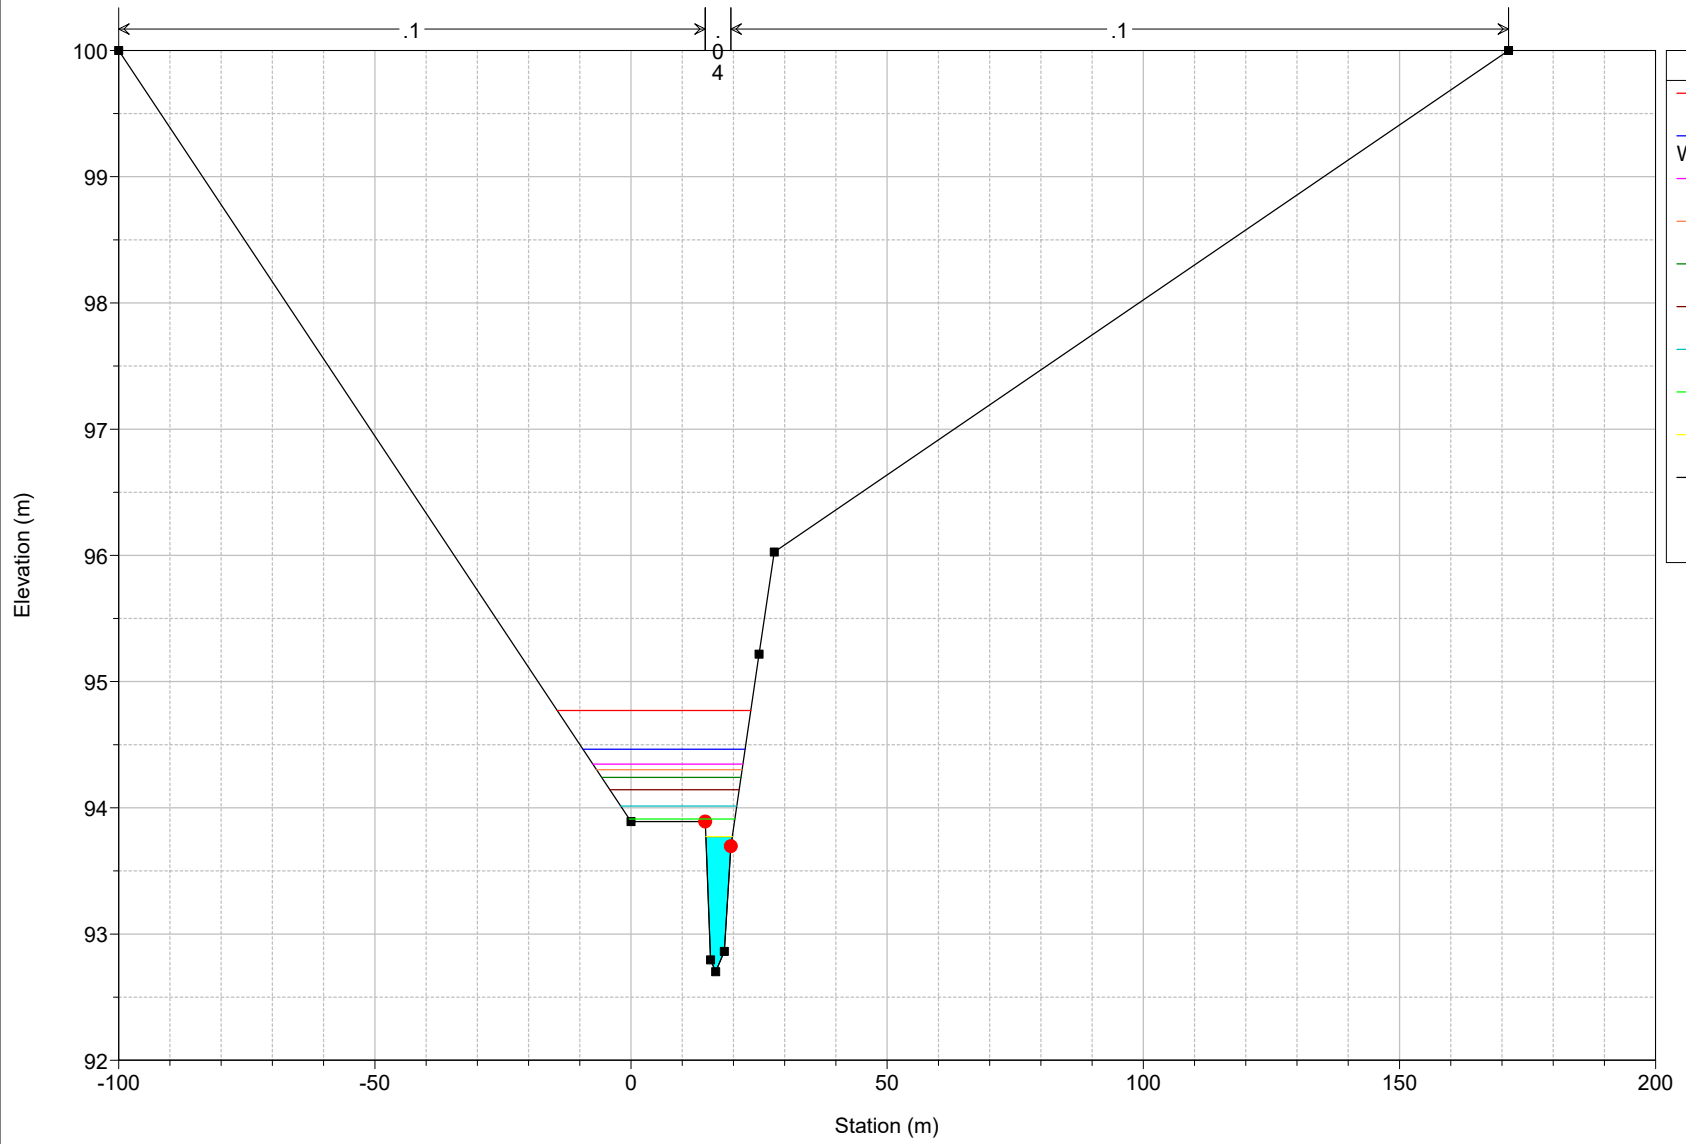


Legend	
WS 1000 year	(Red line)
WS 100 year + cc	(Blue line)
WS 100 year	(Magenta line)
WS 75 year	(Orange line)
WS 50 year	(Green line)
WS 25 year	(Brown line)
WS 10 year	(Cyan line)
WS 5 year	(Light Green line)
WS 2 year	(Yellow line)
Ground	(Black square)
Bank Sta	(Red circle)

Hunsworth Beck 1st Oct Plan: Design Flow1 02/10/2015  
XS22

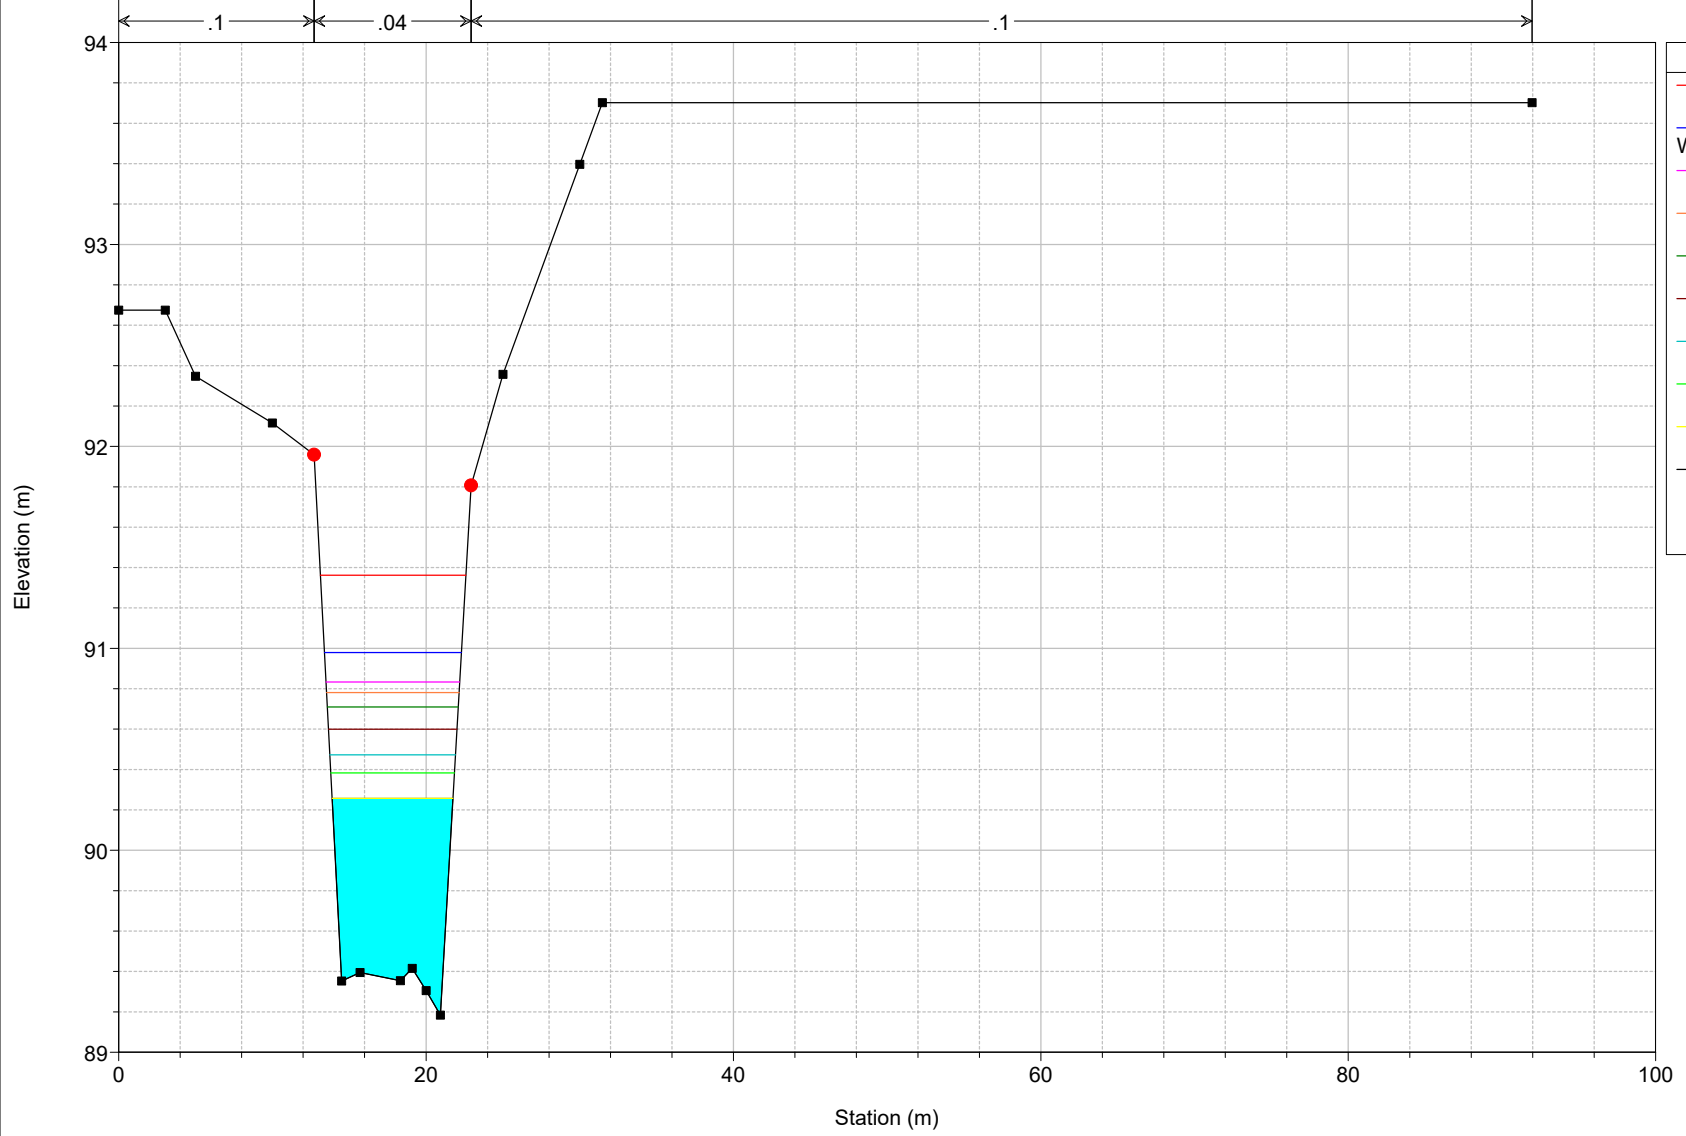

Legend	
WS 1000 year	(Red line)
WS 100 year + cc	(Blue line)
WS 100 year	(Magenta line)
WS 75 year	(Orange line)
WS 50 year	(Green line)
WS 25 year	(Brown line)
WS 10 year	(Cyan line)
WS 5 year	(Light Green line)
WS 2 year	(Yellow line)
Ground	(Black line with square markers)
Bank Sta	(Red dot)

Hunsworth Beck 1st Oct Plan: Design Flow1 02/10/2015  
XS 31

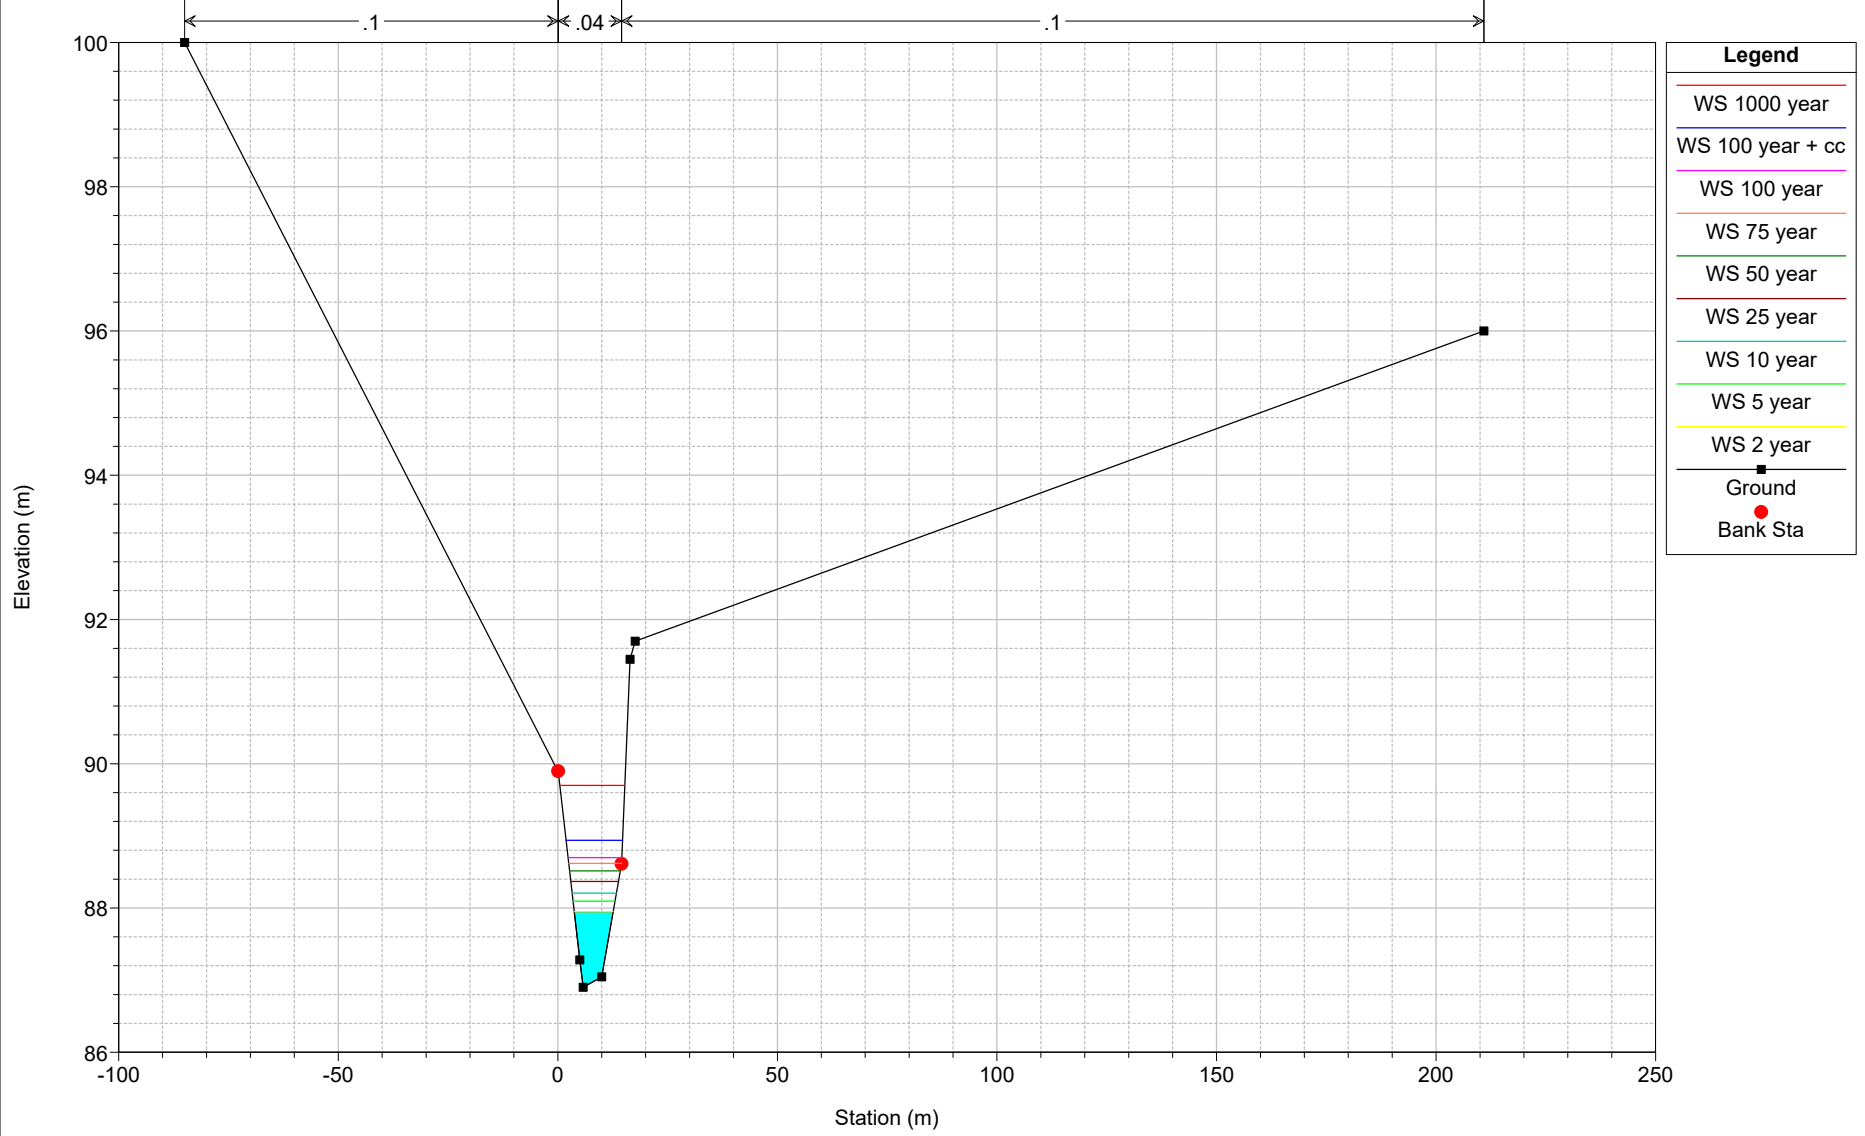

Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

Increased Manning's n Results

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	95.63	95.25	95.69	0.005048	1.12	7.45	20.83	0.42
1	43	5 year	9.14	94.65	95.79	95.35	95.85	0.003891	1.12	11.36	27.89	0.38
1	43	10 year	10.79	94.65	95.93	95.42	95.98	0.002995	1.09	15.59	33.93	0.34
1	43	25 year	13.38	94.65	96.14	95.56	96.18	0.002021	1.01	23.84	43.34	0.29
1	43	50 year	15.78	94.65	96.41	95.65	96.43	0.001153	0.87	36.95	55.07	0.23
1	43	75 year	17.41	94.65	96.55	95.71	96.57	0.000909	0.82	45.40	61.46	0.20
1	43	100 year	18.68	94.65	96.65	95.74	96.67	0.000804	0.80	51.35	65.59	0.19
1	43	100 year + cc	22.41	94.65	96.89	95.84	96.90	0.000615	0.76	68.51	76.25	0.17
1	43	1000 year	33.63	94.65	97.47	96.06	97.48	0.000385	0.72	120.39	101.91	0.14
1	42	2 year	7.08	93.96	95.57	94.74	95.61	0.002032	0.87	8.42	14.38	0.26
1	42	5 year	9.14	93.96	95.73	94.85	95.78	0.002104	0.96	11.21	20.33	0.27
1	42	10 year	10.79	93.96	95.88	94.94	95.92	0.001851	0.97	16.14	35.73	0.26
1	42	25 year	13.38	93.96	96.10	95.06	96.14	0.001408	0.93	25.48	46.64	0.23
1	42	50 year	15.78	93.96	96.39	95.17	96.41	0.000866	0.81	40.50	60.16	0.19
1	42	75 year	17.41	93.96	96.54	95.23	96.56	0.000704	0.77	50.01	67.34	0.17
1	42	100 year	18.68	93.96	96.63	95.29	96.65	0.000634	0.75	56.66	71.93	0.16
1	42	100 year + cc	22.41	93.96	96.88	95.42	96.89	0.000502	0.72	75.77	83.73	0.15
1	42	1000 year	33.63	93.96	97.46	95.93	97.47	0.000328	0.67	133.18	111.95	0.12
1	41	2 year	7.08	94.11	95.49		95.53	0.003179	0.95	10.45	36.09	0.32
1	41	5 year	9.14	94.11	95.68		95.71	0.002126	0.88	18.08	45.13	0.27
1	41	10 year	10.79	94.11	95.84		95.87	0.001455	0.80	26.15	53.05	0.23
1	41	25 year	13.38	94.11	96.08		96.10	0.000901	0.71	40.42	64.72	0.19
1	41	50 year	15.78	94.11	96.38		96.39	0.000498	0.60	61.32	78.75	0.14
1	41	75 year	17.41	94.11	96.53		96.54	0.000396	0.56	73.81	86.05	0.13
1	41	100 year	18.68	94.11	96.62		96.63	0.000354	0.55	82.33	90.70	0.12
1	41	100 year + cc	22.41	94.11	96.87		96.88	0.000281	0.53	106.19	102.59	0.11
1	41	1000 year	33.63	94.11	97.46		97.46	0.000190	0.51	174.90	130.93	0.10
1	40	2 year	7.08	94.13	95.30		95.39	0.006637	1.37	8.21	27.83	0.47
1	40	5 year	9.14	94.13	95.59		95.63	0.002695	1.06	17.73	38.92	0.31
1	40	10 year	10.79	94.13	95.79		95.81	0.001649	0.92	26.28	46.68	0.25
1	40	25 year	13.38	94.13	96.05		96.07	0.000999	0.80	40.01	56.97	0.20
1	40	50 year	15.78	94.13	96.36		96.37	0.000560	0.68	59.27	68.86	0.16

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	40	75 year	17.41	94.13	96.51		96.52	0.000454	0.64	70.42	74.89	0.14
1	40	100 year	18.68	94.13	96.61		96.62	0.000410	0.63	77.94	78.69	0.14
1	40	100 year + cc	22.41	94.13	96.86		96.87	0.000334	0.61	98.77	88.38	0.12
1	40	1000 year	33.63	94.13	97.45		97.46	0.000238	0.60	157.84	111.36	0.11
1	39	2 year	7.08	93.75	95.31		95.31	0.000628	0.41	23.14	50.08	0.15
1	39	5 year	9.14	93.75	95.59		95.59	0.000308	0.35	39.14	62.76	0.11
1	39	10 year	10.79	93.75	95.79		95.79	0.000216	0.33	52.49	71.64	0.09
1	39	25 year	13.38	93.75	96.05		96.06	0.000153	0.32	72.97	83.45	0.08
1	39	50 year	15.78	93.75	96.36		96.36	0.000100	0.29	100.58	97.12	0.07
1	39	75 year	17.41	93.75	96.51		96.52	0.000086	0.28	116.17	104.05	0.06
1	39	100 year	18.68	93.75	96.61		96.61	0.000081	0.28	126.57	108.43	0.06
1	39	100 year + cc	22.41	93.75	96.86		96.86	0.000072	0.29	154.99	119.58	0.06
1	39	1000 year	33.63	93.75	97.45		97.45	0.000061	0.31	233.51	146.01	0.06
1	38	2 year	7.08	93.51	95.26		95.30	0.002176	0.93	15.86	44.75	0.26
1	38	5 year	9.14	93.51	95.57		95.59	0.000944	0.71	32.81	64.86	0.18
1	38	10 year	10.79	93.51	95.78		95.79	0.000603	0.61	47.53	78.25	0.15
1	38	25 year	13.38	93.51	96.05		96.05	0.000378	0.53	70.91	95.74	0.12
1	38	50 year	15.78	93.51	96.35		96.36	0.000217	0.44	103.56	115.82	0.09
1	38	75 year	17.41	93.51	96.51		96.51	0.000177	0.42	122.38	125.95	0.08
1	38	100 year	18.68	93.51	96.61		96.61	0.000160	0.41	135.06	132.34	0.08
1	38	100 year + cc	22.41	93.51	96.86		96.86	0.000131	0.39	170.17	148.60	0.07
1	38	1000 year	33.63	93.51	97.45		97.45	0.000093	0.38	269.54	187.12	0.06
1	37	2 year	7.08	93.65	95.22	94.33	95.24	0.000930	0.67	19.21	40.57	0.19
1	37	5 year	9.14	93.65	95.55	94.45	95.56	0.000486	0.57	35.52	57.24	0.14
1	37	10 year	10.79	93.65	95.76	94.53	95.77	0.000354	0.52	48.78	67.83	0.12
1	37	25 year	13.38	93.65	96.04	94.65	96.04	0.000258	0.49	69.15	81.46	0.11
1	37	50 year	15.78	93.65	96.35	94.85	96.35	0.000168	0.43	97.02	97.06	0.09
1	37	75 year	17.41	93.65	96.50	94.92	96.51	0.000145	0.42	112.84	104.88	0.08
1	37	100 year	18.68	93.65	96.60	94.97	96.61	0.000135	0.42	123.42	109.81	0.08
1	37	100 year + cc	22.41	93.65	96.85	95.07	96.86	0.000118	0.41	152.51	122.32	0.08
1	37	1000 year	33.63	93.65	97.45	95.31	97.45	0.000095	0.42	233.81	151.94	0.07

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36.55		Bridge									
1	36.5	2 year	7.08	93.36	95.21		95.23	0.000944	0.65	20.34	43.10	0.18
1	36.5	5 year	9.14	93.36	95.55		95.56	0.000476	0.54	37.70	59.76	0.13
1	36.5	10 year	10.79	93.36	95.76		95.77	0.000344	0.50	51.54	70.27	0.12
1	36.5	25 year	13.38	93.36	96.03		96.04	0.000249	0.46	72.62	83.77	0.10
1	36.5	50 year	15.78	93.36	96.35		96.35	0.000162	0.41	101.23	99.20	0.08
1	36.5	75 year	17.41	93.36	96.50		96.51	0.000139	0.40	117.39	106.94	0.08
1	36.5	100 year	18.68	93.36	96.60		96.61	0.000130	0.39	128.18	111.81	0.08
1	36.5	100 year + cc	22.41	93.36	96.85		96.86	0.000114	0.39	157.75	124.18	0.07
1	36.5	1000 year	33.63	93.36	97.45		97.45	0.000093	0.40	240.08	153.45	0.07
1	36	2 year	7.08	93.36	95.15	94.22	95.20	0.002153	0.99	7.97	6.35	0.26
1	36	5 year	9.14	93.36	95.49	94.36	95.54	0.001883	1.02	10.11	6.35	0.24
1	36	10 year	10.79	93.36	95.70	94.46	95.75	0.001880	1.08	11.43	6.35	0.24
1	36	25 year	13.38	93.36	95.96	94.62	96.03	0.001998	1.17	13.10	6.35	0.25
1	36	50 year	15.78	93.36	96.27	94.75	96.34	0.001909	1.21	15.06	6.35	0.24
1	36	75 year	17.41	93.36	96.42	94.82	96.49	0.001970	1.26	16.01	6.35	0.24
1	36	100 year	18.68	93.36	96.51	94.87	96.59	0.002059	1.31	16.60	6.35	0.25
1	36	100 year + cc	22.41	93.36	96.74	95.01	96.84	0.002366	1.45	18.07	6.35	0.26
1	36	1000 year	33.63	93.36	97.27	95.39	97.43	0.003407	1.85	21.39	6.35	0.31
1	35.5		Bridge									
1	35	2 year	7.08	93.40	94.88	94.29	95.02	0.010490	1.69	4.30	4.12	0.46
1	35	5 year	9.14	93.40	95.12	94.46	95.29	0.010293	1.82	5.32	4.54	0.46
1	35	10 year	10.79	93.40	95.34	94.58	95.51	0.009059	1.86	6.50	6.17	0.44
1	35	25 year	13.38	93.40	95.73	94.75	95.89	0.006571	1.81	9.48	9.09	0.39
1	35	50 year	15.78	93.40	96.14	94.95	96.26	0.004356	1.65	13.79	11.07	0.33
1	35	75 year	17.41	93.40	96.31	95.04	96.42	0.004033	1.65	15.58	11.07	0.32
1	35	100 year	18.68	93.40	96.40	95.11	96.52	0.003983	1.68	16.63	11.07	0.32
1	35	100 year + cc	22.41	93.40	96.63	95.35	96.76	0.004039	1.78	19.21	11.07	0.32
1	35	1000 year	33.63	93.40	97.15	95.95	97.32	0.004636	2.12	24.97	11.07	0.35
1	34	2 year	7.08	93.29	94.85	94.01	94.92	0.005053	1.22	5.83	4.60	0.33

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	34	5 year	9.14	93.29	95.11	94.15	95.19	0.004874	1.31	7.11	5.32	0.33
1	34	10 year	10.79	93.29	95.34	94.25	95.43	0.004459	1.35	8.41	5.97	0.32
1	34	25 year	13.38	93.29	95.73	94.39	95.82	0.003648	1.34	11.01	7.07	0.29
1	34	50 year	15.78	93.29	96.14	94.52	96.22	0.002905	1.30	14.12	8.21	0.25
1	34	75 year	17.41	93.29	96.30	94.61	96.38	0.002891	1.33	15.45	8.40	0.25
1	34	100 year	18.68	93.29	96.39	94.73	96.48	0.002966	1.37	16.24	8.40	0.26
1	34	100 year + cc	22.41	93.29	96.62	94.90	96.73	0.003277	1.49	18.17	8.40	0.27
1	34	1000 year	33.63	93.29	97.13	95.39	97.28	0.004443	1.84	22.40	8.40	0.31
1	33.5		Culvert									
1	33	2 year	7.08	93.25	94.67		94.77	0.004976	1.42	5.33	4.11	0.38
1	33	5 year	9.14	93.25	94.81		94.95	0.006258	1.67	5.91	4.17	0.43
1	33	10 year	10.79	93.25	94.90		95.07	0.007322	1.85	6.30	4.22	0.46
1	33	25 year	13.38	93.25	95.02		95.25	0.009192	2.14	6.80	4.28	0.52
1	33	50 year	15.78	93.25	95.11		95.39	0.011087	2.40	7.17	4.32	0.57
1	33	75 year	17.41	93.25	95.15		95.49	0.012523	2.58	7.38	4.34	0.60
1	33	100 year	18.68	93.25	95.18		95.55	0.013718	2.72	7.52	4.72	0.63
1	33	100 year + cc	22.41	93.25	95.26		95.75	0.017329	3.14	7.87	4.75	0.71
1	33	1000 year	33.63	93.25	95.36	95.36	96.35	0.032719	4.47	8.37	4.79	0.99
1	32	2 year	7.08	93.11	94.52		94.63	0.006406	1.55	6.72	19.64	0.45
1	32	5 year	9.14	93.11	94.67		94.78	0.006043	1.62	9.86	23.28	0.44
1	32	10 year	10.79	93.11	94.77		94.88	0.005658	1.65	12.46	25.92	0.44
1	32	25 year	13.38	93.11	94.92		95.02	0.005097	1.67	16.65	29.68	0.42
1	32	50 year	15.78	93.11	95.05		95.14	0.004662	1.68	20.59	32.83	0.41
1	32	75 year	17.41	93.11	95.13		95.22	0.004404	1.69	23.31	34.83	0.40
1	32	100 year	18.68	93.11	95.19		95.28	0.004212	1.68	25.47	36.35	0.39
1	32	100 year + cc	22.41	93.11	95.36		95.44	0.003750	1.68	31.86	40.50	0.37
1	32	1000 year	33.63	93.11	95.81		95.87	0.002711	1.63	52.71	51.77	0.33
1	31	2 year	7.08	92.99	94.29		94.41	0.007188	1.55	5.15	7.68	0.48
1	31	5 year	9.14	92.99	94.41		94.56	0.008072	1.76	6.10	8.33	0.52
1	31	10 year	10.79	92.99	94.48		94.66	0.008856	1.93	6.76	8.75	0.55
1	31	25 year	13.38	92.99	94.59		94.81	0.010084	2.17	7.70	9.32	0.60

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	31	50 year	15.78	92.99	94.66		94.93	0.011313	2.39	8.45	9.74	0.64
1	31	75 year	17.41	92.99	94.71		95.01	0.012153	2.53	8.92	10.00	0.67
1	31	100 year	18.68	92.99	94.75		95.07	0.012800	2.64	9.27	10.19	0.69
1	31	100 year + cc	22.41	92.99	94.83	94.67	95.23	0.014928	2.95	10.15	10.66	0.75
1	31	1000 year	33.63	92.99	95.04	95.04	95.68	0.021002	3.80	12.44	11.77	0.91
1	30	2 year	7.08	92.70	93.89	93.57	94.02	0.009528	1.62	4.42	5.70	0.56
1	30	5 year	9.14	92.70	94.03	93.70	94.17	0.008709	1.71	7.35	22.91	0.54
1	30	10 year	10.79	92.70	94.12		94.26	0.008133	1.75	9.53	24.74	0.53
1	30	25 year	13.38	92.70	94.24		94.38	0.007585	1.81	12.65	27.14	0.52
1	30	50 year	15.78	92.70	94.33		94.47	0.007315	1.87	15.31	29.03	0.52
1	30	75 year	17.41	92.70	94.39		94.53	0.007135	1.91	17.09	30.24	0.52
1	30	100 year	18.68	92.70	94.44		94.58	0.007027	1.93	18.44	31.11	0.52
1	30	100 year + cc	22.41	92.70	94.56		94.70	0.006714	2.00	22.39	33.55	0.51
1	30	1000 year	33.63	92.70	94.88		95.02	0.005930	2.13	34.12	39.93	0.50
1	29	2 year	7.08	92.15	93.54	93.12	93.63	0.005995	1.36	6.77	13.14	0.44
1	29	5 year	9.14	92.15	93.64	93.25	93.75	0.006718	1.54	8.20	14.49	0.47
1	29	10 year	10.79	92.15	93.72	93.35	93.84	0.007099	1.66	9.36	15.49	0.49
1	29	25 year	13.38	92.15	93.84	93.47	93.98	0.007415	1.81	11.24	16.99	0.51
1	29	50 year	15.78	92.15	93.93	93.61	94.09	0.007631	1.92	12.94	18.23	0.52
1	29	75 year	17.41	92.15	94.00	93.67	94.16	0.007736	1.99	14.09	19.03	0.53
1	29	100 year	18.68	92.15	94.04	93.71	94.21	0.007821	2.05	14.96	19.61	0.54
1	29	100 year + cc	22.41	92.15	94.16	93.83	94.35	0.008104	2.19	17.44	21.45	0.55
1	29	1000 year	33.63	92.15	94.47	94.11	94.71	0.008425	2.52	24.94	26.42	0.58
1	28	2 year	7.08	92.08	93.38	92.72	93.43	0.004030	1.12	9.08	10.47	0.35
1	28	5 year	9.14	92.08	93.53	92.84	93.55	0.002522	0.96	18.99	31.32	0.28
1	28	10 year	10.79	92.08	93.61	92.93	93.64	0.002573	1.01	21.53	32.29	0.29
1	28	25 year	13.38	92.08	93.74	92.97	93.77	0.002482	1.06	25.86	33.87	0.29
1	28	50 year	15.78	92.08	93.85	93.23	93.88	0.002429	1.10	29.62	35.18	0.29
1	28	75 year	17.41	92.08	93.91	93.28	93.95	0.002403	1.13	32.07	36.02	0.29
1	28	100 year	18.68	92.08	93.96	93.32	94.00	0.002393	1.15	33.89	36.62	0.29
1	28	100 year + cc	22.41	92.08	94.10	93.47	94.14	0.002362	1.21	39.10	38.30	0.29
1	28	1000 year	33.63	92.08	94.45	93.59	94.50	0.002347	1.36	53.22	42.52	0.30

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	27	2 year	7.08	92.13	93.27	92.73	93.31	0.003207	1.01	9.42	11.44	0.33
1	27	5 year	9.14	92.13	93.39	92.82	93.45	0.003529	1.14	10.93	11.99	0.35
1	27	10 year	10.79	92.13	93.49	92.89	93.55	0.003240	1.15	14.81	22.51	0.34
1	27	25 year	13.38	92.13	93.63	92.99	93.68	0.003230	1.24	17.86	23.97	0.35
1	27	50 year	15.78	92.13	93.73	93.07	93.80	0.003230	1.31	20.54	25.19	0.35
1	27	75 year	17.41	92.13	93.80	93.12	93.87	0.003223	1.35	22.31	25.96	0.36
1	27	100 year	18.68	92.13	93.85	93.16	93.92	0.003227	1.38	23.64	26.52	0.36
1	27	100 year + cc	22.41	92.13	93.99	93.27	94.07	0.003231	1.46	27.41	27.94	0.36
1	27	1000 year	33.63	92.13	94.34	93.58	94.43	0.003280	1.68	37.77	31.53	0.38
1	26	2 year	7.08	91.60	92.92		92.97	0.004275	1.06	6.66	8.34	0.38
1	26	5 year	9.14	91.60	93.05		93.12	0.004732	1.17	7.79	9.11	0.40
1	26	10 year	10.79	91.60	93.14		93.22	0.005023	1.25	8.65	9.65	0.42
1	26	25 year	13.38	91.60	93.27		93.36	0.005364	1.35	9.94	10.41	0.44
1	26	50 year	15.78	91.60	93.37		93.48	0.005602	1.42	11.08	11.04	0.45
1	26	75 year	17.41	91.60	93.44		93.55	0.005744	1.47	11.83	11.43	0.46
1	26	100 year	18.68	91.60	93.49		93.60	0.005843	1.51	12.39	11.72	0.47
1	26	100 year + cc	22.41	91.60	93.62		93.75	0.006121	1.60	13.98	12.49	0.48
1	26	1000 year	33.63	91.60	93.95		94.12	0.006042	1.83	19.13	18.53	0.50
1	25	2 year	7.08	91.49	92.52		92.60	0.005776	1.29	5.78	8.19	0.44
1	25	5 year	9.14	91.49	92.64		92.74	0.006361	1.45	6.80	8.95	0.47
1	25	10 year	10.79	91.49	92.72		92.84	0.006763	1.56	7.57	9.48	0.49
1	25	25 year	13.38	91.49	92.85		92.99	0.007082	1.70	8.84	10.32	0.51
1	25	50 year	15.78	91.49	92.95		93.11	0.007273	1.83	9.93	11.17	0.52
1	25	75 year	17.41	91.49	93.01		93.19	0.007447	1.91	10.63	11.68	0.54
1	25	100 year	18.68	91.49	93.06		93.24	0.007588	1.97	11.17	12.05	0.54
1	25	100 year + cc	22.41	91.49	93.18		93.40	0.008000	2.15	12.68	12.99	0.57
1	25	1000 year	33.63	91.49	93.48		93.78	0.009051	2.58	16.87	15.02	0.62
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.012468	1.63	4.41	7.71	0.59
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.014689	1.90	5.11	9.48	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.017430	2.13	5.50	10.25	0.72
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.029975	2.74	5.23	9.71	0.94

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	24	50 year	15.78	91.47	92.55	92.55	92.93	0.026363	2.79	6.49	11.98	0.90
1	24	75 year	17.41	91.47	92.62	92.62	93.01	0.024394	2.82	7.43	13.15	0.88
1	24	100 year	18.68	91.47	92.67	92.67	93.06	0.023782	2.86	8.05	13.73	0.87
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.21	0.021747	2.96	10.00	15.29	0.85
1	24	1000 year	33.63	91.47	93.03	93.08	93.58	0.024656	3.52	13.58	16.49	0.93
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.46	90.32	90.61	0.016687	1.73	4.08	6.36	0.69
1	23	5 year	9.14	89.73	90.58	90.41	90.76	0.016516	1.89	4.84	6.41	0.69
1	23	10 year	10.79	89.73	90.66	90.48	90.87	0.016475	2.00	5.40	6.45	0.70
1	23	25 year	13.38	89.73	90.79	90.59	91.03	0.016526	2.15	6.21	6.50	0.70
1	23	50 year	15.78	89.73	90.90	90.68	91.16	0.016682	2.28	6.92	6.55	0.71
1	23	75 year	17.41	89.73	90.97	90.74	91.25	0.016792	2.36	7.37	6.58	0.71
1	23	100 year	18.68	89.73	91.02	90.78	91.32	0.016865	2.42	7.72	6.60	0.71
1	23	100 year + cc	22.41	89.73	91.17	90.90	91.51	0.017178	2.58	8.68	6.66	0.72
1	23	1000 year	33.63	89.73	91.55	91.24	92.00	0.018225	2.99	11.26	6.82	0.74
1	22	2 year	7.08	89.18	90.31		90.37	0.003679	1.02	6.95	7.94	0.35
1	22	5 year	9.14	89.18	90.44		90.51	0.004017	1.14	8.00	8.13	0.37
1	22	10 year	10.79	89.18	90.54		90.62	0.004245	1.23	8.78	8.27	0.38
1	22	25 year	13.38	89.18	90.68		90.77	0.004532	1.35	9.93	8.47	0.40
1	22	50 year	15.78	89.18	90.79		90.90	0.004755	1.44	10.93	8.64	0.41
1	22	75 year	17.41	89.18	90.87		90.98	0.004880	1.50	11.59	8.75	0.42
1	22	100 year	18.68	89.18	90.93		91.05	0.004960	1.54	12.10	8.83	0.42
1	22	100 year + cc	22.41	89.18	91.09		91.23	0.005178	1.66	13.52	9.06	0.43
1	22	1000 year	33.63	89.18	91.51		91.69	0.005613	1.93	17.45	9.67	0.46
1	21	2 year	7.08	88.62	89.74		89.86	0.008931	1.50	4.73	5.92	0.53
1	21	5 year	9.14	88.62	89.89		90.02	0.009111	1.63	5.61	6.20	0.55
1	21	10 year	10.79	88.62	89.99		90.15	0.009238	1.72	6.27	6.39	0.55
1	21	25 year	13.38	88.62	90.14		90.32	0.009424	1.85	7.25	6.67	0.57
1	21	50 year	15.78	88.62	90.27		90.46	0.009626	1.95	8.09	6.91	0.58
1	21	75 year	17.41	88.62	90.35		90.55	0.009740	2.02	8.64	7.05	0.58
1	21	100 year	18.68	88.62	90.41		90.62	0.009827	2.06	9.06	7.17	0.59

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	21	100 year + cc	22.41	88.62	90.57		90.81	0.010054	2.19	10.24	7.47	0.60
1	21	1000 year	33.63	88.62	90.99		91.30	0.010455	2.48	13.56	8.26	0.62
1	20	2 year	7.08	88.39	89.50		89.59	0.006763	1.29	5.48	7.22	0.47
1	20	5 year	9.14	88.39	89.66		89.75	0.006541	1.38	6.60	7.58	0.47
1	20	10 year	10.79	88.39	89.76		89.87	0.006457	1.45	7.44	7.84	0.47
1	20	25 year	13.38	88.39	89.92		90.04	0.006404	1.54	8.67	8.20	0.48
1	20	50 year	15.78	88.39	90.04		90.18	0.006406	1.62	9.74	8.51	0.48
1	20	75 year	17.41	88.39	90.13		90.27	0.006421	1.67	10.43	8.70	0.49
1	20	100 year	18.68	88.39	90.18		90.33	0.006438	1.71	10.95	8.84	0.49
1	20	100 year + cc	22.41	88.39	90.35		90.51	0.006481	1.80	12.44	9.23	0.50
1	20	1000 year	33.63	88.39	90.79		90.99	0.006404	2.01	16.72	10.27	0.50
1	19	2 year	7.08	88.35	89.29		89.40	0.009305	1.48	4.78	6.12	0.53
1	19	5 year	9.14	88.35	89.44		89.57	0.009454	1.60	5.73	6.61	0.55
1	19	10 year	10.79	88.35	89.54		89.69	0.009548	1.68	6.44	6.95	0.56
1	19	25 year	13.38	88.35	89.69		89.85	0.009661	1.78	7.51	7.44	0.57
1	19	50 year	15.78	88.35	89.82		89.99	0.009724	1.87	8.45	7.85	0.57
1	19	75 year	17.41	88.35	89.89		90.08	0.009736	1.92	9.08	8.10	0.58
1	19	100 year	18.68	88.35	89.95		90.15	0.009720	1.95	9.56	8.26	0.58
1	19	100 year + cc	22.41	88.35	90.11		90.33	0.009639	2.05	10.93	8.72	0.58
1	19	1000 year	33.63	88.35	90.57		90.82	0.008850	2.22	15.16	9.99	0.58
1	18	2 year	7.08	87.85	89.06		89.12	0.003618	1.04	6.81	7.60	0.35
1	18	5 year	9.14	87.85	89.20		89.27	0.004017	1.16	7.90	8.08	0.37
1	18	10 year	10.79	87.85	89.30		89.38	0.004273	1.24	8.72	8.42	0.39
1	18	25 year	13.38	87.85	89.44		89.54	0.004589	1.35	9.94	8.91	0.41
1	18	50 year	15.78	87.85	89.56		89.67	0.004806	1.43	11.04	9.32	0.42
1	18	75 year	17.41	87.85	89.64		89.75	0.004915	1.48	11.77	9.59	0.43
1	18	100 year	18.68	87.85	89.70		89.82	0.004986	1.51	12.33	9.79	0.43
1	18	100 year + cc	22.41	87.85	89.86		89.99	0.005103	1.60	13.99	10.36	0.44
1	18	1000 year	33.63	87.85	90.35		90.50	0.005012	1.71	19.69	13.13	0.45
1	17	2 year	7.08	87.74	88.82		88.87	0.003658	0.93	7.65	10.99	0.35
1	17	5 year	9.14	87.74	88.97		89.02	0.003483	0.98	9.35	11.89	0.35

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	17	10 year	10.79	87.74	89.08		89.13	0.003316	1.01	10.65	12.34	0.35
1	17	25 year	13.38	87.74	89.23		89.29	0.003125	1.06	12.60	12.98	0.34
1	17	50 year	15.78	87.74	89.36		89.43	0.002987	1.10	14.36	13.53	0.34
1	17	75 year	17.41	87.74	89.45		89.51	0.002904	1.12	15.53	13.89	0.34
1	17	100 year	18.68	87.74	89.52		89.58	0.002837	1.14	16.45	14.16	0.34
1	17	100 year + cc	22.41	87.74	89.70		89.77	0.002606	1.17	19.13	14.93	0.33
1	17	1000 year	33.63	87.74	90.25		90.33	0.001816	1.23	27.94	17.10	0.29
1	16	2 year	7.08	87.29	88.58	87.96	88.63	0.002932	0.99	7.18	7.29	0.32
1	16	5 year	9.14	87.29	88.73	88.07	88.79	0.003237	1.10	8.29	7.62	0.34
1	16	10 year	10.79	87.29	88.83	88.14	88.91	0.003444	1.18	9.12	7.86	0.35
1	16	25 year	13.38	87.29	88.99	88.25	89.07	0.003700	1.29	10.37	8.20	0.37
1	16	50 year	15.78	87.29	89.12	88.35	89.22	0.003860	1.37	11.49	8.49	0.38
1	16	75 year	17.41	87.29	89.21	88.41	89.31	0.003939	1.42	12.24	8.69	0.38
1	16	100 year	18.68	87.29	89.28	88.45	89.39	0.003981	1.46	12.83	8.85	0.39
1	16	100 year + cc	22.41	87.29	89.47	88.58	89.59	0.004054	1.54	14.58	9.35	0.39
1	16	1000 year	33.63	87.29	90.06	88.91	90.20	0.003598	1.63	20.57	10.89	0.38
1	15.5	Bridge										
1	15	2 year	7.08	87.32	88.52		88.60	0.005270	1.28	5.54	5.50	0.41
1	15	5 year	9.14	87.32	88.65		88.76	0.006155	1.45	6.28	5.69	0.44
1	15	10 year	10.79	87.32	88.74		88.87	0.006810	1.58	6.82	5.82	0.47
1	15	25 year	13.38	87.32	88.87		89.03	0.007726	1.76	7.60	6.01	0.50
1	15	50 year	15.78	87.32	88.99		89.17	0.008394	1.90	8.31	6.17	0.52
1	15	75 year	17.41	87.32	89.07		89.27	0.008778	1.98	8.78	6.27	0.54
1	15	100 year	18.68	87.32	89.12		89.34	0.009032	2.04	9.14	6.35	0.54
1	15	100 year + cc	22.41	87.32	89.29		89.54	0.009539	2.19	10.22	6.57	0.56
1	15	1000 year	33.63	87.32	89.86		90.14	0.008960	2.38	14.16	7.45	0.55
1	14	2 year	7.08	87.36	88.32		88.42	0.008694	1.38	5.14	7.56	0.53
1	14	5 year	9.14	87.36	88.45		88.57	0.008559	1.48	6.18	8.05	0.54
1	14	10 year	10.79	87.36	88.55		88.67	0.008452	1.54	6.98	8.40	0.54
1	14	25 year	13.38	87.36	88.70		88.83	0.008130	1.62	8.26	8.94	0.54
1	14	50 year	15.78	87.36	88.83		88.97	0.007746	1.67	9.46	9.41	0.53



HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
			(m3/s)	(m)	(m)	(m)	(m)	(m/m)	(m/s)	(m2)	(m)	
1	10.5	2 year	7.08	85.82	86.94	86.53	87.04	0.007002	1.40	5.04	5.59	0.47
1	10.5	5 year	9.14	85.82	87.19	86.65	87.29	0.005687	1.40	6.51	6.06	0.43
1	10.5	10 year	10.79	85.82	87.38	86.73	87.48	0.005023	1.41	7.67	6.40	0.41
1	10.5	25 year	13.38	85.82	87.65	86.86	87.75	0.004289	1.41	9.50	6.90	0.38
1	10.5	50 year	15.78	85.82	87.89	86.97	87.99	0.003813	1.41	11.18	7.34	0.36
1	10.5	75 year	17.41	85.82	88.04	87.04	88.14	0.003549	1.41	12.34	7.62	0.35
1	10.5	100 year	18.68	85.82	88.16	87.09	88.26	0.003369	1.41	13.25	7.84	0.35
1	10.5	100 year + cc	22.41	85.82	88.50	87.23	88.60	0.002925	1.40	15.98	8.45	0.33
1	10.5	1000 year	33.63	85.82	89.45	87.61	89.54	0.001741	1.32	29.30	20.06	0.26
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	86.94	85.96	86.97	0.001619	0.83	8.52	6.64	0.23
1	10	5 year	9.14	85.25	87.19	86.08	87.23	0.001623	0.89	10.25	7.10	0.24
1	10	10 year	10.79	85.25	87.38	86.16	87.42	0.001612	0.93	11.60	7.44	0.24
1	10	25 year	13.38	85.25	87.65	86.29	87.70	0.001578	0.98	13.70	7.94	0.24
1	10	50 year	15.78	85.25	87.89	86.40	87.94	0.001536	1.01	15.64	8.38	0.24
1	10	75 year	17.41	85.25	88.04	86.47	88.09	0.001501	1.03	16.96	8.63	0.23
1	10	100 year	18.68	85.25	88.16	86.52	88.21	0.001472	1.04	17.98	8.77	0.23
1	10	100 year + cc	22.41	85.25	88.49	86.66	88.55	0.001394	1.07	20.98	9.14	0.23
1	10	1000 year	33.63	85.25	89.45	87.04	89.51	0.001132	1.12	30.19	9.96	0.20
1	9.5		Culvert									
1	9	2 year	7.08	83.67	86.06		86.08	0.000546	0.56	12.59	7.20	0.14
1	9	5 year	9.14	83.67	86.23		86.26	0.000705	0.66	13.84	7.48	0.16
1	9	10 year	10.79	83.67	86.35		86.38	0.000827	0.73	14.75	7.67	0.17
1	9	25 year	13.38	83.67	86.52		86.56	0.001007	0.83	16.03	7.73	0.18
1	9	50 year	15.78	83.67	86.66		86.70	0.001174	0.92	17.08	7.73	0.20
1	9	75 year	17.41	83.67	86.74		86.79	0.001285	0.98	17.74	7.73	0.21
1	9	100 year	18.68	83.67	86.80		86.86	0.001373	1.02	18.23	7.73	0.21
1	9	100 year + cc	22.41	83.67	86.97		87.04	0.001628	1.15	19.55	7.73	0.23
1	9	1000 year	33.63	83.67	87.40		87.51	0.002390	1.47	22.88	7.73	0.27
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.009914	1.50	4.71	6.58	0.57

HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.009793	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.009613	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.009357	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.009391	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.009386	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.009338	2.04	9.35	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.009285	2.19	10.62	9.34	0.60
1	8	1000 year	33.63	84.94	86.89	86.48	87.23	0.009659	2.60	14.07	10.84	0.63
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.36		85.42	0.003270	1.09	6.51	5.20	0.31
1	7	5 year	9.14	83.76	85.53		85.61	0.003699	1.23	7.45	5.89	0.33
1	7	10 year	10.79	83.76	85.65		85.74	0.004012	1.34	8.18	6.32	0.35
1	7	25 year	13.38	83.76	85.81		85.93	0.004479	1.49	9.26	6.68	0.37
1	7	50 year	15.78	83.76	85.95		86.08	0.004886	1.62	10.19	7.55	0.38
1	7	75 year	17.41	83.76	86.04		86.18	0.005076	1.70	10.85	7.93	0.39
1	7	100 year	18.68	83.76	86.10		86.26	0.005210	1.77	11.37	8.22	0.40
1	7	100 year + cc	22.41	83.76	86.28		86.46	0.005522	1.92	12.90	9.01	0.42
1	7	1000 year	33.63	83.76	86.72		86.98	0.006263	2.32	17.34	11.04	0.46
1	6	2 year	7.08	83.95	85.16		85.25	0.005851	1.38	5.41	6.31	0.43
1	6	5 year	9.14	83.95	85.31		85.43	0.006341	1.54	6.38	6.72	0.46
1	6	10 year	10.79	83.95	85.41		85.55	0.006675	1.66	7.09	7.04	0.47
1	6	25 year	13.38	83.95	85.55		85.72	0.007022	1.83	8.14	7.62	0.50
1	6	50 year	15.78	83.95	85.67		85.86	0.007322	1.97	9.07	8.10	0.51
1	6	75 year	17.41	83.95	85.75		85.96	0.007514	2.07	9.69	8.41	0.52
1	6	100 year	18.68	83.95	85.80		86.02	0.007659	2.13	10.16	8.63	0.53
1	6	100 year + cc	22.41	83.95	85.95		86.21	0.008032	2.32	11.51	9.24	0.55
1	6	1000 year	33.63	83.95	86.34		86.70	0.008911	2.78	15.36	10.80	0.60
1	5	2 year	7.08	83.93	84.92		85.03	0.007630	1.49	5.13	6.76	0.49
1	5	5 year	9.14	83.93	85.05		85.19	0.008116	1.67	6.04	7.50	0.52
1	5	10 year	10.79	83.93	85.14		85.30	0.008463	1.80	6.75	8.03	0.54
1	5	25 year	13.38	83.93	85.27		85.46	0.009007	1.99	7.79	8.77	0.57


HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	5	50 year	15.78	83.93	85.37		85.59	0.009437	2.15	8.73	9.30	0.59
1	5	75 year	17.41	83.93	85.44		85.68	0.009692	2.25	9.35	9.55	0.60
1	5	100 year	18.68	83.93	85.48		85.74	0.009890	2.32	9.82	9.73	0.61
1	5	100 year + cc	22.41	83.93	85.61		85.91	0.010447	2.52	11.12	10.22	0.63
1	5	1000 year	33.63	83.93	85.95		86.37	0.011696	3.03	14.76	11.48	0.69
1	4	2 year	7.08	83.83	84.71		84.81	0.007854	1.35	5.24	7.10	0.50
1	4	5 year	9.14	83.83	84.84		84.95	0.008179	1.49	6.15	7.36	0.52
1	4	10 year	10.79	83.83	84.93		85.06	0.008389	1.58	6.83	7.57	0.53
1	4	25 year	13.38	83.83	85.06		85.21	0.008582	1.71	7.86	8.54	0.54
1	4	50 year	15.78	83.83	85.16		85.33	0.008759	1.82	8.81	9.34	0.56
1	4	75 year	17.41	83.83	85.23		85.41	0.008853	1.89	9.45	9.81	0.56
1	4	100 year	18.68	83.83	85.28		85.47	0.008899	1.94	9.96	9.96	0.57
1	4	100 year + cc	22.41	83.83	85.42		85.64	0.009037	2.06	11.37	10.36	0.58
1	4	1000 year	33.63	83.83	85.79		86.06	0.009181	2.36	15.36	11.41	0.60
1	3	2 year	7.08	83.63	84.49		84.57	0.007106	1.26	5.61	8.06	0.48
1	3	5 year	9.14	83.63	84.62		84.71	0.007090	1.37	6.69	8.44	0.49
1	3	10 year	10.79	83.63	84.71		84.82	0.007097	1.44	7.50	8.71	0.50
1	3	25 year	13.38	83.63	84.84		84.97	0.007184	1.54	8.66	9.12	0.50
1	3	50 year	15.78	83.63	84.95		85.09	0.007188	1.63	9.68	9.64	0.51
1	3	75 year	17.41	83.63	85.02		85.17	0.007187	1.69	10.36	9.96	0.52
1	3	100 year	18.68	83.63	85.08		85.23	0.007171	1.73	10.89	10.20	0.52
1	3	100 year + cc	22.41	83.63	85.22		85.39	0.007163	1.83	12.40	10.86	0.53
1	3	1000 year	33.63	83.63	85.60		85.82	0.006975	2.07	16.87	12.51	0.54
1	2	2 year	7.08	83.22	84.21		84.29	0.006796	1.24	5.70	7.50	0.45
1	2	5 year	9.14	83.22	84.34		84.43	0.007112	1.38	6.63	7.54	0.47
1	2	10 year	10.79	83.22	84.43		84.54	0.007277	1.48	7.32	7.77	0.48
1	2	25 year	13.38	83.22	84.55		84.69	0.007587	1.62	8.31	8.14	0.50
1	2	50 year	15.78	83.22	84.66		84.81	0.007865	1.74	9.18	8.45	0.51
1	2	75 year	17.41	83.22	84.72		84.89	0.008039	1.82	9.75	8.65	0.52
1	2	100 year	18.68	83.22	84.78		84.95	0.008167	1.87	10.19	8.80	0.52
1	2	100 year + cc	22.41	83.22	84.91		85.12	0.008515	2.03	11.43	9.23	0.54
1	2	1000 year	33.63	83.22	85.27		85.56	0.008956	2.41	15.03	10.91	0.57


HEC-RAS Plan: Inc Man River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	1	2 year	7.08	83.32	84.06	83.83	84.16	0.008901	1.35	5.26	7.92	0.53
1	1	5 year	9.14	83.32	84.18	83.91	84.29	0.008913	1.47	6.20	7.97	0.53
1	1	10 year	10.79	83.32	84.27	83.97	84.39	0.008909	1.57	6.89	8.10	0.54
1	1	25 year	13.38	83.32	84.39	84.06	84.54	0.008901	1.70	7.89	8.50	0.55
1	1	50 year	15.78	83.32	84.49	84.14	84.66	0.008911	1.82	8.76	8.87	0.56
1	1	75 year	17.41	83.32	84.55	84.19	84.74	0.008904	1.89	9.35	9.10	0.56
1	1	100 year	18.68	83.32	84.60	84.23	84.80	0.008902	1.94	9.80	9.28	0.57
1	1	100 year + cc	22.41	83.32	84.74	84.33	84.96	0.008903	2.09	11.09	9.77	0.58
1	1	1000 year	33.63	83.32	85.09	84.63	85.39	0.008915	2.45	14.79	11.06	0.60

Hunsworth Beck 1st Oct Plan: Increased Mannings 01/10/2015

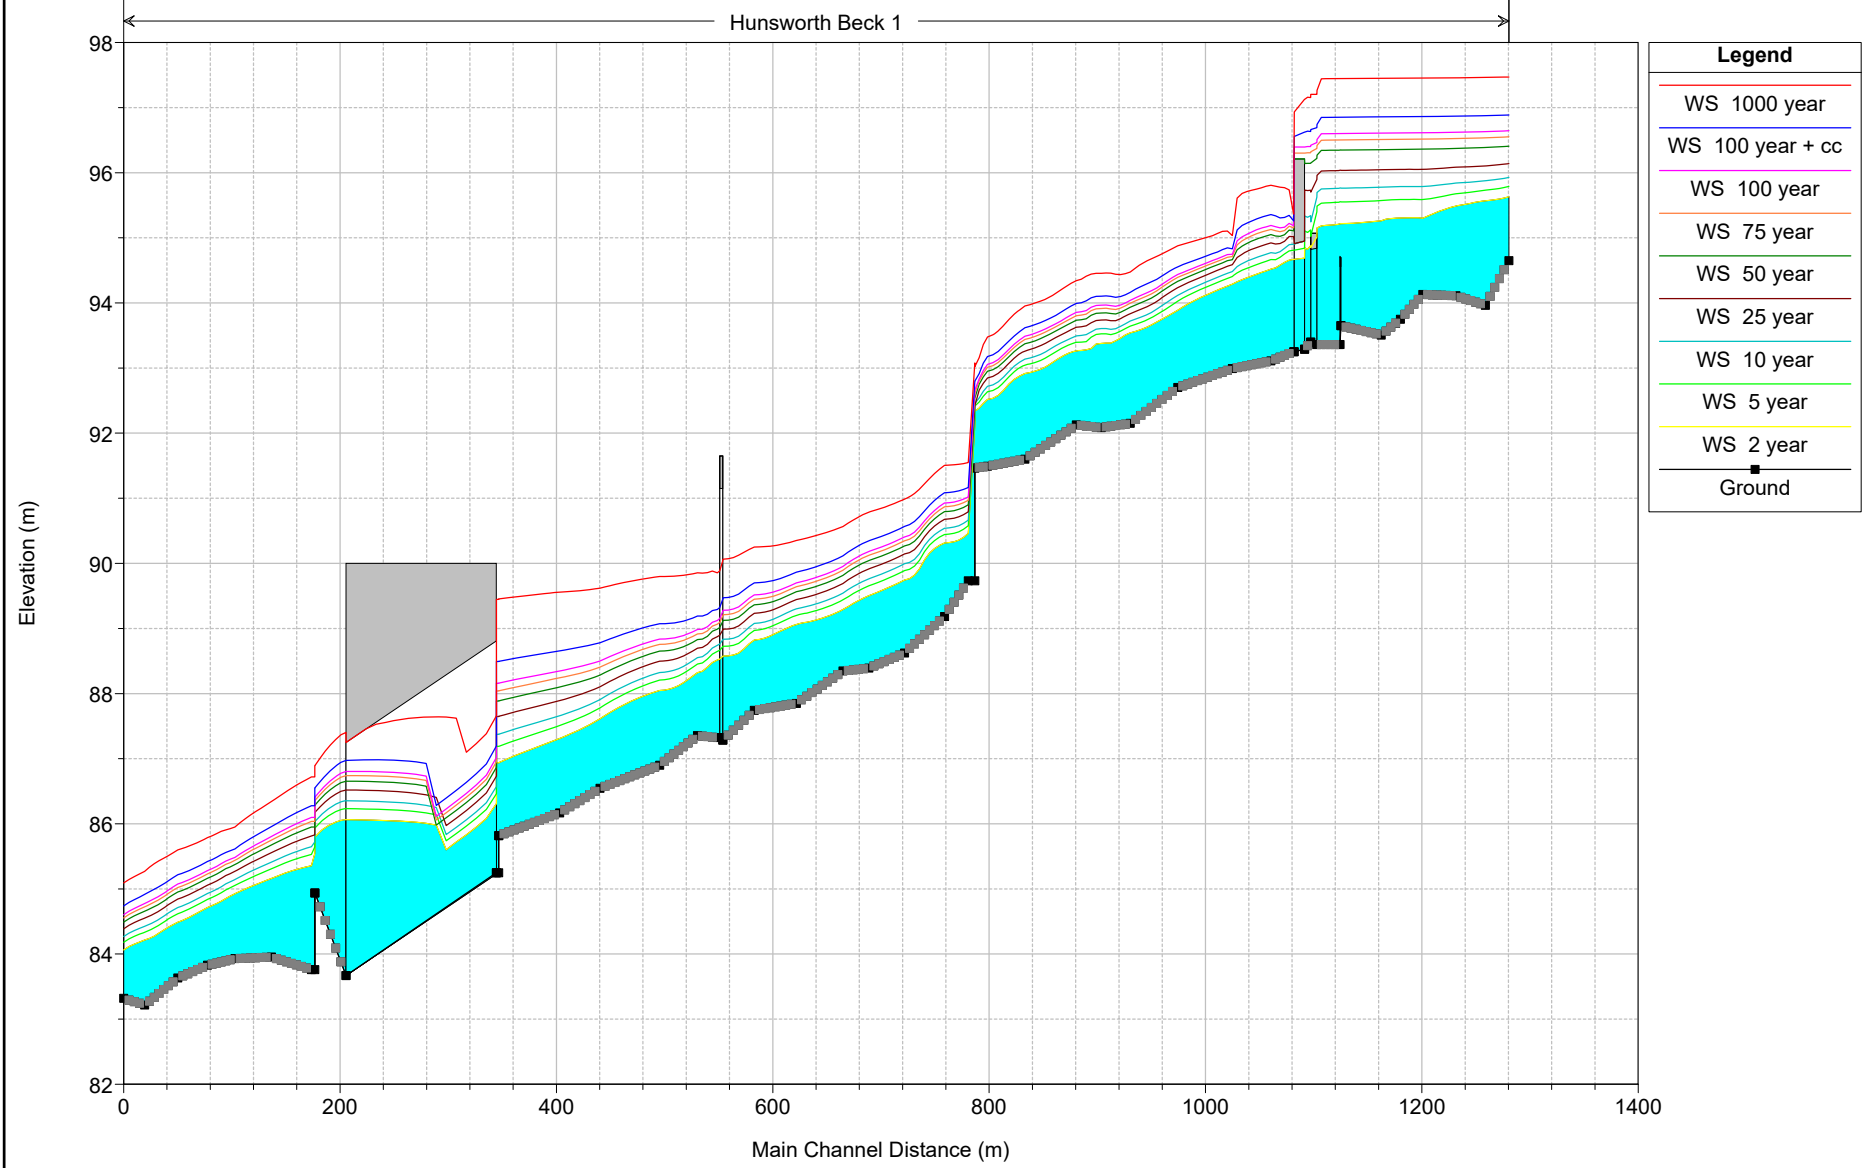


Hunsworth Beck 1st Oct Plan: Increased Mannings 01/10/2015  
XS08

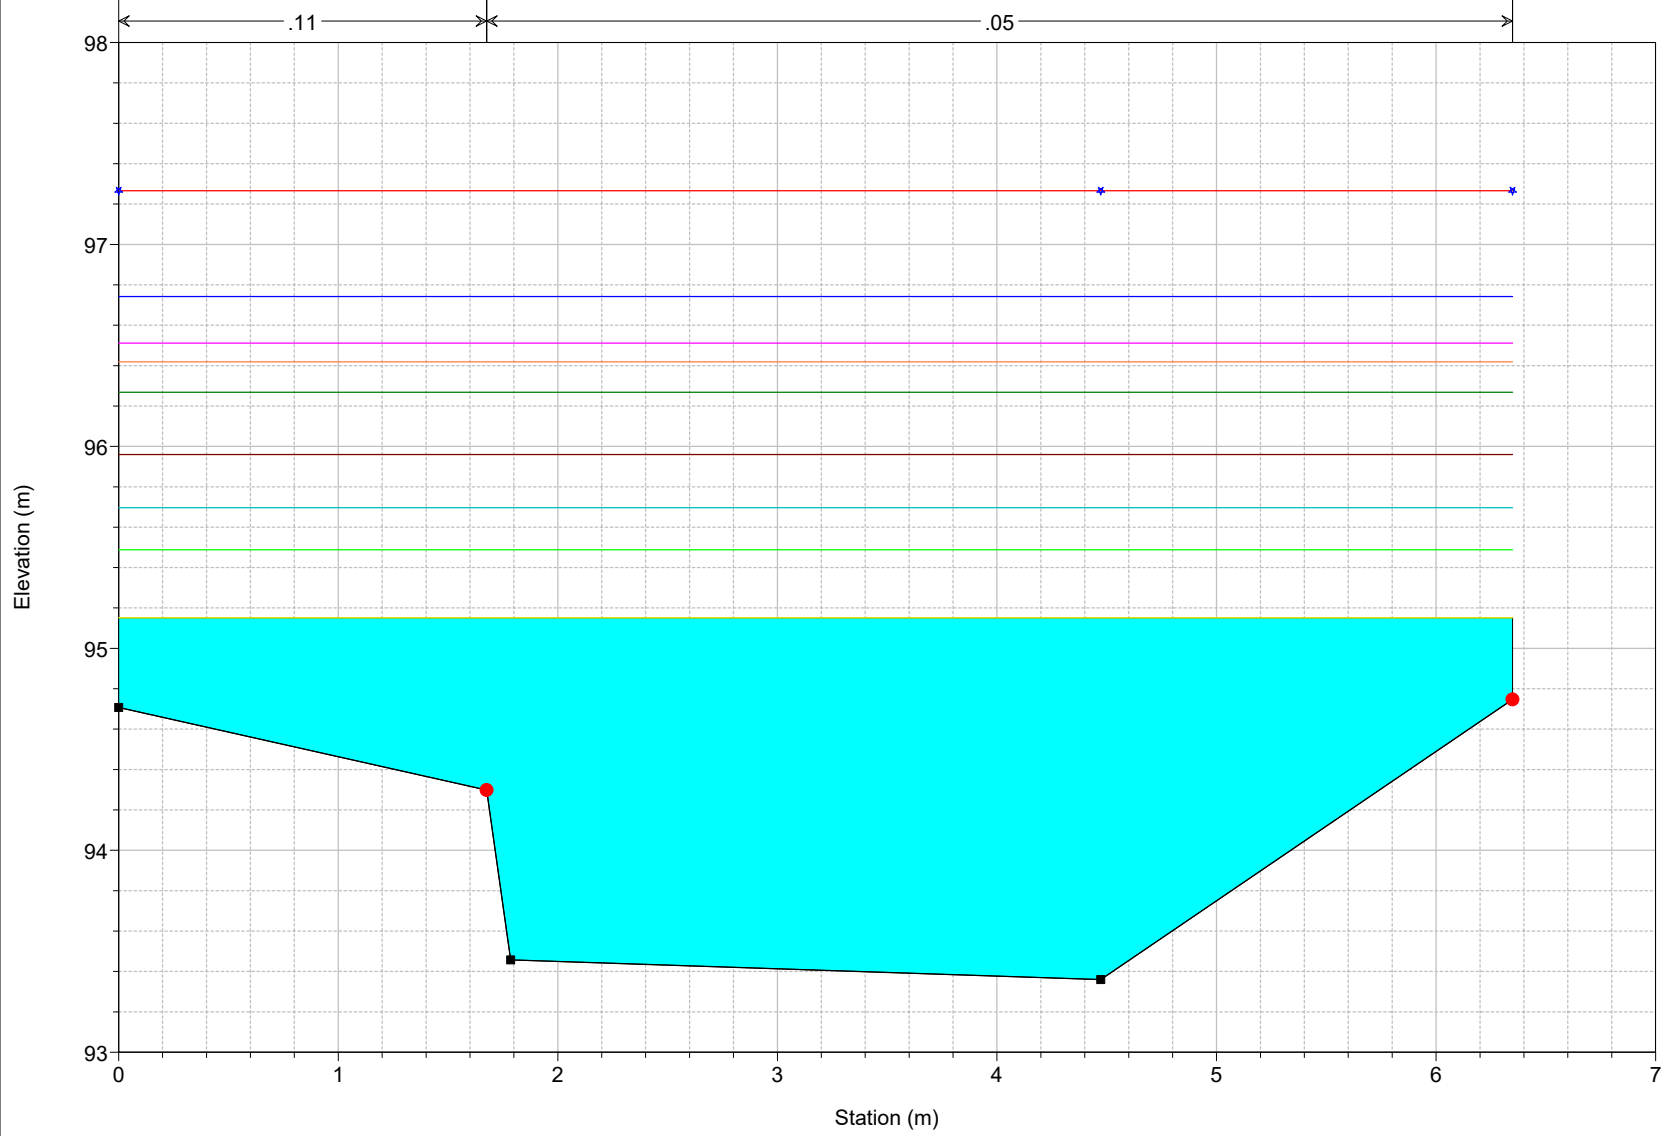


Legend	
WS 1000 year	*
WS 100 year + cc	*
WS 100 year	*
WS 75 year	*
WS 50 year	*
WS 25 year	*
WS 10 year	*
WS 5 year	*
WS 2 year	*
Ground	■
Bank Sta	●

Hunsworth Beck 1st Oct Plan: Increased Mannings 01/10/2015  
XS14

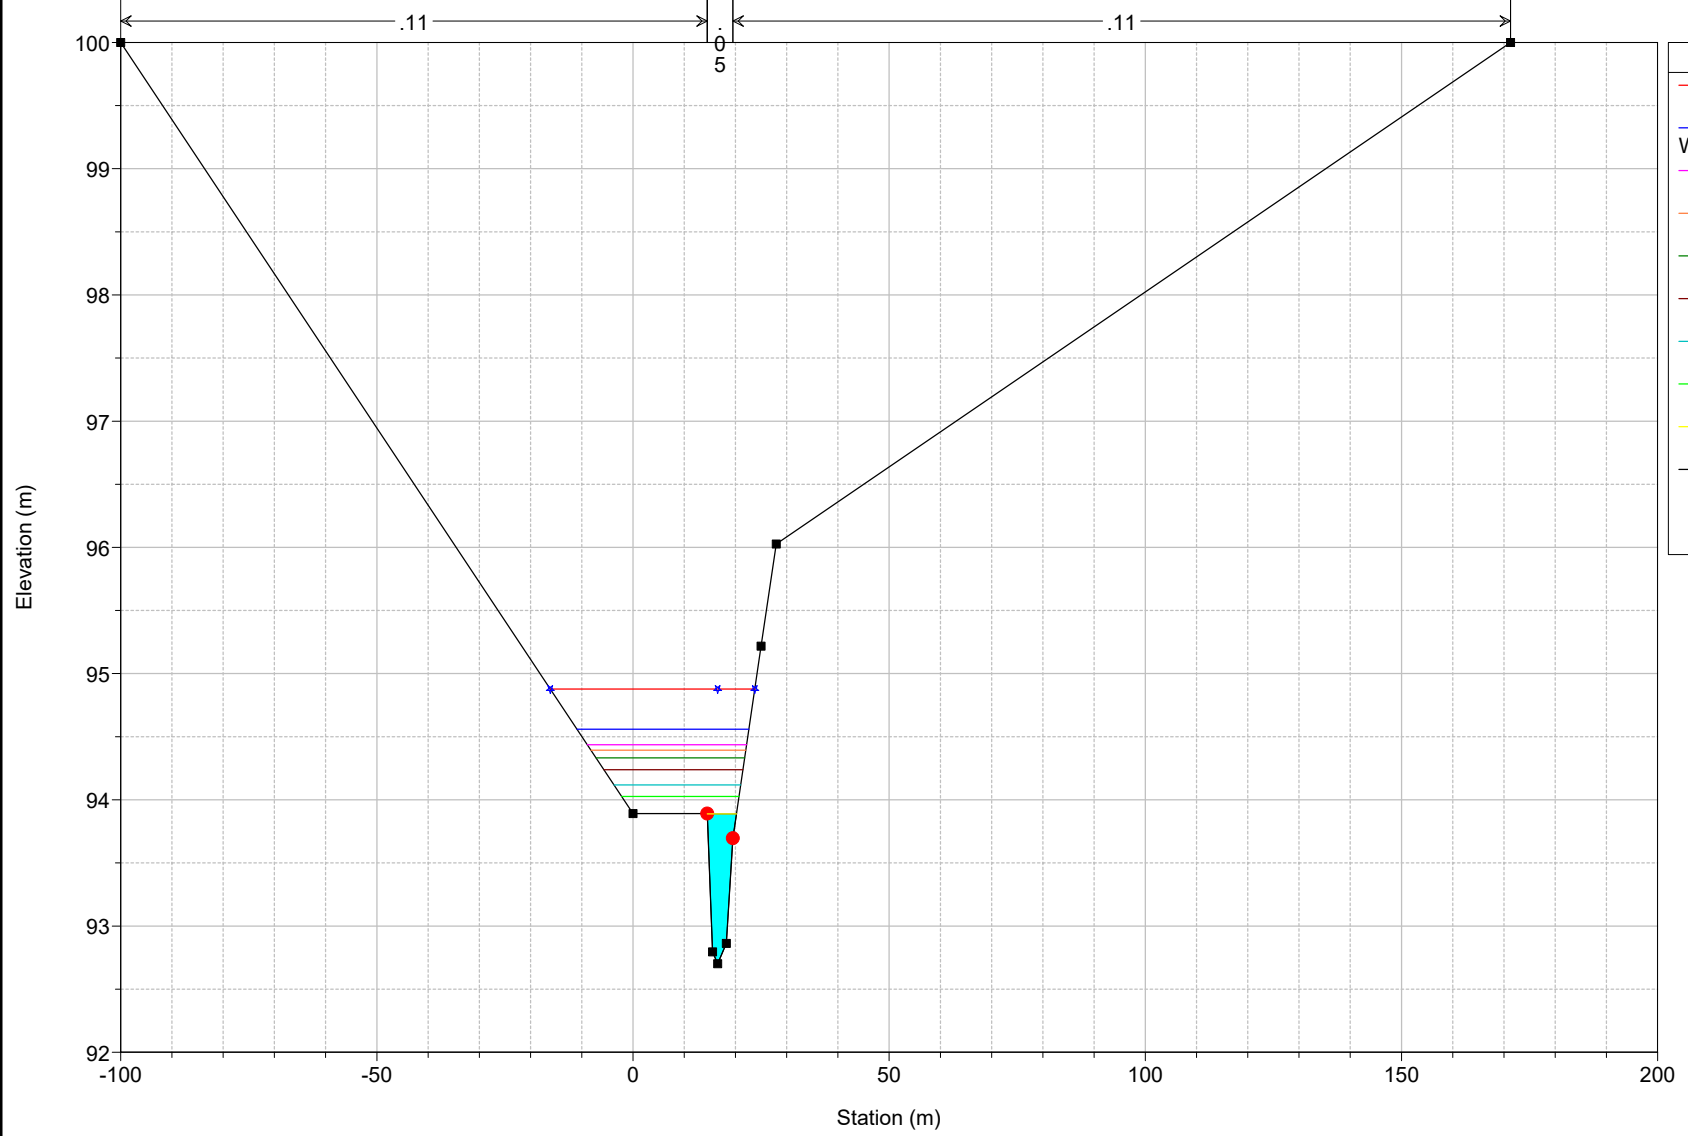



Hunsworth Beck 1st Oct Plan: Increased Mannings 01/10/2015  
XS 31

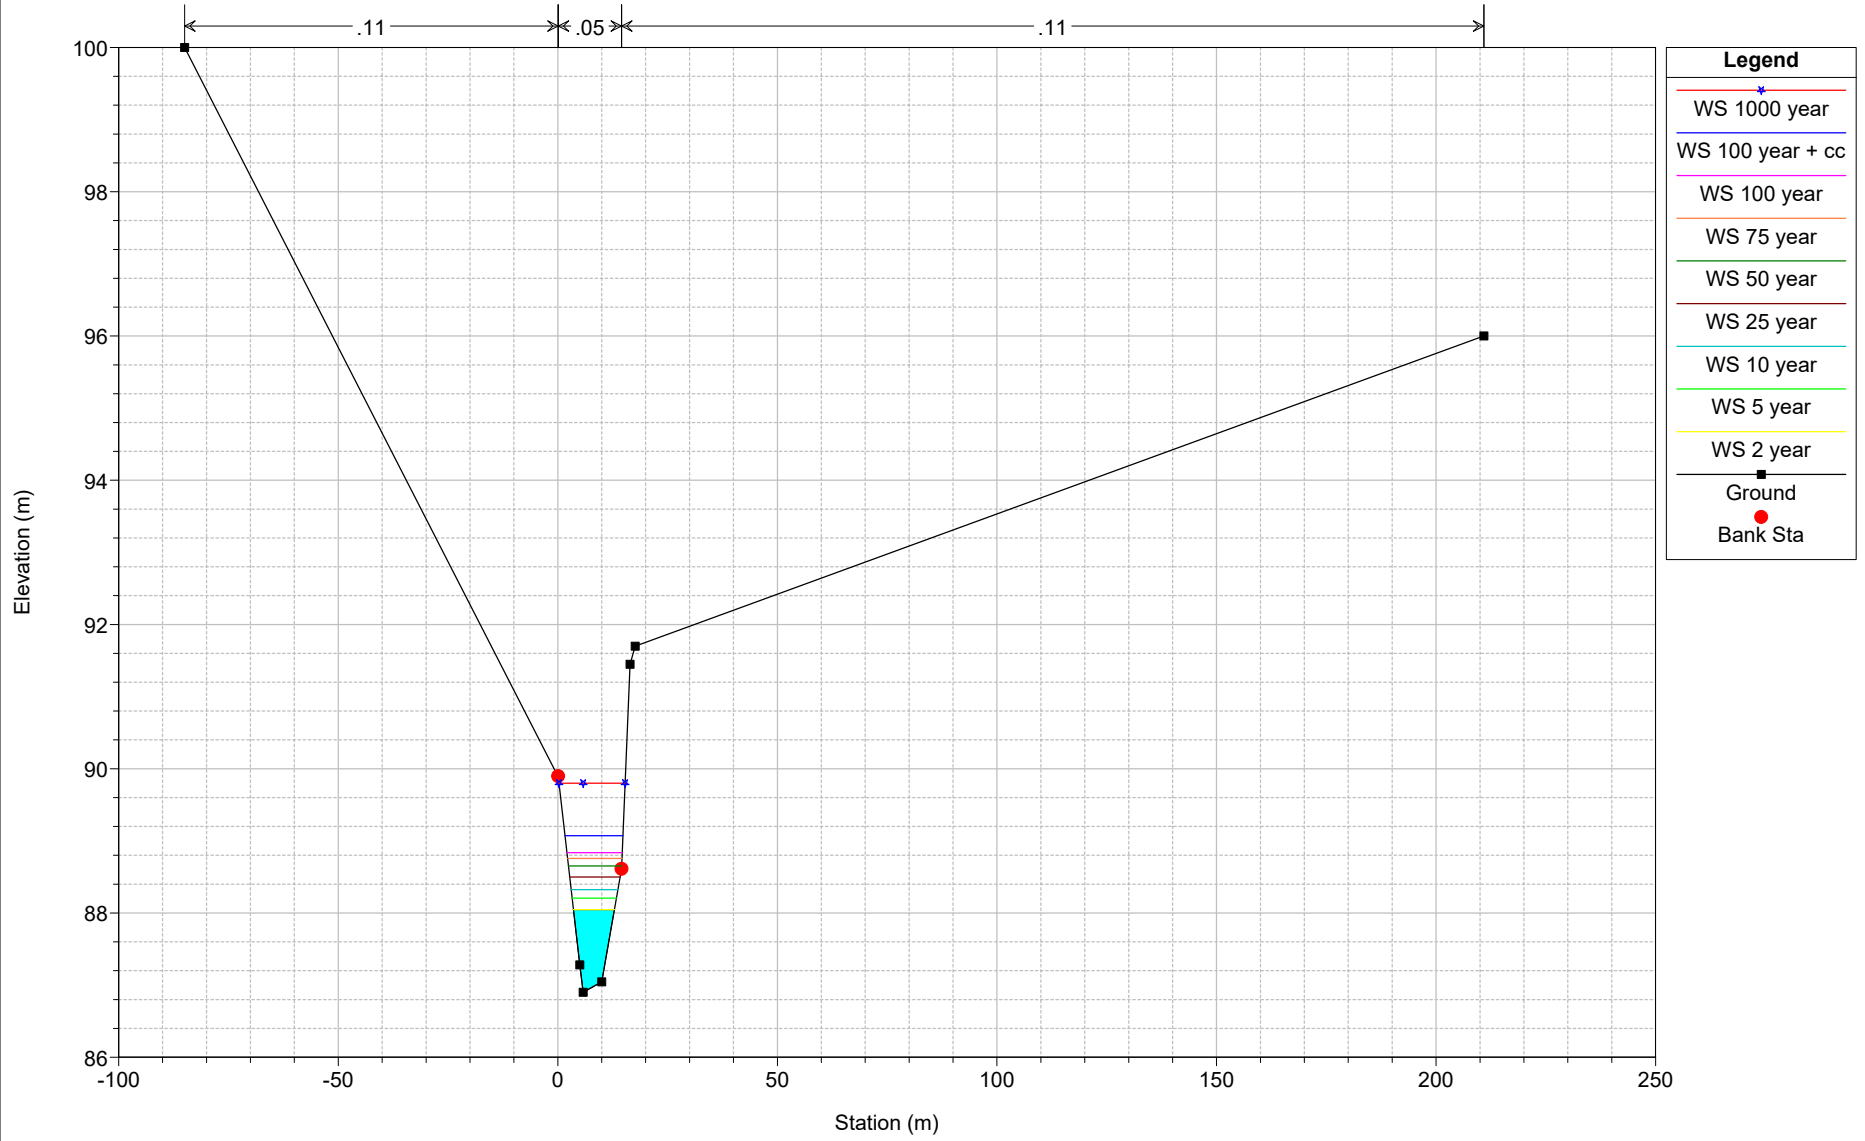

50% Blockage at Foot Bridge (XS36.55) Results

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	95.53	95.25	95.62	0.005234	1.33	5.74	14.58	0.52
1	43	5 year	9.14	94.65	95.68	95.35	95.77	0.004225	1.34	8.56	23.06	0.48
1	43	10 year	10.79	94.65	95.82	95.42	95.90	0.003092	1.28	12.24	29.25	0.42
1	43	25 year	13.38	94.65	96.04	95.55	96.10	0.001987	1.18	19.59	38.78	0.35
1	43	50 year	15.78	94.65	96.30	95.65	96.34	0.001114	1.02	31.27	50.32	0.27
1	43	75 year	17.41	94.65	96.47	95.70	96.50	0.000798	0.93	40.61	57.93	0.24
1	43	100 year	18.68	94.65	96.58	95.74	96.60	0.000682	0.90	46.90	62.53	0.22
1	43	100 year + cc	22.41	94.65	96.83	95.84	96.85	0.000510	0.85	63.90	73.54	0.19
1	43	1000 year	33.63	94.65	97.44	96.07	97.46	0.000299	0.78	117.44	100.63	0.16
1	42	2 year	7.08	93.96	95.49	94.74	95.53	0.001631	0.94	7.53	7.03	0.29
1	42	5 year	9.14	93.96	95.64	94.85	95.69	0.001784	1.06	9.48	16.65	0.31
1	42	10 year	10.79	93.96	95.78	94.94	95.84	0.001619	1.08	12.94	31.12	0.30
1	42	25 year	13.38	93.96	96.01	95.06	96.06	0.001253	1.06	21.16	41.95	0.27
1	42	50 year	15.78	93.96	96.28	95.17	96.32	0.000790	0.93	34.45	55.11	0.22
1	42	75 year	17.41	93.96	96.46	95.23	96.49	0.000597	0.86	44.98	63.64	0.19
1	42	100 year	18.68	93.96	96.56	95.29	96.59	0.000523	0.84	52.01	68.75	0.18
1	42	100 year + cc	22.41	93.96	96.82	95.42	96.84	0.000410	0.80	70.93	80.90	0.16
1	42	1000 year	33.63	93.96	97.44	95.92	97.45	0.000255	0.73	130.17	110.65	0.14
1	41	2 year	7.08	94.11	95.41		95.47	0.003095	1.10	7.69	32.19	0.39
1	41	5 year	9.14	94.11	95.58		95.63	0.002225	1.06	13.90	40.42	0.34
1	41	10 year	10.79	94.11	95.75		95.79	0.001450	0.95	21.46	48.60	0.28
1	41	25 year	13.38	94.11	95.99		96.02	0.000868	0.84	34.71	60.32	0.23
1	41	50 year	15.78	94.11	96.28		96.29	0.000479	0.70	53.68	73.93	0.17
1	41	75 year	17.41	94.11	96.46		96.47	0.000349	0.64	67.73	82.58	0.15
1	41	100 year	18.68	94.11	96.56		96.57	0.000302	0.62	76.83	87.73	0.14
1	41	100 year + cc	22.41	94.11	96.82		96.82	0.000235	0.59	100.62	99.94	0.13
1	41	1000 year	33.63	94.11	97.43		97.44	0.000150	0.56	171.72	129.76	0.11
1	40	2 year	7.08	94.13	95.15	94.95	95.32	0.008366	1.81	4.87	16.77	0.65
1	40	5 year	9.14	94.13	95.47		95.54	0.003184	1.33	13.36	34.27	0.42
1	40	10 year	10.79	94.13	95.69		95.73	0.001694	1.11	21.93	42.90	0.32
1	40	25 year	13.38	94.13	95.96		95.99	0.000973	0.96	34.93	53.40	0.25
1	40	50 year	15.78	94.13	96.26		96.27	0.000544	0.80	52.55	64.96	0.19



HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	37	2 year	7.08	94.10	95.05	94.79	95.10	0.003102	1.15	10.82	32.09	0.41
1	37	5 year	9.14	94.10	95.44	94.89	95.46	0.000819	0.77	27.14	51.58	0.23
1	37	10 year	10.79	94.10	95.67	94.95	95.68	0.000478	0.67	40.63	63.31	0.18
1	37	25 year	13.38	94.10	95.95	95.02	95.96	0.000307	0.60	60.05	77.12	0.15
1	37	50 year	15.78	94.10	96.25	95.09	96.26	0.000189	0.53	85.61	92.20	0.12
1	37	75 year	17.41	94.10	96.44	95.13	96.44	0.000147	0.49	103.60	101.48	0.11
1	37	100 year	18.68	94.10	96.54	95.16	96.55	0.000132	0.48	114.96	106.93	0.10
1	37	100 year + cc	22.41	94.10	96.80	95.23	96.81	0.000111	0.47	144.05	119.75	0.10
1	37	1000 year	33.63	94.10	97.42	95.42	97.43	0.000082	0.47	228.38	150.88	0.08
1	36.55	Bridge										
1	36.5	2 year	7.08	94.10	94.92	94.90	95.07	0.009685	1.85	7.24	28.84	0.71
1	36.5	5 year	9.14	94.10	95.43		95.45	0.001029	0.87	28.13	53.79	0.26
1	36.5	10 year	10.79	94.10	95.67		95.68	0.000560	0.73	42.49	65.65	0.19
1	36.5	25 year	13.38	94.10	95.95		95.95	0.000345	0.64	62.71	79.42	0.16
1	36.5	50 year	15.78	94.10	96.25		96.25	0.000207	0.56	89.05	94.38	0.12
1	36.5	75 year	17.41	94.10	96.43		96.44	0.000159	0.52	107.48	103.56	0.11
1	36.5	100 year	18.68	94.10	96.54		96.55	0.000142	0.50	119.08	108.95	0.11
1	36.5	100 year + cc	22.41	94.10	96.80		96.80	0.000118	0.49	148.69	121.63	0.10
1	36.5	1000 year	33.63	94.10	97.42		97.43	0.000086	0.49	234.10	152.39	0.09
1	36.49	2 year	7.08	93.45	94.99		95.03	0.001675	0.95	11.85	32.42	0.29
1	36.49	5 year	9.14	93.45	95.43		95.45	0.000520	0.67	30.72	53.98	0.17
1	36.49	10 year	10.79	93.45	95.67		95.68	0.000337	0.59	44.95	65.72	0.14
1	36.49	25 year	13.38	93.45	95.95		95.95	0.000235	0.54	65.12	79.43	0.12
1	36.49	50 year	15.78	93.45	96.25		96.25	0.000154	0.48	91.44	94.38	0.10
1	36.49	75 year	17.41	93.45	96.43		96.44	0.000123	0.46	109.85	103.56	0.09
1	36.49	100 year	18.68	93.45	96.54		96.55	0.000112	0.45	121.45	108.95	0.09
1	36.49	100 year + cc	22.41	93.45	96.80		96.80	0.000097	0.44	151.05	121.62	0.08
1	36.49	1000 year	33.63	93.45	97.42		97.43	0.000074	0.44	236.46	152.39	0.08
1	36	2 year	7.08	93.36	94.93	94.22	95.00	0.002308	1.18	6.59	6.35	0.33
1	36	5 year	9.14	93.36	95.37	94.36	95.43	0.001502	1.10	9.36	6.35	0.27
1	36	10 year	10.79	93.36	95.60	94.46	95.67	0.001410	1.14	10.84	6.35	0.26

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36	25 year	13.38	93.36	95.87	94.62	95.94	0.001468	1.23	12.52	6.35	0.27
1	36	50 year	15.78	93.36	96.16	94.75	96.24	0.001400	1.28	14.40	6.35	0.26
1	36	75 year	17.41	93.36	96.35	94.82	96.43	0.001387	1.31	15.55	6.35	0.26
1	36	100 year	18.68	93.36	96.45	94.87	96.54	0.001430	1.35	16.21	6.35	0.26
1	36	100 year + cc	22.41	93.36	96.69	95.01	96.79	0.001626	1.49	17.71	6.35	0.27
1	36	1000 year	33.63	93.36	97.24	95.39	97.41	0.002269	1.88	21.22	6.35	0.32
1	35.5	Bridge										
1	35	2 year	7.08	93.40	94.77	94.29	94.94	0.008311	1.83	3.87	3.04	0.52
1	35	5 year	9.14	93.40	95.02	94.46	95.21	0.008290	1.97	4.87	4.15	0.51
1	35	10 year	10.79	93.40	95.22	94.58	95.42	0.007462	2.02	5.81	5.28	0.50
1	35	25 year	13.38	93.40	95.61	94.75	95.79	0.005363	1.96	8.42	8.17	0.43
1	35	50 year	15.78	93.40	96.02	94.94	96.17	0.003584	1.81	12.43	11.07	0.37
1	35	75 year	17.41	93.40	96.24	95.03	96.37	0.003012	1.76	14.82	11.07	0.34
1	35	100 year	18.68	93.40	96.35	95.10	96.48	0.002919	1.77	16.01	11.07	0.34
1	35	100 year + cc	22.41	93.40	96.58	95.34	96.73	0.002947	1.88	18.63	11.07	0.34
1	35	1000 year	33.63	93.40	97.13	95.95	97.32	0.003265	2.21	24.74	11.07	0.37
1	34	2 year	7.08	93.29	94.76	94.01	94.85	0.003958	1.30	5.44	4.36	0.37
1	34	5 year	9.14	93.29	95.02	94.15	95.12	0.003681	1.39	6.68	5.09	0.36
1	34	10 year	10.79	93.29	95.24	94.25	95.34	0.003397	1.43	7.84	5.69	0.35
1	34	25 year	13.38	93.29	95.63	94.39	95.73	0.002734	1.42	10.30	6.79	0.31
1	34	50 year	15.78	93.29	96.04	94.52	96.13	0.002160	1.37	13.28	7.92	0.27
1	34	75 year	17.41	93.29	96.25	94.61	96.34	0.002015	1.38	15.00	8.40	0.26
1	34	100 year	18.68	93.29	96.35	94.73	96.45	0.002038	1.41	15.89	8.40	0.27
1	34	100 year + cc	22.41	93.29	96.58	94.90	96.69	0.002245	1.53	17.84	8.40	0.28
1	34	1000 year	33.63	93.29	97.12	95.38	97.28	0.002960	1.88	22.35	8.40	0.32
1	33.5	Culvert										
1	33	2 year	7.08	93.25	94.57		94.69	0.004021	1.54	4.91	4.05	0.43
1	33	5 year	9.14	93.25	94.71		94.87	0.004871	1.78	5.51	4.13	0.47
1	33	10 year	10.79	93.25	94.81		95.00	0.005633	1.98	5.90	4.17	0.51
1	33	25 year	13.38	93.25	94.93		95.18	0.006942	2.27	6.40	4.23	0.56

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	33	50 year	15.78	93.25	95.01		95.33	0.008355	2.55	6.76	4.27	0.62
1	33	75 year	17.41	93.25	95.06		95.43	0.009312	2.72	6.99	4.30	0.65
1	33	100 year	18.68	93.25	95.10		95.51	0.010134	2.86	7.14	4.32	0.68
1	33	100 year + cc	22.41	93.25	95.16		95.71	0.013297	3.33	7.39	4.34	0.77
1	33	1000 year	33.63	93.25	95.37	95.37	96.36	0.020997	4.48	8.38	4.80	0.99
1	32	2 year	7.08	93.11	94.40	94.06	94.56	0.006312	1.80	4.77	12.08	0.55
1	32	5 year	9.14	93.11	94.54	94.22	94.72	0.006348	1.96	7.21	20.25	0.56
1	32	10 year	10.79	93.11	94.65	94.33	94.83	0.006000	2.01	9.44	22.83	0.55
1	32	25 year	13.38	93.11	94.80		94.97	0.005269	2.02	13.28	26.70	0.53
1	32	50 year	15.78	93.11	94.94		95.09	0.004642	2.01	17.11	30.06	0.50
1	32	75 year	17.41	93.11	95.03		95.17	0.004228	1.99	19.92	32.32	0.48
1	32	100 year	18.68	93.11	95.10		95.23	0.003952	1.97	22.15	33.99	0.47
1	32	100 year + cc	22.41	93.11	95.29		95.40	0.003202	1.90	29.36	38.92	0.43
1	32	1000 year	33.63	93.11	95.79		95.87	0.002107	1.79	51.57	51.22	0.36
1	31	2 year	7.08	92.99	94.18		94.34	0.006722	1.75	4.39	7.12	0.58
1	31	5 year	9.14	92.99	94.30		94.50	0.007279	1.97	5.29	7.77	0.61
1	31	10 year	10.79	92.99	94.38		94.61	0.007920	2.15	5.88	8.18	0.64
1	31	25 year	13.38	92.99	94.47	94.28	94.76	0.009133	2.43	6.67	8.69	0.70
1	31	50 year	15.78	92.99	94.54	94.40	94.89	0.010335	2.69	7.29	9.08	0.75
1	31	75 year	17.41	92.99	94.58	94.47	94.97	0.011227	2.86	7.66	9.30	0.79
1	31	100 year	18.68	92.99	94.61	94.52	95.04	0.012045	3.00	7.90	9.44	0.82
1	31	100 year + cc	22.41	92.99	94.67	94.67	95.22	0.014627	3.41	8.51	9.78	0.91
1	31	1000 year	33.63	92.99	95.04	95.04	95.71	0.013633	3.84	12.55	11.82	0.91
1	30	2 year	7.08	92.70	93.77		93.95	0.009458	1.87	3.79	5.17	0.68
1	30	5 year	9.14	92.70	93.91	93.70	94.12	0.009267	2.04	4.85	20.61	0.69
1	30	10 year	10.79	92.70	94.01	93.79	94.22	0.008300	2.07	7.07	22.67	0.66
1	30	25 year	13.38	92.70	94.14	94.05	94.35	0.007388	2.12	10.17	25.25	0.64
1	30	50 year	15.78	92.70	94.24	94.14	94.45	0.006962	2.18	12.73	27.20	0.63
1	30	75 year	17.41	92.70	94.30	94.19	94.51	0.006718	2.21	14.44	28.42	0.62
1	30	100 year	18.68	92.70	94.35	94.23	94.55	0.006582	2.24	15.71	29.31	0.62
1	30	100 year + cc	22.41	92.70	94.46		94.67	0.006299	2.32	19.30	31.66	0.62
1	30	1000 year	33.63	92.70	94.77		94.98	0.005588	2.48	29.98	37.80	0.60

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	29	2 year	7.08	92.15	93.43	93.11	93.55	0.006145	1.61	5.03	7.19	0.55
1	29	5 year	9.14	92.15	93.58	93.25	93.72	0.005497	1.68	7.36	13.72	0.53
1	29	10 year	10.79	92.15	93.63	93.35	93.79	0.006440	1.87	8.02	14.32	0.58
1	29	25 year	13.38	92.15	93.73	93.47	93.93	0.006940	2.06	9.54	15.63	0.61
1	29	50 year	15.78	92.15	93.82	93.60	94.04	0.007199	2.21	10.99	16.79	0.63
1	29	75 year	17.41	92.15	93.88	93.67	94.11	0.007374	2.30	11.93	17.50	0.64
1	29	100 year	18.68	92.15	93.92	93.72	94.16	0.007533	2.37	12.63	18.01	0.65
1	29	100 year + cc	22.41	92.15	94.03	93.83	94.30	0.007856	2.55	14.71	19.45	0.67
1	29	1000 year	33.63	92.15	94.30	94.12	94.66	0.008667	3.00	20.66	23.71	0.72
1	28	2 year	7.08	92.08	93.30	92.74	93.36	0.003580	1.27	8.25	10.30	0.41
1	28	5 year	9.14	92.08	93.43	92.86	93.51	0.003910	1.41	9.60	10.59	0.43
1	28	10 year	10.79	92.08	93.54	92.95	93.59	0.002336	1.16	19.54	31.53	0.34
1	28	25 year	13.38	92.08	93.65	93.04	93.70	0.002391	1.25	23.06	32.86	0.35
1	28	50 year	15.78	92.08	93.76	93.24	93.81	0.002326	1.30	26.59	34.13	0.35
1	28	75 year	17.41	92.08	93.83	93.29	93.88	0.002294	1.33	28.89	34.93	0.35
1	28	100 year	18.68	92.08	93.87	93.33	93.93	0.002273	1.35	30.63	35.53	0.35
1	28	100 year + cc	22.41	92.08	94.01	93.47	94.06	0.002247	1.42	35.43	37.13	0.35
1	28	1000 year	33.63	92.08	94.35	93.62	94.41	0.002189	1.59	48.85	41.26	0.36
1	27	2 year	7.08	92.13	93.19	92.74	93.24	0.002813	1.13	8.57	11.12	0.38
1	27	5 year	9.14	92.13	93.31	92.83	93.38	0.003101	1.27	9.94	11.63	0.41
1	27	10 year	10.79	92.13	93.39	92.90	93.47	0.003316	1.38	10.93	11.99	0.43
1	27	25 year	13.38	92.13	93.53	93.00	93.61	0.003030	1.42	15.59	22.89	0.42
1	27	50 year	15.78	92.13	93.63	93.08	93.72	0.003022	1.50	18.02	24.05	0.42
1	27	75 year	17.41	92.13	93.70	93.14	93.79	0.003023	1.55	19.61	24.77	0.43
1	27	100 year	18.68	92.13	93.75	93.18	93.84	0.003023	1.59	20.83	25.31	0.43
1	27	100 year + cc	22.41	92.13	93.88	93.28	93.98	0.003025	1.69	24.27	26.76	0.43
1	27	1000 year	33.63	92.13	94.22	93.60	94.34	0.003019	1.93	33.92	30.24	0.45
1	26	2 year	7.08	91.60	92.85		92.92	0.003373	1.15	6.14	7.97	0.42
1	26	5 year	9.14	91.60	92.98		93.06	0.003751	1.27	7.18	8.70	0.45
1	26	10 year	10.79	91.60	93.06		93.16	0.004004	1.36	7.95	9.21	0.47
1	26	25 year	13.38	91.60	93.18		93.29	0.004321	1.47	9.10	9.92	0.49

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	26	50 year	15.78	91.60	93.28		93.41	0.004538	1.56	10.13	10.52	0.51
1	26	75 year	17.41	91.60	93.35		93.48	0.004655	1.61	10.81	10.89	0.52
1	26	100 year	18.68	91.60	93.40		93.53	0.004732	1.65	11.33	11.17	0.52
1	26	100 year + cc	22.41	91.60	93.53		93.68	0.004908	1.75	12.83	11.94	0.54
1	26	1000 year	33.63	91.60	93.86		94.05	0.004876	1.97	17.38	16.66	0.55
1	25	2 year	7.08	91.49	92.48		92.57	0.004310	1.36	5.45	7.94	0.48
1	25	5 year	9.14	91.49	92.59		92.71	0.004760	1.53	6.40	8.66	0.51
1	25	10 year	10.79	91.49	92.67		92.81	0.005087	1.65	7.11	9.17	0.53
1	25	25 year	13.38	91.49	92.79		92.96	0.005352	1.80	8.30	9.95	0.55
1	25	50 year	15.78	91.49	92.90		93.08	0.005485	1.93	9.35	10.73	0.57
1	25	75 year	17.41	91.49	92.96		93.16	0.005563	2.01	10.05	11.25	0.57
1	25	100 year	18.68	91.49	93.01		93.22	0.005556	2.06	10.63	11.67	0.58
1	25	100 year + cc	22.41	91.49	93.14		93.38	0.005674	2.22	12.23	12.75	0.59
1	25	1000 year	33.63	91.49	93.44		93.78	0.006416	2.68	16.31	14.77	0.65
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.007987	1.64	4.41	7.71	0.60
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.009451	1.90	5.11	9.46	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.011307	2.14	5.48	10.20	0.73
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.019562	2.75	5.19	9.63	0.95
1	24	50 year	15.78	91.47	92.54	92.54	92.94	0.017446	2.82	6.41	11.84	0.91
1	24	75 year	17.41	91.47	92.62	92.62	93.02	0.016095	2.85	7.35	13.08	0.89
1	24	100 year	18.68	91.47	92.66	92.66	93.07	0.015657	2.90	7.99	13.68	0.88
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.22	0.014298	2.99	9.97	15.28	0.86
1	24	1000 year	33.63	91.47	92.98	93.09	93.62	0.018707	3.75	12.79	16.23	1.01
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.37	90.32	90.58	0.017369	2.03	3.49	6.32	0.87
1	23	5 year	9.14	89.73	90.47	90.41	90.72	0.017267	2.22	4.12	6.36	0.88
1	23	10 year	10.79	89.73	90.54	90.48	90.82	0.017209	2.35	4.60	6.40	0.88
1	23	25 year	13.38	89.73	90.65	90.59	90.97	0.017260	2.53	5.29	6.44	0.89
1	23	50 year	15.78	89.73	90.74	90.68	91.11	0.017219	2.68	5.90	6.48	0.90
1	23	75 year	17.41	89.73	90.80	90.74	91.19	0.017297	2.77	6.29	6.51	0.90
1	23	100 year	18.68	89.73	90.85	90.78	91.26	0.017406	2.84	6.58	6.52	0.90

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	23	100 year + cc	22.41	89.73	90.97	90.90	91.44	0.017895	3.04	7.36	6.58	0.92
1	23	1000 year	33.63	89.73	91.28	91.24	91.93	0.019522	3.57	9.42	6.71	0.96
1	22	2 year	7.08	89.18	90.26		90.32	0.002860	1.09	6.51	7.86	0.38
1	22	5 year	9.14	89.18	90.38		90.46	0.003102	1.22	7.51	8.04	0.40
1	22	10 year	10.79	89.18	90.47		90.56	0.003277	1.31	8.24	8.17	0.42
1	22	25 year	13.38	89.18	90.60		90.71	0.003532	1.44	9.29	8.36	0.44
1	22	50 year	15.78	89.18	90.71		90.83	0.003710	1.54	10.22	8.52	0.45
1	22	75 year	17.41	89.18	90.78		90.91	0.003811	1.61	10.83	8.62	0.46
1	22	100 year	18.68	89.18	90.83		90.97	0.003892	1.66	11.28	8.70	0.46
1	22	100 year + cc	22.41	89.18	90.98		91.14	0.004091	1.78	12.57	8.91	0.48
1	22	1000 year	33.63	89.18	91.36		91.59	0.004533	2.09	16.08	9.46	0.51
1	21	2 year	7.08	88.62	89.63	89.44	89.79	0.008839	1.74	4.07	5.71	0.66
1	21	5 year	9.14	88.62	89.76	89.55	89.94	0.009048	1.90	4.81	5.95	0.67
1	21	10 year	10.79	88.62	89.85	89.63	90.06	0.009241	2.01	5.36	6.12	0.69
1	21	25 year	13.38	88.62	89.98		90.22	0.009422	2.16	6.19	6.37	0.70
1	21	50 year	15.78	88.62	90.09		90.36	0.009572	2.28	6.92	6.58	0.71
1	21	75 year	17.41	88.62	90.17		90.45	0.009674	2.36	7.39	6.71	0.72
1	21	100 year	18.68	88.62	90.22		90.51	0.009795	2.42	7.73	6.81	0.72
1	21	100 year + cc	22.41	88.62	90.36		90.69	0.010089	2.57	8.71	7.07	0.74
1	21	1000 year	33.63	88.62	90.73		91.17	0.010554	2.93	11.49	7.78	0.77
1	20	2 year	7.08	88.39	89.40		89.51	0.006639	1.49	4.74	6.97	0.58
1	20	5 year	9.14	88.39	89.54		89.67	0.006398	1.60	5.71	7.29	0.58
1	20	10 year	10.79	88.39	89.63		89.78	0.006252	1.67	6.45	7.53	0.58
1	20	25 year	13.38	88.39	89.78		89.94	0.006099	1.77	7.55	7.87	0.58
1	20	50 year	15.78	88.39	89.90		90.07	0.006032	1.86	8.50	8.15	0.58
1	20	75 year	17.41	88.39	89.97		90.16	0.006014	1.91	9.12	8.33	0.58
1	20	100 year	18.68	88.39	90.03		90.22	0.006008	1.95	9.58	8.46	0.58
1	20	100 year + cc	22.41	88.39	90.18		90.40	0.005993	2.05	10.91	8.83	0.59
1	20	1000 year	33.63	88.39	90.58		90.85	0.005909	2.30	14.65	9.78	0.60
1	19	2 year	7.08	88.35	89.17		89.33	0.009492	1.73	4.09	5.95	0.67
1	19	5 year	9.14	88.35	89.30		89.48	0.009526	1.88	4.85	6.16	0.68

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	19	10 year	10.79	88.35	89.40		89.60	0.009629	1.98	5.46	6.47	0.69
1	19	25 year	13.38	88.35	89.53		89.76	0.009765	2.11	6.35	6.91	0.70
1	19	50 year	15.78	88.35	89.64		89.89	0.009845	2.21	7.14	7.28	0.71
1	19	75 year	17.41	88.35	89.71		89.98	0.009882	2.27	7.67	7.51	0.72
1	19	100 year	18.68	88.35	89.77		90.04	0.009901	2.32	8.07	7.68	0.72
1	19	100 year + cc	22.41	88.35	89.91		90.21	0.009892	2.43	9.22	8.15	0.73
1	19	1000 year	33.63	88.35	90.33		90.68	0.008866	2.61	12.87	9.33	0.71
1	18	2 year	7.08	87.85	88.98		89.05	0.003014	1.14	6.19	7.31	0.40
1	18	5 year	9.14	87.85	89.11		89.19	0.003375	1.28	7.15	7.75	0.42
1	18	10 year	10.79	87.85	89.20		89.30	0.003614	1.37	7.87	8.07	0.44
1	18	25 year	13.38	87.85	89.33		89.44	0.003923	1.50	8.94	8.51	0.47
1	18	50 year	15.78	87.85	89.44		89.57	0.004138	1.59	9.90	8.89	0.48
1	18	75 year	17.41	87.85	89.51		89.65	0.004255	1.65	10.53	9.13	0.49
1	18	100 year	18.68	87.85	89.56		89.71	0.004331	1.70	11.02	9.32	0.50
1	18	100 year + cc	22.41	87.85	89.71		89.87	0.004494	1.80	12.43	9.82	0.51
1	18	1000 year	33.63	87.85	90.17		90.36	0.004313	1.93	17.42	12.05	0.51
1	17	2 year	7.08	87.74	88.76		88.81	0.003069	1.02	6.93	10.51	0.40
1	17	5 year	9.14	87.74	88.89		88.95	0.002991	1.08	8.44	11.49	0.40
1	17	10 year	10.79	87.74	88.99		89.06	0.002858	1.12	9.62	11.99	0.40
1	17	25 year	13.38	87.74	89.14		89.21	0.002678	1.17	11.40	12.59	0.39
1	17	50 year	15.78	87.74	89.26		89.34	0.002565	1.22	12.96	13.10	0.39
1	17	75 year	17.41	87.74	89.34		89.42	0.002490	1.24	14.02	13.43	0.39
1	17	100 year	18.68	87.74	89.40		89.48	0.002433	1.26	14.85	13.68	0.39
1	17	100 year + cc	22.41	87.74	89.57		89.66	0.002274	1.30	17.24	14.39	0.38
1	17	1000 year	33.63	87.74	90.11		90.20	0.001534	1.33	25.52	16.53	0.33
1	16	2 year	7.08	87.29	88.50	87.96	88.56	0.002333	1.06	6.65	7.13	0.35
1	16	5 year	9.14	87.29	88.65	88.07	88.72	0.002575	1.19	7.68	7.44	0.37
1	16	10 year	10.79	87.29	88.75	88.14	88.83	0.002739	1.28	8.45	7.66	0.39
1	16	25 year	13.38	87.29	88.89	88.25	88.99	0.002952	1.40	9.58	7.98	0.41
1	16	50 year	15.78	87.29	89.01	88.35	89.13	0.003114	1.49	10.58	8.25	0.42
1	16	75 year	17.41	87.29	89.10	88.41	89.22	0.003182	1.55	11.26	8.43	0.43
1	16	100 year	18.68	87.29	89.16	88.45	89.29	0.003225	1.59	11.79	8.57	0.43

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	16	100 year + cc	22.41	87.29	89.34	88.58	89.48	0.003296	1.68	13.35	9.00	0.44
1	16	1000 year	33.63	87.29	89.92	88.91	90.08	0.002833	1.77	19.05	10.52	0.42
1	15.5	Bridge										
1	15	2 year	7.08	87.32	88.44		88.54	0.004180	1.38	5.14	5.40	0.45
1	15	5 year	9.14	87.32	88.56		88.69	0.004917	1.57	5.81	5.57	0.49
1	15	10 year	10.79	87.32	88.65		88.80	0.005475	1.72	6.29	5.69	0.52
1	15	25 year	13.38	87.32	88.77		88.95	0.006314	1.92	6.97	5.86	0.56
1	15	50 year	15.78	87.32	88.86		89.09	0.007051	2.09	7.54	6.00	0.60
1	15	75 year	17.41	87.32	88.93		89.17	0.007457	2.20	7.93	6.08	0.61
1	15	100 year	18.68	87.32	88.98		89.24	0.007740	2.27	8.23	6.15	0.63
1	15	100 year + cc	22.41	87.32	89.12		89.43	0.008395	2.46	9.11	6.34	0.66
1	15	1000 year	33.63	87.32	89.68		90.03	0.007296	2.61	12.89	7.10	0.62
1	14	2 year	7.08	87.36	88.23		88.36	0.008396	1.59	4.45	7.23	0.65
1	14	5 year	9.14	87.36	88.35		88.50	0.008287	1.71	5.34	7.66	0.65
1	14	10 year	10.79	87.36	88.43		88.60	0.008199	1.79	6.03	7.98	0.66
1	14	25 year	13.38	87.36	88.56		88.74	0.008000	1.89	7.08	8.45	0.66
1	14	50 year	15.78	87.36	88.68		88.87	0.007703	1.95	8.07	8.86	0.65
1	14	75 year	17.41	87.36	88.75		88.96	0.007448	1.99	8.77	9.14	0.65
1	14	100 year	18.68	87.36	88.82		89.02	0.007143	2.00	9.36	9.37	0.64
1	14	100 year + cc	22.41	87.36	89.02		89.22	0.006095	1.98	11.31	10.10	0.60
1	14	1000 year	33.63	87.36	89.72		89.88	0.003164	1.74	19.33	12.66	0.45
1	13	2 year	7.08	86.90	87.95		88.01	0.003243	1.11	6.38	8.86	0.42
1	13	5 year	9.14	86.90	88.10		88.17	0.003154	1.18	7.74	9.57	0.42
1	13	10 year	10.79	86.90	88.21		88.28	0.003067	1.22	8.82	10.09	0.42
1	13	25 year	13.38	86.90	88.37		88.45	0.002903	1.27	10.51	10.86	0.41
1	13	50 year	15.78	86.90	88.52		88.60	0.002702	1.30	12.17	11.56	0.40
1	13	75 year	17.41	86.90	88.62		88.70	0.002531	1.30	13.39	12.04	0.39
1	13	100 year	18.68	86.90	88.70		88.79	0.002344	1.30	14.37	12.25	0.38
1	13	100 year + cc	22.41	86.90	88.94		89.02	0.001899	1.29	17.37	12.86	0.35
1	13	1000 year	33.63	86.90	89.70		89.78	0.001064	1.22	27.92	14.82	0.28

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	12	2 year	7.08	86.55	87.49	87.31	87.66	0.009415	1.80	3.92	5.53	0.68
1	12	5 year	9.14	86.55	87.65	87.43	87.83	0.008924	1.90	4.80	5.96	0.68
1	12	10 year	10.79	86.55	87.77	87.52	87.96	0.008347	1.95	5.55	6.30	0.66
1	12	25 year	13.38	86.55	87.97	87.64	88.16	0.007219	1.96	6.84	6.85	0.63
1	12	50 year	15.78	86.55	88.15	87.75	88.34	0.006203	1.94	8.15	7.37	0.59
1	12	75 year	17.41	86.55	88.28	87.82	88.46	0.005570	1.91	9.11	7.71	0.56
1	12	100 year	18.68	86.55	88.38	87.86	88.56	0.005122	1.89	9.90	7.98	0.54
1	12	100 year + cc	22.41	86.55	88.67	88.00	88.84	0.004031	1.81	12.36	8.78	0.49
1	12	1000 year	33.63	86.55	89.55	88.36	89.68	0.002134	1.59	21.15	11.17	0.37
1	11	2 year	7.08	86.17	87.22	86.91	87.33	0.005774	1.51	4.70	6.02	0.54
1	11	5 year	9.14	86.17	87.41	87.02	87.54	0.005024	1.54	5.94	6.58	0.52
1	11	10 year	10.79	86.17	87.57	87.11	87.69	0.004437	1.54	7.00	6.98	0.49
1	11	25 year	13.38	86.17	87.81	87.23	87.93	0.003655	1.53	8.75	7.54	0.45
1	11	50 year	15.78	86.17	88.03	87.34	88.14	0.003120	1.51	10.44	8.04	0.42
1	11	75 year	17.41	86.17	88.17	87.40	88.29	0.002828	1.50	11.62	8.37	0.41
1	11	100 year	18.68	86.17	88.28	87.45	88.40	0.002631	1.49	12.55	8.63	0.39
1	11	100 year + cc	22.41	86.17	88.60	87.59	88.71	0.002164	1.45	15.41	9.37	0.36
1	11	1000 year	33.63	86.17	89.52	87.93	89.61	0.001161	1.28	32.68	28.87	0.27
1	10.5	2 year	7.08	85.82	86.94	86.53	87.04	0.004482	1.40	5.04	5.59	0.47
1	10.5	5 year	9.14	85.82	87.19	86.65	87.29	0.003640	1.40	6.51	6.06	0.43
1	10.5	10 year	10.79	85.82	87.38	86.73	87.48	0.003215	1.41	7.67	6.40	0.41
1	10.5	25 year	13.38	85.82	87.65	86.86	87.75	0.002745	1.41	9.50	6.90	0.38
1	10.5	50 year	15.78	85.82	87.89	86.97	87.99	0.002440	1.41	11.18	7.34	0.36
1	10.5	75 year	17.41	85.82	88.04	87.04	88.14	0.002272	1.41	12.34	7.62	0.35
1	10.5	100 year	18.68	85.82	88.16	87.09	88.26	0.002156	1.41	13.25	7.84	0.35
1	10.5	100 year + cc	22.41	85.82	88.50	87.23	88.60	0.001872	1.40	15.98	8.45	0.33
1	10.5	1000 year	33.63	85.82	89.45	87.61	89.54	0.001122	1.33	29.30	20.06	0.26
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	86.94	85.96	86.97	0.001036	0.83	8.52	6.64	0.23
1	10	5 year	9.14	85.25	87.19	86.08	87.23	0.001039	0.89	10.25	7.10	0.24
1	10	10 year	10.79	85.25	87.38	86.16	87.42	0.001032	0.93	11.60	7.44	0.24

HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	10	25 year	13.38	85.25	87.65	86.29	87.70	0.001010	0.98	13.70	7.94	0.24
1	10	50 year	15.78	85.25	87.89	86.40	87.94	0.000983	1.01	15.64	8.38	0.24
1	10	75 year	17.41	85.25	88.04	86.47	88.09	0.000961	1.03	16.96	8.63	0.23
1	10	100 year	18.68	85.25	88.16	86.52	88.21	0.000942	1.04	17.98	8.77	0.23
1	10	100 year + cc	22.41	85.25	88.49	86.66	88.55	0.000892	1.07	20.98	9.14	0.23
1	10	1000 year	33.63	85.25	89.45	87.04	89.51	0.000725	1.12	30.19	9.96	0.20
1	9.5		Culvert									
1	9	2 year	7.08	83.67	86.03		86.04	0.000370	0.57	12.33	7.15	0.14
1	9	5 year	9.14	83.67	86.19		86.22	0.000479	0.68	13.53	7.41	0.16
1	9	10 year	10.79	83.67	86.31		86.34	0.000562	0.75	14.43	7.60	0.17
1	9	25 year	13.38	83.67	86.48		86.51	0.000686	0.85	15.69	7.73	0.19
1	9	50 year	15.78	83.67	86.61		86.65	0.000798	0.94	16.71	7.73	0.20
1	9	75 year	17.41	83.67	86.69		86.74	0.000873	1.00	17.36	7.73	0.21
1	9	100 year	18.68	83.67	86.75		86.81	0.000932	1.05	17.84	7.73	0.22
1	9	100 year + cc	22.41	83.67	86.92		86.99	0.001104	1.17	19.14	7.73	0.24
1	9	1000 year	33.63	83.67	87.34		87.46	0.001622	1.50	22.38	7.73	0.28
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.006345	1.50	4.71	6.58	0.57
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.006268	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.006152	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.005990	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.006016	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.006018	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.005993	2.05	9.34	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.005962	2.20	10.61	9.34	0.60
1	8	1000 year	33.63	84.94	86.88	86.48	87.23	0.006336	2.62	13.97	10.80	0.64
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.24		85.31	0.002776	1.20	5.90	5.14	0.36
1	7	5 year	9.14	83.76	85.40		85.50	0.003154	1.35	6.75	5.22	0.38
1	7	10 year	10.79	83.76	85.52		85.63	0.003391	1.47	7.38	5.80	0.40
1	7	25 year	13.38	83.76	85.68		85.81	0.003742	1.63	8.36	6.38	0.42


HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	7	50 year	15.78	83.76	85.81		85.97	0.004040	1.77	9.22	6.67	0.43
1	7	75 year	17.41	83.76	85.89		86.07	0.004233	1.86	9.78	6.85	0.44
1	7	100 year	18.68	83.76	85.95		86.14	0.004370	1.92	10.21	7.57	0.45
1	7	100 year + cc	22.41	83.76	86.12		86.34	0.004637	2.10	11.55	8.31	0.47
1	7	1000 year	33.63	83.76	86.55		86.86	0.005212	2.53	15.52	10.25	0.52
1	6	2 year	7.08	83.95	85.05		85.17	0.005395	1.56	4.72	5.92	0.51
1	6	5 year	9.14	83.95	85.18		85.34	0.005821	1.74	5.56	6.37	0.54
1	6	10 year	10.79	83.95	85.28		85.46	0.006122	1.87	6.20	6.64	0.56
1	6	25 year	13.38	83.95	85.42		85.63	0.006516	2.06	7.12	7.07	0.59
1	6	50 year	15.78	83.95	85.53		85.77	0.006739	2.21	7.94	7.52	0.60
1	6	75 year	17.41	83.95	85.60		85.86	0.006878	2.31	8.48	7.80	0.62
1	6	100 year	18.68	83.95	85.65		85.93	0.006979	2.39	8.90	8.02	0.62
1	6	100 year + cc	22.41	83.95	85.80		86.12	0.007256	2.59	10.10	8.60	0.65
1	6	1000 year	33.63	83.95	86.16		86.62	0.007925	3.10	13.52	10.08	0.70
1	5	2 year	7.08	83.93	84.82		84.97	0.007056	1.68	4.48	6.43	0.59
1	5	5 year	9.14	83.93	84.94		85.12	0.007827	1.90	5.22	6.82	0.63
1	5	10 year	10.79	83.93	85.02		85.23	0.008203	2.05	5.78	7.30	0.65
1	5	25 year	13.38	83.93	85.13		85.38	0.008837	2.28	6.62	7.94	0.69
1	5	50 year	15.78	83.93	85.22		85.52	0.009392	2.48	7.35	8.46	0.72
1	5	75 year	17.41	83.93	85.27	85.07	85.60	0.009783	2.60	7.82	8.79	0.74
1	5	100 year	18.68	83.93	85.31	85.12	85.66	0.010088	2.70	8.18	9.02	0.75
1	5	100 year + cc	22.41	83.93	85.42	85.27	85.84	0.010895	2.96	9.19	9.49	0.79
1	5	1000 year	33.63	83.93	85.68	85.63	86.31	0.013340	3.66	11.78	10.46	0.90
1	4	2 year	7.08	83.83	84.62		84.74	0.007425	1.54	4.59	6.89	0.60
1	4	5 year	9.14	83.83	84.73		84.88	0.007786	1.70	5.38	7.14	0.63
1	4	10 year	10.79	83.83	84.81		84.98	0.008001	1.81	5.96	7.31	0.64
1	4	25 year	13.38	83.83	84.93		85.13	0.008295	1.96	6.82	7.56	0.66
1	4	50 year	15.78	83.83	85.03		85.25	0.008445	2.09	7.59	8.29	0.67
1	4	75 year	17.41	83.83	85.09		85.33	0.008560	2.17	8.10	8.75	0.68
1	4	100 year	18.68	83.83	85.13		85.38	0.008646	2.23	8.50	9.09	0.69
1	4	100 year + cc	22.41	83.83	85.26		85.54	0.008816	2.38	9.69	9.88	0.71
1	4	1000 year	33.63	83.83	85.58		85.96	0.009055	2.74	13.06	10.82	0.74


HEC-RAS Plan: Block36.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	3	2 year	7.08	83.63	84.40		84.51	0.006761	1.44	4.91	7.81	0.58
1	3	5 year	9.14	83.63	84.52		84.64	0.006665	1.56	5.86	8.15	0.59
1	3	10 year	10.79	83.63	84.61		84.74	0.006609	1.64	6.59	8.41	0.59
1	3	25 year	13.38	83.63	84.73		84.89	0.006617	1.75	7.64	8.76	0.60
1	3	50 year	15.78	83.63	84.83		85.01	0.006651	1.85	8.55	9.06	0.61
1	3	75 year	17.41	83.63	84.90		85.08	0.006631	1.91	9.14	9.36	0.61
1	3	100 year	18.68	83.63	84.94		85.14	0.006623	1.95	9.59	9.59	0.61
1	3	100 year + cc	22.41	83.63	85.08		85.29	0.006568	2.07	10.91	10.21	0.62
1	3	1000 year	33.63	83.63	85.43		85.70	0.006388	2.34	14.77	11.80	0.63
1	2	2 year	7.08	83.22	84.13		84.23	0.006341	1.40	5.05	7.47	0.54
1	2	5 year	9.14	83.22	84.24		84.36	0.006633	1.56	5.87	7.50	0.56
1	2	10 year	10.79	83.22	84.32		84.46	0.006837	1.67	6.47	7.53	0.57
1	2	25 year	13.38	83.22	84.43		84.60	0.007066	1.82	7.35	7.78	0.59
1	2	50 year	15.78	83.22	84.53		84.72	0.007303	1.96	8.10	8.06	0.61
1	2	75 year	17.41	83.22	84.59		84.80	0.007460	2.04	8.59	8.24	0.62
1	2	100 year	18.68	83.22	84.63		84.86	0.007562	2.11	8.97	8.38	0.62
1	2	100 year + cc	22.41	83.22	84.76		85.02	0.007907	2.28	10.02	8.74	0.64
1	2	1000 year	33.63	83.22	85.08		85.45	0.008484	2.72	13.02	10.01	0.68
1	1	2 year	7.08	83.32	83.98	83.83	84.10	0.008901	1.55	4.56	7.87	0.65
1	1	5 year	9.14	83.32	84.08	83.91	84.23	0.008907	1.70	5.37	7.92	0.66
1	1	10 year	10.79	83.32	84.15	83.97	84.32	0.008903	1.81	5.98	7.96	0.66
1	1	25 year	13.38	83.32	84.26	84.06	84.46	0.008901	1.95	6.86	8.09	0.67
1	1	50 year	15.78	83.32	84.35	84.14	84.58	0.008904	2.08	7.60	8.38	0.68
1	1	75 year	17.41	83.32	84.41	84.19	84.65	0.008902	2.16	8.09	8.59	0.69
1	1	100 year	18.68	83.32	84.46	84.23	84.71	0.008902	2.22	8.46	8.74	0.69
1	1	100 year + cc	22.41	83.32	84.57	84.33	84.87	0.008914	2.39	9.53	9.18	0.71
1	1	1000 year	33.63	83.32	84.89	84.63	85.29	0.008904	2.81	12.61	10.32	0.74


Hunsworth Beck 1st Oct Plan: Block at 36.5 01/10/2015

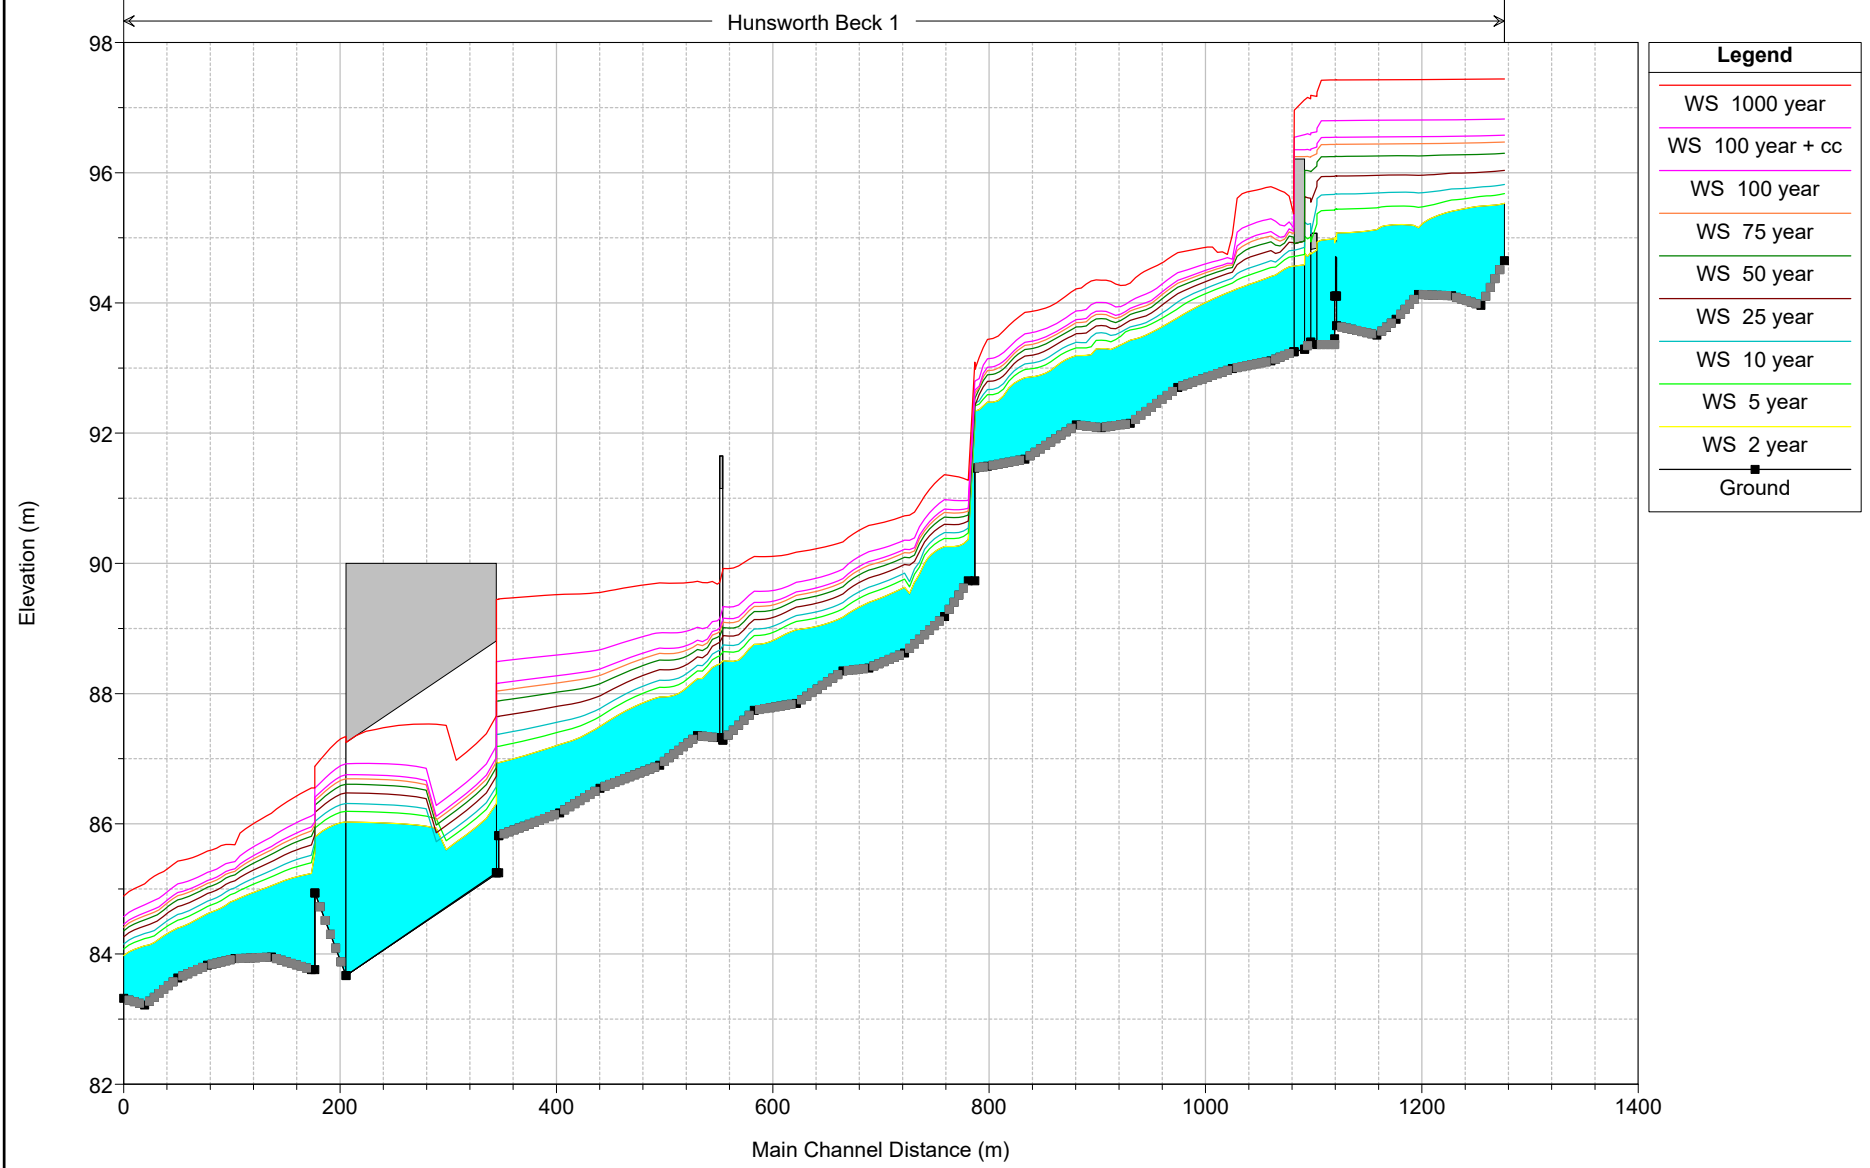


Hunsworth Beck 1st Oct Plan: Block at 36.5 01/10/2015  
XS08

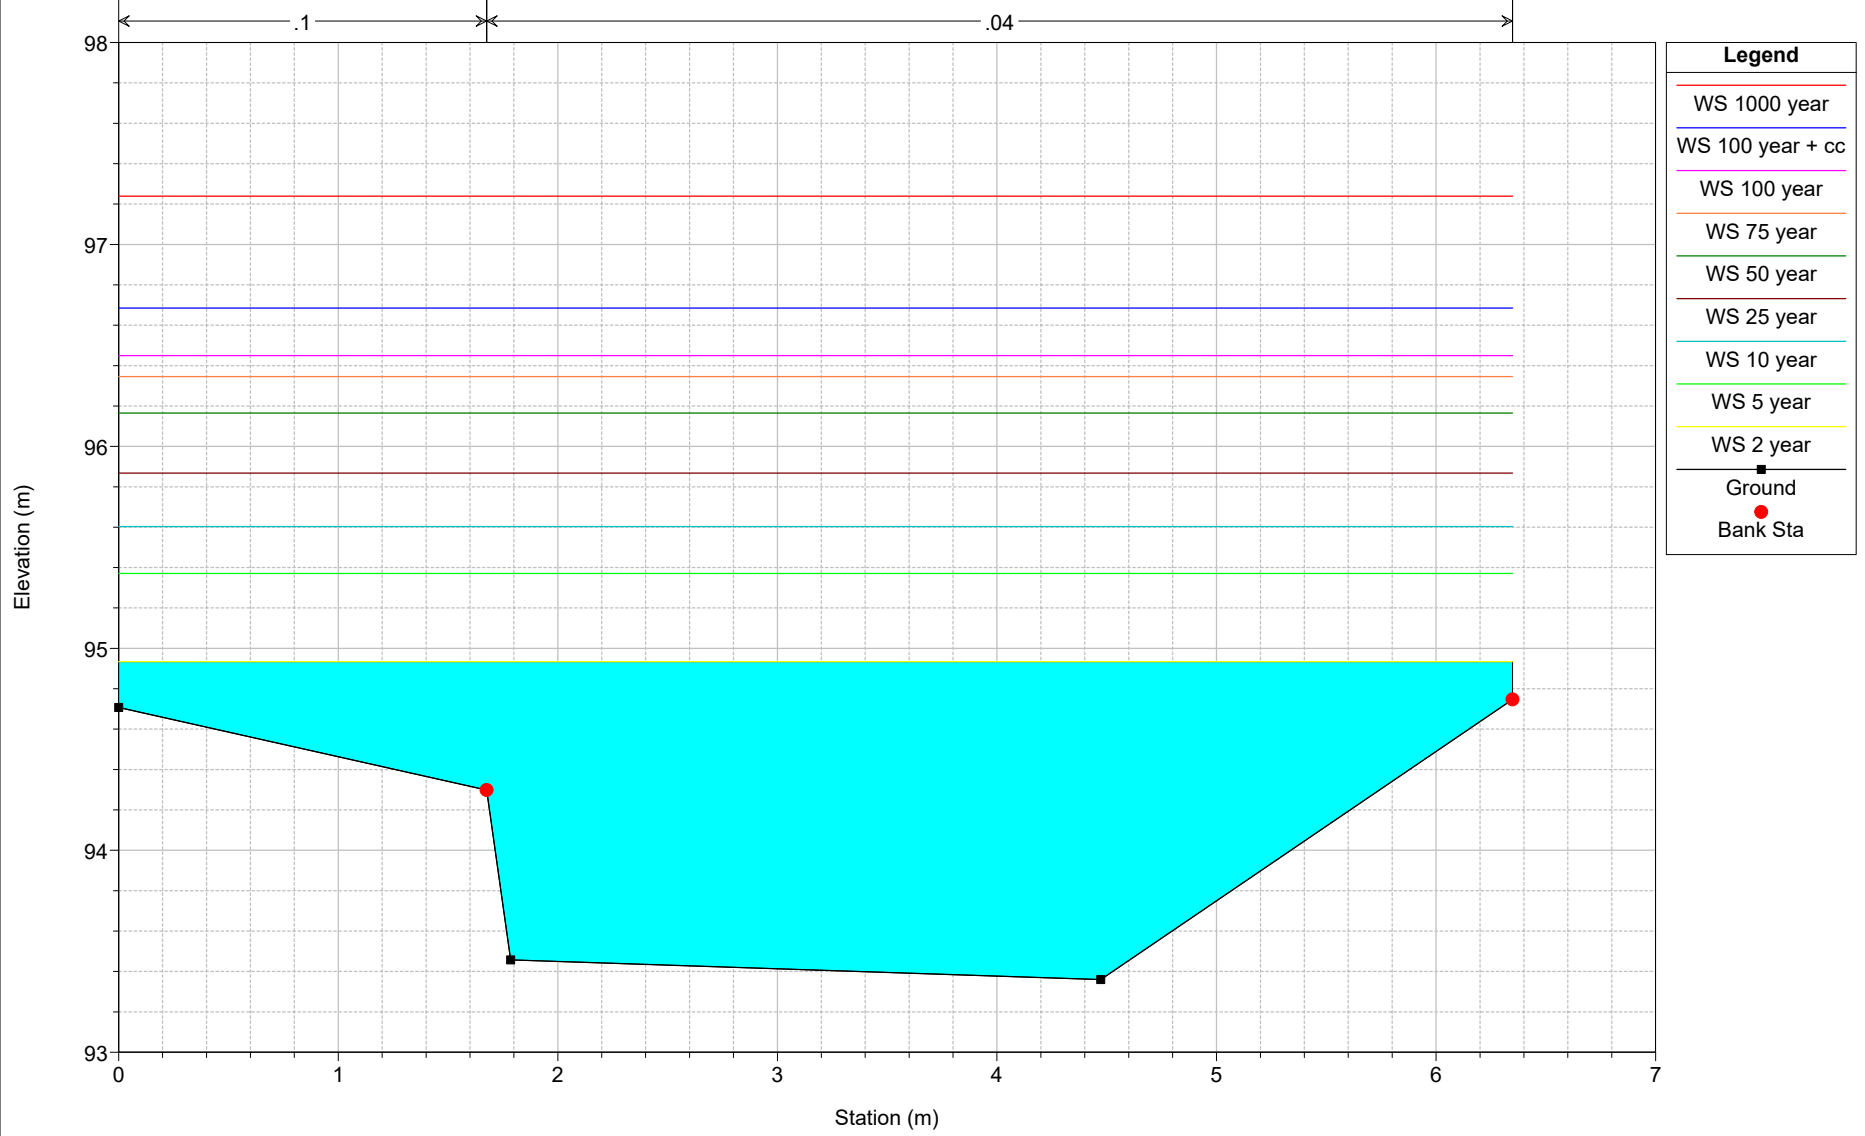


Hunsworth Beck 1st Oct Plan: Block at 36.5 01/10/2015  
XS14

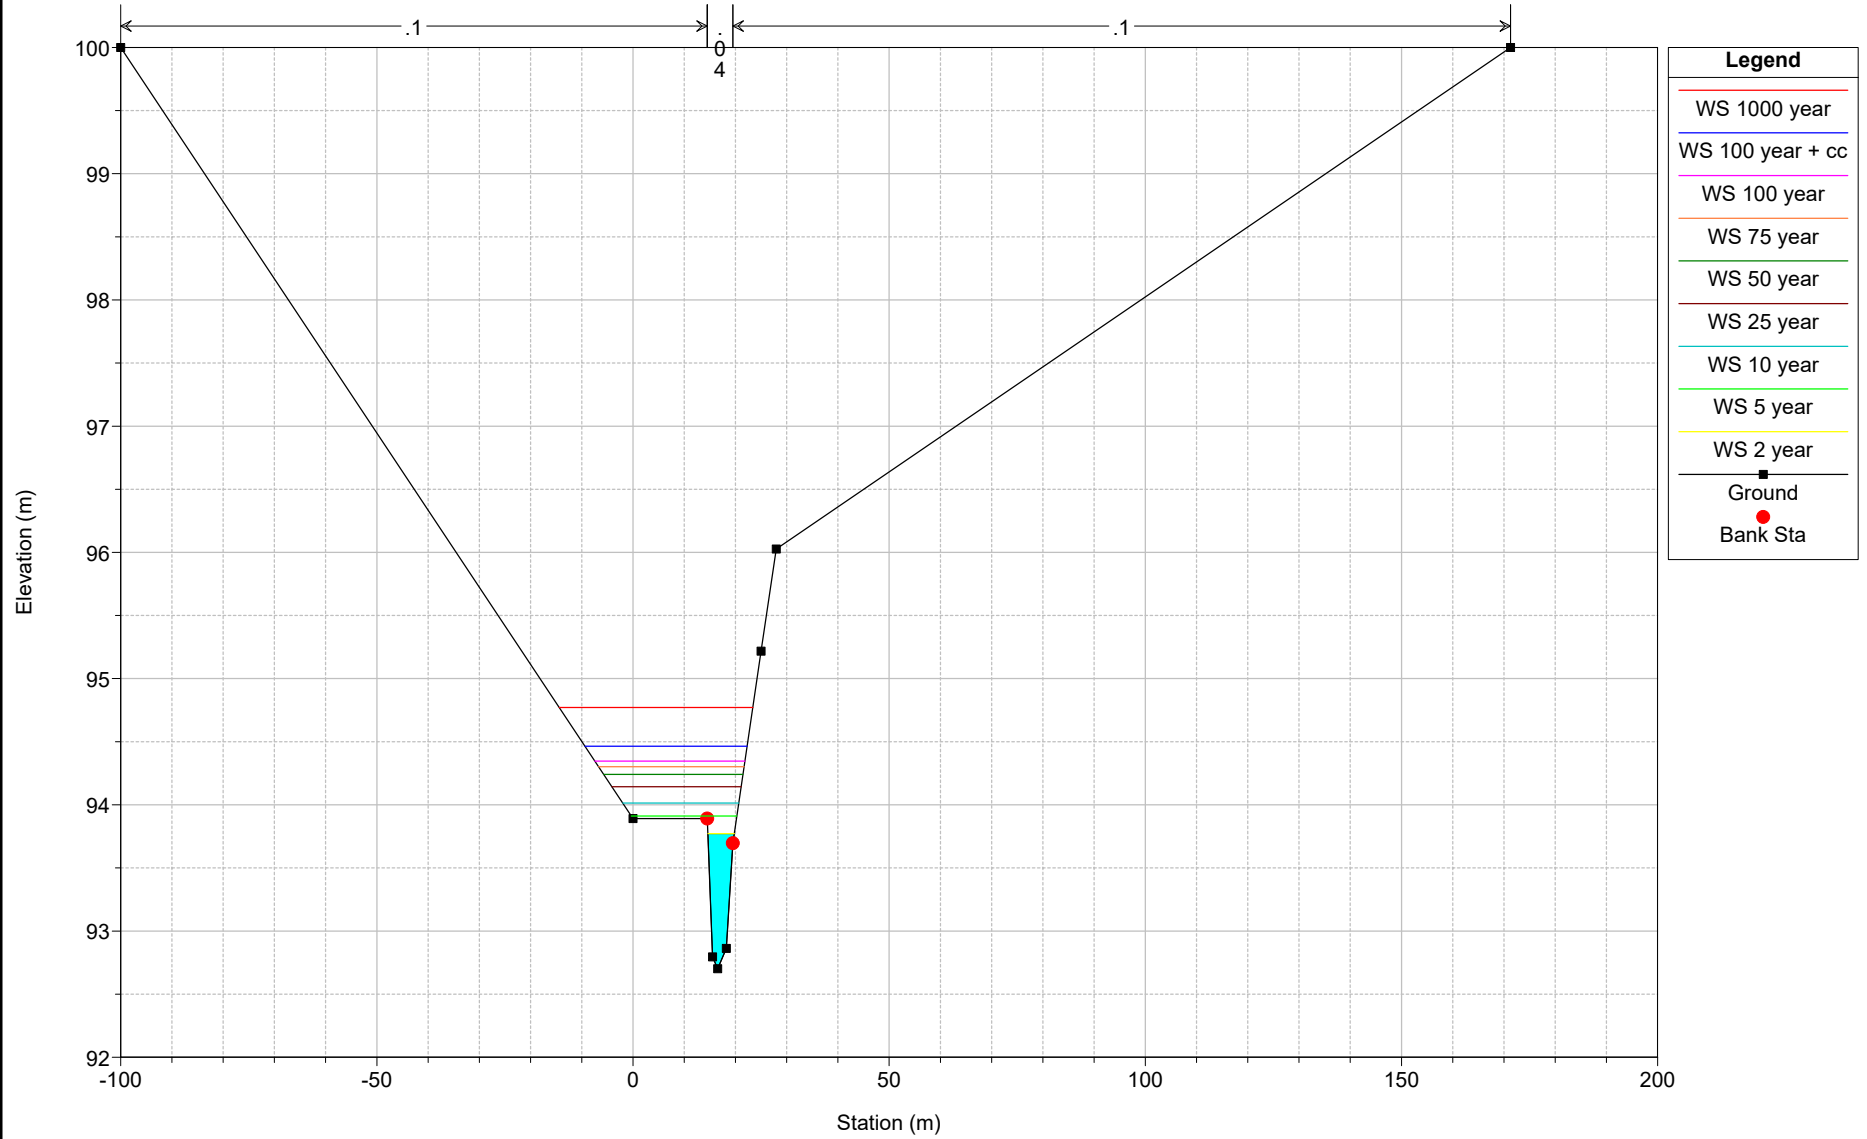

Hunsworth Beck 1st Oct Plan: Block at 36.5 01/10/2015  
XS22

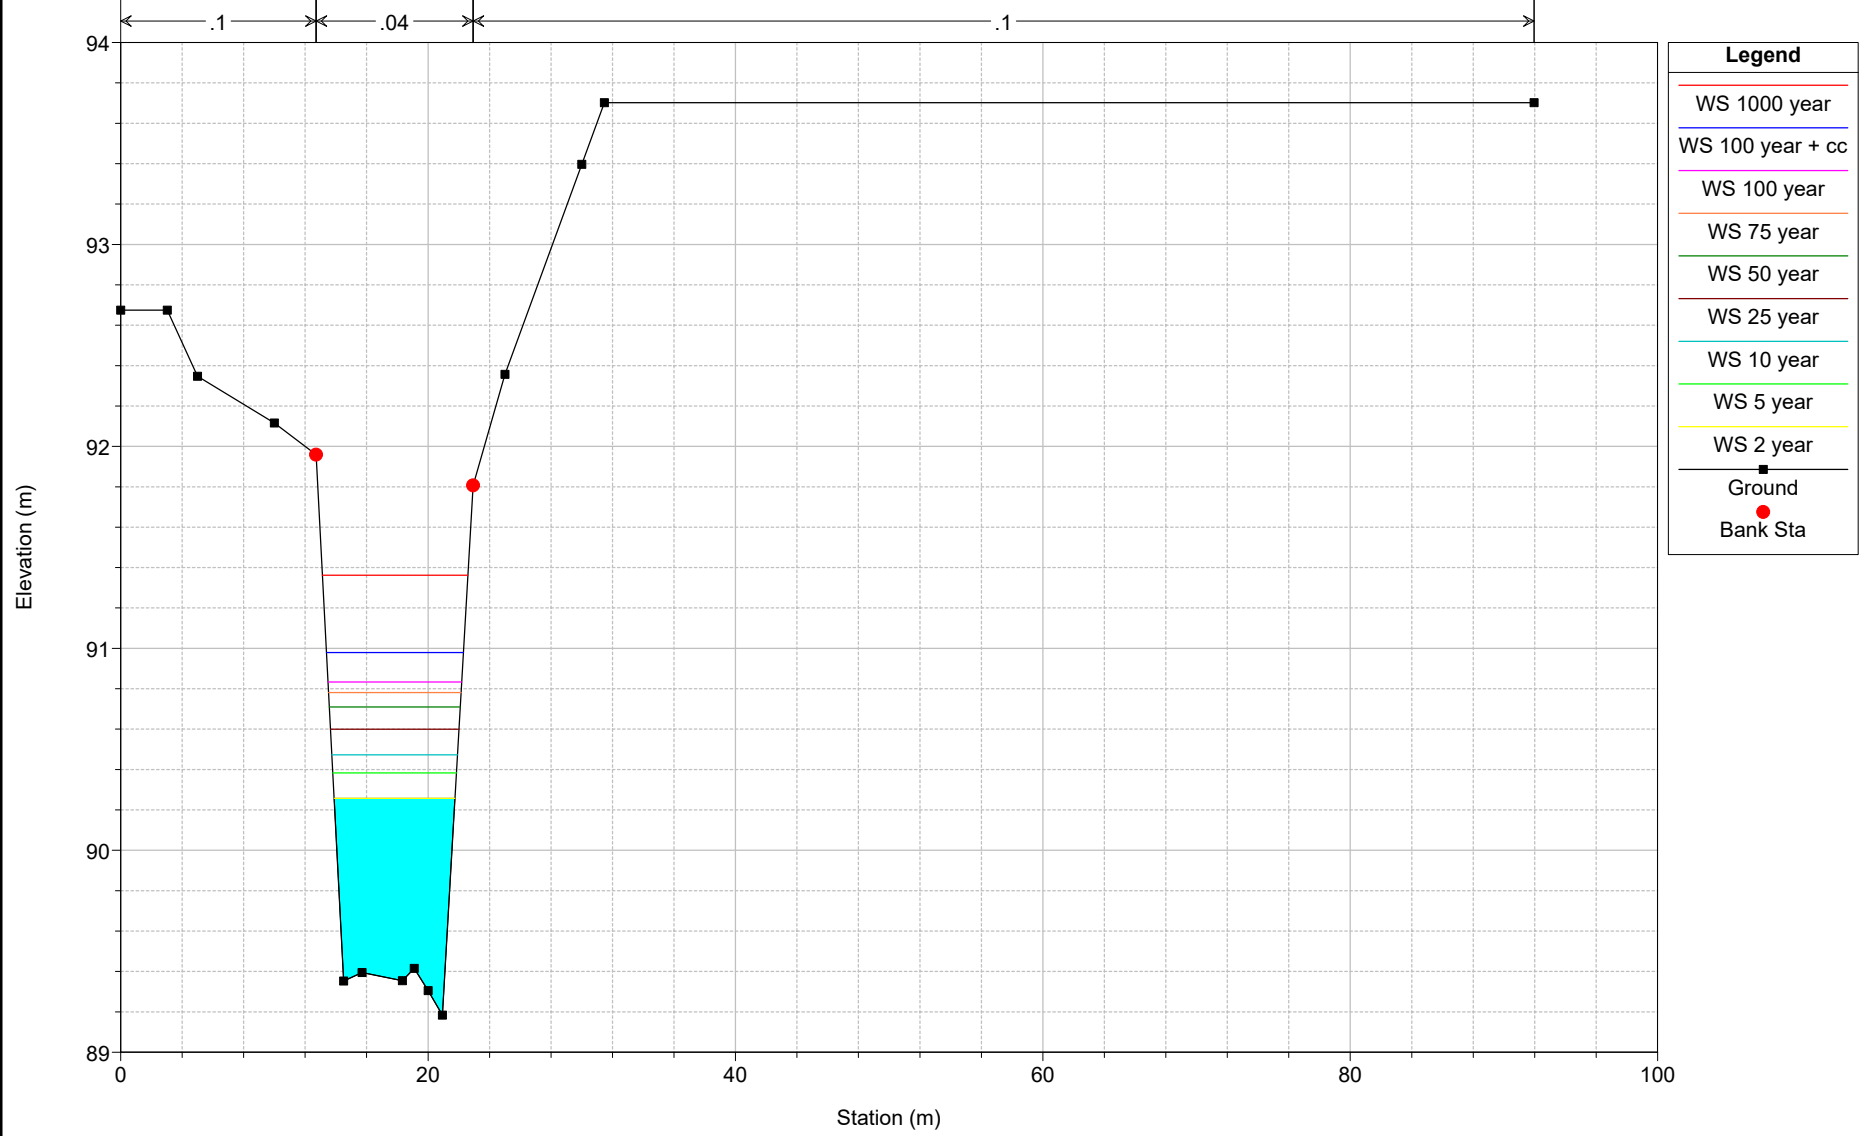

Hunsworth Beck 1st Oct Plan: Block at 36.5 01/10/2015  
XS 31

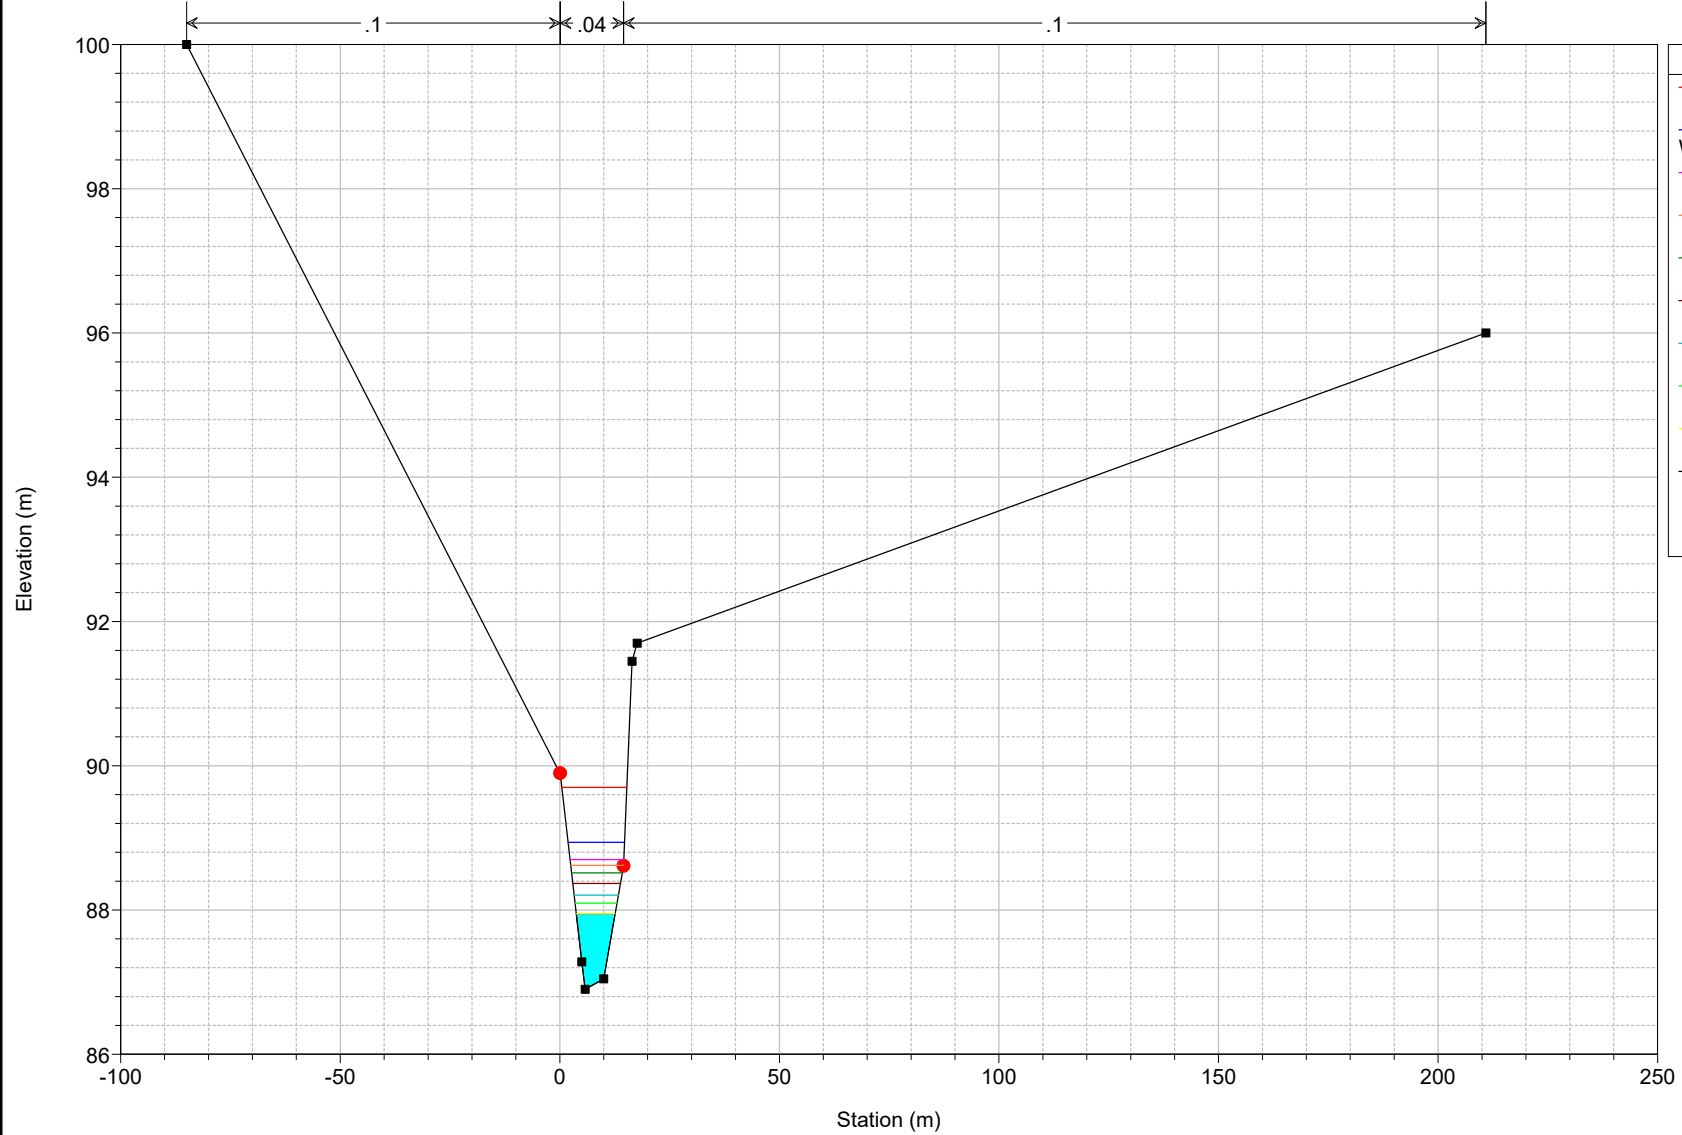

Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

50% Blockage at Vehicle Bridge (XS35.5) Results

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	95.82	95.25	95.86	0.001321	0.84	12.29	29.33	0.28
1	43	5 year	9.14	94.65	95.99	95.35	96.02	0.001122	0.86	17.71	36.58	0.26
1	43	10 year	10.79	94.65	96.10	95.42	96.14	0.001011	0.88	22.28	41.73	0.25
1	43	25 year	13.38	94.65	96.27	95.55	96.30	0.000890	0.89	29.64	48.88	0.24
1	43	50 year	15.78	94.65	96.39	95.65	96.42	0.000830	0.91	36.19	54.46	0.24
1	43	75 year	17.41	94.65	96.53	95.70	96.56	0.000674	0.87	44.10	60.53	0.22
1	43	100 year	18.68	94.65	96.63	95.74	96.65	0.000588	0.85	50.36	64.92	0.21
1	43	100 year + cc	22.41	94.65	96.87	95.84	96.90	0.000452	0.81	67.57	75.70	0.18
1	43	1000 year	33.63	94.65	97.48	96.07	97.50	0.000275	0.76	121.89	102.56	0.15
1	42	2 year	7.08	93.96	95.81	94.74	95.83	0.000644	0.69	13.76	32.36	0.19
1	42	5 year	9.14	93.96	95.97	94.85	96.00	0.000650	0.75	19.72	40.26	0.19
1	42	10 year	10.79	93.96	96.09	94.94	96.12	0.000639	0.78	24.76	45.89	0.19
1	42	25 year	13.38	93.96	96.25	95.06	96.28	0.000616	0.81	32.89	53.73	0.19
1	42	50 year	15.78	93.96	96.38	95.17	96.41	0.000604	0.84	40.10	59.84	0.19
1	42	75 year	17.41	93.96	96.52	95.23	96.54	0.000510	0.81	48.95	66.57	0.18
1	42	100 year	18.68	93.96	96.62	95.29	96.64	0.000455	0.79	55.93	71.43	0.17
1	42	100 year + cc	22.41	93.96	96.87	95.42	96.89	0.000365	0.76	75.04	83.31	0.16
1	42	1000 year	33.63	93.96	97.48	95.92	97.49	0.000234	0.71	135.11	112.78	0.13
1	41	2 year	7.08	94.11	95.80		95.81	0.000512	0.58	23.84	50.91	0.17
1	41	5 year	9.14	94.11	95.96		95.98	0.000448	0.59	33.03	58.97	0.16
1	41	10 year	10.79	94.11	96.08		96.10	0.000413	0.60	40.36	64.68	0.16
1	41	25 year	13.38	94.11	96.25		96.26	0.000374	0.62	51.66	72.61	0.15
1	41	50 year	15.78	94.11	96.38		96.39	0.000357	0.63	61.33	78.76	0.15
1	41	75 year	17.41	94.11	96.52		96.53	0.000296	0.61	72.91	85.55	0.14
1	41	100 year	18.68	94.11	96.62		96.63	0.000262	0.59	81.84	90.44	0.13
1	41	100 year + cc	22.41	94.11	96.87		96.87	0.000209	0.57	105.71	102.36	0.12
1	41	1000 year	33.63	94.11	97.48		97.49	0.000139	0.54	177.52	131.89	0.10
1	40	2 year	7.08	94.13	95.78		95.79	0.000514	0.64	25.97	46.42	0.18
1	40	5 year	9.14	94.13	95.95		95.96	0.000470	0.66	34.37	52.98	0.17
1	40	10 year	10.79	94.13	96.07		96.08	0.000445	0.68	40.98	57.63	0.17
1	40	25 year	13.38	94.13	96.23		96.25	0.000418	0.70	51.06	64.06	0.17
1	40	50 year	15.78	94.13	96.36		96.38	0.000408	0.72	59.58	69.04	0.17



HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36.55		Bridge									
1	36.5	2 year	7.08	93.36	95.77		95.78	0.000102	0.34	52.51	70.94	0.08
1	36.5	5 year	9.14	93.36	95.94		95.95	0.000107	0.37	65.20	79.28	0.08
1	36.5	10 year	10.79	93.36	96.06		96.07	0.000110	0.39	75.03	85.18	0.08
1	36.5	25 year	13.38	93.36	96.23		96.23	0.000113	0.41	89.80	93.34	0.09
1	36.5	50 year	15.78	93.36	96.36		96.36	0.000118	0.44	102.14	99.65	0.09
1	36.5	75 year	17.41	93.36	96.50		96.50	0.000105	0.43	116.99	106.76	0.08
1	36.5	100 year	18.68	93.36	96.60		96.61	0.000098	0.42	128.25	111.84	0.08
1	36.5	100 year + cc	22.41	93.36	96.85		96.86	0.000087	0.42	157.76	124.18	0.08
1	36.5	1000 year	33.63	93.36	97.47		97.47	0.000069	0.43	243.71	154.61	0.07
1	36.01	2 year	7.08	94.10	95.73		95.77	0.001102	0.93	9.05	6.35	0.24
1	36.01	5 year	9.14	94.10	95.88		95.94	0.001372	1.09	10.02	6.35	0.27
1	36.01	10 year	10.79	94.10	95.99		96.06	0.001590	1.21	10.69	6.35	0.29
1	36.01	25 year	13.38	94.10	96.13		96.22	0.001944	1.39	11.59	6.35	0.32
1	36.01	50 year	15.78	94.10	96.23		96.35	0.002315	1.55	12.24	6.35	0.35
1	36.01	75 year	17.41	94.10	96.37		96.49	0.002328	1.60	13.10	6.35	0.35
1	36.01	100 year	18.68	94.10	96.46		96.59	0.002360	1.64	13.71	6.35	0.35
1	36.01	100 year + cc	22.41	94.10	96.69		96.84	0.002582	1.79	15.13	6.35	0.37
1	36.01	1000 year	33.63	94.10	97.22		97.45	0.003352	2.21	18.49	6.35	0.41
1	36	2 year	7.08	94.10	95.73	94.83	95.77	0.001102	0.93	9.05	6.35	0.24
1	36	5 year	9.14	94.10	95.88	94.94	95.94	0.001373	1.09	10.02	6.35	0.27
1	36	10 year	10.79	94.10	95.99	95.02	96.06	0.001590	1.21	10.69	6.35	0.29
1	36	25 year	13.38	94.10	96.13	95.13	96.22	0.001944	1.39	11.59	6.35	0.32
1	36	50 year	15.78	94.10	96.23	95.23	96.35	0.002315	1.55	12.24	6.35	0.35
1	36	75 year	17.41	94.10	96.37	95.29	96.49	0.002328	1.60	13.10	6.35	0.35
1	36	100 year	18.68	94.10	96.46	95.34	96.59	0.002360	1.64	13.71	6.35	0.35
1	36	100 year + cc	22.41	94.10	96.69	95.47	96.84	0.002582	1.79	15.13	6.35	0.37
1	36	1000 year	33.63	94.10	97.22	95.84	97.45	0.003352	2.21	18.49	6.35	0.41
1	35.5		Bridge									
1	35	2 year	7.08	94.10	94.73	94.99	95.56	0.076482	4.05	1.75	2.97	1.68

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	35	5 year	9.14	94.10	94.88	95.14	95.73	0.063538	4.10	2.34	4.10	1.54
1	35	10 year	10.79	94.10	95.00	95.25	95.85	0.053940	4.11	2.83	4.14	1.43
1	35	25 year	13.38	94.10	95.20	95.42	96.01	0.040521	4.06	3.72	5.14	1.28
1	35	50 year	15.78	94.10	95.90	95.58	96.20	0.008141	2.57	9.14	10.35	0.62
1	35	75 year	17.41	94.10	96.16	95.67	96.39	0.005580	2.33	11.93	11.07	0.53
1	35	100 year	18.68	94.10	96.27	95.74	96.49	0.005058	2.31	13.20	11.07	0.51
1	35	100 year + cc	22.41	94.10	96.51	95.92	96.74	0.004618	2.37	15.87	11.07	0.49
1	35	1000 year	33.63	94.10	97.05	96.33	97.32	0.004478	2.68	21.86	11.07	0.50
1	34.99	2 year	7.08	94.10	94.73	94.99	95.56	0.076455	4.05	1.76	3.25	1.68
1	34.99	5 year	9.14	94.10	94.88	95.13	95.73	0.063002	4.10	2.34	4.10	1.53
1	34.99	10 year	10.79	94.10	95.00	95.25	95.85	0.053505	4.10	2.83	4.14	1.43
1	34.99	25 year	13.38	94.10	95.20	95.43	96.01	0.040185	4.06	3.72	5.14	1.28
1	34.99	50 year	15.78	94.10	95.90		96.20	0.008111	2.57	9.13	10.35	0.62
1	34.99	75 year	17.41	94.10	96.16		96.39	0.005559	2.33	11.92	11.07	0.53
1	34.99	100 year	18.68	94.10	96.27		96.49	0.005039	2.31	13.19	11.07	0.51
1	34.99	100 year + cc	22.41	94.10	96.51		96.74	0.004602	2.37	15.86	11.07	0.49
1	34.99	1000 year	33.63	94.10	97.05		97.32	0.004464	2.68	21.85	11.07	0.50
1	34	2 year	7.08	93.29	94.76	94.01	94.85	0.003958	1.30	5.44	4.36	0.37
1	34	5 year	9.14	93.29	95.02	94.15	95.12	0.003681	1.39	6.68	5.09	0.36
1	34	10 year	10.79	93.29	95.24	94.25	95.34	0.003397	1.43	7.84	5.69	0.35
1	34	25 year	13.38	93.29	95.63	94.39	95.73	0.002734	1.42	10.30	6.79	0.31
1	34	50 year	15.78	93.29	96.04	94.52	96.13	0.002160	1.37	13.28	7.92	0.27
1	34	75 year	17.41	93.29	96.25	94.61	96.34	0.002015	1.38	15.00	8.40	0.26
1	34	100 year	18.68	93.29	96.35	94.73	96.45	0.002038	1.41	15.89	8.40	0.27
1	34	100 year + cc	22.41	93.29	96.58	94.90	96.69	0.002245	1.53	17.84	8.40	0.28
1	34	1000 year	33.63	93.29	97.12	95.38	97.28	0.002960	1.88	22.35	8.40	0.32
1	33.5		Culvert									
1	33	2 year	7.08	93.25	94.57		94.69	0.004021	1.54	4.91	4.05	0.43
1	33	5 year	9.14	93.25	94.71		94.87	0.004871	1.78	5.51	4.13	0.47
1	33	10 year	10.79	93.25	94.81		95.00	0.005633	1.98	5.90	4.17	0.51
1	33	25 year	13.38	93.25	94.93		95.18	0.006942	2.27	6.40	4.23	0.56

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	33	50 year	15.78	93.25	95.01		95.33	0.008355	2.55	6.76	4.27	0.62
1	33	75 year	17.41	93.25	95.06		95.43	0.009312	2.72	6.99	4.30	0.65
1	33	100 year	18.68	93.25	95.10		95.51	0.010134	2.86	7.14	4.32	0.68
1	33	100 year + cc	22.41	93.25	95.16		95.71	0.013297	3.33	7.39	4.34	0.77
1	33	1000 year	33.63	93.25	95.37	95.37	96.36	0.020997	4.48	8.38	4.80	0.99
1	32	2 year	7.08	93.11	94.40	94.06	94.56	0.006312	1.80	4.77	12.08	0.55
1	32	5 year	9.14	93.11	94.54	94.22	94.72	0.006348	1.96	7.21	20.25	0.56
1	32	10 year	10.79	93.11	94.65	94.33	94.83	0.006000	2.01	9.44	22.83	0.55
1	32	25 year	13.38	93.11	94.80		94.97	0.005269	2.02	13.28	26.70	0.53
1	32	50 year	15.78	93.11	94.94		95.09	0.004642	2.01	17.11	30.06	0.50
1	32	75 year	17.41	93.11	95.03		95.17	0.004228	1.99	19.92	32.32	0.48
1	32	100 year	18.68	93.11	95.10		95.23	0.003952	1.97	22.15	33.99	0.47
1	32	100 year + cc	22.41	93.11	95.29		95.40	0.003202	1.90	29.36	38.92	0.43
1	32	1000 year	33.63	93.11	95.79		95.87	0.002107	1.79	51.57	51.22	0.36
1	31	2 year	7.08	92.99	94.18		94.34	0.006722	1.75	4.39	7.12	0.58
1	31	5 year	9.14	92.99	94.30		94.50	0.007279	1.97	5.29	7.77	0.61
1	31	10 year	10.79	92.99	94.38		94.61	0.007920	2.15	5.88	8.18	0.64
1	31	25 year	13.38	92.99	94.47	94.28	94.76	0.009133	2.43	6.67	8.69	0.70
1	31	50 year	15.78	92.99	94.54	94.40	94.89	0.010335	2.69	7.29	9.08	0.75
1	31	75 year	17.41	92.99	94.58	94.47	94.97	0.011227	2.86	7.66	9.30	0.79
1	31	100 year	18.68	92.99	94.61	94.52	95.04	0.012045	3.00	7.90	9.44	0.82
1	31	100 year + cc	22.41	92.99	94.67	94.67	95.22	0.014627	3.41	8.51	9.78	0.91
1	31	1000 year	33.63	92.99	95.04	95.04	95.71	0.013633	3.84	12.55	11.82	0.91
1	30	2 year	7.08	92.70	93.77		93.95	0.009458	1.87	3.79	5.17	0.68
1	30	5 year	9.14	92.70	93.91	93.70	94.12	0.009267	2.04	4.85	20.61	0.69
1	30	10 year	10.79	92.70	94.01	93.79	94.22	0.008300	2.07	7.07	22.67	0.66
1	30	25 year	13.38	92.70	94.14	94.05	94.35	0.007388	2.12	10.17	25.25	0.64
1	30	50 year	15.78	92.70	94.24	94.14	94.45	0.006962	2.18	12.73	27.20	0.63
1	30	75 year	17.41	92.70	94.30	94.19	94.51	0.006718	2.21	14.44	28.42	0.62
1	30	100 year	18.68	92.70	94.35	94.23	94.55	0.006582	2.24	15.71	29.31	0.62
1	30	100 year + cc	22.41	92.70	94.46		94.67	0.006299	2.32	19.30	31.66	0.62
1	30	1000 year	33.63	92.70	94.77		94.98	0.005588	2.48	29.98	37.80	0.60

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	29	2 year	7.08	92.15	93.43	93.11	93.55	0.006145	1.61	5.03	7.19	0.55
1	29	5 year	9.14	92.15	93.58	93.25	93.72	0.005497	1.68	7.36	13.72	0.53
1	29	10 year	10.79	92.15	93.63	93.35	93.79	0.006440	1.87	8.02	14.32	0.58
1	29	25 year	13.38	92.15	93.73	93.47	93.93	0.006940	2.06	9.54	15.63	0.61
1	29	50 year	15.78	92.15	93.82	93.60	94.04	0.007199	2.21	10.99	16.79	0.63
1	29	75 year	17.41	92.15	93.88	93.67	94.11	0.007374	2.30	11.93	17.50	0.64
1	29	100 year	18.68	92.15	93.92	93.72	94.16	0.007533	2.37	12.63	18.01	0.65
1	29	100 year + cc	22.41	92.15	94.03	93.83	94.30	0.007856	2.55	14.71	19.45	0.67
1	29	1000 year	33.63	92.15	94.30	94.12	94.66	0.008667	3.00	20.66	23.71	0.72
1	28	2 year	7.08	92.08	93.30	92.74	93.36	0.003580	1.27	8.25	10.30	0.41
1	28	5 year	9.14	92.08	93.43	92.86	93.51	0.003910	1.41	9.60	10.59	0.43
1	28	10 year	10.79	92.08	93.54	92.95	93.59	0.002336	1.16	19.54	31.53	0.34
1	28	25 year	13.38	92.08	93.65	93.04	93.70	0.002391	1.25	23.06	32.86	0.35
1	28	50 year	15.78	92.08	93.76	93.24	93.81	0.002326	1.30	26.59	34.13	0.35
1	28	75 year	17.41	92.08	93.83	93.29	93.88	0.002294	1.33	28.89	34.93	0.35
1	28	100 year	18.68	92.08	93.87	93.33	93.93	0.002273	1.35	30.63	35.53	0.35
1	28	100 year + cc	22.41	92.08	94.01	93.47	94.06	0.002247	1.42	35.43	37.13	0.35
1	28	1000 year	33.63	92.08	94.35	93.62	94.41	0.002189	1.59	48.85	41.26	0.36
1	27	2 year	7.08	92.13	93.19	92.74	93.24	0.002813	1.13	8.57	11.12	0.38
1	27	5 year	9.14	92.13	93.31	92.83	93.38	0.003101	1.27	9.94	11.63	0.41
1	27	10 year	10.79	92.13	93.39	92.90	93.47	0.003316	1.38	10.93	11.99	0.43
1	27	25 year	13.38	92.13	93.53	93.00	93.61	0.003030	1.42	15.59	22.89	0.42
1	27	50 year	15.78	92.13	93.63	93.08	93.72	0.003022	1.50	18.02	24.05	0.42
1	27	75 year	17.41	92.13	93.70	93.14	93.79	0.003023	1.55	19.61	24.77	0.43
1	27	100 year	18.68	92.13	93.75	93.18	93.84	0.003023	1.59	20.83	25.31	0.43
1	27	100 year + cc	22.41	92.13	93.88	93.28	93.98	0.003025	1.69	24.27	26.76	0.43
1	27	1000 year	33.63	92.13	94.22	93.60	94.34	0.003019	1.93	33.92	30.24	0.45
1	26	2 year	7.08	91.60	92.85		92.92	0.003373	1.15	6.14	7.97	0.42
1	26	5 year	9.14	91.60	92.98		93.06	0.003751	1.27	7.18	8.70	0.45
1	26	10 year	10.79	91.60	93.06		93.16	0.004004	1.36	7.95	9.21	0.47
1	26	25 year	13.38	91.60	93.18		93.29	0.004321	1.47	9.10	9.92	0.49

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	26	50 year	15.78	91.60	93.28		93.41	0.004538	1.56	10.13	10.52	0.51
1	26	75 year	17.41	91.60	93.35		93.48	0.004655	1.61	10.81	10.89	0.52
1	26	100 year	18.68	91.60	93.40		93.53	0.004732	1.65	11.33	11.17	0.52
1	26	100 year + cc	22.41	91.60	93.53		93.68	0.004908	1.75	12.83	11.94	0.54
1	26	1000 year	33.63	91.60	93.86		94.05	0.004876	1.97	17.38	16.66	0.55
1	25	2 year	7.08	91.49	92.48		92.57	0.004310	1.36	5.45	7.94	0.48
1	25	5 year	9.14	91.49	92.59		92.71	0.004760	1.53	6.40	8.66	0.51
1	25	10 year	10.79	91.49	92.67		92.81	0.005087	1.65	7.11	9.17	0.53
1	25	25 year	13.38	91.49	92.79		92.96	0.005352	1.80	8.30	9.95	0.55
1	25	50 year	15.78	91.49	92.90		93.08	0.005485	1.93	9.35	10.73	0.57
1	25	75 year	17.41	91.49	92.96		93.16	0.005563	2.01	10.05	11.25	0.57
1	25	100 year	18.68	91.49	93.01		93.22	0.005556	2.06	10.63	11.67	0.58
1	25	100 year + cc	22.41	91.49	93.14		93.38	0.005674	2.22	12.23	12.75	0.59
1	25	1000 year	33.63	91.49	93.44		93.78	0.006416	2.68	16.31	14.77	0.65
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.007987	1.64	4.41	7.71	0.60
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.009451	1.90	5.11	9.46	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.011307	2.14	5.48	10.20	0.73
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.019562	2.75	5.19	9.63	0.95
1	24	50 year	15.78	91.47	92.54	92.54	92.94	0.017446	2.82	6.41	11.84	0.91
1	24	75 year	17.41	91.47	92.62	92.62	93.02	0.016095	2.85	7.35	13.08	0.89
1	24	100 year	18.68	91.47	92.66	92.66	93.07	0.015657	2.90	7.99	13.68	0.88
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.22	0.014298	2.99	9.97	15.28	0.86
1	24	1000 year	33.63	91.47	92.98	93.09	93.62	0.018707	3.75	12.79	16.23	1.01
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.37	90.32	90.58	0.017369	2.03	3.49	6.32	0.87
1	23	5 year	9.14	89.73	90.47	90.41	90.72	0.017267	2.22	4.12	6.36	0.88
1	23	10 year	10.79	89.73	90.54	90.48	90.82	0.017209	2.35	4.60	6.40	0.88
1	23	25 year	13.38	89.73	90.65	90.59	90.97	0.017260	2.53	5.29	6.44	0.89
1	23	50 year	15.78	89.73	90.74	90.68	91.11	0.017219	2.68	5.90	6.48	0.90
1	23	75 year	17.41	89.73	90.80	90.74	91.19	0.017297	2.77	6.29	6.51	0.90
1	23	100 year	18.68	89.73	90.85	90.78	91.26	0.017406	2.84	6.58	6.52	0.90

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	23	100 year + cc	22.41	89.73	90.97	90.90	91.44	0.017895	3.04	7.36	6.58	0.92
1	23	1000 year	33.63	89.73	91.28	91.24	91.93	0.019522	3.57	9.42	6.71	0.96
1	22	2 year	7.08	89.18	90.26		90.32	0.002860	1.09	6.51	7.86	0.38
1	22	5 year	9.14	89.18	90.38		90.46	0.003102	1.22	7.51	8.04	0.40
1	22	10 year	10.79	89.18	90.47		90.56	0.003277	1.31	8.24	8.17	0.42
1	22	25 year	13.38	89.18	90.60		90.71	0.003532	1.44	9.29	8.36	0.44
1	22	50 year	15.78	89.18	90.71		90.83	0.003710	1.54	10.22	8.52	0.45
1	22	75 year	17.41	89.18	90.78		90.91	0.003811	1.61	10.83	8.62	0.46
1	22	100 year	18.68	89.18	90.83		90.97	0.003892	1.66	11.28	8.70	0.46
1	22	100 year + cc	22.41	89.18	90.98		91.14	0.004091	1.78	12.57	8.91	0.48
1	22	1000 year	33.63	89.18	91.36		91.59	0.004533	2.09	16.08	9.46	0.51
1	21	2 year	7.08	88.62	89.63	89.44	89.79	0.008839	1.74	4.07	5.71	0.66
1	21	5 year	9.14	88.62	89.76	89.55	89.94	0.009048	1.90	4.81	5.95	0.67
1	21	10 year	10.79	88.62	89.85	89.63	90.06	0.009241	2.01	5.36	6.12	0.69
1	21	25 year	13.38	88.62	89.98		90.22	0.009422	2.16	6.19	6.37	0.70
1	21	50 year	15.78	88.62	90.09		90.36	0.009572	2.28	6.92	6.58	0.71
1	21	75 year	17.41	88.62	90.17		90.45	0.009674	2.36	7.39	6.71	0.72
1	21	100 year	18.68	88.62	90.22		90.51	0.009795	2.42	7.73	6.81	0.72
1	21	100 year + cc	22.41	88.62	90.36		90.69	0.010089	2.57	8.71	7.07	0.74
1	21	1000 year	33.63	88.62	90.73		91.17	0.010554	2.93	11.49	7.78	0.77
1	20	2 year	7.08	88.39	89.40		89.51	0.006639	1.49	4.74	6.97	0.58
1	20	5 year	9.14	88.39	89.54		89.67	0.006398	1.60	5.71	7.29	0.58
1	20	10 year	10.79	88.39	89.63		89.78	0.006252	1.67	6.45	7.53	0.58
1	20	25 year	13.38	88.39	89.78		89.94	0.006099	1.77	7.55	7.87	0.58
1	20	50 year	15.78	88.39	89.90		90.07	0.006032	1.86	8.50	8.15	0.58
1	20	75 year	17.41	88.39	89.97		90.16	0.006014	1.91	9.12	8.33	0.58
1	20	100 year	18.68	88.39	90.03		90.22	0.006008	1.95	9.58	8.46	0.58
1	20	100 year + cc	22.41	88.39	90.18		90.40	0.005993	2.05	10.91	8.83	0.59
1	20	1000 year	33.63	88.39	90.58		90.85	0.005909	2.30	14.65	9.78	0.60
1	19	2 year	7.08	88.35	89.17		89.33	0.009492	1.73	4.09	5.95	0.67
1	19	5 year	9.14	88.35	89.30		89.48	0.009526	1.88	4.85	6.16	0.68

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	19	10 year	10.79	88.35	89.40		89.60	0.009629	1.98	5.46	6.47	0.69
1	19	25 year	13.38	88.35	89.53		89.76	0.009765	2.11	6.35	6.91	0.70
1	19	50 year	15.78	88.35	89.64		89.89	0.009845	2.21	7.14	7.28	0.71
1	19	75 year	17.41	88.35	89.71		89.98	0.009882	2.27	7.67	7.51	0.72
1	19	100 year	18.68	88.35	89.77		90.04	0.009901	2.32	8.07	7.68	0.72
1	19	100 year + cc	22.41	88.35	89.91		90.21	0.009892	2.43	9.22	8.15	0.73
1	19	1000 year	33.63	88.35	90.33		90.68	0.008866	2.61	12.87	9.33	0.71
1	18	2 year	7.08	87.85	88.98		89.05	0.003014	1.14	6.19	7.31	0.40
1	18	5 year	9.14	87.85	89.11		89.19	0.003375	1.28	7.15	7.75	0.42
1	18	10 year	10.79	87.85	89.20		89.30	0.003614	1.37	7.87	8.07	0.44
1	18	25 year	13.38	87.85	89.33		89.44	0.003923	1.50	8.94	8.51	0.47
1	18	50 year	15.78	87.85	89.44		89.57	0.004138	1.59	9.90	8.89	0.48
1	18	75 year	17.41	87.85	89.51		89.65	0.004255	1.65	10.53	9.13	0.49
1	18	100 year	18.68	87.85	89.56		89.71	0.004331	1.70	11.02	9.32	0.50
1	18	100 year + cc	22.41	87.85	89.71		89.87	0.004494	1.80	12.43	9.82	0.51
1	18	1000 year	33.63	87.85	90.17		90.36	0.004313	1.93	17.42	12.05	0.51
1	17	2 year	7.08	87.74	88.76		88.81	0.003069	1.02	6.93	10.51	0.40
1	17	5 year	9.14	87.74	88.89		88.95	0.002991	1.08	8.44	11.49	0.40
1	17	10 year	10.79	87.74	88.99		89.06	0.002858	1.12	9.62	11.99	0.40
1	17	25 year	13.38	87.74	89.14		89.21	0.002678	1.17	11.40	12.59	0.39
1	17	50 year	15.78	87.74	89.26		89.34	0.002565	1.22	12.96	13.10	0.39
1	17	75 year	17.41	87.74	89.34		89.42	0.002490	1.24	14.02	13.43	0.39
1	17	100 year	18.68	87.74	89.40		89.48	0.002433	1.26	14.85	13.68	0.39
1	17	100 year + cc	22.41	87.74	89.57		89.66	0.002274	1.30	17.24	14.39	0.38
1	17	1000 year	33.63	87.74	90.11		90.20	0.001534	1.33	25.52	16.53	0.33
1	16	2 year	7.08	87.29	88.50	87.96	88.56	0.002333	1.06	6.65	7.13	0.35
1	16	5 year	9.14	87.29	88.65	88.07	88.72	0.002575	1.19	7.68	7.44	0.37
1	16	10 year	10.79	87.29	88.75	88.14	88.83	0.002739	1.28	8.45	7.66	0.39
1	16	25 year	13.38	87.29	88.89	88.25	88.99	0.002952	1.40	9.58	7.98	0.41
1	16	50 year	15.78	87.29	89.01	88.35	89.13	0.003114	1.49	10.58	8.25	0.42
1	16	75 year	17.41	87.29	89.10	88.41	89.22	0.003182	1.55	11.26	8.43	0.43
1	16	100 year	18.68	87.29	89.16	88.45	89.29	0.003225	1.59	11.79	8.57	0.43

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	16	100 year + cc	22.41	87.29	89.34	88.58	89.48	0.003296	1.68	13.35	9.00	0.44
1	16	1000 year	33.63	87.29	89.92	88.91	90.08	0.002833	1.77	19.05	10.52	0.42
1	15.5	Bridge										
1	15	2 year	7.08	87.32	88.44		88.54	0.004180	1.38	5.14	5.40	0.45
1	15	5 year	9.14	87.32	88.56		88.69	0.004917	1.57	5.81	5.57	0.49
1	15	10 year	10.79	87.32	88.65		88.80	0.005475	1.72	6.29	5.69	0.52
1	15	25 year	13.38	87.32	88.77		88.95	0.006314	1.92	6.97	5.86	0.56
1	15	50 year	15.78	87.32	88.86		89.09	0.007051	2.09	7.54	6.00	0.60
1	15	75 year	17.41	87.32	88.93		89.17	0.007457	2.20	7.93	6.08	0.61
1	15	100 year	18.68	87.32	88.98		89.24	0.007740	2.27	8.23	6.15	0.63
1	15	100 year + cc	22.41	87.32	89.12		89.43	0.008395	2.46	9.11	6.34	0.66
1	15	1000 year	33.63	87.32	89.68		90.03	0.007296	2.61	12.89	7.10	0.62
1	14	2 year	7.08	87.36	88.23		88.36	0.008396	1.59	4.45	7.23	0.65
1	14	5 year	9.14	87.36	88.35		88.50	0.008287	1.71	5.34	7.66	0.65
1	14	10 year	10.79	87.36	88.43		88.60	0.008199	1.79	6.03	7.98	0.66
1	14	25 year	13.38	87.36	88.56		88.74	0.008000	1.89	7.08	8.45	0.66
1	14	50 year	15.78	87.36	88.68		88.87	0.007703	1.95	8.07	8.86	0.65
1	14	75 year	17.41	87.36	88.75		88.96	0.007448	1.99	8.77	9.14	0.65
1	14	100 year	18.68	87.36	88.82		89.02	0.007143	2.00	9.36	9.37	0.64
1	14	100 year + cc	22.41	87.36	89.02		89.22	0.006095	1.98	11.31	10.10	0.60
1	14	1000 year	33.63	87.36	89.72		89.88	0.003164	1.74	19.33	12.66	0.45
1	13	2 year	7.08	86.90	87.95		88.01	0.003243	1.11	6.38	8.86	0.42
1	13	5 year	9.14	86.90	88.10		88.17	0.003154	1.18	7.74	9.57	0.42
1	13	10 year	10.79	86.90	88.21		88.28	0.003067	1.22	8.82	10.09	0.42
1	13	25 year	13.38	86.90	88.37		88.45	0.002903	1.27	10.51	10.86	0.41
1	13	50 year	15.78	86.90	88.52		88.60	0.002702	1.30	12.17	11.56	0.40
1	13	75 year	17.41	86.90	88.62		88.70	0.002531	1.30	13.39	12.04	0.39
1	13	100 year	18.68	86.90	88.70		88.79	0.002344	1.30	14.37	12.25	0.38
1	13	100 year + cc	22.41	86.90	88.94		89.02	0.001899	1.29	17.37	12.86	0.35
1	13	1000 year	33.63	86.90	89.70		89.78	0.001064	1.22	27.92	14.82	0.28

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	12	2 year	7.08	86.55	87.49	87.31	87.66	0.009415	1.80	3.92	5.53	0.68
1	12	5 year	9.14	86.55	87.65	87.43	87.83	0.008924	1.90	4.80	5.96	0.68
1	12	10 year	10.79	86.55	87.77	87.52	87.96	0.008347	1.95	5.55	6.30	0.66
1	12	25 year	13.38	86.55	87.97	87.64	88.16	0.007219	1.96	6.84	6.85	0.63
1	12	50 year	15.78	86.55	88.15	87.75	88.34	0.006203	1.94	8.15	7.37	0.59
1	12	75 year	17.41	86.55	88.28	87.82	88.46	0.005570	1.91	9.11	7.71	0.56
1	12	100 year	18.68	86.55	88.38	87.86	88.56	0.005122	1.89	9.90	7.98	0.54
1	12	100 year + cc	22.41	86.55	88.67	88.00	88.84	0.004031	1.81	12.36	8.78	0.49
1	12	1000 year	33.63	86.55	89.55	88.36	89.68	0.002134	1.59	21.15	11.17	0.37
1	11	2 year	7.08	86.17	87.22	86.91	87.33	0.005774	1.51	4.70	6.02	0.54
1	11	5 year	9.14	86.17	87.41	87.02	87.54	0.005024	1.54	5.94	6.58	0.52
1	11	10 year	10.79	86.17	87.57	87.11	87.69	0.004437	1.54	7.00	6.98	0.49
1	11	25 year	13.38	86.17	87.81	87.23	87.93	0.003655	1.53	8.75	7.54	0.45
1	11	50 year	15.78	86.17	88.03	87.34	88.14	0.003120	1.51	10.44	8.04	0.42
1	11	75 year	17.41	86.17	88.17	87.40	88.29	0.002828	1.50	11.62	8.37	0.41
1	11	100 year	18.68	86.17	88.28	87.45	88.40	0.002631	1.49	12.55	8.63	0.39
1	11	100 year + cc	22.41	86.17	88.60	87.59	88.71	0.002164	1.45	15.41	9.37	0.36
1	11	1000 year	33.63	86.17	89.52	87.93	89.61	0.001161	1.28	32.68	28.87	0.27
1	10.5	2 year	7.08	85.82	86.94	86.53	87.04	0.004482	1.40	5.04	5.59	0.47
1	10.5	5 year	9.14	85.82	87.19	86.65	87.29	0.003640	1.40	6.51	6.06	0.43
1	10.5	10 year	10.79	85.82	87.38	86.73	87.48	0.003215	1.41	7.67	6.40	0.41
1	10.5	25 year	13.38	85.82	87.65	86.86	87.75	0.002745	1.41	9.50	6.90	0.38
1	10.5	50 year	15.78	85.82	87.89	86.97	87.99	0.002440	1.41	11.18	7.34	0.36
1	10.5	75 year	17.41	85.82	88.04	87.04	88.14	0.002272	1.41	12.34	7.62	0.35
1	10.5	100 year	18.68	85.82	88.16	87.09	88.26	0.002156	1.41	13.25	7.84	0.35
1	10.5	100 year + cc	22.41	85.82	88.50	87.23	88.60	0.001872	1.40	15.98	8.45	0.33
1	10.5	1000 year	33.63	85.82	89.45	87.61	89.54	0.001122	1.33	29.30	20.06	0.26
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	86.94	85.96	86.97	0.001036	0.83	8.52	6.64	0.23
1	10	5 year	9.14	85.25	87.19	86.08	87.23	0.001039	0.89	10.25	7.10	0.24
1	10	10 year	10.79	85.25	87.38	86.16	87.42	0.001032	0.93	11.60	7.44	0.24

HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	10	25 year	13.38	85.25	87.65	86.29	87.70	0.001010	0.98	13.70	7.94	0.24
1	10	50 year	15.78	85.25	87.89	86.40	87.94	0.000983	1.01	15.64	8.38	0.24
1	10	75 year	17.41	85.25	88.04	86.47	88.09	0.000961	1.03	16.96	8.63	0.23
1	10	100 year	18.68	85.25	88.16	86.52	88.21	0.000942	1.04	17.98	8.77	0.23
1	10	100 year + cc	22.41	85.25	88.49	86.66	88.55	0.000892	1.07	20.98	9.14	0.23
1	10	1000 year	33.63	85.25	89.45	87.04	89.51	0.000725	1.12	30.19	9.96	0.20
1	9.5		Culvert									
1	9	2 year	7.08	83.67	85.97		85.98	0.000407	0.60	11.90	7.05	0.15
1	9	5 year	9.14	83.67	86.12		86.15	0.000532	0.70	13.02	7.30	0.17
1	9	10 year	10.79	83.67	86.24		86.27	0.000627	0.78	13.85	7.48	0.18
1	9	25 year	13.38	83.67	86.39		86.43	0.000771	0.89	15.05	7.70	0.20
1	9	50 year	15.78	83.67	86.52		86.57	0.000897	0.98	16.03	7.73	0.22
1	9	75 year	17.41	83.67	86.60		86.66	0.000980	1.04	16.66	7.73	0.23
1	9	100 year	18.68	83.67	86.66		86.72	0.001046	1.09	17.12	7.73	0.23
1	9	100 year + cc	22.41	83.67	86.82		86.90	0.001237	1.22	18.37	7.73	0.25
1	9	1000 year	33.63	83.67	87.22		87.35	0.001814	1.57	21.48	7.73	0.30
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.006345	1.50	4.71	6.58	0.57
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.006268	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.006152	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.005990	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.006016	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.006018	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.005993	2.05	9.34	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.005962	2.20	10.61	9.34	0.60
1	8	1000 year	33.63	84.94	86.88	86.48	87.23	0.006336	2.62	13.97	10.80	0.64
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.24		85.31	0.002776	1.20	5.90	5.14	0.36
1	7	5 year	9.14	83.76	85.40		85.50	0.003154	1.35	6.75	5.22	0.38
1	7	10 year	10.79	83.76	85.52		85.63	0.003391	1.47	7.38	5.80	0.40
1	7	25 year	13.38	83.76	85.68		85.81	0.003742	1.63	8.36	6.38	0.42


HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	7	50 year	15.78	83.76	85.81		85.97	0.004040	1.77	9.22	6.67	0.43
1	7	75 year	17.41	83.76	85.89		86.07	0.004233	1.86	9.78	6.85	0.44
1	7	100 year	18.68	83.76	85.95		86.14	0.004370	1.92	10.21	7.57	0.45
1	7	100 year + cc	22.41	83.76	86.12		86.34	0.004637	2.10	11.55	8.31	0.47
1	7	1000 year	33.63	83.76	86.55		86.86	0.005212	2.53	15.52	10.25	0.52
1	6	2 year	7.08	83.95	85.05		85.17	0.005395	1.56	4.72	5.92	0.51
1	6	5 year	9.14	83.95	85.18		85.34	0.005821	1.74	5.56	6.37	0.54
1	6	10 year	10.79	83.95	85.28		85.46	0.006122	1.87	6.20	6.64	0.56
1	6	25 year	13.38	83.95	85.42		85.63	0.006516	2.06	7.12	7.07	0.59
1	6	50 year	15.78	83.95	85.53		85.77	0.006739	2.21	7.94	7.52	0.60
1	6	75 year	17.41	83.95	85.60		85.86	0.006878	2.31	8.48	7.80	0.62
1	6	100 year	18.68	83.95	85.65		85.93	0.006979	2.39	8.90	8.02	0.62
1	6	100 year + cc	22.41	83.95	85.80		86.12	0.007256	2.59	10.10	8.60	0.65
1	6	1000 year	33.63	83.95	86.16		86.62	0.007925	3.10	13.52	10.08	0.70
1	5	2 year	7.08	83.93	84.82		84.97	0.007056	1.68	4.48	6.43	0.59
1	5	5 year	9.14	83.93	84.94		85.12	0.007827	1.90	5.22	6.82	0.63
1	5	10 year	10.79	83.93	85.02		85.23	0.008203	2.05	5.78	7.30	0.65
1	5	25 year	13.38	83.93	85.13		85.38	0.008837	2.28	6.62	7.94	0.69
1	5	50 year	15.78	83.93	85.22		85.52	0.009392	2.48	7.35	8.46	0.72
1	5	75 year	17.41	83.93	85.27	85.07	85.60	0.009783	2.60	7.82	8.79	0.74
1	5	100 year	18.68	83.93	85.31	85.12	85.66	0.010088	2.70	8.18	9.02	0.75
1	5	100 year + cc	22.41	83.93	85.42	85.27	85.84	0.010895	2.96	9.19	9.49	0.79
1	5	1000 year	33.63	83.93	85.68	85.63	86.31	0.013340	3.66	11.78	10.46	0.90
1	4	2 year	7.08	83.83	84.62		84.74	0.007425	1.54	4.59	6.89	0.60
1	4	5 year	9.14	83.83	84.73		84.88	0.007786	1.70	5.38	7.14	0.63
1	4	10 year	10.79	83.83	84.81		84.98	0.008001	1.81	5.96	7.31	0.64
1	4	25 year	13.38	83.83	84.93		85.13	0.008295	1.96	6.82	7.56	0.66
1	4	50 year	15.78	83.83	85.03		85.25	0.008445	2.09	7.59	8.29	0.67
1	4	75 year	17.41	83.83	85.09		85.33	0.008560	2.17	8.10	8.75	0.68
1	4	100 year	18.68	83.83	85.13		85.38	0.008646	2.23	8.50	9.09	0.69
1	4	100 year + cc	22.41	83.83	85.26		85.54	0.008816	2.38	9.69	9.88	0.71
1	4	1000 year	33.63	83.83	85.58		85.96	0.009055	2.74	13.06	10.82	0.74


HEC-RAS Plan: Block35.5 (3) River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	3	2 year	7.08	83.63	84.40		84.51	0.006761	1.44	4.91	7.81	0.58
1	3	5 year	9.14	83.63	84.52		84.64	0.006665	1.56	5.86	8.15	0.59
1	3	10 year	10.79	83.63	84.61		84.74	0.006609	1.64	6.59	8.41	0.59
1	3	25 year	13.38	83.63	84.73		84.89	0.006617	1.75	7.64	8.76	0.60
1	3	50 year	15.78	83.63	84.83		85.01	0.006651	1.85	8.55	9.06	0.61
1	3	75 year	17.41	83.63	84.90		85.08	0.006631	1.91	9.14	9.36	0.61
1	3	100 year	18.68	83.63	84.94		85.14	0.006623	1.95	9.59	9.59	0.61
1	3	100 year + cc	22.41	83.63	85.08		85.29	0.006569	2.07	10.91	10.21	0.62
1	3	1000 year	33.63	83.63	85.43		85.70	0.006388	2.34	14.77	11.80	0.63
1	2	2 year	7.08	83.22	84.13		84.23	0.006341	1.40	5.05	7.47	0.54
1	2	5 year	9.14	83.22	84.24		84.36	0.006633	1.56	5.87	7.50	0.56
1	2	10 year	10.79	83.22	84.32		84.46	0.006837	1.67	6.47	7.53	0.57
1	2	25 year	13.38	83.22	84.43		84.60	0.007066	1.82	7.35	7.78	0.59
1	2	50 year	15.78	83.22	84.53		84.72	0.007303	1.96	8.10	8.06	0.61
1	2	75 year	17.41	83.22	84.59		84.80	0.007460	2.04	8.59	8.24	0.62
1	2	100 year	18.68	83.22	84.63		84.86	0.007562	2.11	8.97	8.38	0.62
1	2	100 year + cc	22.41	83.22	84.76		85.02	0.007908	2.28	10.02	8.74	0.64
1	2	1000 year	33.63	83.22	85.08		85.45	0.008484	2.72	13.02	10.01	0.68
1	1	2 year	7.08	83.32	83.98	83.83	84.10	0.008901	1.55	4.56	7.87	0.65
1	1	5 year	9.14	83.32	84.08	83.91	84.23	0.008907	1.70	5.37	7.92	0.66
1	1	10 year	10.79	83.32	84.15	83.97	84.32	0.008903	1.81	5.98	7.96	0.66
1	1	25 year	13.38	83.32	84.26	84.06	84.46	0.008901	1.95	6.86	8.09	0.67
1	1	50 year	15.78	83.32	84.35	84.14	84.58	0.008904	2.08	7.60	8.38	0.68
1	1	75 year	17.41	83.32	84.41	84.19	84.65	0.008902	2.16	8.09	8.59	0.69
1	1	100 year	18.68	83.32	84.46	84.23	84.71	0.008902	2.22	8.46	8.74	0.69
1	1	100 year + cc	22.41	83.32	84.57	84.33	84.87	0.008914	2.39	9.53	9.18	0.71
1	1	1000 year	33.63	83.32	84.89	84.63	85.29	0.008904	2.81	12.61	10.32	0.74

Hunsworth Beck 1st Oct Plan: Blockage at 35.5 02/10/2015

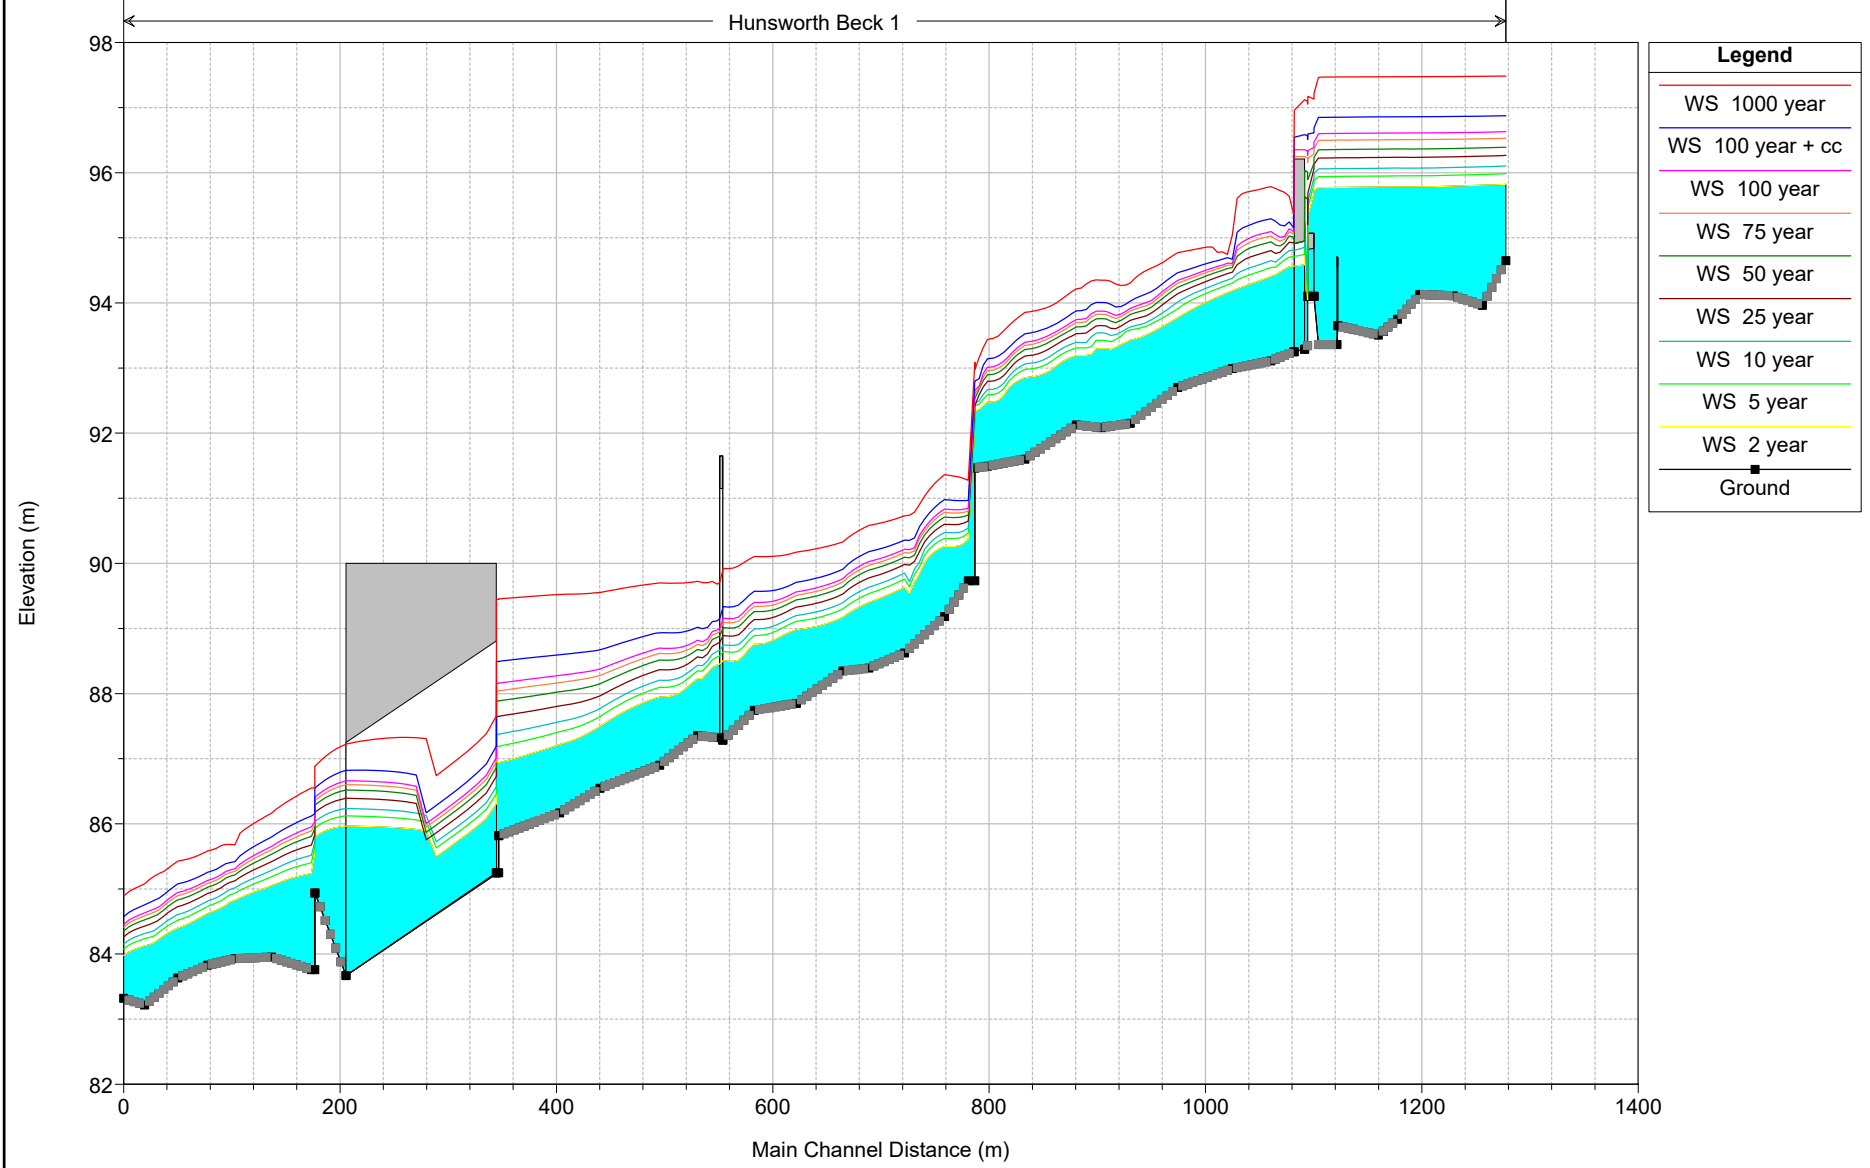


Hunsworth Beck 1st Oct Plan: Blockage at 35.5 02/10/2015  
XS08

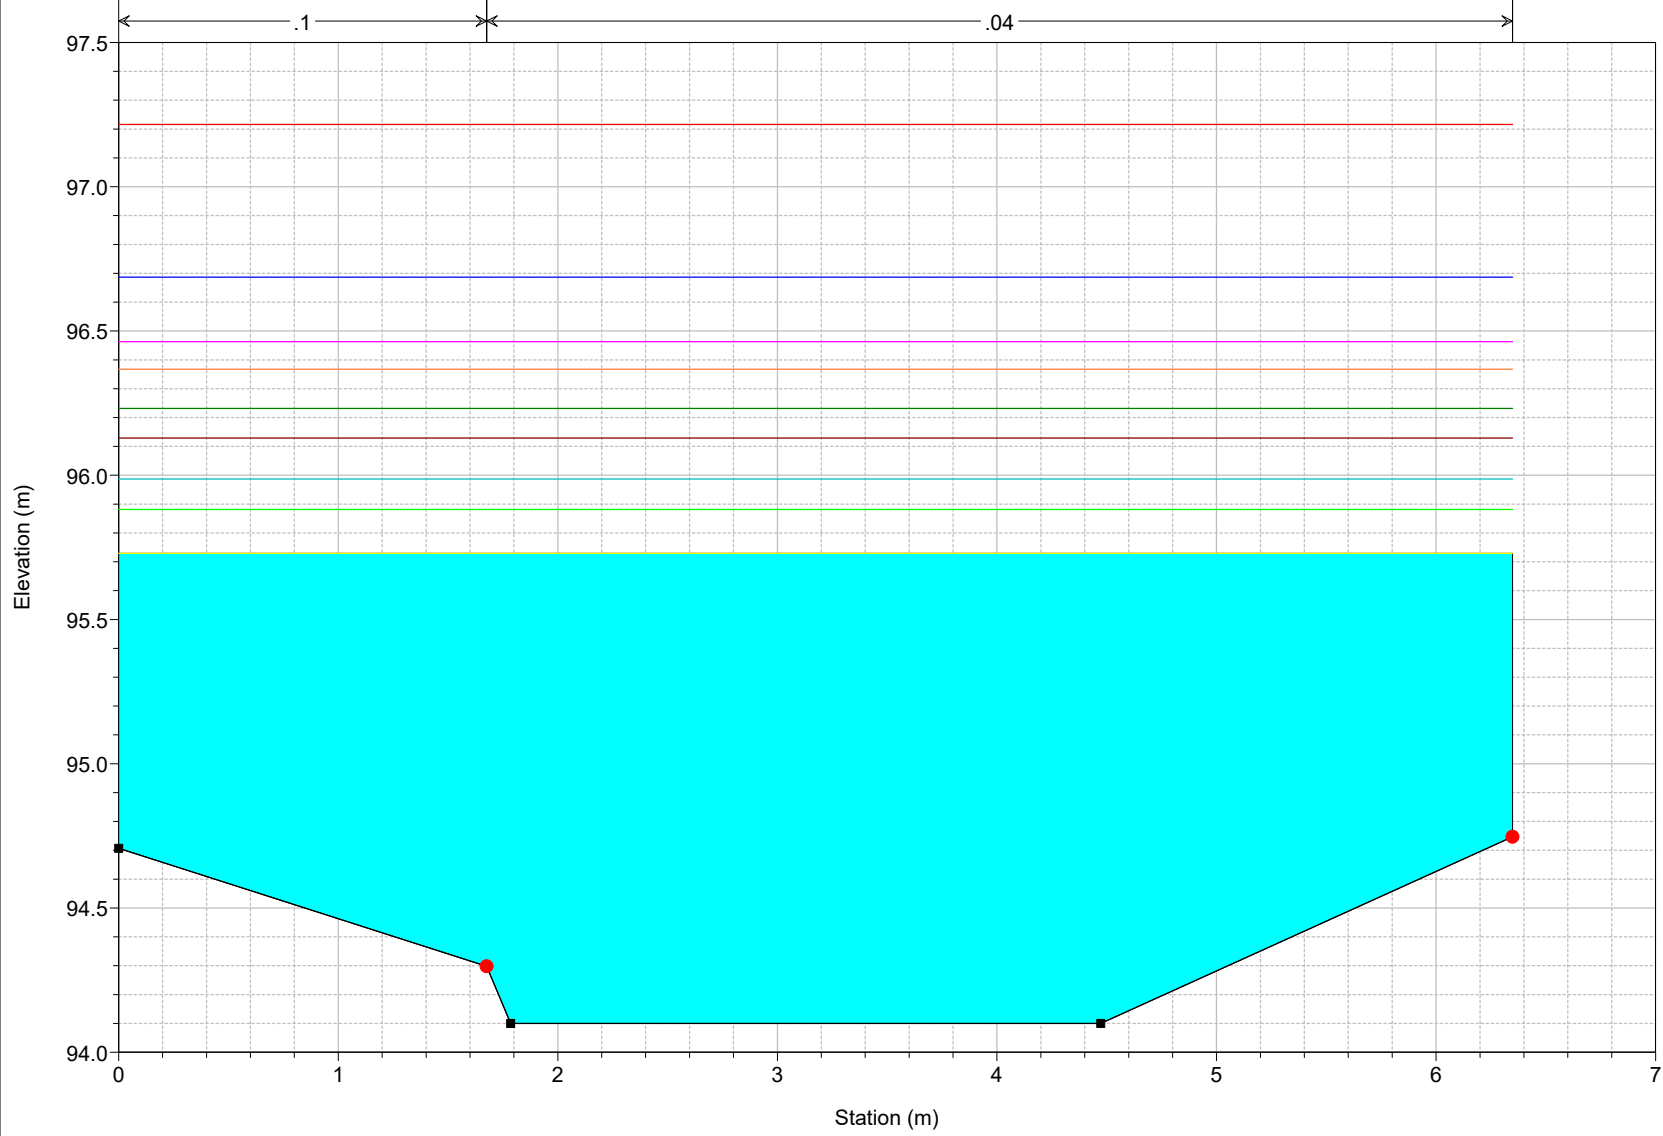


Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

Hunsworth Beck 1st Oct Plan: Blockage at 35.5 02/10/2015  
XS14

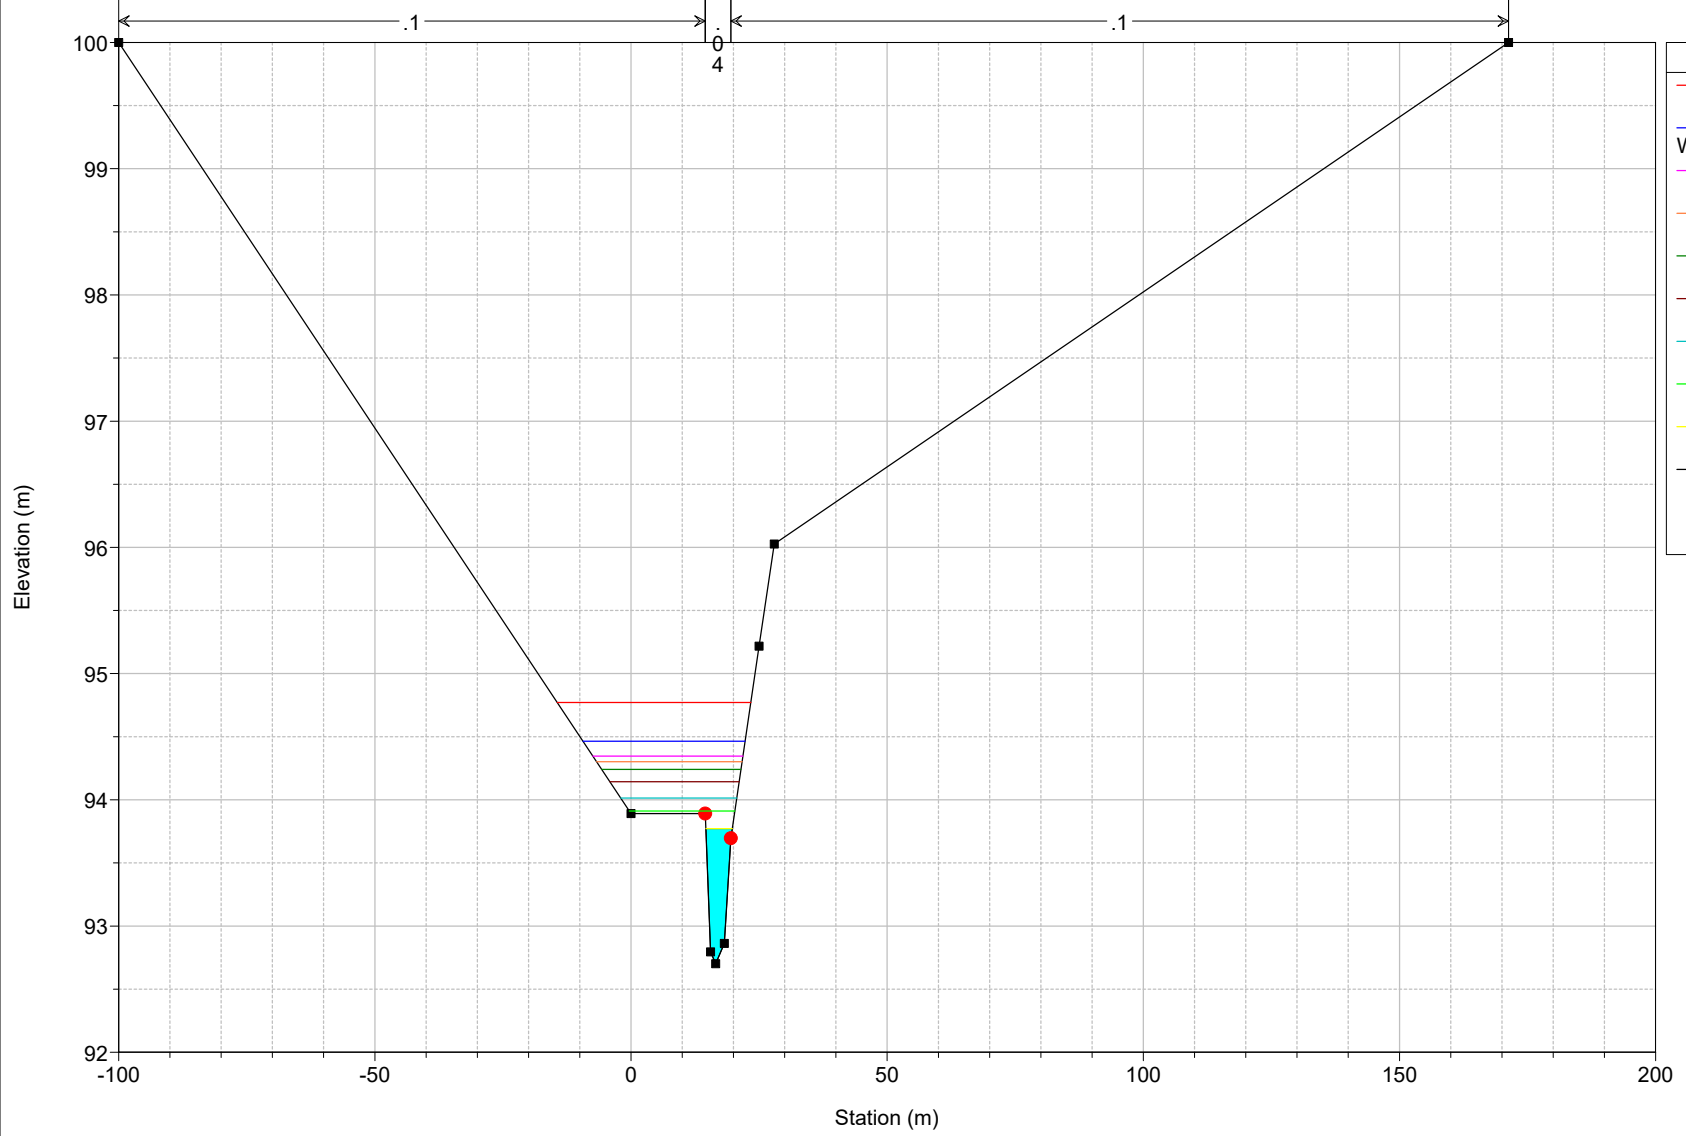


Legend	
WS 1000 year	(Red line)
WS 100 year + cc	(Blue line)
WS 100 year	(Magenta line)
WS 75 year	(Red line)
WS 50 year	(Dark Green line)
WS 25 year	(Orange line)
WS 10 year	(Cyan line)
WS 5 year	(Green line)
WS 2 year	(Yellow line)
Ground	(Black square)
Bank Sta	(Red circle)

Hunsworth Beck 1st Oct Plan: Blockage at 35.5 02/10/2015  
XS22

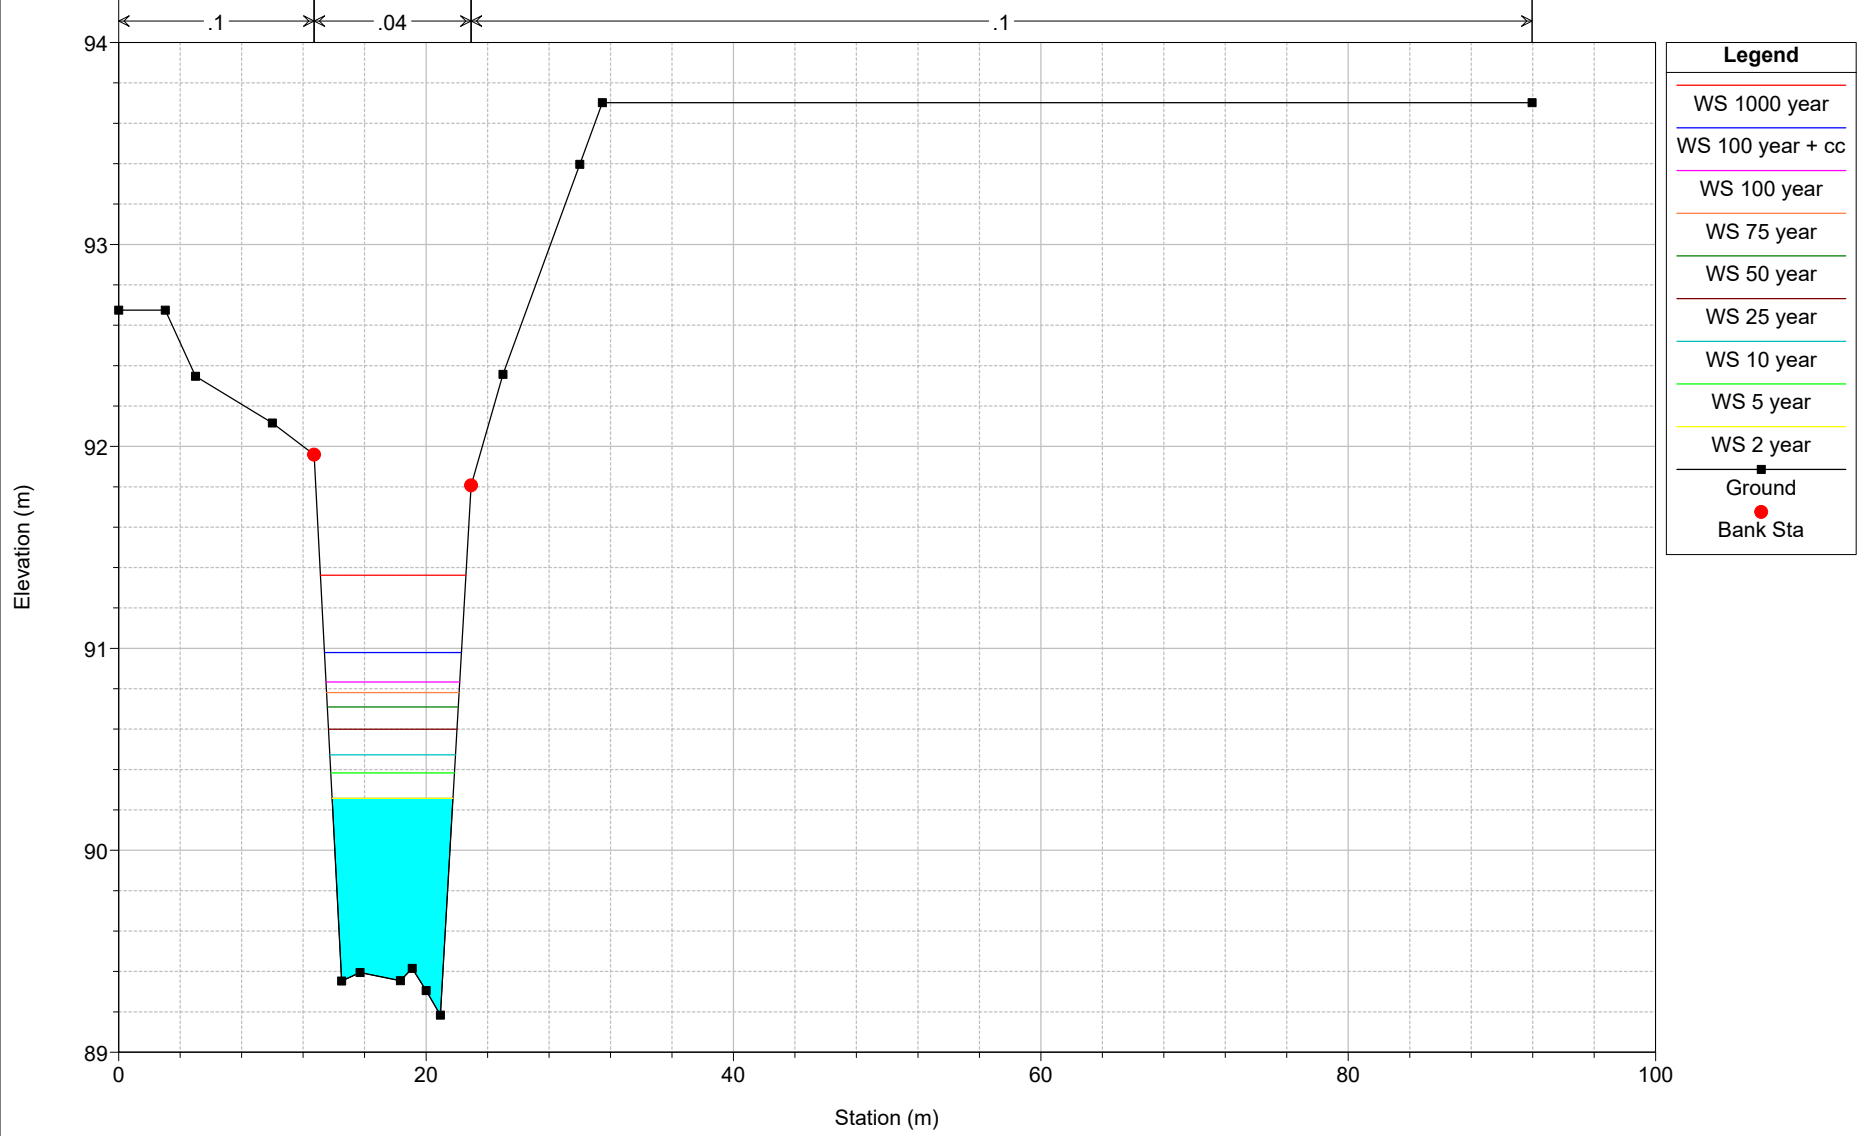

Hunsworth Beck 1st Oct Plan: Blockage at 35.5 02/10/2015  
XS 31

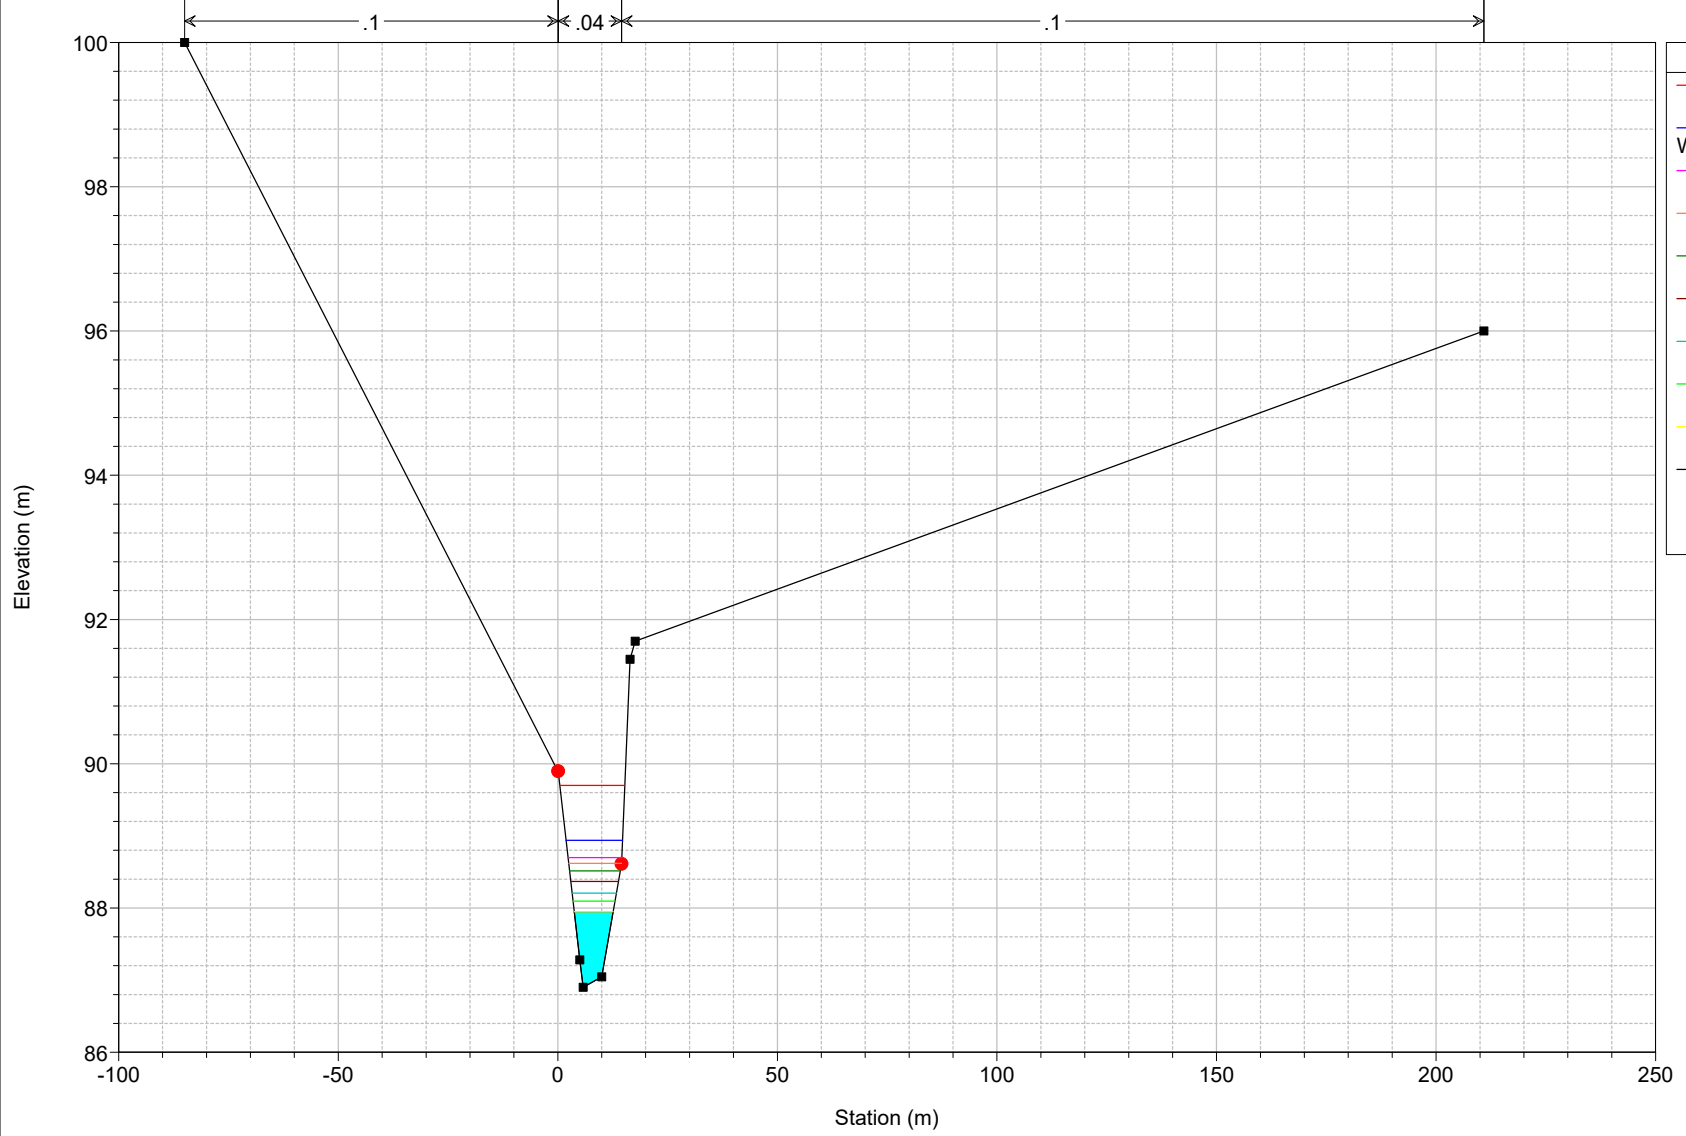

Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

## 50% Blockage at Stone Arch Culvert (XS33.5) Results

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	96.40	95.25	96.41	0.000163	0.41	36.66	54.84	0.11
1	43	5 year	9.14	94.65	96.59	95.35	96.60	0.000156	0.43	47.99	63.29	0.11
1	43	10 year	10.79	94.65	96.73	95.42	96.73	0.000152	0.45	56.74	69.12	0.11
1	43	25 year	13.38	94.65	96.87	95.55	96.88	0.000163	0.49	67.15	75.46	0.11
1	43	50 year	15.78	94.65	97.03	95.65	97.04	0.000156	0.50	79.78	82.51	0.11
1	43	75 year	17.41	94.65	97.13	95.70	97.14	0.000150	0.51	88.68	87.13	0.11
1	43	100 year	18.68	94.65	97.20	95.74	97.21	0.000149	0.52	94.86	90.20	0.11
1	43	100 year + cc	22.41	94.65	97.40	95.84	97.41	0.000142	0.53	113.88	99.05	0.11
1	43	1000 year	33.63	94.65	97.95	96.07	97.96	0.000120	0.56	174.29	123.02	0.10
1	42	2 year	7.08	93.96	96.40	94.74	96.40	0.000116	0.37	41.26	60.77	0.08
1	42	5 year	9.14	93.96	96.59	94.85	96.60	0.000117	0.40	53.81	70.00	0.09
1	42	10 year	10.79	93.96	96.72	94.94	96.73	0.000119	0.42	63.49	76.36	0.09
1	42	25 year	13.38	93.96	96.87	95.06	96.87	0.000131	0.46	74.96	83.27	0.09
1	42	50 year	15.78	93.96	97.03	95.17	97.03	0.000128	0.47	88.91	90.97	0.09
1	42	75 year	17.41	93.96	97.13	95.23	97.14	0.000124	0.48	98.72	96.02	0.09
1	42	100 year	18.68	93.96	97.20	95.29	97.21	0.000124	0.48	105.54	99.37	0.09
1	42	100 year + cc	22.41	93.96	97.40	95.42	97.41	0.000120	0.50	126.50	109.04	0.09
1	42	1000 year	33.63	93.96	97.95	95.92	97.95	0.000104	0.52	193.02	135.23	0.09
1	41	2 year	7.08	94.11	96.40		96.40	0.000068	0.28	63.09	79.83	0.07
1	41	5 year	9.14	94.11	96.59		96.59	0.000067	0.30	79.30	89.08	0.07
1	41	10 year	10.79	94.11	96.72		96.72	0.000068	0.31	91.51	95.45	0.07
1	41	25 year	13.38	94.11	96.87		96.87	0.000075	0.34	105.72	102.37	0.07
1	41	50 year	15.78	94.11	97.03		97.03	0.000073	0.35	122.73	110.08	0.07
1	41	75 year	17.41	94.11	97.13		97.13	0.000072	0.36	134.55	115.14	0.07
1	41	100 year	18.68	94.11	97.20		97.20	0.000072	0.37	142.70	118.50	0.07
1	41	100 year + cc	22.41	94.11	97.40		97.41	0.000071	0.38	167.51	128.19	0.07
1	41	1000 year	33.63	94.11	97.95		97.95	0.000064	0.41	244.45	154.41	0.07
1	40	2 year	7.08	94.13	96.40		96.40	0.000075	0.31	61.92	70.34	0.07
1	40	5 year	9.14	94.13	96.59		96.59	0.000077	0.34	76.13	77.80	0.07
1	40	10 year	10.79	94.13	96.72		96.72	0.000079	0.36	86.76	82.94	0.08
1	40	25 year	13.38	94.13	96.86		96.87	0.000089	0.39	99.04	88.50	0.08
1	40	50 year	15.78	94.13	97.02		97.03	0.000089	0.41	113.72	94.73	0.08



HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36.55		Bridge									
1	36.5	2 year	7.08	93.36	96.39		96.40	0.000022	0.19	106.04	101.57	0.04
1	36.5	5 year	9.14	93.36	96.59		96.59	0.000024	0.21	126.42	111.03	0.04
1	36.5	10 year	10.79	93.36	96.72		96.72	0.000026	0.22	141.52	117.55	0.04
1	36.5	25 year	13.38	93.36	96.86		96.86	0.000030	0.25	158.85	124.62	0.05
1	36.5	50 year	15.78	93.36	97.02		97.02	0.000032	0.27	179.43	132.52	0.05
1	36.5	75 year	17.41	93.36	97.13		97.13	0.000032	0.27	193.60	137.69	0.05
1	36.5	100 year	18.68	93.36	97.20		97.20	0.000033	0.28	203.33	141.13	0.05
1	36.5	100 year + cc	22.41	93.36	97.40		97.40	0.000034	0.30	232.70	151.06	0.05
1	36.5	1000 year	33.63	93.36	97.94		97.94	0.000035	0.33	322.29	177.94	0.05
1	36	2 year	7.08	93.36	96.38	94.22	96.39	0.000221	0.53	15.77	6.35	0.10
1	36	5 year	9.14	93.36	96.57	94.36	96.58	0.000304	0.63	16.94	6.35	0.12
1	36	10 year	10.79	93.36	96.69	94.46	96.72	0.000375	0.72	17.75	6.35	0.13
1	36	25 year	13.38	93.36	96.82	94.62	96.86	0.000510	0.85	18.59	6.35	0.15
1	36	50 year	15.78	93.36	96.97	94.75	97.02	0.000621	0.96	19.54	6.35	0.17
1	36	75 year	17.41	93.36	97.07	94.82	97.12	0.000696	1.02	20.16	6.35	0.18
1	36	100 year	18.68	93.36	97.14	94.87	97.19	0.000760	1.08	20.56	6.35	0.19
1	36	100 year + cc	22.41	93.36	97.32	95.01	97.39	0.000947	1.23	21.73	6.35	0.21
1	36	1000 year	33.63	93.36	97.80	95.39	97.93	0.001509	1.62	24.81	6.35	0.25
1	35.5		Bridge									
1	35	2 year	7.08	93.40	96.37	94.29	96.38	0.000406	0.66	16.24	11.07	0.13
1	35	5 year	9.14	93.40	96.55	94.46	96.57	0.000515	0.78	18.26	11.07	0.14
1	35	10 year	10.79	93.40	96.67	94.58	96.70	0.000602	0.87	19.63	11.07	0.16
1	35	25 year	13.38	93.40	96.80	94.75	96.84	0.000781	1.01	21.03	11.07	0.18
1	35	50 year	15.78	93.40	96.95	94.94	96.99	0.000901	1.12	22.66	11.07	0.19
1	35	75 year	17.41	93.40	97.04	95.03	97.10	0.000975	1.19	23.72	11.07	0.20
1	35	100 year	18.68	93.40	97.10	95.10	97.16	0.001043	1.24	24.41	11.07	0.21
1	35	100 year + cc	22.41	93.40	97.28	95.34	97.36	0.001225	1.39	26.39	11.07	0.23
1	35	1000 year	33.63	93.40	97.76	95.95	97.88	0.001699	1.77	31.68	11.07	0.28
1	34	2 year	7.08	93.29	96.37	94.01	96.38	0.000287	0.53	16.02	8.40	0.10

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	34	5 year	9.14	93.29	96.55	94.15	96.57	0.000388	0.63	17.55	8.40	0.12
1	34	10 year	10.79	93.29	96.67	94.25	96.70	0.000473	0.71	18.59	8.40	0.13
1	34	25 year	13.38	93.29	96.80	94.39	96.83	0.000637	0.84	19.66	8.40	0.15
1	34	50 year	15.78	93.29	96.95	94.52	96.99	0.000767	0.94	20.89	8.40	0.16
1	34	75 year	17.41	93.29	97.04	94.61	97.09	0.000853	1.00	21.69	8.40	0.17
1	34	100 year	18.68	93.29	97.10	94.73	97.15	0.000927	1.05	22.21	8.40	0.18
1	34	100 year + cc	22.41	93.29	97.28	94.90	97.35	0.001140	1.19	23.70	8.40	0.19
1	34	1000 year	33.63	93.29	97.75	95.38	97.86	0.001758	1.55	27.68	8.40	0.24
1	33.5		Culvert									
1	33	2 year	7.08	93.25	94.57		94.69	0.004021	1.54	4.91	4.05	0.43
1	33	5 year	9.14	93.25	94.71		94.87	0.004871	1.78	5.51	4.13	0.47
1	33	10 year	10.79	93.25	94.81		95.00	0.005633	1.98	5.90	4.17	0.51
1	33	25 year	13.38	93.25	94.93		95.18	0.006942	2.27	6.40	4.23	0.56
1	33	50 year	15.78	93.25	95.01		95.33	0.008355	2.55	6.76	4.27	0.62
1	33	75 year	17.41	93.25	95.06		95.43	0.009312	2.72	6.99	4.30	0.65
1	33	100 year	18.68	93.25	95.10		95.51	0.010134	2.86	7.14	4.32	0.68
1	33	100 year + cc	22.41	93.25	95.16		95.71	0.013297	3.33	7.39	4.34	0.77
1	33	1000 year	33.63	93.25	95.37	95.37	96.36	0.020997	4.48	8.38	4.80	0.99
1	32	2 year	7.08	93.11	94.40	94.06	94.56	0.006312	1.80	4.77	12.08	0.55
1	32	5 year	9.14	93.11	94.54	94.22	94.72	0.006348	1.96	7.21	20.25	0.56
1	32	10 year	10.79	93.11	94.65	94.33	94.83	0.006000	2.01	9.44	22.83	0.55
1	32	25 year	13.38	93.11	94.80		94.97	0.005269	2.02	13.28	26.70	0.53
1	32	50 year	15.78	93.11	94.94		95.09	0.004642	2.01	17.11	30.06	0.50
1	32	75 year	17.41	93.11	95.03		95.17	0.004228	1.99	19.92	32.32	0.48
1	32	100 year	18.68	93.11	95.10		95.23	0.003952	1.97	22.15	33.99	0.47
1	32	100 year + cc	22.41	93.11	95.29		95.40	0.003202	1.90	29.36	38.92	0.43
1	32	1000 year	33.63	93.11	95.79		95.87	0.002107	1.79	51.57	51.22	0.36
1	31	2 year	7.08	92.99	94.18		94.34	0.006722	1.75	4.39	7.12	0.58
1	31	5 year	9.14	92.99	94.30		94.50	0.007279	1.97	5.29	7.77	0.61
1	31	10 year	10.79	92.99	94.38		94.61	0.007920	2.15	5.88	8.18	0.64
1	31	25 year	13.38	92.99	94.47	94.28	94.76	0.009133	2.43	6.67	8.69	0.70

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	31	50 year	15.78	92.99	94.54	94.40	94.89	0.010335	2.69	7.29	9.08	0.75
1	31	75 year	17.41	92.99	94.58	94.47	94.97	0.011227	2.86	7.66	9.30	0.79
1	31	100 year	18.68	92.99	94.61	94.52	95.04	0.012045	3.00	7.90	9.44	0.82
1	31	100 year + cc	22.41	92.99	94.67	94.67	95.22	0.014627	3.41	8.51	9.78	0.91
1	31	1000 year	33.63	92.99	95.04	95.04	95.71	0.013633	3.84	12.55	11.82	0.91
1	30	2 year	7.08	92.70	93.77		93.95	0.009458	1.87	3.79	5.17	0.68
1	30	5 year	9.14	92.70	93.91	93.70	94.12	0.009267	2.04	4.85	20.61	0.69
1	30	10 year	10.79	92.70	94.01	93.79	94.22	0.008300	2.07	7.07	22.67	0.66
1	30	25 year	13.38	92.70	94.14	94.05	94.35	0.007388	2.12	10.17	25.25	0.64
1	30	50 year	15.78	92.70	94.24	94.14	94.45	0.006962	2.18	12.73	27.20	0.63
1	30	75 year	17.41	92.70	94.30	94.19	94.51	0.006718	2.21	14.44	28.42	0.62
1	30	100 year	18.68	92.70	94.35	94.23	94.55	0.006582	2.24	15.71	29.31	0.62
1	30	100 year + cc	22.41	92.70	94.46		94.67	0.006299	2.32	19.30	31.66	0.62
1	30	1000 year	33.63	92.70	94.77		94.98	0.005588	2.48	29.98	37.80	0.60
1	29	2 year	7.08	92.15	93.43	93.11	93.55	0.006145	1.61	5.03	7.19	0.55
1	29	5 year	9.14	92.15	93.58	93.25	93.72	0.005497	1.68	7.36	13.72	0.53
1	29	10 year	10.79	92.15	93.63	93.35	93.79	0.006440	1.87	8.02	14.32	0.58
1	29	25 year	13.38	92.15	93.73	93.47	93.93	0.006940	2.06	9.54	15.63	0.61
1	29	50 year	15.78	92.15	93.82	93.60	94.04	0.007199	2.21	10.99	16.79	0.63
1	29	75 year	17.41	92.15	93.88	93.67	94.11	0.007374	2.30	11.93	17.50	0.64
1	29	100 year	18.68	92.15	93.92	93.72	94.16	0.007533	2.37	12.63	18.01	0.65
1	29	100 year + cc	22.41	92.15	94.03	93.83	94.30	0.007856	2.55	14.71	19.45	0.67
1	29	1000 year	33.63	92.15	94.30	94.12	94.66	0.008667	3.00	20.66	23.71	0.72
1	28	2 year	7.08	92.08	93.30	92.74	93.36	0.003580	1.27	8.25	10.30	0.41
1	28	5 year	9.14	92.08	93.43	92.86	93.51	0.003910	1.41	9.60	10.59	0.43
1	28	10 year	10.79	92.08	93.54	92.95	93.59	0.002336	1.16	19.54	31.53	0.34
1	28	25 year	13.38	92.08	93.65	93.04	93.70	0.002391	1.25	23.06	32.86	0.35
1	28	50 year	15.78	92.08	93.76	93.24	93.81	0.002326	1.30	26.59	34.13	0.35
1	28	75 year	17.41	92.08	93.83	93.29	93.88	0.002294	1.33	28.89	34.93	0.35
1	28	100 year	18.68	92.08	93.87	93.33	93.93	0.002273	1.35	30.63	35.53	0.35
1	28	100 year + cc	22.41	92.08	94.01	93.47	94.06	0.002247	1.42	35.43	37.13	0.35
1	28	1000 year	33.63	92.08	94.35	93.62	94.41	0.002189	1.59	48.85	41.26	0.36

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	27	2 year	7.08	92.13	93.19	92.74	93.24	0.002813	1.13	8.57	11.12	0.38
1	27	5 year	9.14	92.13	93.31	92.83	93.38	0.003101	1.27	9.94	11.63	0.41
1	27	10 year	10.79	92.13	93.39	92.90	93.47	0.003316	1.38	10.93	11.99	0.43
1	27	25 year	13.38	92.13	93.53	93.00	93.61	0.003030	1.42	15.59	22.89	0.42
1	27	50 year	15.78	92.13	93.63	93.08	93.72	0.003022	1.50	18.02	24.05	0.42
1	27	75 year	17.41	92.13	93.70	93.14	93.79	0.003023	1.55	19.61	24.77	0.43
1	27	100 year	18.68	92.13	93.75	93.18	93.84	0.003023	1.59	20.83	25.31	0.43
1	27	100 year + cc	22.41	92.13	93.88	93.28	93.98	0.003025	1.69	24.27	26.76	0.43
1	27	1000 year	33.63	92.13	94.22	93.60	94.34	0.003019	1.93	33.92	30.24	0.45
1	26	2 year	7.08	91.60	92.85		92.92	0.003373	1.15	6.14	7.97	0.42
1	26	5 year	9.14	91.60	92.98		93.06	0.003751	1.27	7.18	8.70	0.45
1	26	10 year	10.79	91.60	93.06		93.16	0.004004	1.36	7.95	9.21	0.47
1	26	25 year	13.38	91.60	93.18		93.29	0.004321	1.47	9.10	9.92	0.49
1	26	50 year	15.78	91.60	93.28		93.41	0.004538	1.56	10.13	10.52	0.51
1	26	75 year	17.41	91.60	93.35		93.48	0.004655	1.61	10.81	10.89	0.52
1	26	100 year	18.68	91.60	93.40		93.53	0.004732	1.65	11.33	11.17	0.52
1	26	100 year + cc	22.41	91.60	93.53		93.68	0.004908	1.75	12.83	11.94	0.54
1	26	1000 year	33.63	91.60	93.86		94.05	0.004876	1.97	17.38	16.66	0.55
1	25	2 year	7.08	91.49	92.48		92.57	0.004310	1.36	5.45	7.94	0.48
1	25	5 year	9.14	91.49	92.59		92.71	0.004760	1.53	6.40	8.66	0.51
1	25	10 year	10.79	91.49	92.67		92.81	0.005087	1.65	7.11	9.17	0.53
1	25	25 year	13.38	91.49	92.79		92.96	0.005352	1.80	8.30	9.95	0.55
1	25	50 year	15.78	91.49	92.90		93.08	0.005485	1.93	9.35	10.73	0.57
1	25	75 year	17.41	91.49	92.96		93.16	0.005563	2.01	10.05	11.25	0.57
1	25	100 year	18.68	91.49	93.01		93.22	0.005556	2.06	10.63	11.67	0.58
1	25	100 year + cc	22.41	91.49	93.14		93.38	0.005674	2.22	12.23	12.75	0.59
1	25	1000 year	33.63	91.49	93.44		93.78	0.006416	2.68	16.31	14.77	0.65
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.007987	1.64	4.41	7.71	0.60
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.009451	1.90	5.11	9.46	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.011307	2.14	5.48	10.20	0.73
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.019562	2.75	5.19	9.63	0.95

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	24	50 year	15.78	91.47	92.54	92.54	92.94	0.017446	2.82	6.41	11.84	0.91
1	24	75 year	17.41	91.47	92.62	92.62	93.02	0.016095	2.85	7.35	13.08	0.89
1	24	100 year	18.68	91.47	92.66	92.66	93.07	0.015657	2.90	7.99	13.68	0.88
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.22	0.014298	2.99	9.97	15.28	0.86
1	24	1000 year	33.63	91.47	92.98	93.09	93.62	0.018707	3.75	12.79	16.23	1.01
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.37	90.32	90.58	0.017369	2.03	3.49	6.32	0.87
1	23	5 year	9.14	89.73	90.47	90.41	90.72	0.017267	2.22	4.12	6.36	0.88
1	23	10 year	10.79	89.73	90.54	90.48	90.82	0.017209	2.35	4.60	6.40	0.88
1	23	25 year	13.38	89.73	90.65	90.59	90.97	0.017260	2.53	5.29	6.44	0.89
1	23	50 year	15.78	89.73	90.74	90.68	91.11	0.017219	2.68	5.90	6.48	0.90
1	23	75 year	17.41	89.73	90.80	90.74	91.19	0.017297	2.77	6.29	6.51	0.90
1	23	100 year	18.68	89.73	90.85	90.78	91.26	0.017406	2.84	6.58	6.52	0.90
1	23	100 year + cc	22.41	89.73	90.97	90.90	91.44	0.017895	3.04	7.36	6.58	0.92
1	23	1000 year	33.63	89.73	91.28	91.24	91.93	0.019522	3.57	9.42	6.71	0.96
1	22	2 year	7.08	89.18	90.26		90.32	0.002860	1.09	6.51	7.86	0.38
1	22	5 year	9.14	89.18	90.38		90.46	0.003102	1.22	7.51	8.04	0.40
1	22	10 year	10.79	89.18	90.47		90.56	0.003277	1.31	8.24	8.17	0.42
1	22	25 year	13.38	89.18	90.60		90.71	0.003532	1.44	9.29	8.36	0.44
1	22	50 year	15.78	89.18	90.71		90.83	0.003710	1.54	10.22	8.52	0.45
1	22	75 year	17.41	89.18	90.78		90.91	0.003811	1.61	10.83	8.62	0.46
1	22	100 year	18.68	89.18	90.83		90.97	0.003892	1.66	11.28	8.70	0.46
1	22	100 year + cc	22.41	89.18	90.98		91.14	0.004091	1.78	12.57	8.91	0.48
1	22	1000 year	33.63	89.18	91.36		91.59	0.004533	2.09	16.08	9.46	0.51
1	21	2 year	7.08	88.62	89.63	89.44	89.79	0.008839	1.74	4.07	5.71	0.66
1	21	5 year	9.14	88.62	89.76	89.55	89.94	0.009048	1.90	4.81	5.95	0.67
1	21	10 year	10.79	88.62	89.85	89.63	90.06	0.009241	2.01	5.36	6.12	0.69
1	21	25 year	13.38	88.62	89.98		90.22	0.009422	2.16	6.19	6.37	0.70
1	21	50 year	15.78	88.62	90.09		90.36	0.009572	2.28	6.92	6.58	0.71
1	21	75 year	17.41	88.62	90.17		90.45	0.009674	2.36	7.39	6.71	0.72
1	21	100 year	18.68	88.62	90.22		90.51	0.009795	2.42	7.73	6.81	0.72

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	21	100 year + cc	22.41	88.62	90.36		90.69	0.010089	2.57	8.71	7.07	0.74
1	21	1000 year	33.63	88.62	90.73		91.17	0.010554	2.93	11.49	7.78	0.77
1	20	2 year	7.08	88.39	89.40		89.51	0.006639	1.49	4.74	6.97	0.58
1	20	5 year	9.14	88.39	89.54		89.67	0.006398	1.60	5.71	7.29	0.58
1	20	10 year	10.79	88.39	89.63		89.78	0.006252	1.67	6.45	7.53	0.58
1	20	25 year	13.38	88.39	89.78		89.94	0.006099	1.77	7.55	7.87	0.58
1	20	50 year	15.78	88.39	89.90		90.07	0.006032	1.86	8.50	8.15	0.58
1	20	75 year	17.41	88.39	89.97		90.16	0.006014	1.91	9.12	8.33	0.58
1	20	100 year	18.68	88.39	90.03		90.22	0.006008	1.95	9.58	8.46	0.58
1	20	100 year + cc	22.41	88.39	90.18		90.40	0.005993	2.05	10.91	8.83	0.59
1	20	1000 year	33.63	88.39	90.58		90.85	0.005909	2.30	14.65	9.78	0.60
1	19	2 year	7.08	88.35	89.17		89.33	0.009492	1.73	4.09	5.95	0.67
1	19	5 year	9.14	88.35	89.30		89.48	0.009526	1.88	4.85	6.16	0.68
1	19	10 year	10.79	88.35	89.40		89.60	0.009629	1.98	5.46	6.47	0.69
1	19	25 year	13.38	88.35	89.53		89.76	0.009765	2.11	6.35	6.91	0.70
1	19	50 year	15.78	88.35	89.64		89.89	0.009845	2.21	7.14	7.28	0.71
1	19	75 year	17.41	88.35	89.71		89.98	0.009882	2.27	7.67	7.51	0.72
1	19	100 year	18.68	88.35	89.77		90.04	0.009901	2.32	8.07	7.68	0.72
1	19	100 year + cc	22.41	88.35	89.91		90.21	0.009892	2.43	9.22	8.15	0.73
1	19	1000 year	33.63	88.35	90.33		90.68	0.008866	2.61	12.87	9.33	0.71
1	18	2 year	7.08	87.85	88.98		89.05	0.003014	1.14	6.19	7.31	0.40
1	18	5 year	9.14	87.85	89.11		89.19	0.003375	1.28	7.15	7.75	0.42
1	18	10 year	10.79	87.85	89.20		89.30	0.003614	1.37	7.87	8.07	0.44
1	18	25 year	13.38	87.85	89.33		89.44	0.003923	1.50	8.94	8.51	0.47
1	18	50 year	15.78	87.85	89.44		89.57	0.004138	1.59	9.90	8.89	0.48
1	18	75 year	17.41	87.85	89.51		89.65	0.004255	1.65	10.53	9.13	0.49
1	18	100 year	18.68	87.85	89.56		89.71	0.004331	1.70	11.02	9.32	0.50
1	18	100 year + cc	22.41	87.85	89.71		89.87	0.004494	1.80	12.43	9.82	0.51
1	18	1000 year	33.63	87.85	90.17		90.36	0.004313	1.93	17.42	12.05	0.51
1	17	2 year	7.08	87.74	88.76		88.81	0.003069	1.02	6.93	10.51	0.40
1	17	5 year	9.14	87.74	88.89		88.95	0.002991	1.08	8.44	11.49	0.40

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	17	10 year	10.79	87.74	88.99		89.06	0.002858	1.12	9.62	11.99	0.40
1	17	25 year	13.38	87.74	89.14		89.21	0.002678	1.17	11.40	12.59	0.39
1	17	50 year	15.78	87.74	89.26		89.34	0.002565	1.22	12.96	13.10	0.39
1	17	75 year	17.41	87.74	89.34		89.42	0.002490	1.24	14.02	13.43	0.39
1	17	100 year	18.68	87.74	89.40		89.48	0.002433	1.26	14.85	13.68	0.39
1	17	100 year + cc	22.41	87.74	89.57		89.66	0.002274	1.30	17.24	14.39	0.38
1	17	1000 year	33.63	87.74	90.11		90.20	0.001534	1.33	25.52	16.53	0.33
1	16	2 year	7.08	87.29	88.50	87.96	88.56	0.002333	1.06	6.65	7.13	0.35
1	16	5 year	9.14	87.29	88.65	88.07	88.72	0.002575	1.19	7.68	7.44	0.37
1	16	10 year	10.79	87.29	88.75	88.14	88.83	0.002739	1.28	8.45	7.66	0.39
1	16	25 year	13.38	87.29	88.89	88.25	88.99	0.002952	1.40	9.58	7.98	0.41
1	16	50 year	15.78	87.29	89.01	88.35	89.13	0.003114	1.49	10.58	8.25	0.42
1	16	75 year	17.41	87.29	89.10	88.41	89.22	0.003182	1.55	11.26	8.43	0.43
1	16	100 year	18.68	87.29	89.16	88.45	89.29	0.003225	1.59	11.79	8.57	0.43
1	16	100 year + cc	22.41	87.29	89.34	88.58	89.48	0.003296	1.68	13.35	9.00	0.44
1	16	1000 year	33.63	87.29	89.92	88.91	90.08	0.002833	1.77	19.05	10.52	0.42
1	15.5		Bridge									
1	15	2 year	7.08	87.32	88.44		88.54	0.004180	1.38	5.14	5.40	0.45
1	15	5 year	9.14	87.32	88.56		88.69	0.004917	1.57	5.81	5.57	0.49
1	15	10 year	10.79	87.32	88.65		88.80	0.005475	1.72	6.29	5.69	0.52
1	15	25 year	13.38	87.32	88.77		88.95	0.006314	1.92	6.97	5.86	0.56
1	15	50 year	15.78	87.32	88.86		89.09	0.007051	2.09	7.54	6.00	0.60
1	15	75 year	17.41	87.32	88.93		89.17	0.007457	2.20	7.93	6.08	0.61
1	15	100 year	18.68	87.32	88.98		89.24	0.007740	2.27	8.23	6.15	0.63
1	15	100 year + cc	22.41	87.32	89.12		89.43	0.008395	2.46	9.11	6.34	0.66
1	15	1000 year	33.63	87.32	89.68		90.03	0.007296	2.61	12.89	7.10	0.62
1	14	2 year	7.08	87.36	88.23		88.36	0.008396	1.59	4.45	7.23	0.65
1	14	5 year	9.14	87.36	88.35		88.50	0.008287	1.71	5.34	7.66	0.65
1	14	10 year	10.79	87.36	88.43		88.60	0.008199	1.79	6.03	7.98	0.66
1	14	25 year	13.38	87.36	88.56		88.74	0.008000	1.89	7.08	8.45	0.66
1	14	50 year	15.78	87.36	88.68		88.87	0.007703	1.95	8.07	8.86	0.65

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	14	75 year	17.41	87.36	88.75		88.96	0.007448	1.99	8.77	9.14	0.65
1	14	100 year	18.68	87.36	88.82		89.02	0.007143	2.00	9.36	9.37	0.64
1	14	100 year + cc	22.41	87.36	89.02		89.22	0.006095	1.98	11.31	10.10	0.60
1	14	1000 year	33.63	87.36	89.72		89.88	0.003164	1.74	19.33	12.66	0.45
1	13	2 year	7.08	86.90	87.95		88.01	0.003243	1.11	6.38	8.86	0.42
1	13	5 year	9.14	86.90	88.10		88.17	0.003154	1.18	7.74	9.57	0.42
1	13	10 year	10.79	86.90	88.21		88.28	0.003067	1.22	8.82	10.09	0.42
1	13	25 year	13.38	86.90	88.37		88.45	0.002903	1.27	10.51	10.86	0.41
1	13	50 year	15.78	86.90	88.52		88.60	0.002702	1.30	12.17	11.56	0.40
1	13	75 year	17.41	86.90	88.62		88.70	0.002531	1.30	13.39	12.04	0.39
1	13	100 year	18.68	86.90	88.70		88.79	0.002344	1.30	14.37	12.25	0.38
1	13	100 year + cc	22.41	86.90	88.94		89.02	0.001899	1.29	17.37	12.86	0.35
1	13	1000 year	33.63	86.90	89.70		89.78	0.001064	1.22	27.92	14.82	0.28
1	12	2 year	7.08	86.55	87.49	87.31	87.66	0.009415	1.80	3.92	5.53	0.68
1	12	5 year	9.14	86.55	87.65	87.43	87.83	0.008924	1.90	4.80	5.96	0.68
1	12	10 year	10.79	86.55	87.77	87.52	87.96	0.008347	1.95	5.55	6.30	0.66
1	12	25 year	13.38	86.55	87.97	87.64	88.16	0.007219	1.96	6.84	6.85	0.63
1	12	50 year	15.78	86.55	88.15	87.75	88.34	0.006203	1.94	8.15	7.37	0.59
1	12	75 year	17.41	86.55	88.28	87.82	88.46	0.005570	1.91	9.11	7.71	0.56
1	12	100 year	18.68	86.55	88.38	87.86	88.56	0.005122	1.89	9.90	7.98	0.54
1	12	100 year + cc	22.41	86.55	88.67	88.00	88.84	0.004031	1.81	12.36	8.78	0.49
1	12	1000 year	33.63	86.55	89.55	88.36	89.68	0.002134	1.59	21.15	11.17	0.37
1	11	2 year	7.08	86.17	87.22	86.91	87.33	0.005774	1.51	4.70	6.02	0.54
1	11	5 year	9.14	86.17	87.41	87.02	87.54	0.005024	1.54	5.94	6.58	0.52
1	11	10 year	10.79	86.17	87.57	87.11	87.69	0.004437	1.54	7.00	6.98	0.49
1	11	25 year	13.38	86.17	87.81	87.23	87.93	0.003655	1.53	8.75	7.54	0.45
1	11	50 year	15.78	86.17	88.03	87.34	88.14	0.003120	1.51	10.44	8.04	0.42
1	11	75 year	17.41	86.17	88.17	87.40	88.29	0.002828	1.50	11.62	8.37	0.41
1	11	100 year	18.68	86.17	88.28	87.45	88.40	0.002631	1.49	12.55	8.63	0.39
1	11	100 year + cc	22.41	86.17	88.60	87.59	88.71	0.002164	1.45	15.41	9.37	0.36
1	11	1000 year	33.63	86.17	89.52	87.93	89.61	0.001161	1.28	32.68	28.87	0.27

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	10.5	2 year	7.08	85.82	86.94	86.53	87.04	0.004482	1.40	5.04	5.59	0.47
1	10.5	5 year	9.14	85.82	87.19	86.65	87.29	0.003640	1.40	6.51	6.06	0.43
1	10.5	10 year	10.79	85.82	87.38	86.73	87.48	0.003215	1.41	7.67	6.40	0.41
1	10.5	25 year	13.38	85.82	87.65	86.86	87.75	0.002745	1.41	9.50	6.90	0.38
1	10.5	50 year	15.78	85.82	87.89	86.97	87.99	0.002440	1.41	11.18	7.34	0.36
1	10.5	75 year	17.41	85.82	88.04	87.04	88.14	0.002272	1.41	12.34	7.62	0.35
1	10.5	100 year	18.68	85.82	88.16	87.09	88.26	0.002156	1.41	13.25	7.84	0.35
1	10.5	100 year + cc	22.41	85.82	88.50	87.23	88.60	0.001872	1.40	15.98	8.45	0.33
1	10.5	1000 year	33.63	85.82	89.45	87.61	89.54	0.001122	1.33	29.30	20.06	0.26
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	86.94	85.96	86.97	0.001036	0.83	8.52	6.64	0.23
1	10	5 year	9.14	85.25	87.19	86.08	87.23	0.001039	0.89	10.25	7.10	0.24
1	10	10 year	10.79	85.25	87.38	86.16	87.42	0.001032	0.93	11.60	7.44	0.24
1	10	25 year	13.38	85.25	87.65	86.29	87.70	0.001010	0.98	13.70	7.94	0.24
1	10	50 year	15.78	85.25	87.89	86.40	87.94	0.000983	1.01	15.64	8.38	0.24
1	10	75 year	17.41	85.25	88.04	86.47	88.09	0.000961	1.03	16.96	8.63	0.23
1	10	100 year	18.68	85.25	88.16	86.52	88.21	0.000942	1.04	17.98	8.77	0.23
1	10	100 year + cc	22.41	85.25	88.49	86.66	88.55	0.000892	1.07	20.98	9.14	0.23
1	10	1000 year	33.63	85.25	89.45	87.04	89.51	0.000725	1.12	30.19	9.96	0.20
1	9.5		Culvert									
1	9	2 year	7.08	83.67	85.97		85.98	0.000407	0.60	11.90	7.05	0.15
1	9	5 year	9.14	83.67	86.12		86.15	0.000532	0.70	13.02	7.30	0.17
1	9	10 year	10.79	83.67	86.24		86.27	0.000627	0.78	13.85	7.48	0.18
1	9	25 year	13.38	83.67	86.39		86.43	0.000771	0.89	15.05	7.70	0.20
1	9	50 year	15.78	83.67	86.52		86.57	0.000897	0.98	16.03	7.73	0.22
1	9	75 year	17.41	83.67	86.60		86.66	0.000980	1.04	16.66	7.73	0.23
1	9	100 year	18.68	83.67	86.66		86.72	0.001046	1.09	17.12	7.73	0.23
1	9	100 year + cc	22.41	83.67	86.82		86.90	0.001237	1.22	18.37	7.73	0.25
1	9	1000 year	33.63	83.67	87.22		87.35	0.001814	1.57	21.48	7.73	0.30
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.006345	1.50	4.71	6.58	0.57

HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.006268	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.006152	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.005990	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.006016	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.006018	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.005993	2.05	9.34	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.005962	2.20	10.61	9.34	0.60
1	8	1000 year	33.63	84.94	86.88	86.48	87.23	0.006336	2.62	13.97	10.80	0.64
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.24		85.31	0.002776	1.20	5.90	5.14	0.36
1	7	5 year	9.14	83.76	85.40		85.50	0.003154	1.35	6.75	5.22	0.38
1	7	10 year	10.79	83.76	85.52		85.63	0.003391	1.47	7.38	5.80	0.40
1	7	25 year	13.38	83.76	85.68		85.81	0.003742	1.63	8.36	6.38	0.42
1	7	50 year	15.78	83.76	85.81		85.97	0.004040	1.77	9.22	6.67	0.43
1	7	75 year	17.41	83.76	85.89		86.07	0.004233	1.86	9.78	6.85	0.44
1	7	100 year	18.68	83.76	85.95		86.14	0.004370	1.92	10.21	7.57	0.45
1	7	100 year + cc	22.41	83.76	86.12		86.34	0.004638	2.10	11.54	8.31	0.47
1	7	1000 year	33.63	83.76	86.55		86.86	0.005212	2.53	15.52	10.25	0.52
1	6	2 year	7.08	83.95	85.05		85.17	0.005395	1.56	4.72	5.92	0.51
1	6	5 year	9.14	83.95	85.18		85.34	0.005821	1.74	5.56	6.37	0.54
1	6	10 year	10.79	83.95	85.28		85.46	0.006122	1.87	6.20	6.64	0.56
1	6	25 year	13.38	83.95	85.42		85.63	0.006516	2.06	7.12	7.07	0.59
1	6	50 year	15.78	83.95	85.53		85.77	0.006739	2.21	7.94	7.52	0.60
1	6	75 year	17.41	83.95	85.60		85.86	0.006878	2.31	8.48	7.80	0.62
1	6	100 year	18.68	83.95	85.65		85.93	0.006979	2.39	8.90	8.02	0.62
1	6	100 year + cc	22.41	83.95	85.80		86.12	0.007262	2.59	10.09	8.60	0.65
1	6	1000 year	33.63	83.95	86.16		86.62	0.007925	3.10	13.52	10.08	0.70
1	5	2 year	7.08	83.93	84.82		84.97	0.007056	1.68	4.48	6.43	0.59
1	5	5 year	9.14	83.93	84.94		85.12	0.007827	1.90	5.22	6.82	0.63
1	5	10 year	10.79	83.93	85.02		85.23	0.008203	2.05	5.78	7.30	0.65
1	5	25 year	13.38	83.93	85.13		85.38	0.008837	2.28	6.62	7.94	0.69


HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	5	50 year	15.78	83.93	85.22		85.52	0.009392	2.48	7.35	8.46	0.72
1	5	75 year	17.41	83.93	85.27	85.07	85.60	0.009783	2.60	7.82	8.79	0.74
1	5	100 year	18.68	83.93	85.31	85.12	85.66	0.010088	2.70	8.18	9.02	0.75
1	5	100 year + cc	22.41	83.93	85.42	85.27	85.84	0.010877	2.95	9.20	9.49	0.79
1	5	1000 year	33.63	83.93	85.68	85.63	86.31	0.013340	3.66	11.78	10.46	0.90
1	4	2 year	7.08	83.83	84.62		84.74	0.007425	1.54	4.59	6.89	0.60
1	4	5 year	9.14	83.83	84.73		84.88	0.007786	1.70	5.38	7.14	0.63
1	4	10 year	10.79	83.83	84.81		84.98	0.008001	1.81	5.96	7.31	0.64
1	4	25 year	13.38	83.83	84.93		85.13	0.008295	1.96	6.82	7.56	0.66
1	4	50 year	15.78	83.83	85.03		85.25	0.008445	2.09	7.59	8.29	0.67
1	4	75 year	17.41	83.83	85.09		85.33	0.008560	2.17	8.10	8.75	0.68
1	4	100 year	18.68	83.83	85.13		85.38	0.008646	2.23	8.50	9.09	0.69
1	4	100 year + cc	22.41	83.83	85.26		85.54	0.008817	2.38	9.69	9.88	0.71
1	4	1000 year	33.63	83.83	85.58		85.96	0.009055	2.74	13.06	10.82	0.74
1	3	2 year	7.08	83.63	84.40		84.51	0.006761	1.44	4.91	7.81	0.58
1	3	5 year	9.14	83.63	84.52		84.64	0.006665	1.56	5.86	8.15	0.59
1	3	10 year	10.79	83.63	84.61		84.74	0.006609	1.64	6.59	8.41	0.59
1	3	25 year	13.38	83.63	84.73		84.89	0.006617	1.75	7.64	8.76	0.60
1	3	50 year	15.78	83.63	84.83		85.01	0.006651	1.85	8.55	9.06	0.61
1	3	75 year	17.41	83.63	84.90		85.08	0.006631	1.91	9.14	9.36	0.61
1	3	100 year	18.68	83.63	84.94		85.14	0.006623	1.95	9.59	9.59	0.61
1	3	100 year + cc	22.41	83.63	85.08		85.29	0.006570	2.07	10.91	10.21	0.62
1	3	1000 year	33.63	83.63	85.43		85.70	0.006388	2.34	14.77	11.80	0.63
1	2	2 year	7.08	83.22	84.13		84.23	0.006341	1.40	5.05	7.47	0.54
1	2	5 year	9.14	83.22	84.24		84.36	0.006633	1.56	5.87	7.50	0.56
1	2	10 year	10.79	83.22	84.32		84.46	0.006837	1.67	6.47	7.53	0.57
1	2	25 year	13.38	83.22	84.43		84.60	0.007066	1.82	7.35	7.78	0.59
1	2	50 year	15.78	83.22	84.53		84.72	0.007303	1.96	8.10	8.06	0.61
1	2	75 year	17.41	83.22	84.59		84.80	0.007460	2.04	8.59	8.24	0.62
1	2	100 year	18.68	83.22	84.63		84.86	0.007562	2.11	8.97	8.38	0.62
1	2	100 year + cc	22.41	83.22	84.75		85.02	0.007912	2.28	10.01	8.74	0.64
1	2	1000 year	33.63	83.22	85.08		85.45	0.008484	2.72	13.02	10.01	0.68


HEC-RAS Plan: BlockCulv33.5 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	1	2 year	7.08	83.32	83.98	83.83	84.10	0.008901	1.55	4.56	7.87	0.65
1	1	5 year	9.14	83.32	84.08	83.91	84.23	0.008907	1.70	5.37	7.92	0.66
1	1	10 year	10.79	83.32	84.15	83.97	84.32	0.008903	1.81	5.98	7.96	0.66
1	1	25 year	13.38	83.32	84.26	84.06	84.46	0.008901	1.95	6.86	8.09	0.67
1	1	50 year	15.78	83.32	84.35	84.14	84.58	0.008904	2.08	7.60	8.38	0.68
1	1	75 year	17.41	83.32	84.41	84.19	84.65	0.008902	2.16	8.09	8.59	0.69
1	1	100 year	18.68	83.32	84.46	84.23	84.71	0.008902	2.22	8.46	8.74	0.69
1	1	100 year + cc	22.41	83.32	84.57	84.33	84.87	0.008914	2.39	9.53	9.18	0.71
1	1	1000 year	33.63	83.32	84.89	84.63	85.29	0.008904	2.81	12.61	10.32	0.74


Hunsworth Beck 1st Oct Plan: Block at Culvert 33.5 02/10/2015

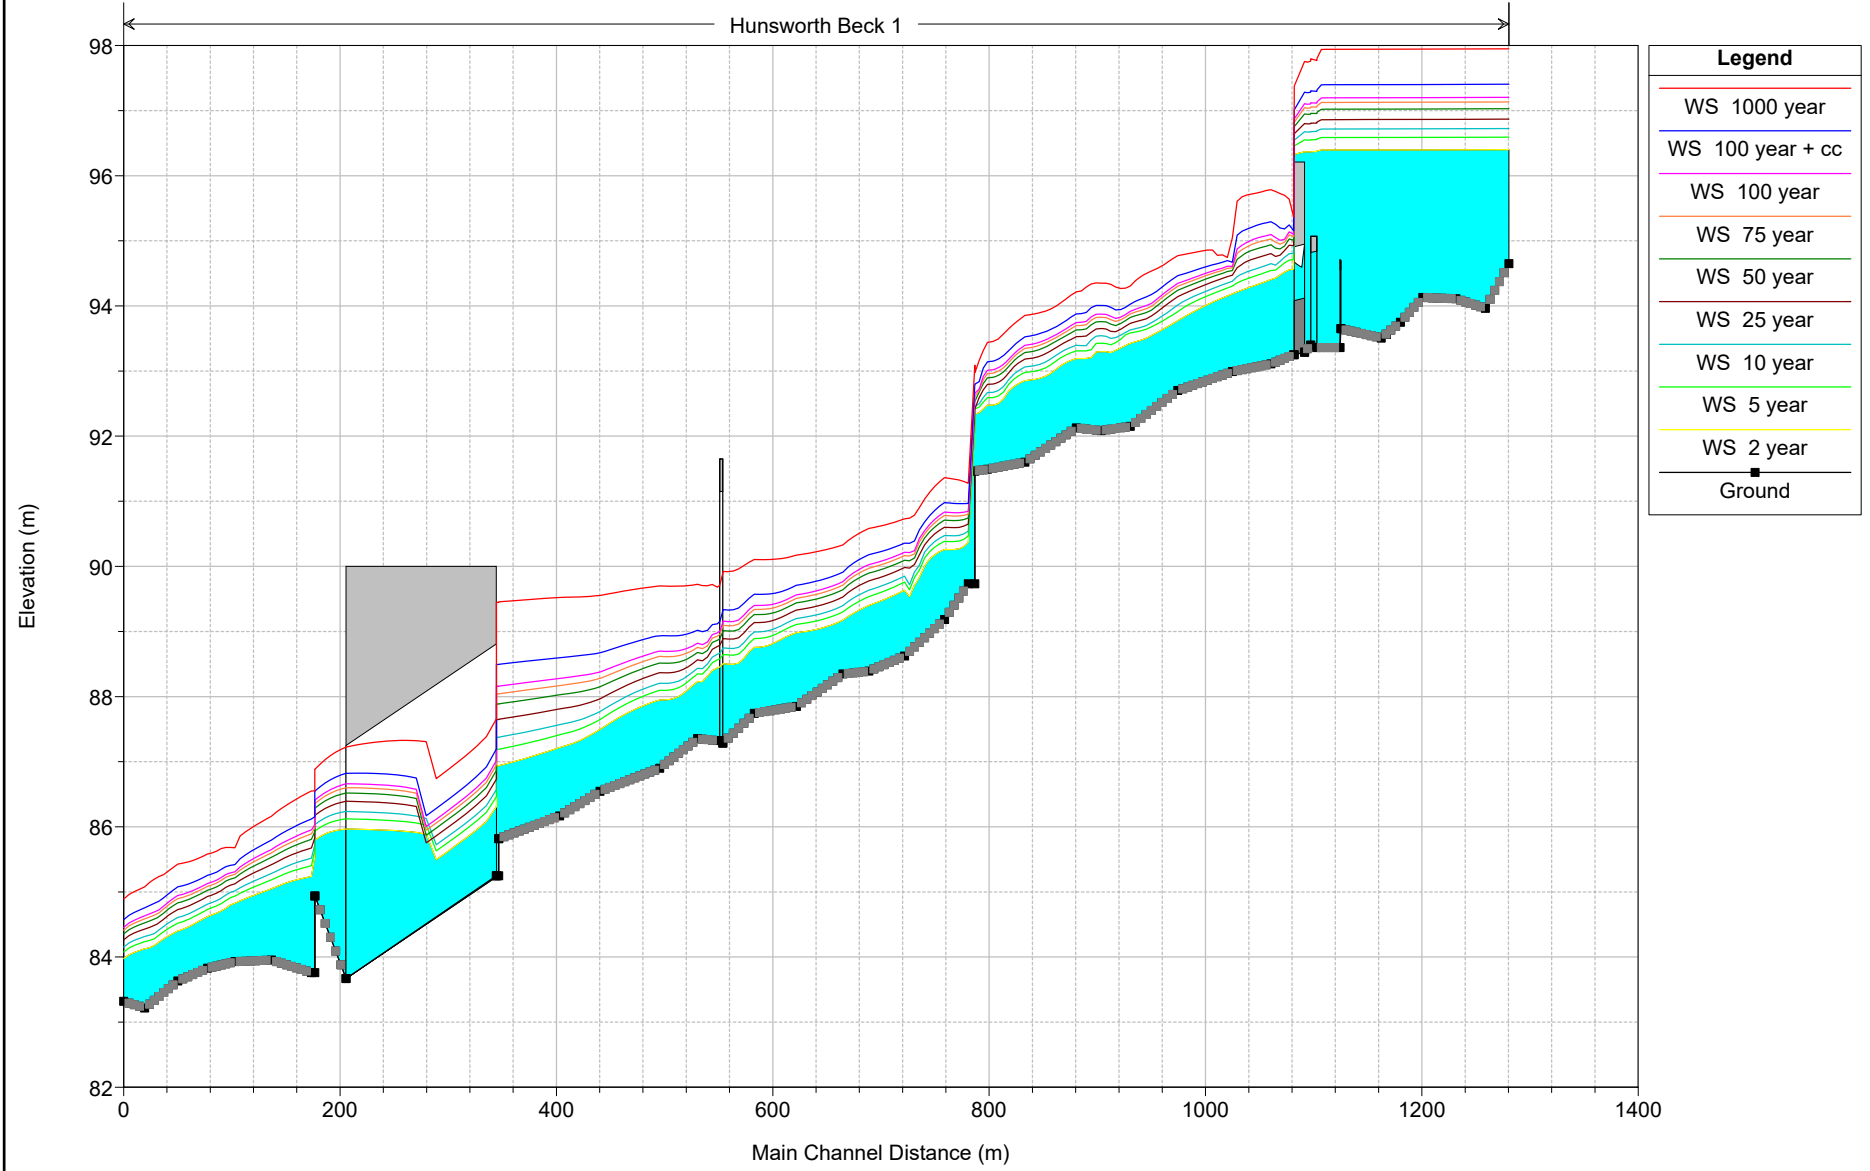

Hunsworth Beck 1st Oct Plan: Block at Culvert 33.5 02/10/2015  
XS08

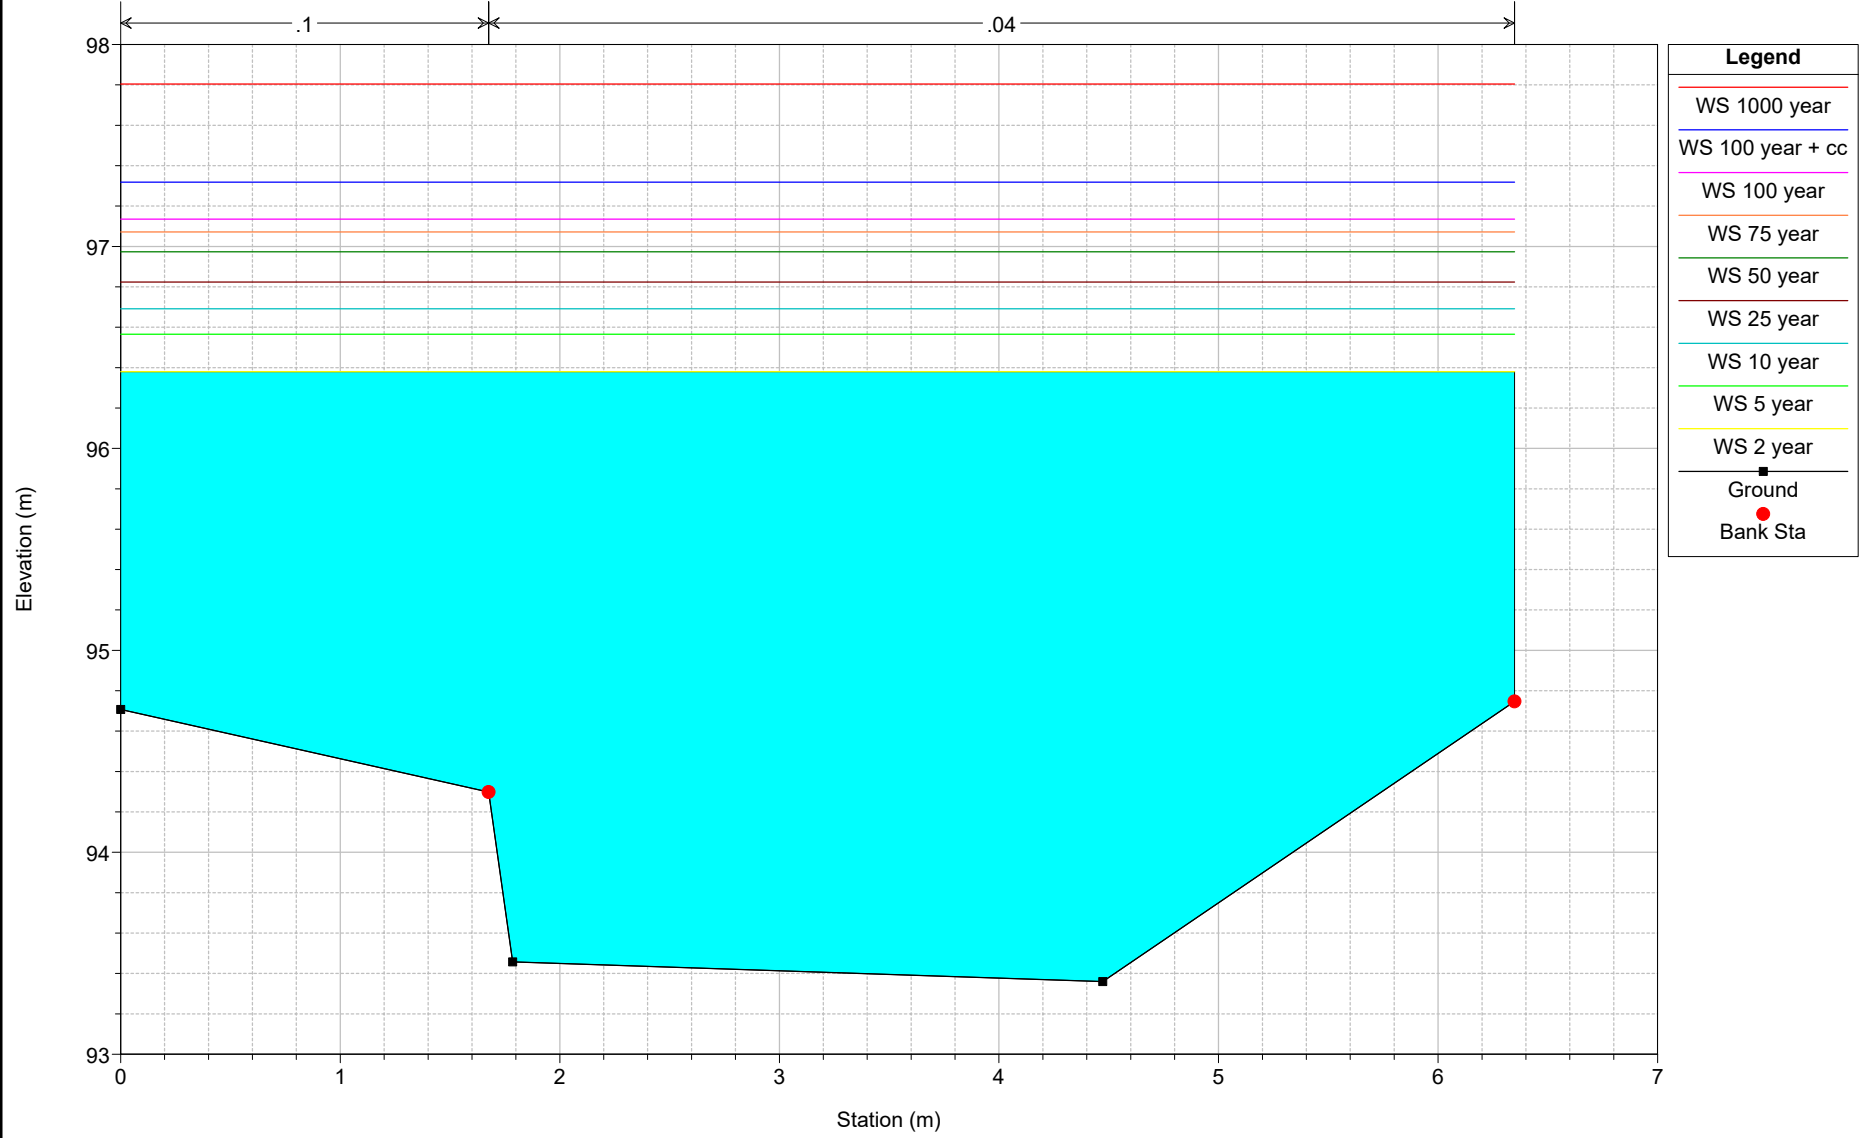


Hunsworth Beck 1st Oct Plan: Block at Culvert 33.5 02/10/2015  
XS14

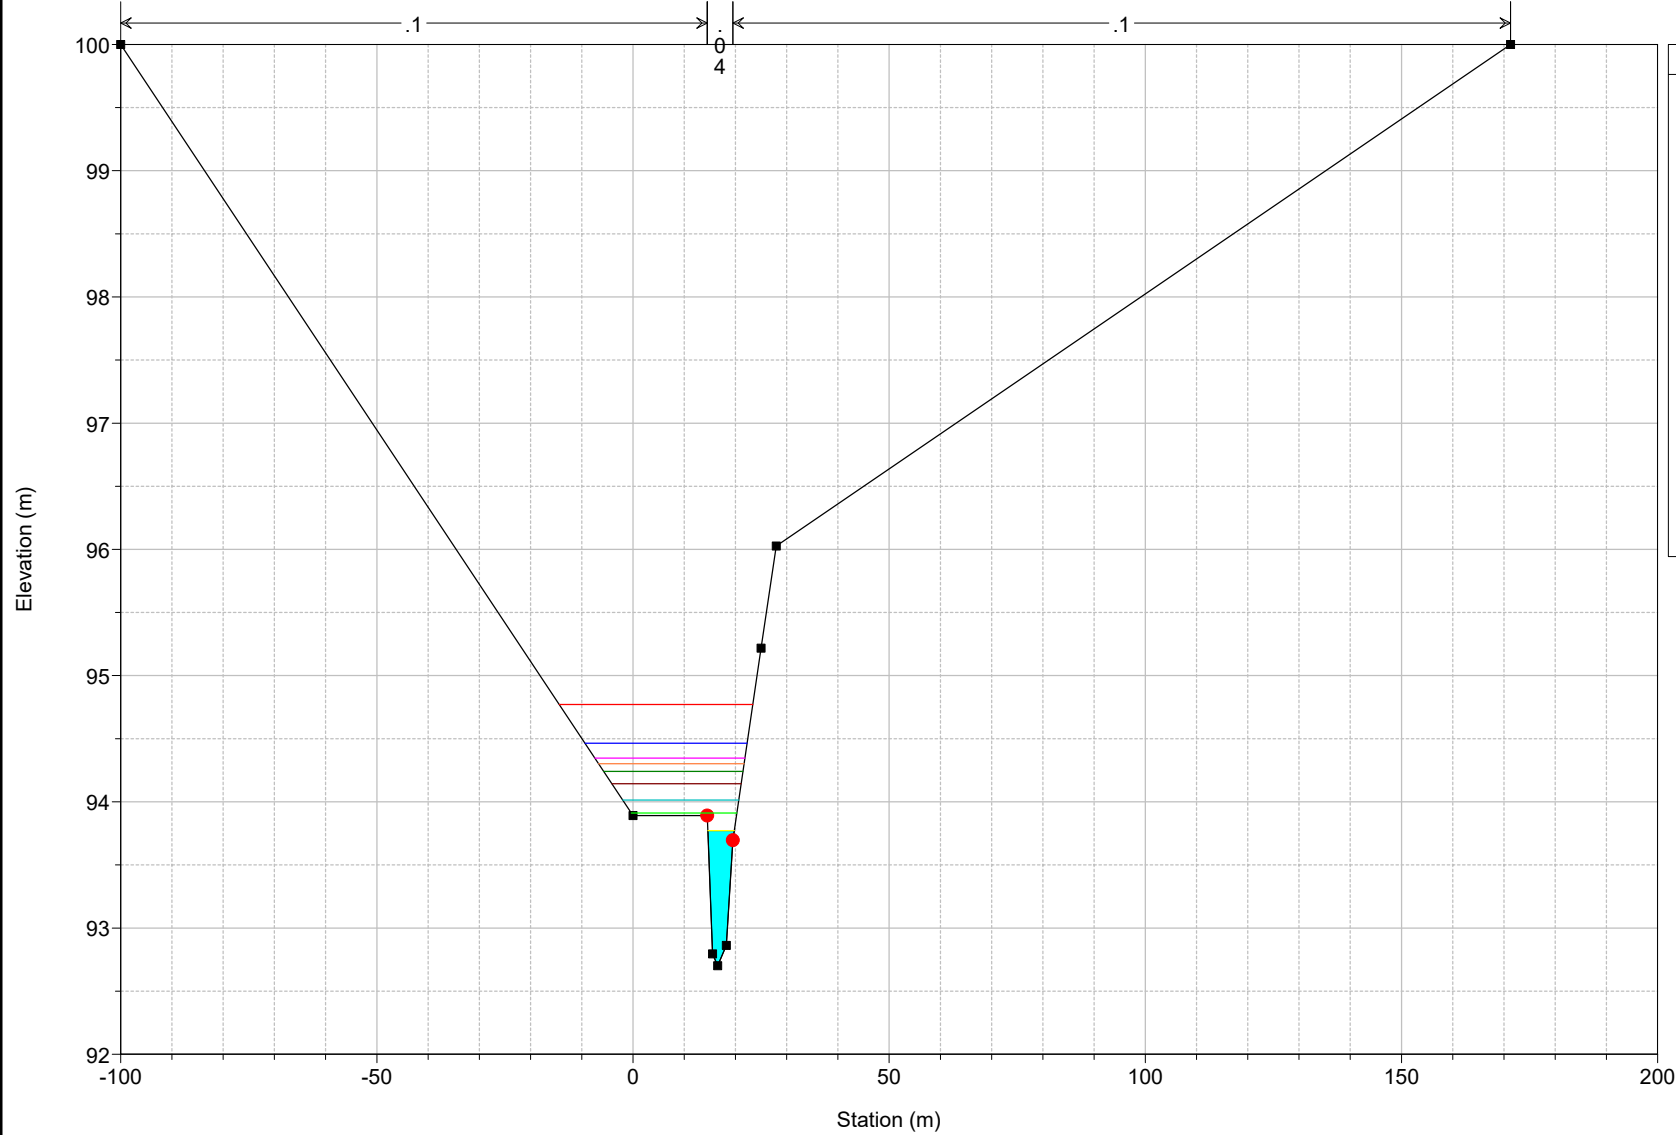


Legend	
WS 1000 year	(Red line)
WS 100 year + cc	(Blue line)
WS 100 year	(Magenta line)
WS 75 year	(Orange line)
WS 50 year	(Green line)
WS 25 year	(Brown line)
WS 10 year	(Cyan line)
WS 5 year	(Light green line)
WS 2 year	(Yellow line)
Ground	(Black square)
Bank Sta	(Red circle)

Hunsworth Beck 1st Oct Plan: Block at Culvert 33.5 02/10/2015  
XS22

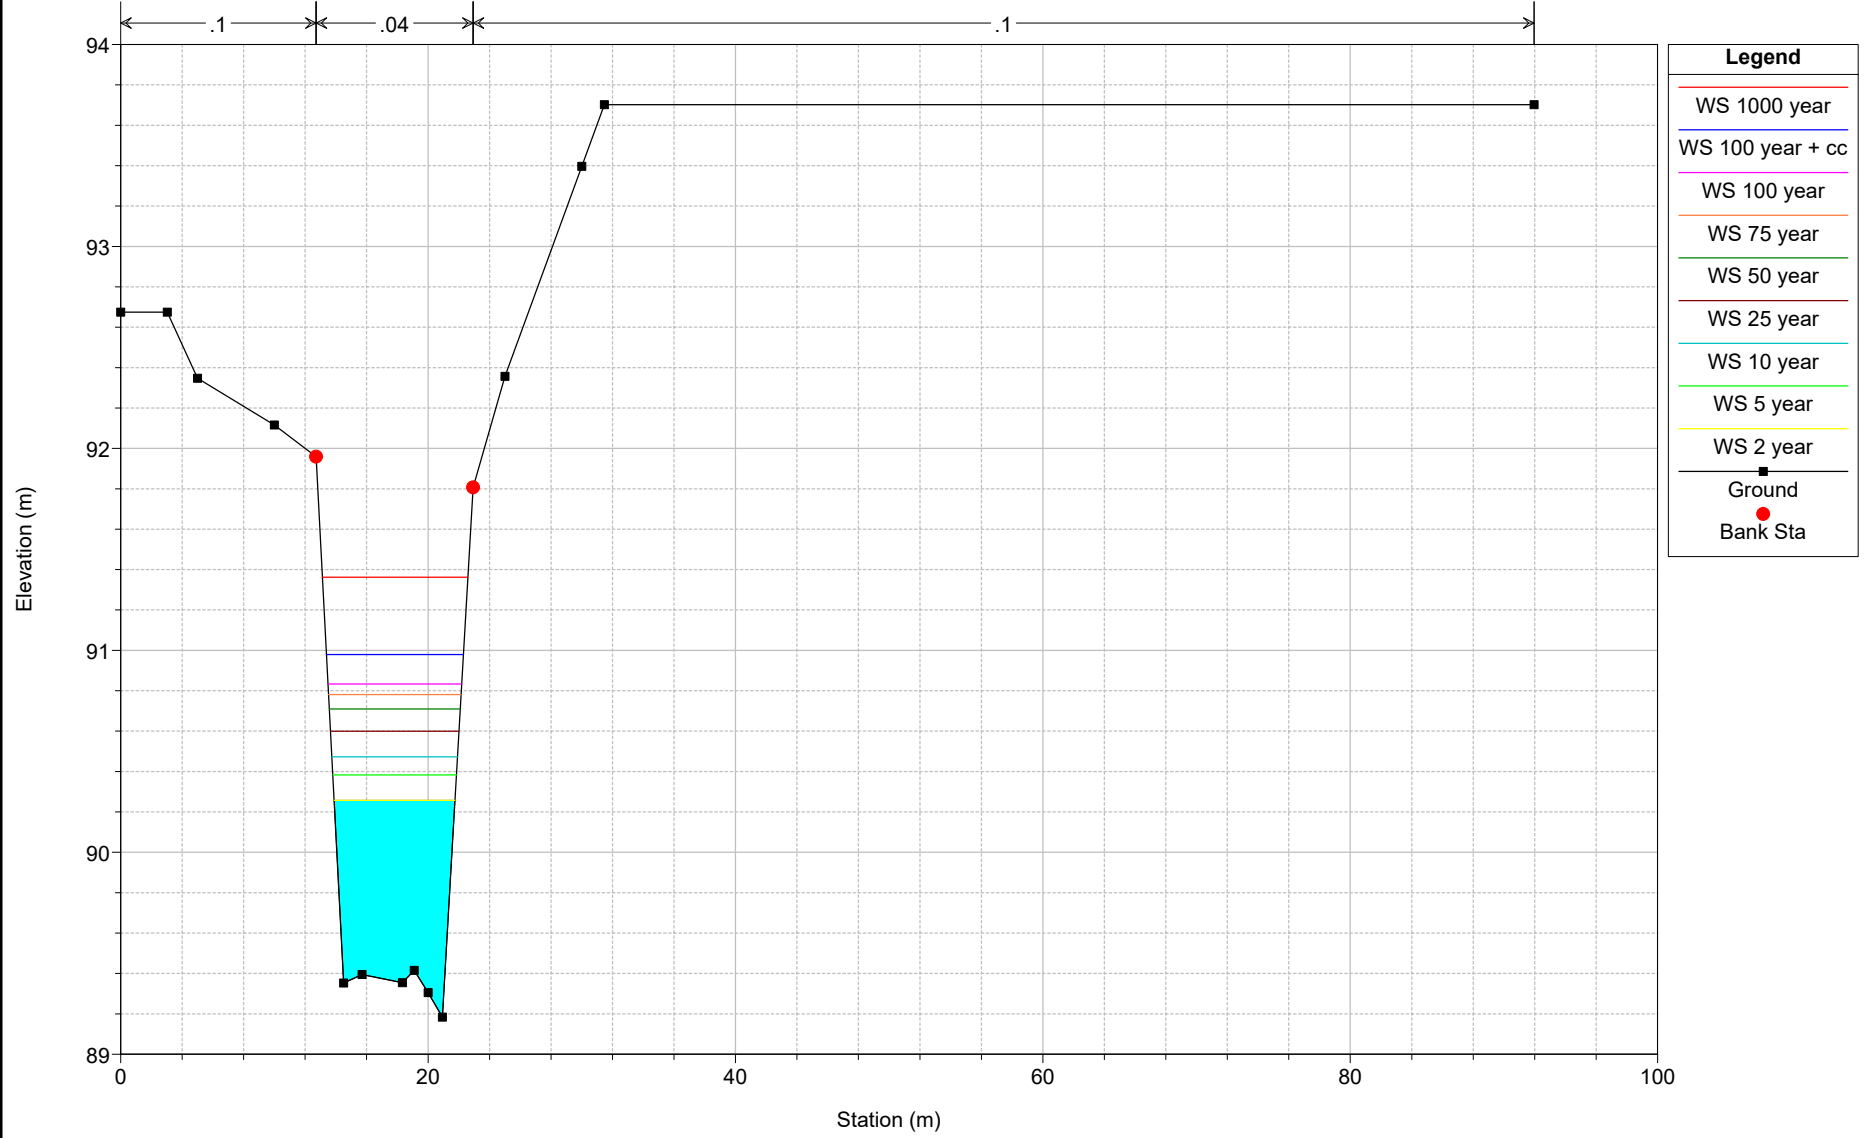

Hunsworth Beck 1st Oct Plan: Block at Culvert 33.5 02/10/2015  
XS 31

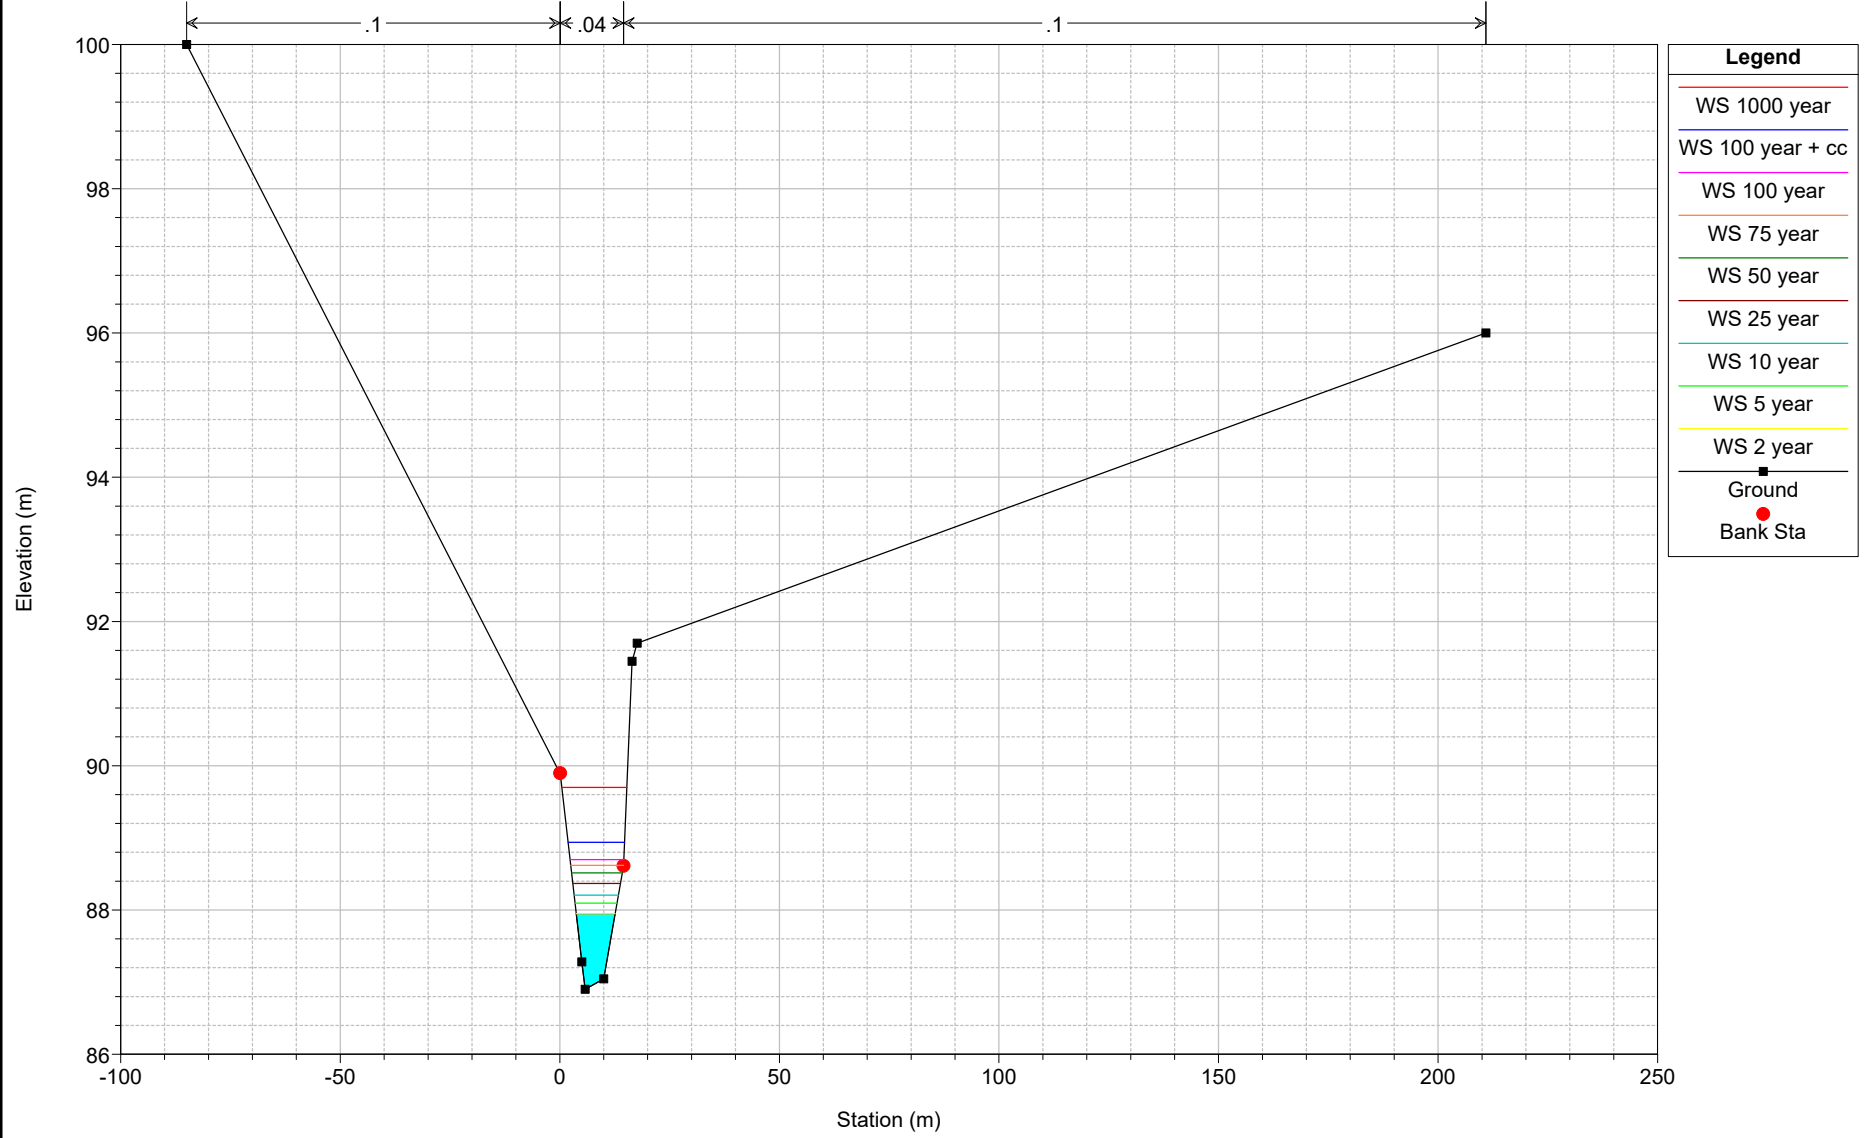

50% Blockage at Bridge (XS15.5) Results

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	95.53	95.25	95.62	0.005315	1.34	5.70	14.47	0.53
1	43	5 year	9.14	94.65	95.68	95.35	95.77	0.004312	1.35	8.47	22.88	0.49
1	43	10 year	10.79	94.65	95.81	95.42	95.89	0.003186	1.29	12.04	28.95	0.43
1	43	25 year	13.38	94.65	96.03	95.55	96.09	0.002013	1.19	19.46	38.63	0.35
1	43	50 year	15.78	94.65	96.29	95.65	96.33	0.001131	1.02	31.02	50.11	0.28
1	43	75 year	17.41	94.65	96.47	95.70	96.50	0.000810	0.93	40.32	57.71	0.24
1	43	100 year	18.68	94.65	96.57	95.74	96.60	0.000692	0.90	46.58	62.31	0.22
1	43	100 year + cc	22.41	94.65	96.82	95.84	96.84	0.000518	0.85	63.45	73.27	0.20
1	43	1000 year	33.63	94.65	97.43	96.07	97.45	0.000305	0.79	116.41	100.18	0.16
1	42	2 year	7.08	93.96	95.49	94.74	95.53	0.001647	0.94	7.50	7.02	0.29
1	42	5 year	9.14	93.96	95.63	94.85	95.69	0.001809	1.06	9.40	16.48	0.31
1	42	10 year	10.79	93.96	95.77	94.94	95.83	0.001674	1.10	12.09	22.07	0.30
1	42	25 year	13.38	93.96	96.00	95.06	96.05	0.001267	1.06	21.00	41.76	0.27
1	42	50 year	15.78	93.96	96.28	95.17	96.31	0.000802	0.94	34.17	54.87	0.22
1	42	75 year	17.41	93.96	96.45	95.23	96.48	0.000605	0.87	44.65	63.39	0.19
1	42	100 year	18.68	93.96	96.56	95.29	96.58	0.000530	0.84	51.66	68.50	0.18
1	42	100 year + cc	22.41	93.96	96.81	95.42	96.83	0.000416	0.80	70.42	80.60	0.17
1	42	1000 year	33.63	93.96	97.43	95.92	97.44	0.000260	0.74	129.03	110.16	0.14
1	41	2 year	7.08	94.11	95.40		95.46	0.003186	1.11	7.51	31.91	0.40
1	41	5 year	9.14	94.11	95.57		95.63	0.002300	1.07	13.61	40.08	0.35
1	41	10 year	10.79	94.11	95.74		95.78	0.001510	0.97	21.00	48.14	0.29
1	41	25 year	13.38	94.11	95.99		96.01	0.000881	0.84	34.46	60.12	0.23
1	41	50 year	15.78	94.11	96.27		96.29	0.000487	0.71	53.29	73.68	0.18
1	41	75 year	17.41	94.11	96.45		96.46	0.000354	0.65	67.29	82.33	0.15
1	41	100 year	18.68	94.11	96.56		96.57	0.000307	0.63	76.37	87.48	0.14
1	41	100 year + cc	22.41	94.11	96.81		96.82	0.000238	0.60	99.99	99.63	0.13
1	41	1000 year	33.63	94.11	97.42		97.43	0.000153	0.56	170.39	129.26	0.11
1	40	2 year	7.08	94.13	95.12	94.95	95.30	0.009642	1.90	4.39	13.24	0.69
1	40	5 year	9.14	94.13	95.45		95.53	0.003396	1.36	12.89	33.74	0.43
1	40	10 year	10.79	94.13	95.68		95.72	0.001782	1.13	21.39	42.41	0.32
1	40	25 year	13.38	94.13	95.95		95.98	0.000989	0.96	34.68	53.21	0.25
1	40	50 year	15.78	94.13	96.25		96.27	0.000553	0.81	52.19	64.75	0.19



HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36.55		Bridge									
1	36.5	2 year	7.08	93.36	94.99		95.03	0.001514	0.92	12.02	32.19	0.28
1	36.5	5 year	9.14	93.36	95.42		95.44	0.000504	0.66	30.56	53.54	0.17
1	36.5	10 year	10.79	93.36	95.66		95.67	0.000333	0.59	44.54	65.16	0.14
1	36.5	25 year	13.38	93.36	95.94		95.95	0.000230	0.54	65.12	79.23	0.12
1	36.5	50 year	15.78	93.36	96.24		96.25	0.000152	0.48	91.25	94.11	0.10
1	36.5	75 year	17.41	93.36	96.43		96.43	0.000122	0.45	109.62	103.29	0.09
1	36.5	100 year	18.68	93.36	96.54		96.54	0.000112	0.45	121.19	108.68	0.09
1	36.5	100 year + cc	22.41	93.36	96.79		96.80	0.000097	0.44	150.59	121.30	0.08
1	36.5	1000 year	33.63	93.36	97.41		97.42	0.000075	0.44	235.20	151.87	0.07
1	36	2 year	7.08	93.36	94.92	94.22	94.99	0.002419	1.19	6.48	6.35	0.34
1	36	5 year	9.14	93.36	95.36	94.36	95.42	0.001537	1.11	9.28	6.35	0.27
1	36	10 year	10.79	93.36	95.59	94.46	95.65	0.001442	1.15	10.75	6.35	0.27
1	36	25 year	13.38	93.36	95.86	94.62	95.94	0.001479	1.24	12.48	6.35	0.27
1	36	50 year	15.78	93.36	96.16	94.75	96.24	0.001411	1.28	14.36	6.35	0.26
1	36	75 year	17.41	93.36	96.34	94.82	96.42	0.001396	1.31	15.51	6.35	0.26
1	36	100 year	18.68	93.36	96.44	94.87	96.53	0.001439	1.35	16.17	6.35	0.26
1	36	100 year + cc	22.41	93.36	96.68	95.01	96.78	0.001638	1.49	17.66	6.35	0.28
1	36	1000 year	33.63	93.36	97.23	95.39	97.40	0.002291	1.89	21.15	6.35	0.32
1	35.5		Bridge									
1	35	2 year	7.08	93.40	94.75	94.29	94.92	0.008795	1.87	3.79	3.03	0.53
1	35	5 year	9.14	93.40	94.99	94.46	95.19	0.008733	2.00	4.77	4.14	0.53
1	35	10 year	10.79	93.40	95.20	94.58	95.41	0.007807	2.05	5.70	5.12	0.51
1	35	25 year	13.38	93.40	95.59	94.75	95.78	0.005514	1.98	8.30	8.06	0.44
1	35	50 year	15.78	93.40	96.01	94.94	96.16	0.003646	1.82	12.32	11.07	0.37
1	35	75 year	17.41	93.40	96.23	95.03	96.37	0.003052	1.76	14.74	11.07	0.34
1	35	100 year	18.68	93.40	96.34	95.10	96.47	0.002955	1.78	15.93	11.07	0.34
1	35	100 year + cc	22.41	93.40	96.57	95.34	96.72	0.002985	1.89	18.53	11.07	0.35
1	35	1000 year	33.63	93.40	97.12	95.95	97.31	0.003319	2.22	24.58	11.07	0.37
1	34	2 year	7.08	93.29	94.76	94.01	94.85	0.003958	1.30	5.44	4.36	0.37

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	34	5 year	9.14	93.29	95.02	94.15	95.12	0.003681	1.39	6.68	5.09	0.36
1	34	10 year	10.79	93.29	95.24	94.25	95.34	0.003397	1.43	7.84	5.69	0.35
1	34	25 year	13.38	93.29	95.63	94.39	95.73	0.002734	1.42	10.30	6.79	0.31
1	34	50 year	15.78	93.29	96.04	94.52	96.13	0.002160	1.37	13.28	7.92	0.27
1	34	75 year	17.41	93.29	96.25	94.61	96.34	0.002015	1.38	15.00	8.40	0.26
1	34	100 year	18.68	93.29	96.35	94.73	96.45	0.002038	1.41	15.89	8.40	0.27
1	34	100 year + cc	22.41	93.29	96.58	94.90	96.69	0.002245	1.53	17.84	8.40	0.28
1	34	1000 year	33.63	93.29	97.12	95.38	97.28	0.002960	1.88	22.35	8.40	0.32
1	33.5	Culvert										
1	33	2 year	7.08	93.25	94.57		94.69	0.004021	1.54	4.91	4.05	0.43
1	33	5 year	9.14	93.25	94.71		94.87	0.004871	1.78	5.51	4.13	0.47
1	33	10 year	10.79	93.25	94.81		95.00	0.005633	1.98	5.90	4.17	0.51
1	33	25 year	13.38	93.25	94.93		95.18	0.006942	2.27	6.40	4.23	0.56
1	33	50 year	15.78	93.25	95.01		95.33	0.008355	2.55	6.76	4.27	0.62
1	33	75 year	17.41	93.25	95.06		95.43	0.009312	2.72	6.99	4.30	0.65
1	33	100 year	18.68	93.25	95.10		95.51	0.010134	2.86	7.14	4.32	0.68
1	33	100 year + cc	22.41	93.25	95.16		95.71	0.013297	3.33	7.39	4.34	0.77
1	33	1000 year	33.63	93.25	95.37	95.37	96.36	0.020997	4.48	8.38	4.80	0.99
1	32	2 year	7.08	93.11	94.40	94.06	94.56	0.006312	1.80	4.77	12.08	0.55
1	32	5 year	9.14	93.11	94.54	94.22	94.72	0.006348	1.96	7.21	20.25	0.56
1	32	10 year	10.79	93.11	94.65	94.33	94.83	0.006000	2.01	9.44	22.83	0.55
1	32	25 year	13.38	93.11	94.80		94.97	0.005269	2.02	13.28	26.70	0.53
1	32	50 year	15.78	93.11	94.94		95.09	0.004642	2.01	17.11	30.06	0.50
1	32	75 year	17.41	93.11	95.03		95.17	0.004228	1.99	19.92	32.32	0.48
1	32	100 year	18.68	93.11	95.10		95.23	0.003952	1.97	22.15	33.99	0.47
1	32	100 year + cc	22.41	93.11	95.29		95.40	0.003202	1.90	29.36	38.92	0.43
1	32	1000 year	33.63	93.11	95.79		95.87	0.002107	1.79	51.57	51.22	0.36
1	31	2 year	7.08	92.99	94.18		94.34	0.006722	1.75	4.39	7.12	0.58
1	31	5 year	9.14	92.99	94.30		94.50	0.007279	1.97	5.29	7.77	0.61
1	31	10 year	10.79	92.99	94.38		94.61	0.007920	2.15	5.88	8.18	0.64
1	31	25 year	13.38	92.99	94.47	94.28	94.76	0.009133	2.43	6.67	8.69	0.70

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	31	50 year	15.78	92.99	94.54	94.40	94.89	0.010335	2.69	7.29	9.08	0.75
1	31	75 year	17.41	92.99	94.58	94.47	94.97	0.011227	2.86	7.66	9.30	0.79
1	31	100 year	18.68	92.99	94.61	94.52	95.04	0.012045	3.00	7.90	9.44	0.82
1	31	100 year + cc	22.41	92.99	94.67	94.67	95.22	0.014627	3.41	8.51	9.78	0.91
1	31	1000 year	33.63	92.99	95.04	95.04	95.71	0.013633	3.84	12.55	11.82	0.91
1	30	2 year	7.08	92.70	93.77		93.95	0.009458	1.87	3.79	5.17	0.68
1	30	5 year	9.14	92.70	93.91	93.70	94.12	0.009267	2.04	4.85	20.61	0.69
1	30	10 year	10.79	92.70	94.01	93.79	94.22	0.008300	2.07	7.07	22.67	0.66
1	30	25 year	13.38	92.70	94.14	94.05	94.35	0.007388	2.12	10.17	25.25	0.64
1	30	50 year	15.78	92.70	94.24	94.14	94.45	0.006962	2.18	12.73	27.20	0.63
1	30	75 year	17.41	92.70	94.30	94.19	94.51	0.006718	2.21	14.44	28.42	0.62
1	30	100 year	18.68	92.70	94.35	94.23	94.55	0.006582	2.24	15.71	29.31	0.62
1	30	100 year + cc	22.41	92.70	94.46		94.67	0.006299	2.32	19.30	31.66	0.62
1	30	1000 year	33.63	92.70	94.77		94.98	0.005588	2.48	29.98	37.80	0.60
1	29	2 year	7.08	92.15	93.43	93.11	93.55	0.006145	1.61	5.03	7.19	0.55
1	29	5 year	9.14	92.15	93.58	93.25	93.72	0.005497	1.68	7.36	13.72	0.53
1	29	10 year	10.79	92.15	93.63	93.35	93.79	0.006440	1.87	8.02	14.32	0.58
1	29	25 year	13.38	92.15	93.73	93.47	93.93	0.006940	2.06	9.54	15.63	0.61
1	29	50 year	15.78	92.15	93.82	93.60	94.04	0.007199	2.21	10.99	16.79	0.63
1	29	75 year	17.41	92.15	93.88	93.67	94.11	0.007374	2.30	11.93	17.50	0.64
1	29	100 year	18.68	92.15	93.92	93.72	94.16	0.007533	2.37	12.63	18.01	0.65
1	29	100 year + cc	22.41	92.15	94.03	93.83	94.30	0.007856	2.55	14.71	19.45	0.67
1	29	1000 year	33.63	92.15	94.30	94.12	94.66	0.008667	3.00	20.66	23.71	0.72
1	28	2 year	7.08	92.08	93.30	92.74	93.36	0.003580	1.27	8.25	10.30	0.41
1	28	5 year	9.14	92.08	93.43	92.86	93.51	0.003910	1.41	9.60	10.59	0.43
1	28	10 year	10.79	92.08	93.54	92.95	93.59	0.002336	1.16	19.54	31.53	0.34
1	28	25 year	13.38	92.08	93.65	93.04	93.70	0.002391	1.25	23.06	32.86	0.35
1	28	50 year	15.78	92.08	93.76	93.24	93.81	0.002326	1.30	26.59	34.13	0.35
1	28	75 year	17.41	92.08	93.83	93.29	93.88	0.002294	1.33	28.89	34.93	0.35
1	28	100 year	18.68	92.08	93.87	93.33	93.93	0.002273	1.35	30.63	35.53	0.35
1	28	100 year + cc	22.41	92.08	94.01	93.47	94.06	0.002247	1.42	35.43	37.13	0.35
1	28	1000 year	33.63	92.08	94.35	93.62	94.41	0.002189	1.59	48.85	41.26	0.36

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	27	2 year	7.08	92.13	93.19	92.74	93.24	0.002813	1.13	8.57	11.12	0.38
1	27	5 year	9.14	92.13	93.31	92.83	93.38	0.003101	1.27	9.94	11.63	0.41
1	27	10 year	10.79	92.13	93.39	92.90	93.47	0.003316	1.38	10.93	11.99	0.43
1	27	25 year	13.38	92.13	93.53	93.00	93.61	0.003030	1.42	15.59	22.89	0.42
1	27	50 year	15.78	92.13	93.63	93.08	93.72	0.003023	1.50	18.02	24.05	0.42
1	27	75 year	17.41	92.13	93.70	93.14	93.79	0.003023	1.55	19.61	24.77	0.43
1	27	100 year	18.68	92.13	93.75	93.18	93.84	0.003023	1.59	20.83	25.31	0.43
1	27	100 year + cc	22.41	92.13	93.88	93.28	93.98	0.003025	1.69	24.27	26.76	0.43
1	27	1000 year	33.63	92.13	94.22	93.60	94.34	0.003019	1.93	33.92	30.24	0.45
1	26	2 year	7.08	91.60	92.85		92.92	0.003373	1.15	6.14	7.97	0.42
1	26	5 year	9.14	91.60	92.98		93.06	0.003751	1.27	7.18	8.70	0.45
1	26	10 year	10.79	91.60	93.06		93.16	0.004004	1.36	7.95	9.21	0.47
1	26	25 year	13.38	91.60	93.18		93.29	0.004321	1.47	9.10	9.92	0.49
1	26	50 year	15.78	91.60	93.28		93.41	0.004538	1.56	10.13	10.51	0.51
1	26	75 year	17.41	91.60	93.35		93.48	0.004655	1.61	10.81	10.89	0.52
1	26	100 year	18.68	91.60	93.40		93.53	0.004732	1.65	11.33	11.17	0.52
1	26	100 year + cc	22.41	91.60	93.53		93.68	0.004908	1.75	12.83	11.94	0.54
1	26	1000 year	33.63	91.60	93.86		94.05	0.004876	1.97	17.38	16.66	0.55
1	25	2 year	7.08	91.49	92.48		92.57	0.004307	1.36	5.46	7.94	0.48
1	25	5 year	9.14	91.49	92.59		92.71	0.004756	1.53	6.40	8.66	0.51
1	25	10 year	10.79	91.49	92.67		92.81	0.005082	1.65	7.12	9.17	0.53
1	25	25 year	13.38	91.49	92.79		92.96	0.005352	1.80	8.30	9.95	0.55
1	25	50 year	15.78	91.49	92.90		93.08	0.005498	1.93	9.35	10.72	0.57
1	25	75 year	17.41	91.49	92.96		93.16	0.005562	2.01	10.05	11.25	0.57
1	25	100 year	18.68	91.49	93.01		93.22	0.005554	2.06	10.63	11.68	0.58
1	25	100 year + cc	22.41	91.49	93.14		93.38	0.005674	2.22	12.23	12.75	0.59
1	25	1000 year	33.63	91.49	93.44		93.78	0.006416	2.68	16.31	14.77	0.65
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.007987	1.64	4.41	7.71	0.60
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.009451	1.90	5.11	9.46	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.011306	2.14	5.48	10.20	0.73
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.019598	2.75	5.18	9.62	0.95

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	24	50 year	15.78	91.47	92.54	92.54	92.94	0.017475	2.83	6.40	11.83	0.92
1	24	75 year	17.41	91.47	92.62	92.62	93.02	0.016095	2.85	7.35	13.08	0.89
1	24	100 year	18.68	91.47	92.67	92.67	93.07	0.015467	2.89	8.04	13.72	0.88
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.22	0.014295	2.99	9.97	15.28	0.86
1	24	1000 year	33.63	91.47	92.98	93.09	93.62	0.018707	3.75	12.79	16.23	1.01
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.39	90.32	90.58	0.015165	1.94	3.65	6.33	0.82
1	23	5 year	9.14	89.73	90.51	90.41	90.73	0.014136	2.08	4.40	6.38	0.80
1	23	10 year	10.79	89.73	90.60	90.48	90.84	0.013446	2.17	4.98	6.42	0.78
1	23	25 year	13.38	89.73	90.73	90.59	91.00	0.012775	2.29	5.84	6.48	0.77
1	23	50 year	15.78	89.73	90.84	90.68	91.14	0.012498	2.40	6.56	6.52	0.77
1	23	75 year	17.41	89.73	90.91	90.74	91.23	0.012456	2.48	7.02	6.55	0.77
1	23	100 year	18.68	89.73	90.97	90.78	91.29	0.012429	2.54	7.36	6.58	0.77
1	23	100 year + cc	22.41	89.73	91.11	90.90	91.48	0.012586	2.70	8.29	6.63	0.77
1	23	1000 year	33.63	89.73	91.46	91.24	91.97	0.013751	3.16	10.63	6.78	0.81
1	22	2 year	7.08	89.18	90.32		90.37	0.002269	1.01	7.03	7.95	0.34
1	22	5 year	9.14	89.18	90.46		90.53	0.002409	1.12	8.17	8.16	0.36
1	22	10 year	10.79	89.18	90.57		90.64	0.002501	1.20	9.02	8.31	0.37
1	22	25 year	13.38	89.18	90.72		90.80	0.002627	1.30	10.27	8.52	0.38
1	22	50 year	15.78	89.18	90.84		90.94	0.002736	1.39	11.34	8.70	0.39
1	22	75 year	17.41	89.18	90.92		91.02	0.002816	1.45	12.01	8.82	0.40
1	22	100 year	18.68	89.18	90.97		91.09	0.002869	1.49	12.53	8.90	0.40
1	22	100 year + cc	22.41	89.18	91.13		91.26	0.003033	1.61	13.94	9.13	0.42
1	22	1000 year	33.63	89.18	91.53		91.71	0.003463	1.90	17.68	9.71	0.45
1	21	2 year	7.08	88.62	90.18		90.22	0.001554	0.95	7.46	6.73	0.29
1	21	5 year	9.14	88.62	90.31		90.37	0.001859	1.09	8.40	6.99	0.32
1	21	10 year	10.79	88.62	90.41		90.48	0.002069	1.19	9.10	7.18	0.34
1	21	25 year	13.38	88.62	90.55		90.64	0.002359	1.32	10.14	7.44	0.36
1	21	50 year	15.78	88.62	90.67		90.78	0.002602	1.43	11.02	7.66	0.38
1	21	75 year	17.41	88.62	90.74		90.86	0.002770	1.50	11.57	7.80	0.39
1	21	100 year	18.68	88.62	90.80		90.92	0.002886	1.56	12.00	7.90	0.40

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	21	100 year + cc	22.41	88.62	90.94		91.09	0.003230	1.70	13.15	8.17	0.43
1	21	1000 year	33.63	88.62	91.30		91.52	0.004128	2.08	16.18	8.84	0.49
1	20	2 year	7.08	88.39	90.16		90.18	0.000627	0.66	10.73	8.78	0.19
1	20	5 year	9.14	88.39	90.29		90.32	0.000776	0.77	11.93	9.10	0.21
1	20	10 year	10.79	88.39	90.39		90.43	0.000881	0.84	12.83	9.33	0.23
1	20	25 year	13.38	88.39	90.53		90.58	0.001029	0.94	14.16	9.66	0.25
1	20	50 year	15.78	88.39	90.65		90.70	0.001154	1.03	15.30	9.94	0.27
1	20	75 year	17.41	88.39	90.72		90.78	0.001240	1.09	16.00	10.10	0.28
1	20	100 year	18.68	88.39	90.77		90.84	0.001300	1.13	16.55	10.23	0.28
1	20	100 year + cc	22.41	88.39	90.91		90.99	0.001476	1.24	18.04	10.57	0.30
1	20	1000 year	33.63	88.39	91.27		91.39	0.001935	1.53	21.96	11.42	0.35
1	19	2 year	7.08	88.35	90.15		90.17	0.000574	0.63	11.22	8.81	0.18
1	19	5 year	9.14	88.35	90.28		90.30	0.000727	0.74	12.39	9.18	0.20
1	19	10 year	10.79	88.35	90.37		90.41	0.000837	0.81	13.28	9.45	0.22
1	19	25 year	13.38	88.35	90.51		90.55	0.000994	0.92	14.60	9.83	0.24
1	19	50 year	15.78	88.35	90.62		90.67	0.001127	1.00	15.73	10.15	0.26
1	19	75 year	17.41	88.35	90.69		90.75	0.001218	1.06	16.43	10.35	0.27
1	19	100 year	18.68	88.35	90.74		90.81	0.001281	1.10	16.98	10.50	0.28
1	19	100 year + cc	22.41	88.35	90.88		90.96	0.001470	1.21	18.46	10.89	0.30
1	19	1000 year	33.63	88.35	91.23		91.34	0.001955	1.50	22.41	11.87	0.35
1	18	2 year	7.08	87.85	90.14		90.15	0.000201	0.42	17.05	11.87	0.11
1	18	5 year	9.14	87.85	90.27		90.28	0.000271	0.49	18.63	12.63	0.13
1	18	10 year	10.79	87.85	90.36		90.38	0.000324	0.54	19.85	13.21	0.14
1	18	25 year	13.38	87.85	90.50		90.52	0.000401	0.62	21.69	14.04	0.16
1	18	50 year	15.78	87.85	90.61		90.63	0.000467	0.68	23.31	14.73	0.17
1	18	75 year	17.41	87.85	90.68		90.71	0.000513	0.72	24.32	15.18	0.18
1	18	100 year	18.68	87.85	90.73		90.76	0.000546	0.74	25.13	15.54	0.19
1	18	100 year + cc	22.41	87.85	90.87		90.90	0.000626	0.82	27.43	18.26	0.20
1	18	1000 year	33.63	87.85	91.22		91.27	0.000765	1.01	34.24	20.85	0.23
1	17	2 year	7.08	87.74	90.14		90.14	0.000064	0.28	26.05	16.66	0.07
1	17	5 year	9.14	87.74	90.27		90.27	0.000083	0.33	28.23	17.16	0.08

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	17	10 year	10.79	87.74	90.36		90.37	0.000098	0.37	29.86	17.53	0.09
1	17	25 year	13.38	87.74	90.50		90.50	0.000120	0.43	32.26	18.05	0.10
1	17	50 year	15.78	87.74	90.61		90.62	0.000140	0.48	34.31	18.49	0.10
1	17	75 year	17.41	87.74	90.68		90.69	0.000153	0.51	35.58	18.75	0.11
1	17	100 year	18.68	87.74	90.73		90.74	0.000163	0.54	36.57	18.96	0.11
1	17	100 year + cc	22.41	87.74	90.87		90.88	0.000193	0.61	39.21	19.49	0.12
1	17	1000 year	33.63	87.74	91.21		91.25	0.000275	0.79	46.27	21.25	0.15
1	16.01	2 year	7.08	89.29	90.07		90.13	0.003512	1.07	6.65	10.54	0.43
1	16.01	5 year	9.14	89.29	90.19		90.26	0.003525	1.15	7.93	11.16	0.44
1	16.01	10 year	10.79	89.29	90.28		90.35	0.003455	1.21	8.91	11.46	0.44
1	16.01	25 year	13.38	89.29	90.40		90.49	0.003377	1.29	10.37	11.86	0.44
1	16.01	50 year	15.78	89.29	90.51		90.60	0.003357	1.36	11.61	12.18	0.44
1	16.01	75 year	17.41	89.29	90.57		90.67	0.003397	1.41	12.36	12.38	0.45
1	16.01	100 year	18.68	89.29	90.62		90.72	0.003402	1.44	12.96	12.53	0.45
1	16.01	100 year + cc	22.41	89.29	90.74		90.86	0.003507	1.54	14.53	12.92	0.46
1	16.01	1000 year	33.63	89.29	91.05		91.22	0.003799	1.80	18.75	14.78	0.50
1	16	2 year	7.08	89.29	90.07	89.76	90.13	0.003513	1.07	6.65	10.54	0.43
1	16	5 year	9.14	89.29	90.19	89.84	90.26	0.003526	1.15	7.93	11.16	0.44
1	16	10 year	10.79	89.29	90.28	89.89	90.35	0.003456	1.21	8.91	11.46	0.44
1	16	25 year	13.38	89.29	90.40	89.98	90.49	0.003378	1.29	10.37	11.86	0.44
1	16	50 year	15.78	89.29	90.51	90.05	90.60	0.003358	1.36	11.61	12.18	0.44
1	16	75 year	17.41	89.29	90.57	90.10	90.67	0.003397	1.41	12.36	12.38	0.45
1	16	100 year	18.68	89.29	90.62	90.13	90.72	0.003403	1.44	12.96	12.53	0.45
1	16	100 year + cc	22.41	89.29	90.74	90.23	90.86	0.003507	1.54	14.53	12.92	0.46
1	16	1000 year	33.63	89.29	91.05	90.47	91.22	0.003801	1.80	18.69	13.91	0.50
1	15.5		Bridge									
1	15	2 year	7.08	89.29	89.84	89.83	90.07	0.020949	2.10	3.38	7.32	0.98
1	15	5 year	9.14	89.29	89.93	89.92	90.19	0.020084	2.25	4.06	7.63	0.98
1	15	10 year	10.79	89.29	90.00	89.99	90.28	0.019574	2.35	4.59	7.86	0.98
1	15	25 year	13.38	89.29	90.10	90.09	90.41	0.019038	2.50	5.36	8.19	0.98
1	15	50 year	15.78	89.29	90.18	90.17	90.53	0.018768	2.62	6.03	8.46	0.99

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	15	75 year	17.41	89.29	90.30	90.24	90.60	0.015655	2.44	7.14	9.76	0.91
1	15	100 year	18.68	89.29	90.29	90.28	90.65	0.018452	2.64	7.08	9.73	0.99
1	15	100 year + cc	22.41	89.29	90.47	90.39	90.79	0.014027	2.51	8.94	10.77	0.88
1	15	1000 year	33.63	89.29	90.75	90.66	91.14	0.013703	2.77	12.14	12.37	0.89
1	14.99	2 year	7.08	89.29	89.83	89.83	90.07	0.021923	2.13	3.33	7.30	1.01
1	14.99	5 year	9.14	89.29	89.92	89.92	90.19	0.021093	2.29	4.00	7.60	1.01
1	14.99	10 year	10.79	89.29	89.99	89.99	90.28	0.020441	2.39	4.52	7.83	1.00
1	14.99	25 year	13.38	89.29	90.09	90.09	90.41	0.019955	2.54	5.27	8.15	1.01
1	14.99	50 year	15.78	89.29	90.17	90.17	90.53	0.019135	2.63	5.99	8.44	1.00
1	14.99	75 year	17.41	89.29	90.24	90.24	90.60	0.019484	2.64	6.60	9.43	1.01
1	14.99	100 year	18.68	89.29	90.28	90.28	90.65	0.019181	2.67	6.98	9.66	1.00
1	14.99	100 year + cc	22.41	89.29	90.39	90.39	90.78	0.018751	2.79	8.04	10.27	1.01
1	14.99	1000 year	33.63	89.29	90.66	90.66	91.13	0.017506	3.03	11.09	11.87	1.00
1	14	2 year	7.08	87.36	88.23		88.36	0.008396	1.59	4.45	7.23	0.65
1	14	5 year	9.14	87.36	88.35		88.50	0.008287	1.71	5.34	7.66	0.65
1	14	10 year	10.79	87.36	88.43		88.60	0.008199	1.79	6.03	7.98	0.66
1	14	25 year	13.38	87.36	88.56	88.32	88.74	0.008000	1.89	7.08	8.45	0.66
1	14	50 year	15.78	87.36	88.68	88.41	88.87	0.007703	1.95	8.07	8.86	0.65
1	14	75 year	17.41	87.36	88.75	88.46	88.96	0.007448	1.99	8.77	9.14	0.65
1	14	100 year	18.68	87.36	88.82	88.51	89.02	0.007143	2.00	9.36	9.37	0.64
1	14	100 year + cc	22.41	87.36	89.02	88.62	89.22	0.006095	1.98	11.31	10.10	0.60
1	14	1000 year	33.63	87.36	89.72		89.88	0.003164	1.74	19.33	12.66	0.45
1	13	2 year	7.08	86.90	87.95		88.01	0.003243	1.11	6.38	8.86	0.42
1	13	5 year	9.14	86.90	88.10		88.17	0.003154	1.18	7.74	9.57	0.42
1	13	10 year	10.79	86.90	88.21		88.28	0.003067	1.22	8.82	10.09	0.42
1	13	25 year	13.38	86.90	88.37		88.45	0.002903	1.27	10.51	10.86	0.41
1	13	50 year	15.78	86.90	88.52		88.60	0.002702	1.30	12.17	11.56	0.40
1	13	75 year	17.41	86.90	88.62		88.70	0.002531	1.30	13.39	12.04	0.39
1	13	100 year	18.68	86.90	88.70		88.79	0.002344	1.30	14.37	12.25	0.38
1	13	100 year + cc	22.41	86.90	88.94		89.02	0.001899	1.29	17.37	12.86	0.35
1	13	1000 year	33.63	86.90	89.70		89.78	0.001064	1.22	27.92	14.82	0.28

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	12	2 year	7.08	86.55	87.49	87.31	87.66	0.009415	1.80	3.92	5.53	0.68
1	12	5 year	9.14	86.55	87.65	87.43	87.83	0.008924	1.90	4.80	5.96	0.68
1	12	10 year	10.79	86.55	87.77	87.52	87.96	0.008347	1.95	5.55	6.30	0.66
1	12	25 year	13.38	86.55	87.97	87.64	88.16	0.007219	1.96	6.84	6.85	0.63
1	12	50 year	15.78	86.55	88.15	87.75	88.34	0.006203	1.94	8.15	7.37	0.59
1	12	75 year	17.41	86.55	88.28	87.82	88.46	0.005570	1.91	9.11	7.71	0.56
1	12	100 year	18.68	86.55	88.38	87.86	88.56	0.005122	1.89	9.90	7.98	0.54
1	12	100 year + cc	22.41	86.55	88.67	88.00	88.84	0.004031	1.81	12.36	8.78	0.49
1	12	1000 year	33.63	86.55	89.55	88.36	89.68	0.002134	1.59	21.15	11.17	0.37
1	11	2 year	7.08	86.17	87.22	86.91	87.33	0.005774	1.51	4.70	6.02	0.54
1	11	5 year	9.14	86.17	87.41	87.02	87.54	0.005024	1.54	5.94	6.58	0.52
1	11	10 year	10.79	86.17	87.57	87.11	87.69	0.004437	1.54	7.00	6.98	0.49
1	11	25 year	13.38	86.17	87.81	87.23	87.93	0.003655	1.53	8.75	7.54	0.45
1	11	50 year	15.78	86.17	88.03	87.34	88.14	0.003120	1.51	10.44	8.04	0.42
1	11	75 year	17.41	86.17	88.17	87.40	88.29	0.002828	1.50	11.62	8.37	0.41
1	11	100 year	18.68	86.17	88.28	87.45	88.40	0.002631	1.49	12.55	8.63	0.39
1	11	100 year + cc	22.41	86.17	88.60	87.59	88.71	0.002164	1.45	15.41	9.37	0.36
1	11	1000 year	33.63	86.17	89.52	87.93	89.61	0.001161	1.28	32.68	28.87	0.27
1	10.5	2 year	7.08	85.82	86.94	86.53	87.04	0.004482	1.40	5.04	5.59	0.47
1	10.5	5 year	9.14	85.82	87.19	86.65	87.29	0.003640	1.40	6.51	6.06	0.43
1	10.5	10 year	10.79	85.82	87.38	86.73	87.48	0.003215	1.41	7.67	6.40	0.41
1	10.5	25 year	13.38	85.82	87.65	86.86	87.75	0.002745	1.41	9.50	6.90	0.38
1	10.5	50 year	15.78	85.82	87.89	86.97	87.99	0.002440	1.41	11.18	7.34	0.36
1	10.5	75 year	17.41	85.82	88.04	87.04	88.14	0.002272	1.41	12.34	7.62	0.35
1	10.5	100 year	18.68	85.82	88.16	87.09	88.26	0.002156	1.41	13.25	7.84	0.35
1	10.5	100 year + cc	22.41	85.82	88.50	87.23	88.60	0.001872	1.40	15.98	8.45	0.33
1	10.5	1000 year	33.63	85.82	89.45	87.61	89.54	0.001122	1.33	29.30	20.06	0.26
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	86.94	85.96	86.97	0.001036	0.83	8.52	6.64	0.23
1	10	5 year	9.14	85.25	87.19	86.08	87.23	0.001039	0.89	10.25	7.10	0.24
1	10	10 year	10.79	85.25	87.38	86.16	87.42	0.001032	0.93	11.60	7.44	0.24

HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
			(m3/s)	(m)	(m)	(m)	(m)	(m/m)	(m/s)	(m2)	(m)	
1	10	25 year	13.38	85.25	87.65	86.29	87.70	0.001010	0.98	13.70	7.94	0.24
1	10	50 year	15.78	85.25	87.89	86.40	87.94	0.000983	1.01	15.64	8.38	0.24
1	10	75 year	17.41	85.25	88.04	86.47	88.09	0.000961	1.03	16.96	8.63	0.23
1	10	100 year	18.68	85.25	88.16	86.52	88.21	0.000942	1.04	17.98	8.77	0.23
1	10	100 year + cc	22.41	85.25	88.49	86.66	88.55	0.000892	1.07	20.98	9.14	0.23
1	10	1000 year	33.63	85.25	89.45	87.04	89.51	0.000725	1.12	30.19	9.96	0.20
1	9.5		Culvert									
1	9	2 year	7.08	83.67	85.97		85.98	0.000407	0.60	11.90	7.05	0.15
1	9	5 year	9.14	83.67	86.12		86.15	0.000532	0.70	13.02	7.30	0.17
1	9	10 year	10.79	83.67	86.24		86.27	0.000627	0.78	13.85	7.48	0.18
1	9	25 year	13.38	83.67	86.39		86.43	0.000771	0.89	15.05	7.70	0.20
1	9	50 year	15.78	83.67	86.52		86.57	0.000897	0.98	16.03	7.73	0.22
1	9	75 year	17.41	83.67	86.60		86.66	0.000980	1.04	16.66	7.73	0.23
1	9	100 year	18.68	83.67	86.66		86.72	0.001046	1.09	17.12	7.73	0.23
1	9	100 year + cc	22.41	83.67	86.82		86.90	0.001237	1.22	18.37	7.73	0.25
1	9	1000 year	33.63	83.67	87.22		87.35	0.001814	1.57	21.48	7.73	0.30
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.006345	1.50	4.71	6.58	0.57
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.006268	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.006152	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.005990	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.006016	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.006018	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.005993	2.05	9.34	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.005962	2.20	10.61	9.34	0.60
1	8	1000 year	33.63	84.94	86.88	86.48	87.23	0.006336	2.62	13.97	10.80	0.64
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.24		85.31	0.002776	1.20	5.90	5.14	0.36
1	7	5 year	9.14	83.76	85.40		85.50	0.003154	1.35	6.75	5.22	0.38
1	7	10 year	10.79	83.76	85.52		85.63	0.003391	1.47	7.38	5.80	0.40
1	7	25 year	13.38	83.76	85.68		85.81	0.003742	1.63	8.36	6.38	0.42


HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	7	50 year	15.78	83.76	85.81		85.97	0.004040	1.77	9.22	6.67	0.43
1	7	75 year	17.41	83.76	85.89		86.07	0.004233	1.86	9.78	6.85	0.44
1	7	100 year	18.68	83.76	85.95		86.14	0.004370	1.92	10.21	7.57	0.45
1	7	100 year + cc	22.41	83.76	86.12		86.34	0.004637	2.10	11.55	8.31	0.47
1	7	1000 year	33.63	83.76	86.55		86.86	0.005212	2.53	15.52	10.25	0.52
1	6	2 year	7.08	83.95	85.05		85.17	0.005395	1.56	4.72	5.92	0.51
1	6	5 year	9.14	83.95	85.18		85.34	0.005820	1.74	5.56	6.37	0.54
1	6	10 year	10.79	83.95	85.28		85.46	0.006122	1.87	6.20	6.64	0.56
1	6	25 year	13.38	83.95	85.42		85.63	0.006516	2.06	7.12	7.07	0.59
1	6	50 year	15.78	83.95	85.53		85.77	0.006739	2.21	7.94	7.52	0.60
1	6	75 year	17.41	83.95	85.60		85.86	0.006878	2.31	8.48	7.80	0.62
1	6	100 year	18.68	83.95	85.65		85.93	0.006980	2.39	8.90	8.02	0.62
1	6	100 year + cc	22.41	83.95	85.80		86.12	0.007256	2.59	10.10	8.60	0.65
1	6	1000 year	33.63	83.95	86.16		86.62	0.007925	3.10	13.52	10.08	0.70
1	5	2 year	7.08	83.93	84.82		84.97	0.007056	1.68	4.48	6.43	0.59
1	5	5 year	9.14	83.93	84.94		85.12	0.007827	1.90	5.22	6.82	0.63
1	5	10 year	10.79	83.93	85.02		85.23	0.008203	2.05	5.78	7.30	0.65
1	5	25 year	13.38	83.93	85.13		85.38	0.008837	2.28	6.62	7.94	0.69
1	5	50 year	15.78	83.93	85.22		85.52	0.009392	2.48	7.35	8.46	0.72
1	5	75 year	17.41	83.93	85.27	85.07	85.60	0.009783	2.60	7.82	8.79	0.74
1	5	100 year	18.68	83.93	85.31	85.12	85.66	0.010101	2.70	8.18	9.02	0.75
1	5	100 year + cc	22.41	83.93	85.42	85.27	85.84	0.010895	2.96	9.19	9.49	0.79
1	5	1000 year	33.63	83.93	85.68	85.63	86.31	0.013340	3.66	11.78	10.46	0.90
1	4	2 year	7.08	83.83	84.62		84.74	0.007425	1.54	4.59	6.89	0.60
1	4	5 year	9.14	83.83	84.73		84.88	0.007786	1.70	5.38	7.14	0.63
1	4	10 year	10.79	83.83	84.81		84.98	0.008001	1.81	5.96	7.31	0.64
1	4	25 year	13.38	83.83	84.93		85.13	0.008296	1.96	6.82	7.56	0.66
1	4	50 year	15.78	83.83	85.03		85.25	0.008444	2.09	7.59	8.29	0.67
1	4	75 year	17.41	83.83	85.09		85.33	0.008559	2.17	8.10	8.75	0.68
1	4	100 year	18.68	83.83	85.13		85.38	0.008644	2.23	8.50	9.09	0.69
1	4	100 year + cc	22.41	83.83	85.26		85.54	0.008816	2.38	9.69	9.88	0.71
1	4	1000 year	33.63	83.83	85.58		85.96	0.009055	2.74	13.07	10.82	0.74


HEC-RAS Plan: Brigde 1 River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	3	2 year	7.08	83.63	84.40		84.51	0.006761	1.44	4.91	7.81	0.58
1	3	5 year	9.14	83.63	84.52		84.64	0.006664	1.56	5.86	8.15	0.59
1	3	10 year	10.79	83.63	84.61		84.74	0.006607	1.64	6.59	8.41	0.59
1	3	25 year	13.38	83.63	84.73		84.89	0.006619	1.75	7.64	8.76	0.60
1	3	50 year	15.78	83.63	84.83		85.01	0.006650	1.85	8.55	9.06	0.61
1	3	75 year	17.41	83.63	84.90		85.08	0.006628	1.91	9.14	9.36	0.61
1	3	100 year	18.68	83.63	84.94		85.14	0.006620	1.95	9.60	9.59	0.61
1	3	100 year + cc	22.41	83.63	85.08		85.29	0.006569	2.07	10.91	10.21	0.62
1	3	1000 year	33.63	83.63	85.43		85.70	0.006387	2.34	14.77	11.80	0.63
1	2	2 year	7.08	83.22	84.13		84.23	0.006341	1.40	5.05	7.47	0.54
1	2	5 year	9.14	83.22	84.24		84.36	0.006624	1.56	5.87	7.50	0.56
1	2	10 year	10.79	83.22	84.32		84.46	0.006827	1.67	6.47	7.53	0.57
1	2	25 year	13.38	83.22	84.43		84.60	0.007075	1.82	7.34	7.78	0.59
1	2	50 year	15.78	83.22	84.53		84.72	0.007298	1.96	8.10	8.06	0.61
1	2	75 year	17.41	83.22	84.59		84.80	0.007451	2.04	8.59	8.24	0.62
1	2	100 year	18.68	83.22	84.63		84.86	0.007550	2.11	8.97	8.38	0.62
1	2	100 year + cc	22.41	83.22	84.76		85.02	0.007868	2.28	10.03	8.75	0.64
1	2	1000 year	33.63	83.22	85.08		85.45	0.008482	2.72	13.02	10.01	0.68
1	1	2 year	7.08	83.32	83.98	83.83	84.10	0.008901	1.55	4.56	7.87	0.65
1	1	5 year	9.14	83.32	84.08	83.91	84.23	0.008907	1.70	5.37	7.92	0.66
1	1	10 year	10.79	83.32	84.15	83.97	84.32	0.008903	1.81	5.98	7.96	0.66
1	1	25 year	13.38	83.32	84.26	84.06	84.46	0.008901	1.95	6.86	8.09	0.67
1	1	50 year	15.78	83.32	84.35	84.14	84.58	0.008904	2.08	7.60	8.38	0.68
1	1	75 year	17.41	83.32	84.41	84.19	84.65	0.008902	2.16	8.09	8.59	0.69
1	1	100 year	18.68	83.32	84.46	84.23	84.71	0.008902	2.22	8.46	8.74	0.69
1	1	100 year + cc	22.41	83.32	84.57	84.33	84.87	0.008914	2.39	9.53	9.18	0.71
1	1	1000 year	33.63	83.32	84.89	84.63	85.29	0.008904	2.81	12.61	10.32	0.74


Hunsworth Beck 1st Oct Plan: Block at Bridge 15.5 02/10/2015

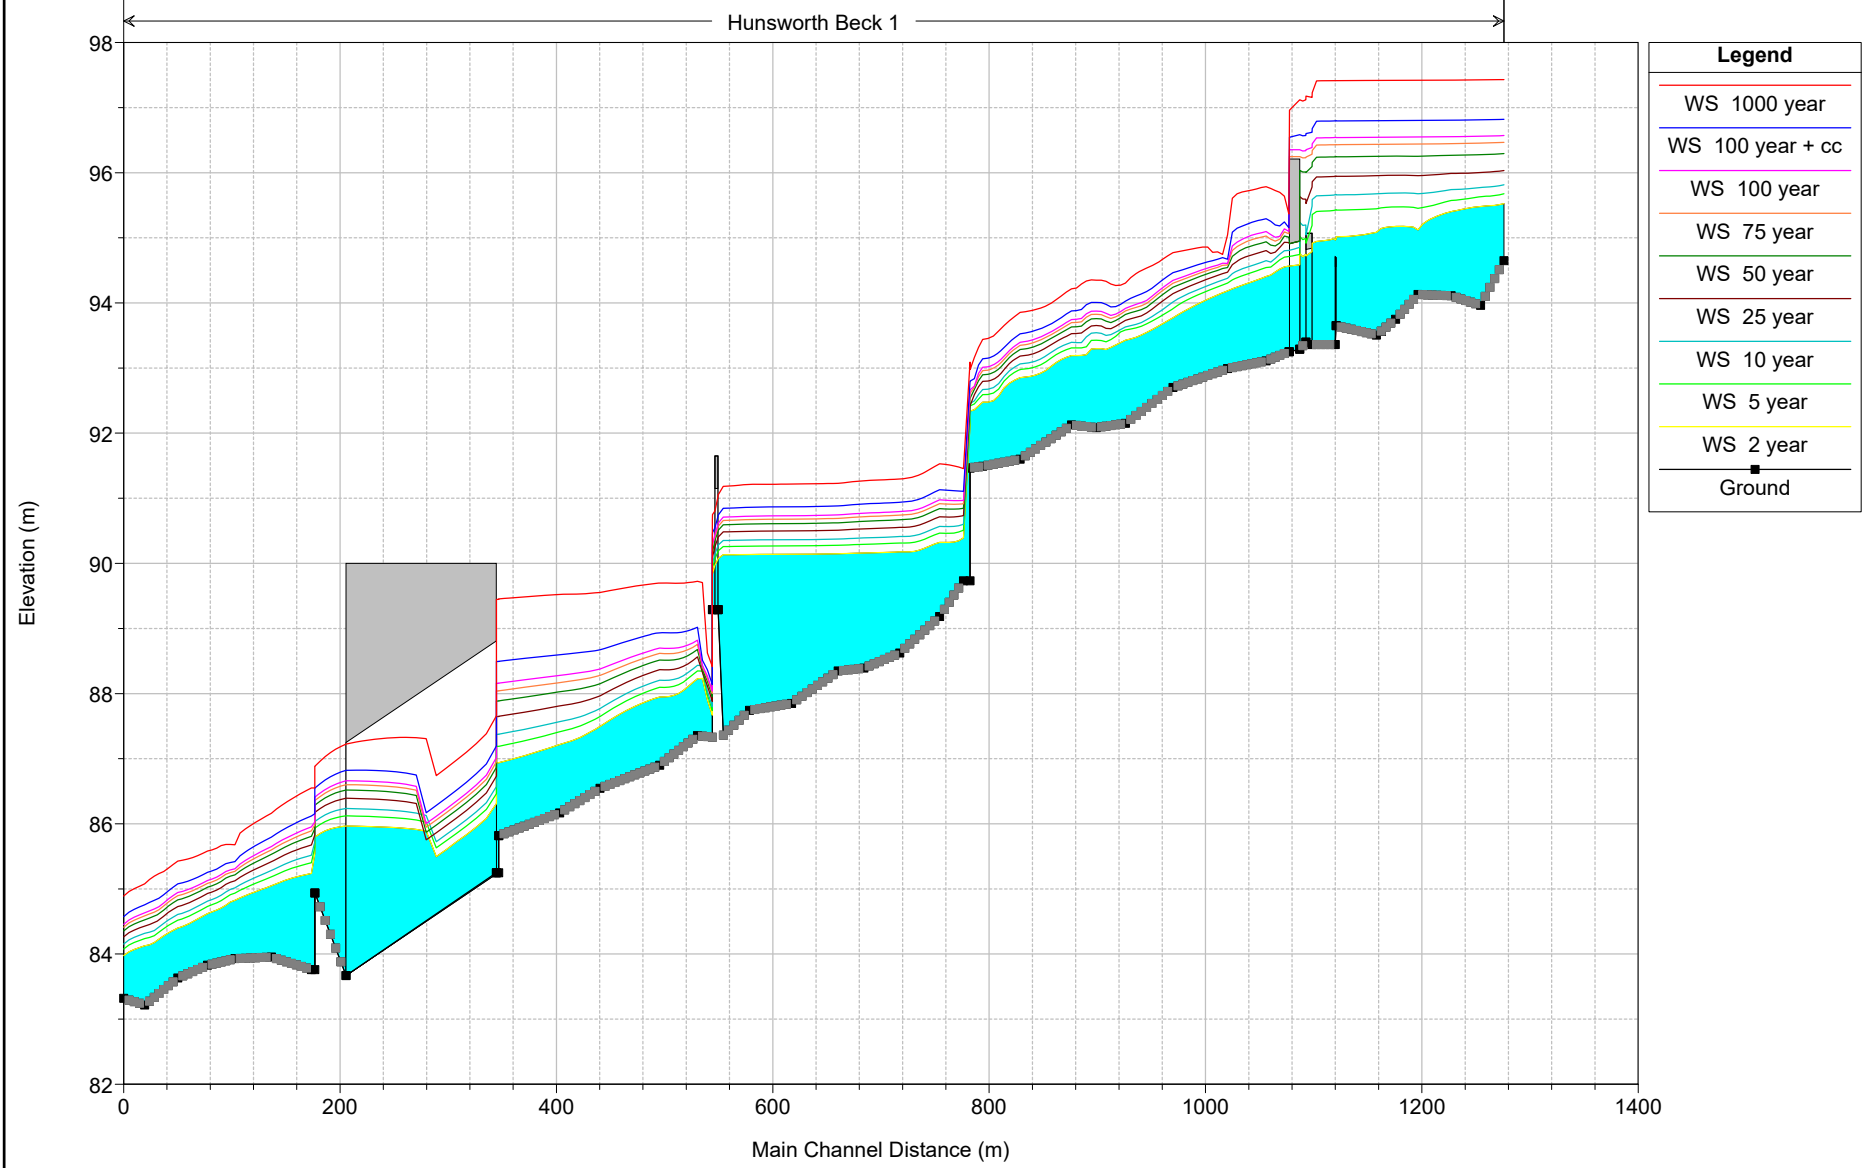

Hunsworth Beck 1st Oct Plan: Block at Bridge 15.5 02/10/2015  
XS08

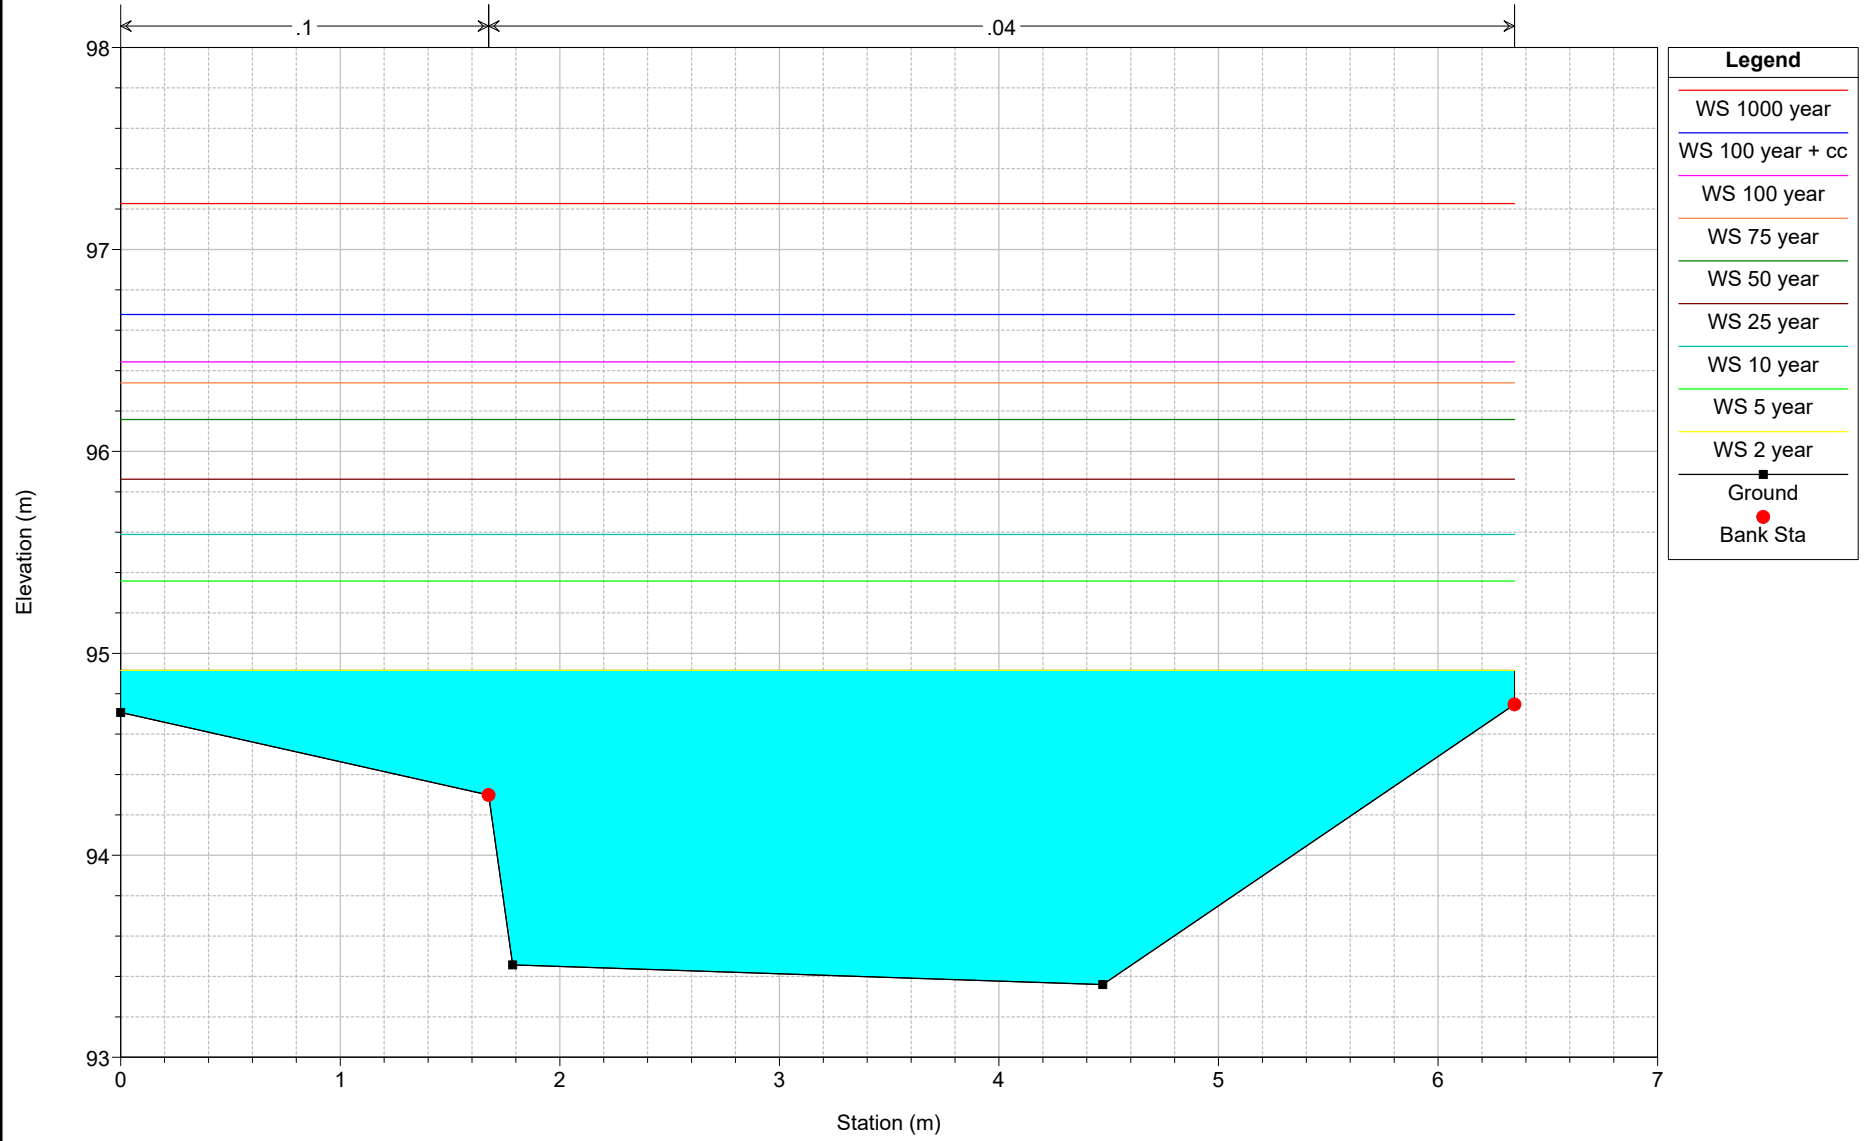


Hunsworth Beck 1st Oct Plan: Block at Bridge 15.5 02/10/2015  
XS14

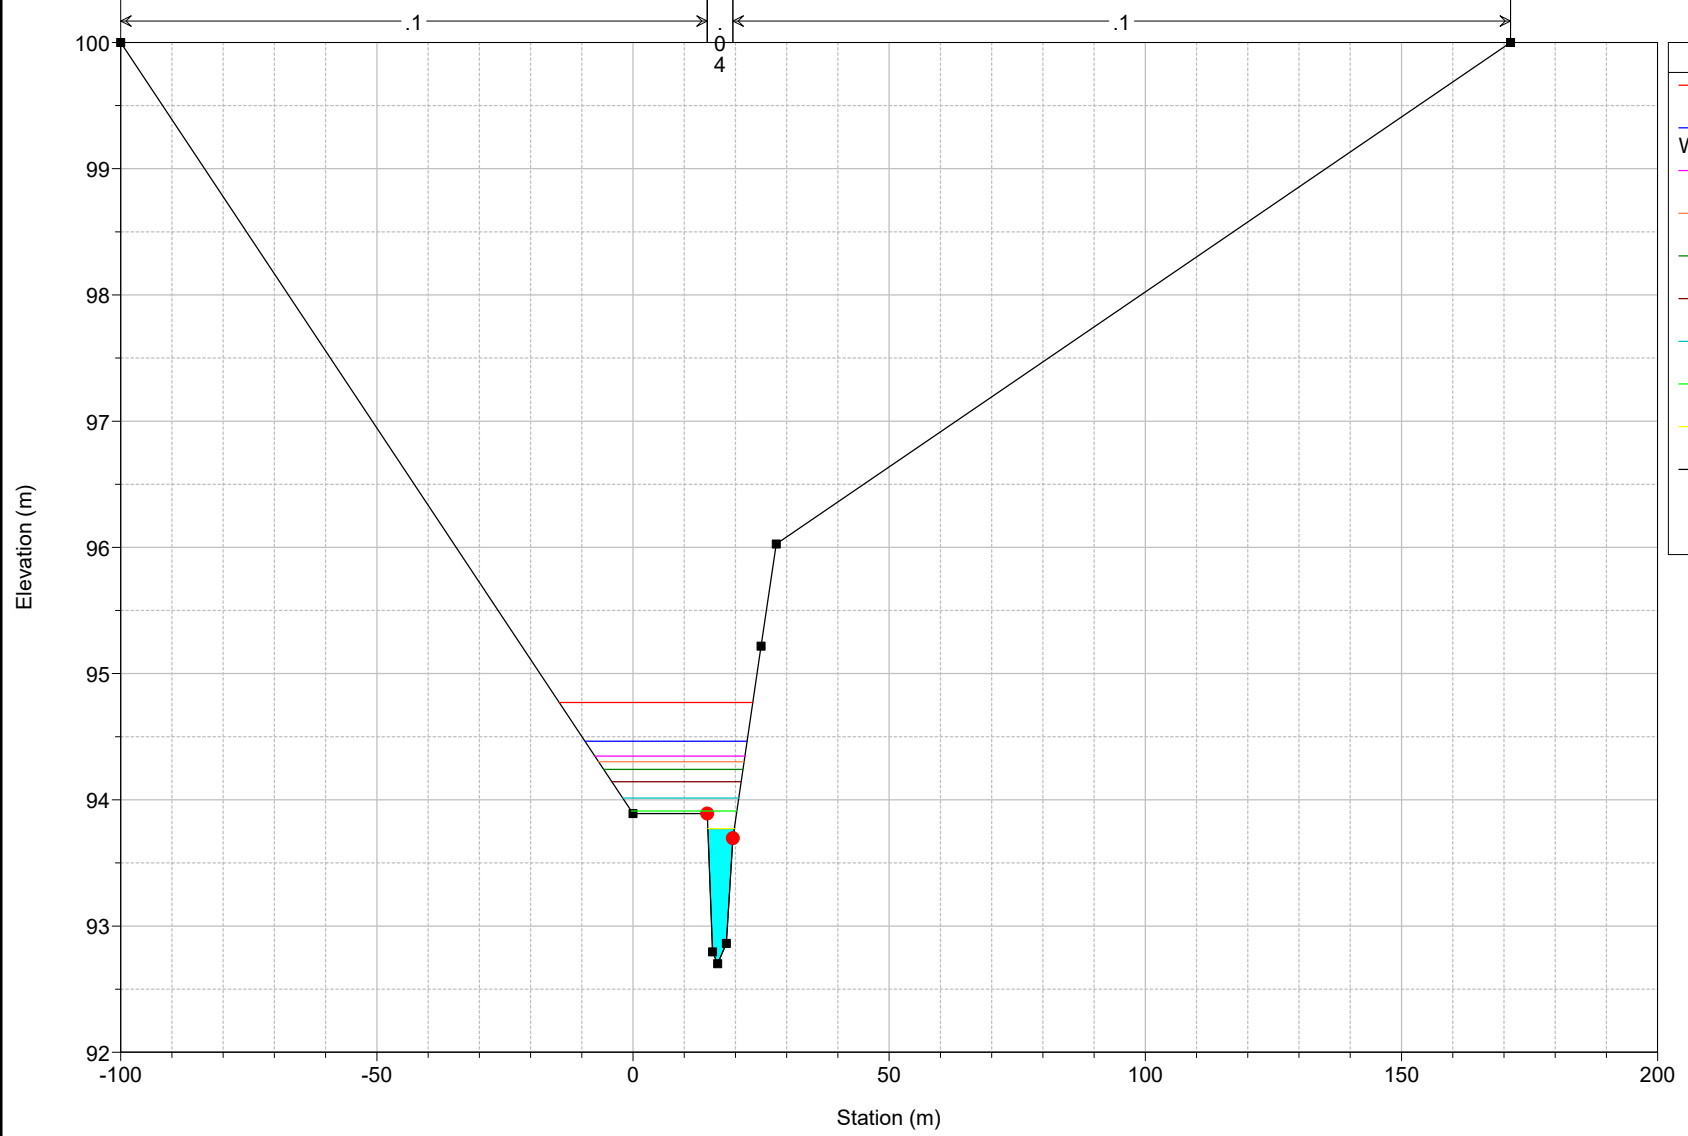


Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

Hunsworth Beck 1st Oct Plan: Block at Bridge 15.5 02/10/2015  
XS22

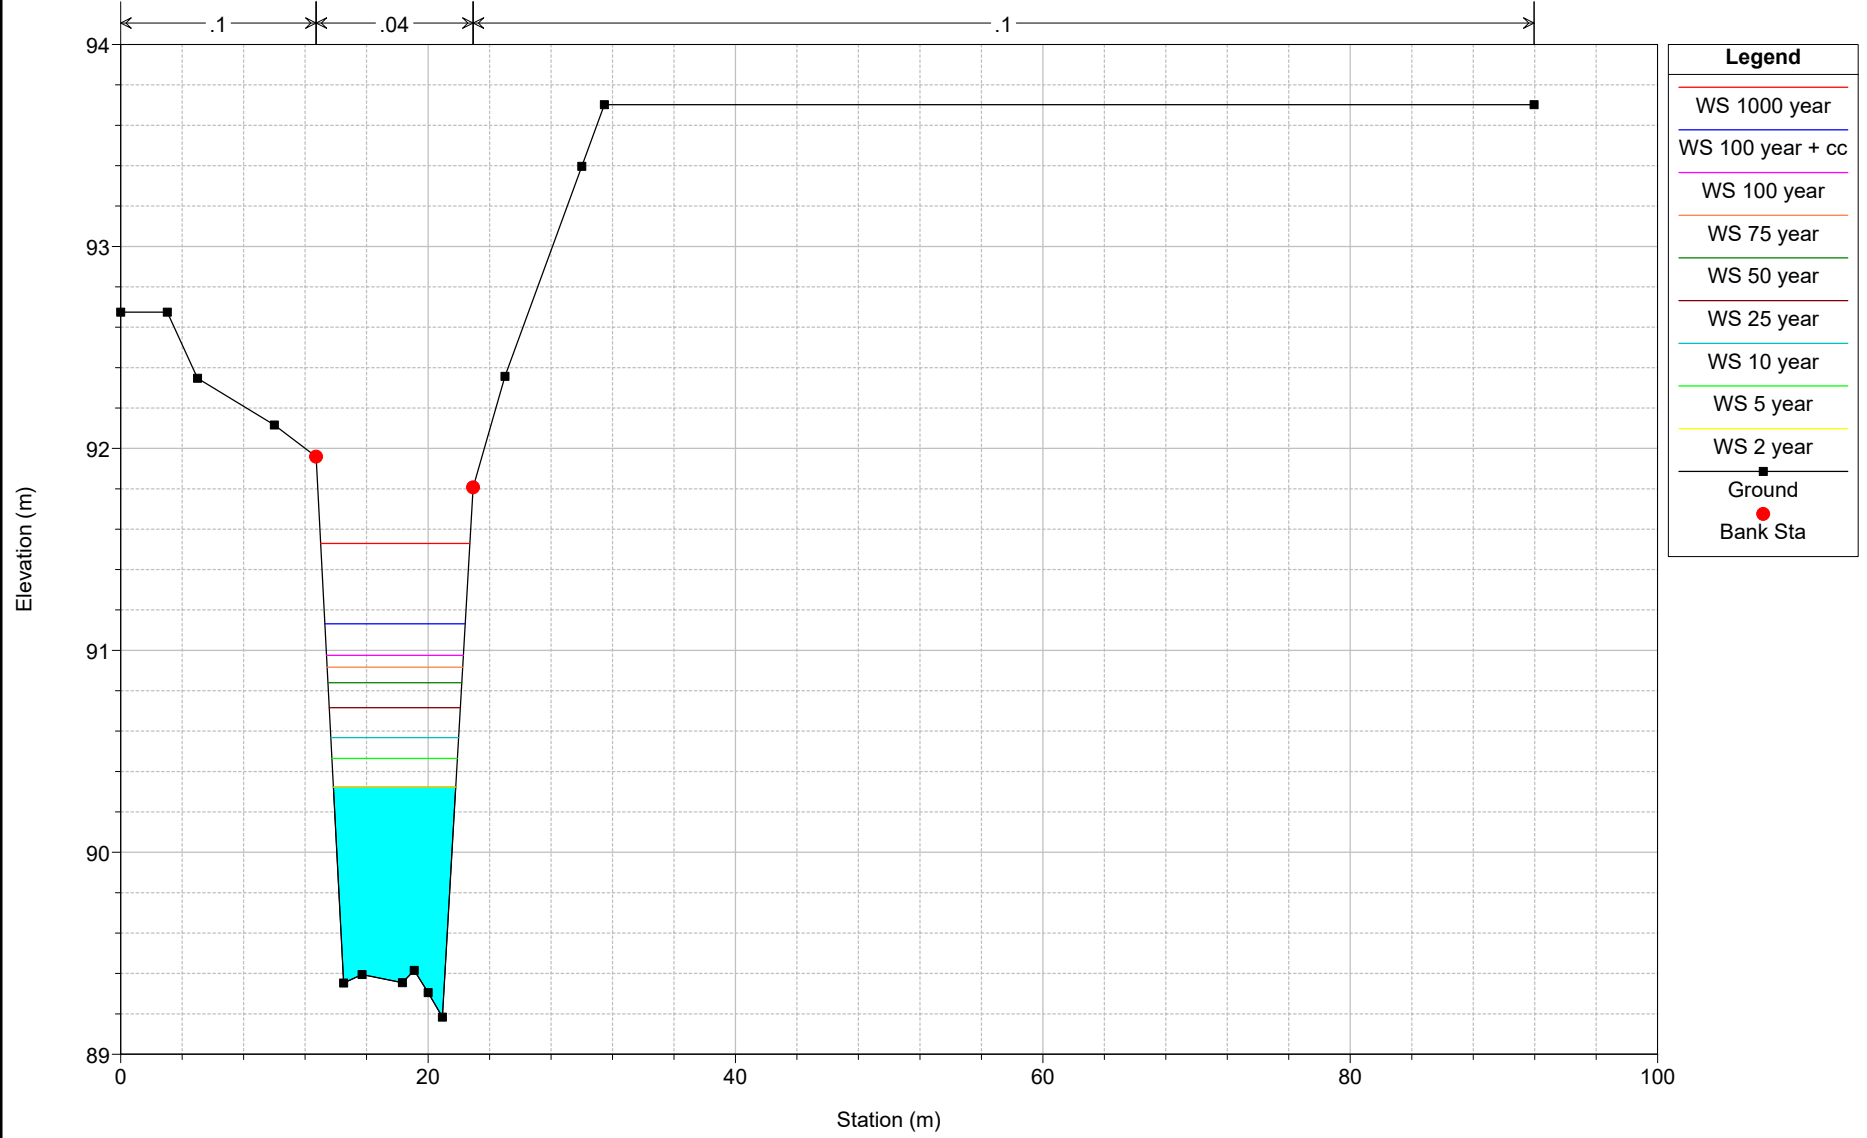

Hunsworth Beck 1st Oct Plan: Block at Bridge 15.5 02/10/2015  
XS 31

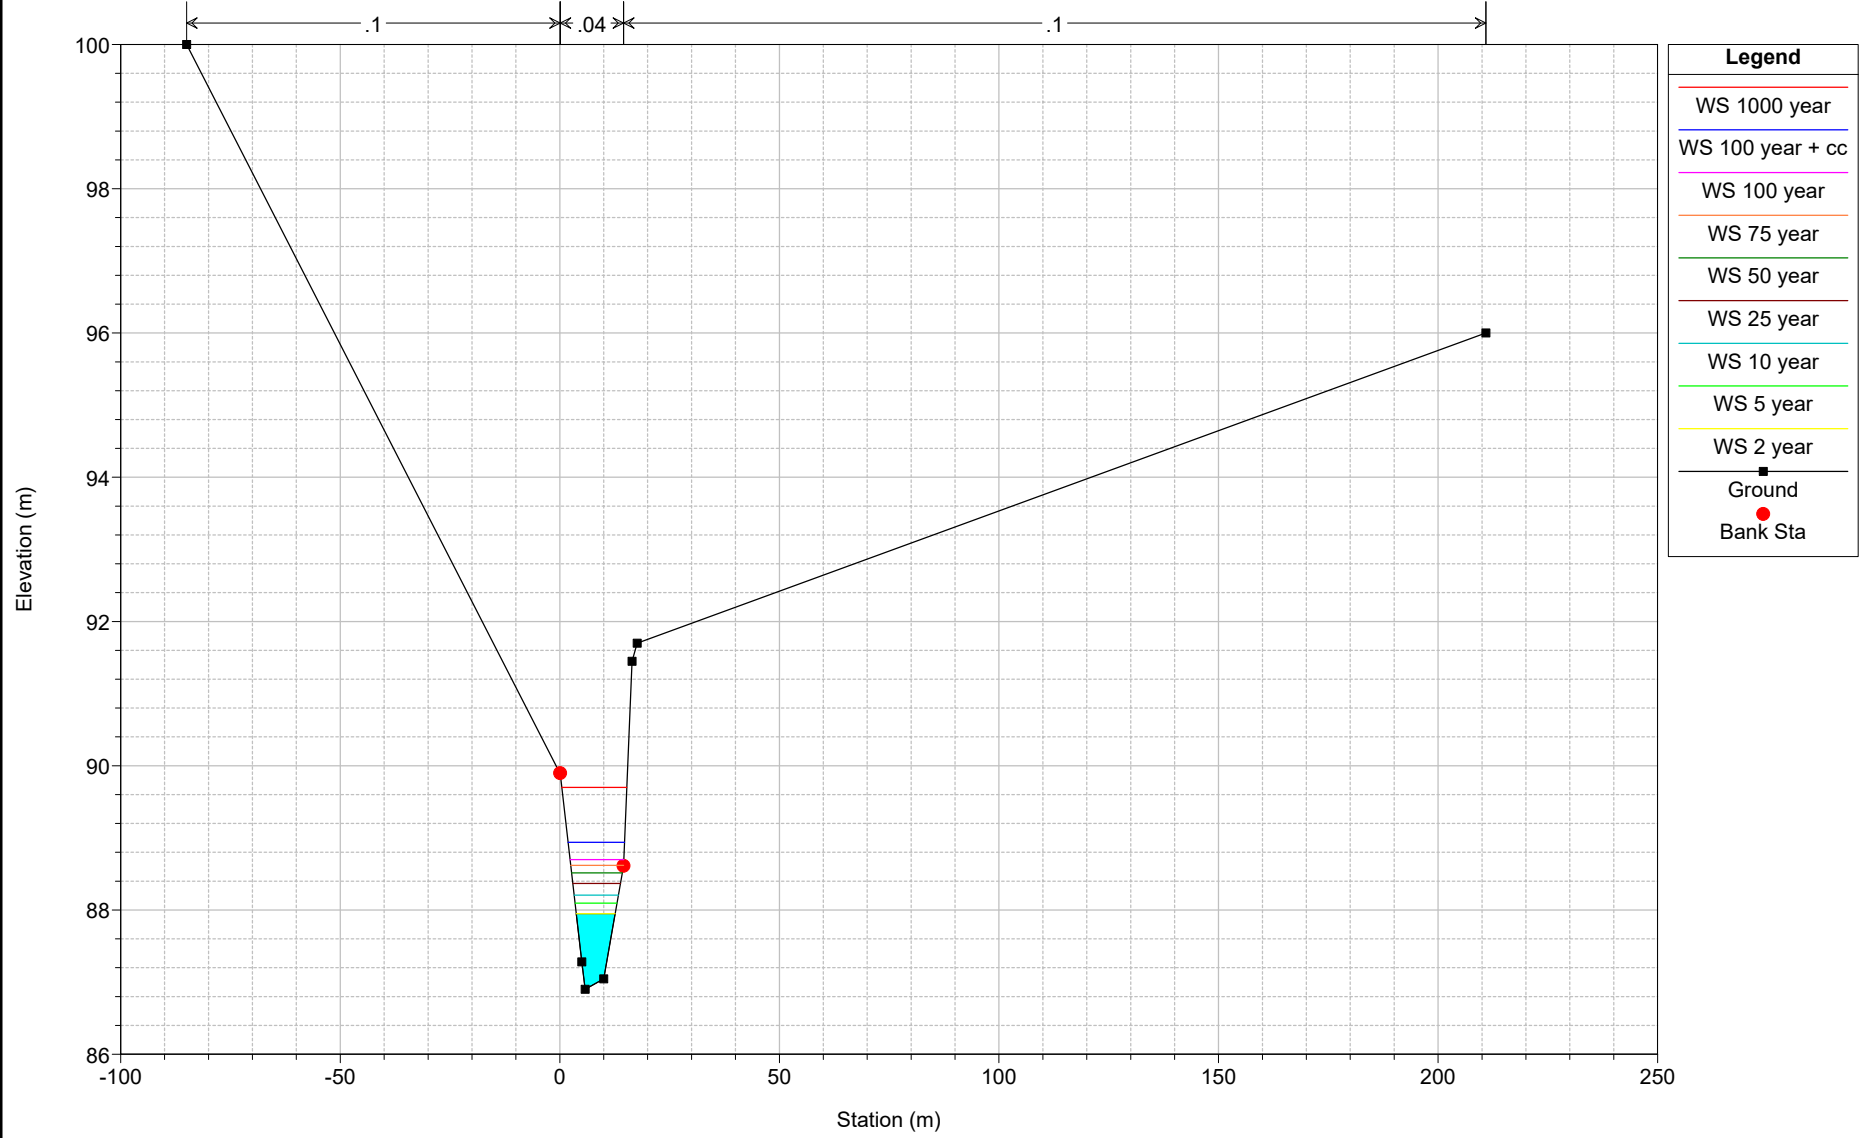

50% Blockage at Culvert Beneath Motorway (XS9.5)

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	43	2 year	7.08	94.65	95.53	95.25	95.62	0.005315	1.34	5.70	14.47	0.53
1	43	5 year	9.14	94.65	95.68	95.35	95.77	0.004312	1.35	8.47	22.88	0.49
1	43	10 year	10.79	94.65	95.81	95.42	95.89	0.003186	1.29	12.04	28.95	0.43
1	43	25 year	13.38	94.65	96.03	95.55	96.09	0.002013	1.19	19.46	38.63	0.35
1	43	50 year	15.78	94.65	96.29	95.65	96.33	0.001131	1.02	31.02	50.11	0.28
1	43	75 year	17.41	94.65	96.47	95.70	96.50	0.000810	0.93	40.32	57.71	0.24
1	43	100 year	18.68	94.65	96.57	95.74	96.60	0.000692	0.90	46.58	62.31	0.22
1	43	100 year + cc	22.41	94.65	96.82	95.84	96.84	0.000518	0.85	63.45	73.27	0.20
1	43	1000 year	33.63	94.65	97.43	96.07	97.45	0.000305	0.79	116.41	100.18	0.16
1	42	2 year	7.08	93.96	95.49	94.74	95.53	0.001647	0.94	7.50	7.02	0.29
1	42	5 year	9.14	93.96	95.63	94.85	95.69	0.001809	1.06	9.40	16.48	0.31
1	42	10 year	10.79	93.96	95.77	94.94	95.83	0.001674	1.10	12.09	22.07	0.30
1	42	25 year	13.38	93.96	96.00	95.06	96.05	0.001267	1.06	21.00	41.76	0.27
1	42	50 year	15.78	93.96	96.28	95.17	96.31	0.000802	0.94	34.17	54.87	0.22
1	42	75 year	17.41	93.96	96.45	95.23	96.48	0.000605	0.87	44.65	63.39	0.19
1	42	100 year	18.68	93.96	96.56	95.29	96.58	0.000530	0.84	51.66	68.50	0.18
1	42	100 year + cc	22.41	93.96	96.81	95.42	96.83	0.000416	0.80	70.42	80.60	0.17
1	42	1000 year	33.63	93.96	97.43	95.92	97.44	0.000260	0.74	129.03	110.16	0.14
1	41	2 year	7.08	94.11	95.40		95.46	0.003186	1.11	7.51	31.91	0.40
1	41	5 year	9.14	94.11	95.57		95.63	0.002300	1.07	13.61	40.08	0.35
1	41	10 year	10.79	94.11	95.74		95.78	0.001510	0.97	21.00	48.14	0.29
1	41	25 year	13.38	94.11	95.99		96.01	0.000881	0.84	34.46	60.12	0.23
1	41	50 year	15.78	94.11	96.27		96.29	0.000487	0.71	53.29	73.68	0.18
1	41	75 year	17.41	94.11	96.45		96.46	0.000354	0.65	67.29	82.33	0.15
1	41	100 year	18.68	94.11	96.56		96.57	0.000307	0.63	76.37	87.48	0.14
1	41	100 year + cc	22.41	94.11	96.81		96.82	0.000238	0.60	99.99	99.63	0.13
1	41	1000 year	33.63	94.11	97.42		97.43	0.000153	0.56	170.39	129.26	0.11
1	40	2 year	7.08	94.13	95.12	94.95	95.30	0.009642	1.90	4.39	13.24	0.69
1	40	5 year	9.14	94.13	95.45		95.53	0.003396	1.36	12.89	33.74	0.43
1	40	10 year	10.79	94.13	95.68		95.72	0.001782	1.13	21.39	42.41	0.32
1	40	25 year	13.38	94.13	95.95		95.98	0.000989	0.96	34.68	53.21	0.25
1	40	50 year	15.78	94.13	96.25		96.27	0.000553	0.81	52.19	64.75	0.19



HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	36.55		Bridge									
1	36.5	2 year	7.08	93.36	94.99		95.03	0.001514	0.92	12.02	32.19	0.28
1	36.5	5 year	9.14	93.36	95.42		95.44	0.000504	0.66	30.56	53.54	0.17
1	36.5	10 year	10.79	93.36	95.66		95.67	0.000333	0.59	44.54	65.16	0.14
1	36.5	25 year	13.38	93.36	95.94		95.95	0.000230	0.54	65.12	79.23	0.12
1	36.5	50 year	15.78	93.36	96.24		96.25	0.000152	0.48	91.25	94.11	0.10
1	36.5	75 year	17.41	93.36	96.43		96.43	0.000122	0.45	109.62	103.29	0.09
1	36.5	100 year	18.68	93.36	96.54		96.54	0.000112	0.45	121.19	108.68	0.09
1	36.5	100 year + cc	22.41	93.36	96.79		96.80	0.000097	0.44	150.59	121.30	0.08
1	36.5	1000 year	33.63	93.36	97.41		97.42	0.000075	0.44	235.20	151.87	0.07
1	36	2 year	7.08	93.36	94.92	94.22	94.99	0.002419	1.19	6.48	6.35	0.34
1	36	5 year	9.14	93.36	95.36	94.36	95.42	0.001537	1.11	9.28	6.35	0.27
1	36	10 year	10.79	93.36	95.59	94.46	95.65	0.001442	1.15	10.75	6.35	0.27
1	36	25 year	13.38	93.36	95.86	94.62	95.94	0.001479	1.24	12.48	6.35	0.27
1	36	50 year	15.78	93.36	96.16	94.75	96.24	0.001411	1.28	14.36	6.35	0.26
1	36	75 year	17.41	93.36	96.34	94.82	96.42	0.001396	1.31	15.51	6.35	0.26
1	36	100 year	18.68	93.36	96.44	94.87	96.53	0.001439	1.35	16.17	6.35	0.26
1	36	100 year + cc	22.41	93.36	96.68	95.01	96.78	0.001638	1.49	17.66	6.35	0.28
1	36	1000 year	33.63	93.36	97.23	95.39	97.40	0.002291	1.89	21.15	6.35	0.32
1	35.5		Bridge									
1	35	2 year	7.08	93.40	94.75	94.29	94.92	0.008795	1.87	3.79	3.03	0.53
1	35	5 year	9.14	93.40	94.99	94.46	95.19	0.008733	2.00	4.77	4.14	0.53
1	35	10 year	10.79	93.40	95.20	94.58	95.41	0.007807	2.05	5.70	5.12	0.51
1	35	25 year	13.38	93.40	95.59	94.75	95.78	0.005514	1.98	8.30	8.06	0.44
1	35	50 year	15.78	93.40	96.01	94.94	96.16	0.003646	1.82	12.32	11.07	0.37
1	35	75 year	17.41	93.40	96.23	95.03	96.37	0.003052	1.76	14.74	11.07	0.34
1	35	100 year	18.68	93.40	96.34	95.10	96.47	0.002955	1.78	15.93	11.07	0.34
1	35	100 year + cc	22.41	93.40	96.57	95.34	96.72	0.002985	1.89	18.53	11.07	0.35
1	35	1000 year	33.63	93.40	97.12	95.95	97.31	0.003319	2.22	24.58	11.07	0.37
1	34	2 year	7.08	93.29	94.76	94.01	94.85	0.003958	1.30	5.44	4.36	0.37

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	34	5 year	9.14	93.29	95.02	94.15	95.12	0.003681	1.39	6.68	5.09	0.36
1	34	10 year	10.79	93.29	95.24	94.25	95.34	0.003397	1.43	7.84	5.69	0.35
1	34	25 year	13.38	93.29	95.63	94.39	95.73	0.002734	1.42	10.30	6.79	0.31
1	34	50 year	15.78	93.29	96.04	94.52	96.13	0.002160	1.37	13.28	7.92	0.27
1	34	75 year	17.41	93.29	96.25	94.61	96.34	0.002015	1.38	15.00	8.40	0.26
1	34	100 year	18.68	93.29	96.35	94.73	96.45	0.002038	1.41	15.89	8.40	0.27
1	34	100 year + cc	22.41	93.29	96.58	94.90	96.69	0.002245	1.53	17.84	8.40	0.28
1	34	1000 year	33.63	93.29	97.12	95.38	97.28	0.002960	1.88	22.35	8.40	0.32
1	33.5	Culvert										
1	33	2 year	7.08	93.25	94.57		94.69	0.004021	1.54	4.91	4.05	0.43
1	33	5 year	9.14	93.25	94.71		94.87	0.004871	1.78	5.51	4.13	0.47
1	33	10 year	10.79	93.25	94.81		95.00	0.005633	1.98	5.90	4.17	0.51
1	33	25 year	13.38	93.25	94.93		95.18	0.006942	2.27	6.40	4.23	0.56
1	33	50 year	15.78	93.25	95.01		95.33	0.008355	2.55	6.76	4.27	0.62
1	33	75 year	17.41	93.25	95.06		95.43	0.009312	2.72	6.99	4.30	0.65
1	33	100 year	18.68	93.25	95.10		95.51	0.010134	2.86	7.14	4.32	0.68
1	33	100 year + cc	22.41	93.25	95.16		95.71	0.013297	3.33	7.39	4.34	0.77
1	33	1000 year	33.63	93.25	95.37	95.37	96.36	0.020997	4.48	8.38	4.80	0.99
1	32	2 year	7.08	93.11	94.40	94.06	94.56	0.006312	1.80	4.77	12.08	0.55
1	32	5 year	9.14	93.11	94.54	94.22	94.72	0.006348	1.96	7.21	20.25	0.56
1	32	10 year	10.79	93.11	94.65	94.33	94.83	0.006000	2.01	9.44	22.83	0.55
1	32	25 year	13.38	93.11	94.80		94.97	0.005269	2.02	13.28	26.70	0.53
1	32	50 year	15.78	93.11	94.94		95.09	0.004642	2.01	17.11	30.06	0.50
1	32	75 year	17.41	93.11	95.03		95.17	0.004228	1.99	19.92	32.32	0.48
1	32	100 year	18.68	93.11	95.10		95.23	0.003952	1.97	22.15	33.99	0.47
1	32	100 year + cc	22.41	93.11	95.29		95.40	0.003202	1.90	29.36	38.92	0.43
1	32	1000 year	33.63	93.11	95.79		95.87	0.002107	1.79	51.57	51.22	0.36
1	31	2 year	7.08	92.99	94.18		94.34	0.006722	1.75	4.39	7.12	0.58
1	31	5 year	9.14	92.99	94.30		94.50	0.007279	1.97	5.29	7.77	0.61
1	31	10 year	10.79	92.99	94.38		94.61	0.007920	2.15	5.88	8.18	0.64
1	31	25 year	13.38	92.99	94.47	94.28	94.76	0.009133	2.43	6.67	8.69	0.70

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	31	50 year	15.78	92.99	94.54	94.40	94.89	0.010335	2.69	7.29	9.08	0.75
1	31	75 year	17.41	92.99	94.58	94.47	94.97	0.011227	2.86	7.66	9.30	0.79
1	31	100 year	18.68	92.99	94.61	94.52	95.04	0.012045	3.00	7.90	9.44	0.82
1	31	100 year + cc	22.41	92.99	94.67	94.67	95.22	0.014627	3.41	8.51	9.78	0.91
1	31	1000 year	33.63	92.99	95.04	95.04	95.71	0.013633	3.84	12.55	11.82	0.91
1	30	2 year	7.08	92.70	93.77		93.95	0.009458	1.87	3.79	5.17	0.68
1	30	5 year	9.14	92.70	93.91	93.70	94.12	0.009267	2.04	4.85	20.61	0.69
1	30	10 year	10.79	92.70	94.01	93.79	94.22	0.008300	2.07	7.07	22.67	0.66
1	30	25 year	13.38	92.70	94.14	94.05	94.35	0.007388	2.12	10.17	25.25	0.64
1	30	50 year	15.78	92.70	94.24	94.14	94.45	0.006962	2.18	12.73	27.20	0.63
1	30	75 year	17.41	92.70	94.30	94.19	94.51	0.006718	2.21	14.44	28.42	0.62
1	30	100 year	18.68	92.70	94.35	94.23	94.55	0.006582	2.24	15.71	29.31	0.62
1	30	100 year + cc	22.41	92.70	94.46		94.67	0.006299	2.32	19.30	31.66	0.62
1	30	1000 year	33.63	92.70	94.77		94.98	0.005588	2.48	29.98	37.80	0.60
1	29	2 year	7.08	92.15	93.43	93.11	93.55	0.006145	1.61	5.03	7.19	0.55
1	29	5 year	9.14	92.15	93.58	93.25	93.72	0.005497	1.68	7.36	13.72	0.53
1	29	10 year	10.79	92.15	93.63	93.35	93.79	0.006440	1.87	8.02	14.32	0.58
1	29	25 year	13.38	92.15	93.73	93.47	93.93	0.006940	2.06	9.54	15.63	0.61
1	29	50 year	15.78	92.15	93.82	93.60	94.04	0.007199	2.21	10.99	16.79	0.63
1	29	75 year	17.41	92.15	93.88	93.67	94.11	0.007374	2.30	11.93	17.50	0.64
1	29	100 year	18.68	92.15	93.92	93.72	94.16	0.007533	2.37	12.63	18.01	0.65
1	29	100 year + cc	22.41	92.15	94.03	93.83	94.30	0.007856	2.55	14.71	19.45	0.67
1	29	1000 year	33.63	92.15	94.30	94.12	94.66	0.008667	3.00	20.66	23.71	0.72
1	28	2 year	7.08	92.08	93.30	92.74	93.36	0.003580	1.27	8.25	10.30	0.41
1	28	5 year	9.14	92.08	93.43	92.86	93.51	0.003910	1.41	9.60	10.59	0.43
1	28	10 year	10.79	92.08	93.54	92.95	93.59	0.002336	1.16	19.54	31.53	0.34
1	28	25 year	13.38	92.08	93.65	93.04	93.70	0.002391	1.25	23.06	32.86	0.35
1	28	50 year	15.78	92.08	93.76	93.24	93.81	0.002326	1.30	26.59	34.13	0.35
1	28	75 year	17.41	92.08	93.83	93.29	93.88	0.002294	1.33	28.89	34.93	0.35
1	28	100 year	18.68	92.08	93.87	93.33	93.93	0.002273	1.35	30.63	35.53	0.35
1	28	100 year + cc	22.41	92.08	94.01	93.47	94.06	0.002247	1.42	35.43	37.13	0.35
1	28	1000 year	33.63	92.08	94.35	93.62	94.41	0.002189	1.59	48.85	41.26	0.36

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	27	2 year	7.08	92.13	93.19	92.74	93.24	0.002813	1.13	8.57	11.12	0.38
1	27	5 year	9.14	92.13	93.31	92.83	93.38	0.003101	1.27	9.94	11.63	0.41
1	27	10 year	10.79	92.13	93.39	92.90	93.47	0.003316	1.38	10.93	11.99	0.43
1	27	25 year	13.38	92.13	93.53	93.00	93.61	0.003030	1.42	15.59	22.89	0.42
1	27	50 year	15.78	92.13	93.63	93.08	93.72	0.003022	1.50	18.02	24.05	0.42
1	27	75 year	17.41	92.13	93.70	93.14	93.79	0.003023	1.55	19.61	24.77	0.43
1	27	100 year	18.68	92.13	93.75	93.18	93.84	0.003023	1.59	20.83	25.31	0.43
1	27	100 year + cc	22.41	92.13	93.88	93.28	93.98	0.003025	1.69	24.27	26.76	0.43
1	27	1000 year	33.63	92.13	94.22	93.60	94.34	0.003019	1.93	33.92	30.24	0.45
1	26	2 year	7.08	91.60	92.85		92.92	0.003373	1.15	6.14	7.97	0.42
1	26	5 year	9.14	91.60	92.98		93.06	0.003751	1.27	7.18	8.70	0.45
1	26	10 year	10.79	91.60	93.06		93.16	0.004004	1.36	7.95	9.21	0.47
1	26	25 year	13.38	91.60	93.18		93.29	0.004321	1.47	9.10	9.92	0.49
1	26	50 year	15.78	91.60	93.28		93.41	0.004538	1.56	10.13	10.52	0.51
1	26	75 year	17.41	91.60	93.35		93.48	0.004655	1.61	10.81	10.89	0.52
1	26	100 year	18.68	91.60	93.40		93.53	0.004732	1.65	11.33	11.17	0.52
1	26	100 year + cc	22.41	91.60	93.53		93.68	0.004908	1.75	12.83	11.94	0.54
1	26	1000 year	33.63	91.60	93.86		94.05	0.004876	1.97	17.38	16.66	0.55
1	25	2 year	7.08	91.49	92.48		92.57	0.004310	1.36	5.45	7.94	0.48
1	25	5 year	9.14	91.49	92.59		92.71	0.004760	1.53	6.40	8.66	0.51
1	25	10 year	10.79	91.49	92.67		92.81	0.005087	1.65	7.11	9.17	0.53
1	25	25 year	13.38	91.49	92.79		92.96	0.005352	1.80	8.30	9.95	0.55
1	25	50 year	15.78	91.49	92.90		93.08	0.005485	1.93	9.35	10.73	0.57
1	25	75 year	17.41	91.49	92.96		93.16	0.005563	2.01	10.05	11.25	0.57
1	25	100 year	18.68	91.49	93.01		93.22	0.005555	2.06	10.63	11.67	0.58
1	25	100 year + cc	22.41	91.49	93.14		93.38	0.005674	2.22	12.23	12.75	0.59
1	25	1000 year	33.63	91.49	93.44		93.78	0.006416	2.68	16.31	14.77	0.65
1	24	2 year	7.08	91.47	92.34	92.11	92.47	0.007987	1.64	4.41	7.71	0.60
1	24	5 year	9.14	91.47	92.42	92.21	92.60	0.009451	1.90	5.11	9.46	0.66
1	24	10 year	10.79	91.47	92.46	92.29	92.69	0.011307	2.14	5.48	10.20	0.73
1	24	25 year	13.38	91.47	92.43	92.43	92.81	0.019562	2.75	5.19	9.63	0.95

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	24	50 year	15.78	91.47	92.54	92.54	92.94	0.017446	2.82	6.41	11.84	0.91
1	24	75 year	17.41	91.47	92.62	92.62	93.02	0.016095	2.85	7.35	13.08	0.89
1	24	100 year	18.68	91.47	92.66	92.66	93.07	0.015657	2.90	7.99	13.68	0.88
1	24	100 year + cc	22.41	91.47	92.80	92.80	93.22	0.014298	2.99	9.97	15.28	0.86
1	24	1000 year	33.63	91.47	92.98	93.09	93.62	0.018707	3.75	12.79	16.23	1.01
1	23.5		Inl Struct									
1	23	2 year	7.08	89.73	90.37	90.32	90.58	0.017369	2.03	3.49	6.32	0.87
1	23	5 year	9.14	89.73	90.47	90.41	90.72	0.017267	2.22	4.12	6.36	0.88
1	23	10 year	10.79	89.73	90.54	90.48	90.82	0.017209	2.35	4.60	6.40	0.88
1	23	25 year	13.38	89.73	90.65	90.59	90.97	0.017260	2.53	5.29	6.44	0.89
1	23	50 year	15.78	89.73	90.74	90.68	91.11	0.017245	2.68	5.90	6.48	0.90
1	23	75 year	17.41	89.73	90.80	90.74	91.19	0.017247	2.77	6.29	6.51	0.90
1	23	100 year	18.68	89.73	90.85	90.78	91.26	0.017142	2.83	6.61	6.53	0.90
1	23	100 year + cc	22.41	89.73	90.99	90.90	91.44	0.016799	2.98	7.52	6.59	0.89
1	23	1000 year	33.63	89.73	91.36	91.24	91.94	0.016529	3.37	9.98	6.74	0.88
1	22	2 year	7.08	89.18	90.26		90.32	0.002860	1.09	6.51	7.86	0.38
1	22	5 year	9.14	89.18	90.38		90.46	0.003102	1.22	7.51	8.04	0.40
1	22	10 year	10.79	89.18	90.47		90.56	0.003277	1.31	8.24	8.17	0.42
1	22	25 year	13.38	89.18	90.60		90.71	0.003532	1.44	9.29	8.36	0.44
1	22	50 year	15.78	89.18	90.71		90.83	0.003716	1.55	10.21	8.51	0.45
1	22	75 year	17.41	89.18	90.78		90.91	0.003799	1.61	10.84	8.62	0.46
1	22	100 year	18.68	89.18	90.84		90.98	0.003832	1.65	11.34	8.70	0.46
1	22	100 year + cc	22.41	89.18	91.01		91.16	0.003866	1.75	12.81	8.95	0.47
1	22	1000 year	33.63	89.18	91.44		91.64	0.004004	2.00	16.80	9.57	0.48
1	21	2 year	7.08	88.62	89.63	89.44	89.79	0.008836	1.74	4.07	5.71	0.66
1	21	5 year	9.14	88.62	89.76	89.55	89.94	0.009016	1.90	4.82	5.95	0.67
1	21	10 year	10.79	88.62	89.85	89.63	90.06	0.009146	2.01	5.38	6.13	0.68
1	21	25 year	13.38	88.62	90.00		90.23	0.009038	2.13	6.28	6.40	0.69
1	21	50 year	15.78	88.62	90.21		90.42	0.007110	2.05	7.68	6.80	0.62
1	21	75 year	17.41	88.62	90.37		90.57	0.005972	1.98	8.77	7.09	0.57
1	21	100 year	18.68	88.62	90.45		90.65	0.005696	1.99	9.39	7.25	0.56

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	21	100 year + cc	22.41	88.62	90.66		90.87	0.005400	2.05	10.91	7.64	0.55
1	21	1000 year	33.63	88.62	91.12		91.39	0.005443	2.30	14.62	8.50	0.56
1	20	2 year	7.08	88.39	89.40		89.51	0.006627	1.49	4.74	6.97	0.58
1	20	5 year	9.14	88.39	89.54		89.67	0.006323	1.59	5.73	7.30	0.57
1	20	10 year	10.79	88.39	89.64		89.78	0.006048	1.65	6.52	7.55	0.57
1	20	25 year	13.38	88.39	89.81		89.96	0.005503	1.71	7.82	7.95	0.55
1	20	50 year	15.78	88.39	90.11		90.23	0.003540	1.54	10.25	8.65	0.45
1	20	75 year	17.41	88.39	90.29		90.40	0.002830	1.46	11.90	9.09	0.41
1	20	100 year	18.68	88.39	90.38		90.49	0.002681	1.46	12.76	9.31	0.40
1	20	100 year + cc	22.41	88.39	90.60		90.72	0.002537	1.51	14.83	9.83	0.39
1	20	1000 year	33.63	88.39	91.08		91.22	0.002583	1.70	19.77	10.95	0.40
1	19	2 year	7.08	88.35	89.18		89.33	0.009407	1.73	4.10	5.95	0.66
1	19	5 year	9.14	88.35	89.31		89.49	0.009108	1.85	4.93	6.20	0.66
1	19	10 year	10.79	88.35	89.43		89.61	0.008658	1.90	5.67	6.58	0.65
1	19	25 year	13.38	88.35	89.63		89.81	0.007395	1.90	7.03	7.23	0.62
1	19	50 year	15.78	88.35	90.01		90.14	0.003838	1.57	10.07	8.44	0.46
1	19	75 year	17.41	88.35	90.22		90.33	0.002952	1.46	11.89	9.02	0.41
1	19	100 year	18.68	88.35	90.32		90.43	0.002785	1.46	12.79	9.30	0.40
1	19	100 year + cc	22.41	88.35	90.54		90.66	0.002635	1.50	14.90	9.92	0.39
1	19	1000 year	33.63	88.35	91.01		91.16	0.002685	1.69	19.93	11.26	0.40
1	18	2 year	7.08	87.85	88.99		89.05	0.002955	1.14	6.23	7.34	0.39
1	18	5 year	9.14	87.85	89.14		89.22	0.003091	1.24	7.38	7.86	0.41
1	18	10 year	10.79	87.85	89.27		89.35	0.002983	1.28	8.44	8.31	0.40
1	18	25 year	13.38	87.85	89.50		89.59	0.002545	1.28	10.48	9.11	0.38
1	18	50 year	15.78	87.85	89.96		90.02	0.001353	1.05	15.03	10.84	0.28
1	18	75 year	17.41	87.85	90.19		90.24	0.001129	0.99	17.59	12.13	0.26
1	18	100 year	18.68	87.85	90.29		90.34	0.001101	0.99	18.84	12.73	0.26
1	18	100 year + cc	22.41	87.85	90.51		90.56	0.001104	1.03	21.85	14.11	0.26
1	18	1000 year	33.63	87.85	90.99		91.06	0.001121	1.14	29.76	19.13	0.27
1	17	2 year	7.08	87.74	88.78		88.83	0.002743	0.98	7.22	10.70	0.38
1	17	5 year	9.14	87.74	88.98		89.03	0.002157	0.97	9.46	11.93	0.35

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	17	10 year	10.79	87.74	89.15		89.19	0.001681	0.94	11.54	12.63	0.31
1	17	25 year	13.38	87.74	89.43		89.47	0.001152	0.88	15.27	13.81	0.27
1	17	50 year	15.78	87.74	89.94		89.97	0.000476	0.69	22.86	15.90	0.18
1	17	75 year	17.41	87.74	90.17		90.19	0.000361	0.66	26.62	16.79	0.16
1	17	100 year	18.68	87.74	90.27		90.30	0.000343	0.67	28.36	17.19	0.16
1	17	100 year + cc	22.41	87.74	90.50		90.53	0.000334	0.72	32.36	18.07	0.16
1	17	1000 year	33.63	87.74	90.99		91.02	0.000367	0.86	41.61	19.96	0.17
1	16	2 year	7.08	87.29	88.61	87.96	88.66	0.001690	0.95	7.44	7.37	0.30
1	16	5 year	9.14	87.29	88.85	88.07	88.90	0.001515	0.99	9.27	7.89	0.29
1	16	10 year	10.79	87.29	89.05	88.14	89.10	0.001361	1.00	10.83	8.32	0.28
1	16	25 year	13.38	87.29	89.35	88.25	89.40	0.001138	0.99	13.51	9.04	0.26
1	16	50 year	15.78	87.29	89.90	88.35	89.94	0.000642	0.84	18.85	10.47	0.20
1	16	75 year	17.41	87.29	90.14	88.41	90.17	0.000555	0.81	21.40	11.08	0.19
1	16	100 year	18.68	87.29	90.24	88.45	90.28	0.000556	0.83	22.54	11.37	0.19
1	16	100 year + cc	22.41	87.29	90.47	88.58	90.51	0.000600	0.89	25.18	12.08	0.20
1	16	1000 year	33.63	87.29	90.94	88.91	91.00	0.000764	1.07	31.31	13.58	0.23
1	15.5	Bridge										
1	15	2 year	7.08	87.32	88.57		88.64	0.002921	1.21	5.83	5.58	0.38
1	15	5 year	9.14	87.32	88.80		88.89	0.002708	1.27	7.18	5.91	0.37
1	15	10 year	10.79	87.32	89.00		89.08	0.002482	1.29	8.34	6.18	0.36
1	15	25 year	13.38	87.32	89.30		89.39	0.002124	1.30	10.31	6.59	0.33
1	15	50 year	15.78	87.32	89.87		89.93	0.001246	1.11	14.23	7.49	0.26
1	15	75 year	17.41	87.32	90.10		90.16	0.001131	1.08	16.11	8.23	0.25
1	15	100 year	18.68	87.32	90.21		90.27	0.001241	1.10	16.96	9.23	0.26
1	15	100 year + cc	22.41	87.32	90.43		90.50	0.001375	1.17	19.14	10.51	0.28
1	15	1000 year	33.63	87.32	90.89		90.99	0.001715	1.36	24.68	13.19	0.32
1	14	2 year	7.08	87.36	88.50		88.56	0.002743	1.07	6.59	8.23	0.38
1	14	5 year	9.14	87.36	88.77		88.82	0.001970	1.03	8.90	9.19	0.33
1	14	10 year	10.79	87.36	88.98		89.03	0.001568	0.99	10.89	9.95	0.30
1	14	25 year	13.38	87.36	89.30		89.35	0.001138	0.94	14.31	11.12	0.26
1	14	50 year	15.78	87.36	89.88		89.90	0.000532	0.74	21.30	13.75	0.19

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	14	75 year	17.41	87.36	90.12		90.14	0.000418	0.71	24.84	15.70	0.17
1	14	100 year	18.68	87.36	90.22		90.24	0.000406	0.72	26.48	16.53	0.17
1	14	100 year + cc	22.41	87.36	90.44		90.47	0.000411	0.77	30.38	18.35	0.17
1	14	1000 year	33.63	87.36	90.91		90.96	0.000468	0.93	40.02	22.49	0.19
1	13	2 year	7.08	86.90	88.47		88.49	0.000611	0.61	11.67	11.35	0.19
1	13	5 year	9.14	86.90	88.75		88.77	0.000495	0.61	14.97	12.38	0.18
1	13	10 year	10.79	86.90	88.96		88.98	0.000418	0.61	17.68	12.93	0.17
1	13	25 year	13.38	86.90	89.29		89.31	0.000332	0.61	22.09	13.77	0.15
1	13	50 year	15.78	86.90	89.87		89.89	0.000182	0.53	30.50	15.26	0.12
1	13	75 year	17.41	86.90	90.11		90.13	0.000154	0.52	34.43	17.36	0.11
1	13	100 year	18.68	86.90	90.22		90.23	0.000153	0.53	36.25	18.29	0.11
1	13	100 year + cc	22.41	86.90	90.44		90.46	0.000163	0.58	40.58	20.33	0.11
1	13	1000 year	33.63	86.90	90.91		90.94	0.000207	0.73	51.25	24.64	0.13
1	12	2 year	7.08	86.55	88.43	87.31	88.45	0.000661	0.69	10.29	8.12	0.20
1	12	5 year	9.14	86.55	88.71	87.43	88.73	0.000628	0.72	12.66	8.87	0.19
1	12	10 year	10.79	86.55	88.92	87.52	88.95	0.000590	0.74	14.65	9.46	0.19
1	12	25 year	13.38	86.55	89.26	87.64	89.29	0.000524	0.74	17.96	10.36	0.18
1	12	50 year	15.78	86.55	89.85	87.75	89.87	0.000314	0.64	24.59	11.97	0.14
1	12	75 year	17.41	86.55	90.09	87.82	90.11	0.000273	0.63	27.73	13.97	0.14
1	12	100 year	18.68	86.55	90.20	87.86	90.22	0.000264	0.64	32.51	28.19	0.13
1	12	100 year + cc	22.41	86.55	90.42	88.00	90.44	0.000271	0.69	39.59	35.09	0.14
1	12	1000 year	33.63	86.55	90.89	88.36	90.93	0.000310	0.82	59.60	49.67	0.15
1	11	2 year	7.08	86.17	88.42	86.91	88.43	0.000295	0.52	13.74	8.94	0.13
1	11	5 year	9.14	86.17	88.70	87.02	88.71	0.000307	0.56	16.33	9.59	0.14
1	11	10 year	10.79	86.17	88.91	87.11	88.93	0.000307	0.58	18.46	10.10	0.14
1	11	25 year	13.38	86.17	89.25	87.23	89.27	0.000295	0.61	21.98	10.87	0.14
1	11	50 year	15.78	86.17	89.85	87.34	89.86	0.000157	0.50	43.02	35.07	0.10
1	11	75 year	17.41	86.17	90.09	87.40	90.10	0.000134	0.49	52.22	39.78	0.10
1	11	100 year	18.68	86.17	90.20	87.45	90.21	0.000134	0.50	56.41	41.75	0.10
1	11	100 year + cc	22.41	86.17	90.42	87.59	90.43	0.000139	0.53	66.44	47.55	0.10
1	11	1000 year	33.63	86.17	90.89	87.93	90.91	0.000166	0.64	91.86	59.78	0.11

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	10.5	2 year	7.08	85.82	88.41	86.53	88.42	0.000213	0.47	15.22	8.29	0.11
1	10.5	5 year	9.14	85.82	88.68	86.65	88.70	0.000236	0.52	17.67	10.09	0.12
1	10.5	10 year	10.79	85.82	88.90	86.73	88.92	0.000241	0.55	20.16	12.89	0.12
1	10.5	25 year	13.38	85.82	89.24	86.86	89.25	0.000235	0.58	25.22	17.23	0.12
1	10.5	50 year	15.78	85.82	89.84	86.97	89.85	0.000151	0.53	38.06	26.18	0.10
1	10.5	75 year	17.41	85.82	90.08	87.04	90.10	0.000133	0.52	45.07	30.87	0.09
1	10.5	100 year	18.68	85.82	90.19	87.09	90.20	0.000135	0.54	48.34	32.82	0.10
1	10.5	100 year + cc	22.41	85.82	90.41	87.23	90.43	0.000148	0.59	56.13	37.07	0.10
1	10.5	1000 year	33.63	85.82	90.88	87.61	90.90	0.000194	0.73	75.59	46.00	0.12
1	10.4		Inl Struct									
1	10	2 year	7.08	85.25	88.40	85.96	88.41	0.000099	0.35	20.16	9.04	0.08
1	10	5 year	9.14	85.25	88.68	86.08	88.69	0.000120	0.40	22.72	9.36	0.08
1	10	10 year	10.79	85.25	88.90	86.16	88.91	0.000132	0.44	24.77	9.60	0.09
1	10	25 year	13.38	85.25	89.23	86.29	89.24	0.000143	0.48	28.07	9.96	0.09
1	10	50 year	15.78	85.25	89.84	86.40	89.85	0.000111	0.46	34.07	9.96	0.08
1	10	75 year	17.41	85.25	90.08	86.47	90.09	0.000110	0.48	36.47	9.96	0.08
1	10	100 year	18.68	85.25	90.18	86.52	90.19	0.000117	0.50	37.49	9.96	0.08
1	10	100 year + cc	22.41	85.25	90.40	86.66	90.42	0.000142	0.57	39.71	9.96	0.09
1	10	1000 year	33.63	85.25	90.87	87.04	90.90	0.000231	0.76	44.34	9.96	0.11
1	9.5		Culvert									
1	9	2 year	7.08	83.67	85.97		85.98	0.000407	0.60	11.90	7.05	0.15
1	9	5 year	9.14	83.67	86.12		86.15	0.000532	0.70	13.02	7.30	0.17
1	9	10 year	10.79	83.67	86.24		86.27	0.000627	0.78	13.85	7.48	0.18
1	9	25 year	13.38	83.67	86.39		86.43	0.000771	0.89	15.05	7.70	0.20
1	9	50 year	15.78	83.67	86.52		86.57	0.000897	0.98	16.03	7.73	0.22
1	9	75 year	17.41	83.67	86.60		86.66	0.000980	1.04	16.66	7.73	0.23
1	9	100 year	18.68	83.67	86.66		86.72	0.001046	1.09	17.12	7.73	0.23
1	9	100 year + cc	22.41	83.67	86.82		86.90	0.001237	1.22	18.37	7.73	0.25
1	9	1000 year	33.63	83.67	87.22		87.35	0.001814	1.57	21.48	7.73	0.30
1	8	2 year	7.08	84.94	85.80	85.54	85.91	0.006345	1.50	4.71	6.58	0.57

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	8	5 year	9.14	84.94	85.93	85.64	86.07	0.006268	1.62	5.65	6.91	0.57
1	8	10 year	10.79	84.94	86.04	85.72	86.18	0.006152	1.70	6.36	7.22	0.57
1	8	25 year	13.38	84.94	86.18	85.83	86.34	0.005990	1.82	7.41	7.77	0.58
1	8	50 year	15.78	84.94	86.29	85.92	86.48	0.006016	1.93	8.30	8.21	0.58
1	8	75 year	17.41	84.94	86.36	85.98	86.56	0.006018	1.99	8.90	8.50	0.59
1	8	100 year	18.68	84.94	86.41	86.03	86.62	0.005993	2.05	9.34	8.72	0.59
1	8	100 year + cc	22.41	84.94	86.55	86.15	86.80	0.005962	2.20	10.61	9.34	0.60
1	8	1000 year	33.63	84.94	86.88	86.48	87.23	0.006336	2.62	13.97	10.80	0.64
1	7.5		Inl Struct									
1	7	2 year	7.08	83.76	85.24		85.31	0.002776	1.20	5.90	5.14	0.36
1	7	5 year	9.14	83.76	85.40		85.50	0.003154	1.35	6.75	5.22	0.38
1	7	10 year	10.79	83.76	85.52		85.63	0.003391	1.47	7.38	5.80	0.40
1	7	25 year	13.38	83.76	85.68		85.81	0.003742	1.63	8.36	6.38	0.42
1	7	50 year	15.78	83.76	85.81		85.97	0.004040	1.77	9.22	6.67	0.43
1	7	75 year	17.41	83.76	85.89		86.07	0.004233	1.86	9.78	6.85	0.44
1	7	100 year	18.68	83.76	85.95		86.14	0.004370	1.92	10.21	7.57	0.45
1	7	100 year + cc	22.41	83.76	86.12		86.34	0.004637	2.10	11.55	8.31	0.47
1	7	1000 year	33.63	83.76	86.55		86.86	0.005212	2.53	15.52	10.25	0.52
1	6	2 year	7.08	83.95	85.05		85.17	0.005395	1.56	4.72	5.92	0.51
1	6	5 year	9.14	83.95	85.18		85.34	0.005821	1.74	5.56	6.37	0.54
1	6	10 year	10.79	83.95	85.28		85.46	0.006122	1.87	6.20	6.64	0.56
1	6	25 year	13.38	83.95	85.42		85.63	0.006516	2.06	7.12	7.07	0.59
1	6	50 year	15.78	83.95	85.53		85.77	0.006739	2.21	7.94	7.52	0.60
1	6	75 year	17.41	83.95	85.60		85.86	0.006878	2.31	8.48	7.80	0.62
1	6	100 year	18.68	83.95	85.65		85.93	0.006980	2.39	8.90	8.02	0.62
1	6	100 year + cc	22.41	83.95	85.80		86.12	0.007256	2.59	10.10	8.60	0.65
1	6	1000 year	33.63	83.95	86.16		86.62	0.007925	3.10	13.52	10.08	0.70
1	5	2 year	7.08	83.93	84.82		84.97	0.007056	1.68	4.48	6.43	0.59
1	5	5 year	9.14	83.93	84.94		85.12	0.007827	1.90	5.22	6.82	0.63
1	5	10 year	10.79	83.93	85.02		85.23	0.008203	2.05	5.78	7.30	0.65
1	5	25 year	13.38	83.93	85.13		85.38	0.008837	2.28	6.62	7.94	0.69


HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)

Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	5	50 year	15.78	83.93	85.22		85.52	0.009392	2.48	7.35	8.46	0.72
1	5	75 year	17.41	83.93	85.27	85.07	85.60	0.009784	2.60	7.82	8.79	0.74
1	5	100 year	18.68	83.93	85.31	85.12	85.66	0.010102	2.70	8.17	9.02	0.75
1	5	100 year + cc	22.41	83.93	85.42	85.27	85.84	0.010895	2.96	9.19	9.49	0.79
1	5	1000 year	33.63	83.93	85.68	85.63	86.31	0.013340	3.66	11.78	10.46	0.90
1	4	2 year	7.08	83.83	84.62		84.74	0.007425	1.54	4.59	6.89	0.60
1	4	5 year	9.14	83.83	84.73		84.88	0.007786	1.70	5.38	7.14	0.63
1	4	10 year	10.79	83.83	84.81		84.98	0.008001	1.81	5.96	7.31	0.64
1	4	25 year	13.38	83.83	84.93		85.13	0.008295	1.96	6.82	7.56	0.66
1	4	50 year	15.78	83.83	85.03		85.25	0.008445	2.09	7.59	8.29	0.67
1	4	75 year	17.41	83.83	85.09		85.33	0.008561	2.17	8.10	8.75	0.68
1	4	100 year	18.68	83.83	85.13		85.38	0.008647	2.23	8.50	9.09	0.69
1	4	100 year + cc	22.41	83.83	85.26		85.54	0.008816	2.38	9.69	9.88	0.71
1	4	1000 year	33.63	83.83	85.58		85.96	0.009055	2.74	13.06	10.82	0.74
1	3	2 year	7.08	83.63	84.40		84.51	0.006761	1.44	4.91	7.81	0.58
1	3	5 year	9.14	83.63	84.52		84.64	0.006665	1.56	5.86	8.15	0.59
1	3	10 year	10.79	83.63	84.61		84.74	0.006609	1.64	6.59	8.41	0.59
1	3	25 year	13.38	83.63	84.73		84.89	0.006617	1.75	7.64	8.76	0.60
1	3	50 year	15.78	83.63	84.83		85.01	0.006651	1.85	8.55	9.06	0.61
1	3	75 year	17.41	83.63	84.90		85.08	0.006632	1.91	9.14	9.36	0.61
1	3	100 year	18.68	83.63	84.94		85.14	0.006625	1.95	9.59	9.59	0.61
1	3	100 year + cc	22.41	83.63	85.08		85.29	0.006568	2.07	10.91	10.21	0.62
1	3	1000 year	33.63	83.63	85.43		85.70	0.006388	2.34	14.77	11.80	0.63
1	2	2 year	7.08	83.22	84.13		84.23	0.006341	1.40	5.05	7.47	0.54
1	2	5 year	9.14	83.22	84.24		84.36	0.006633	1.56	5.87	7.50	0.56
1	2	10 year	10.79	83.22	84.32		84.46	0.006837	1.67	6.47	7.53	0.57
1	2	25 year	13.38	83.22	84.43		84.60	0.007066	1.82	7.35	7.78	0.59
1	2	50 year	15.78	83.22	84.53		84.72	0.007303	1.96	8.10	8.06	0.61
1	2	75 year	17.41	83.22	84.59		84.80	0.007466	2.04	8.58	8.24	0.62
1	2	100 year	18.68	83.22	84.63		84.86	0.007572	2.11	8.96	8.37	0.62
1	2	100 year + cc	22.41	83.22	84.76		85.02	0.007907	2.28	10.02	8.74	0.64
1	2	1000 year	33.63	83.22	85.08		85.45	0.008484	2.72	13.02	10.01	0.68

HEC-RAS Plan: Culv9.5Block River: Hunsworth Beck Reach: 1 (Continued)


Reach	River Sta	Profile	Q Total (m3/s)	Min Ch El (m)	W.S. Elev (m)	Crit W.S. (m)	E.G. Elev (m)	E.G. Slope (m/m)	Vel Chnl (m/s)	Flow Area (m2)	Top Width (m)	Froude # Chl
1	1	2 year	7.08	83.32	83.98	83.83	84.10	0.008901	1.55	4.56	7.87	0.65
1	1	5 year	9.14	83.32	84.08	83.91	84.23	0.008907	1.70	5.37	7.92	0.66
1	1	10 year	10.79	83.32	84.15	83.97	84.32	0.008903	1.81	5.98	7.96	0.66
1	1	25 year	13.38	83.32	84.26	84.06	84.46	0.008901	1.95	6.86	8.09	0.67
1	1	50 year	15.78	83.32	84.35	84.14	84.58	0.008904	2.08	7.60	8.38	0.68
1	1	75 year	17.41	83.32	84.41	84.19	84.65	0.008902	2.16	8.09	8.59	0.69
1	1	100 year	18.68	83.32	84.46	84.23	84.71	0.008902	2.22	8.46	8.74	0.69
1	1	100 year + cc	22.41	83.32	84.57	84.33	84.87	0.008914	2.39	9.53	9.18	0.71
1	1	1000 year	33.63	83.32	84.89	84.63	85.29	0.008904	2.81	12.61	10.32	0.74

Hunsworth Beck 1st Oct Plan: Block at Culvert 9.5 02/10/2015

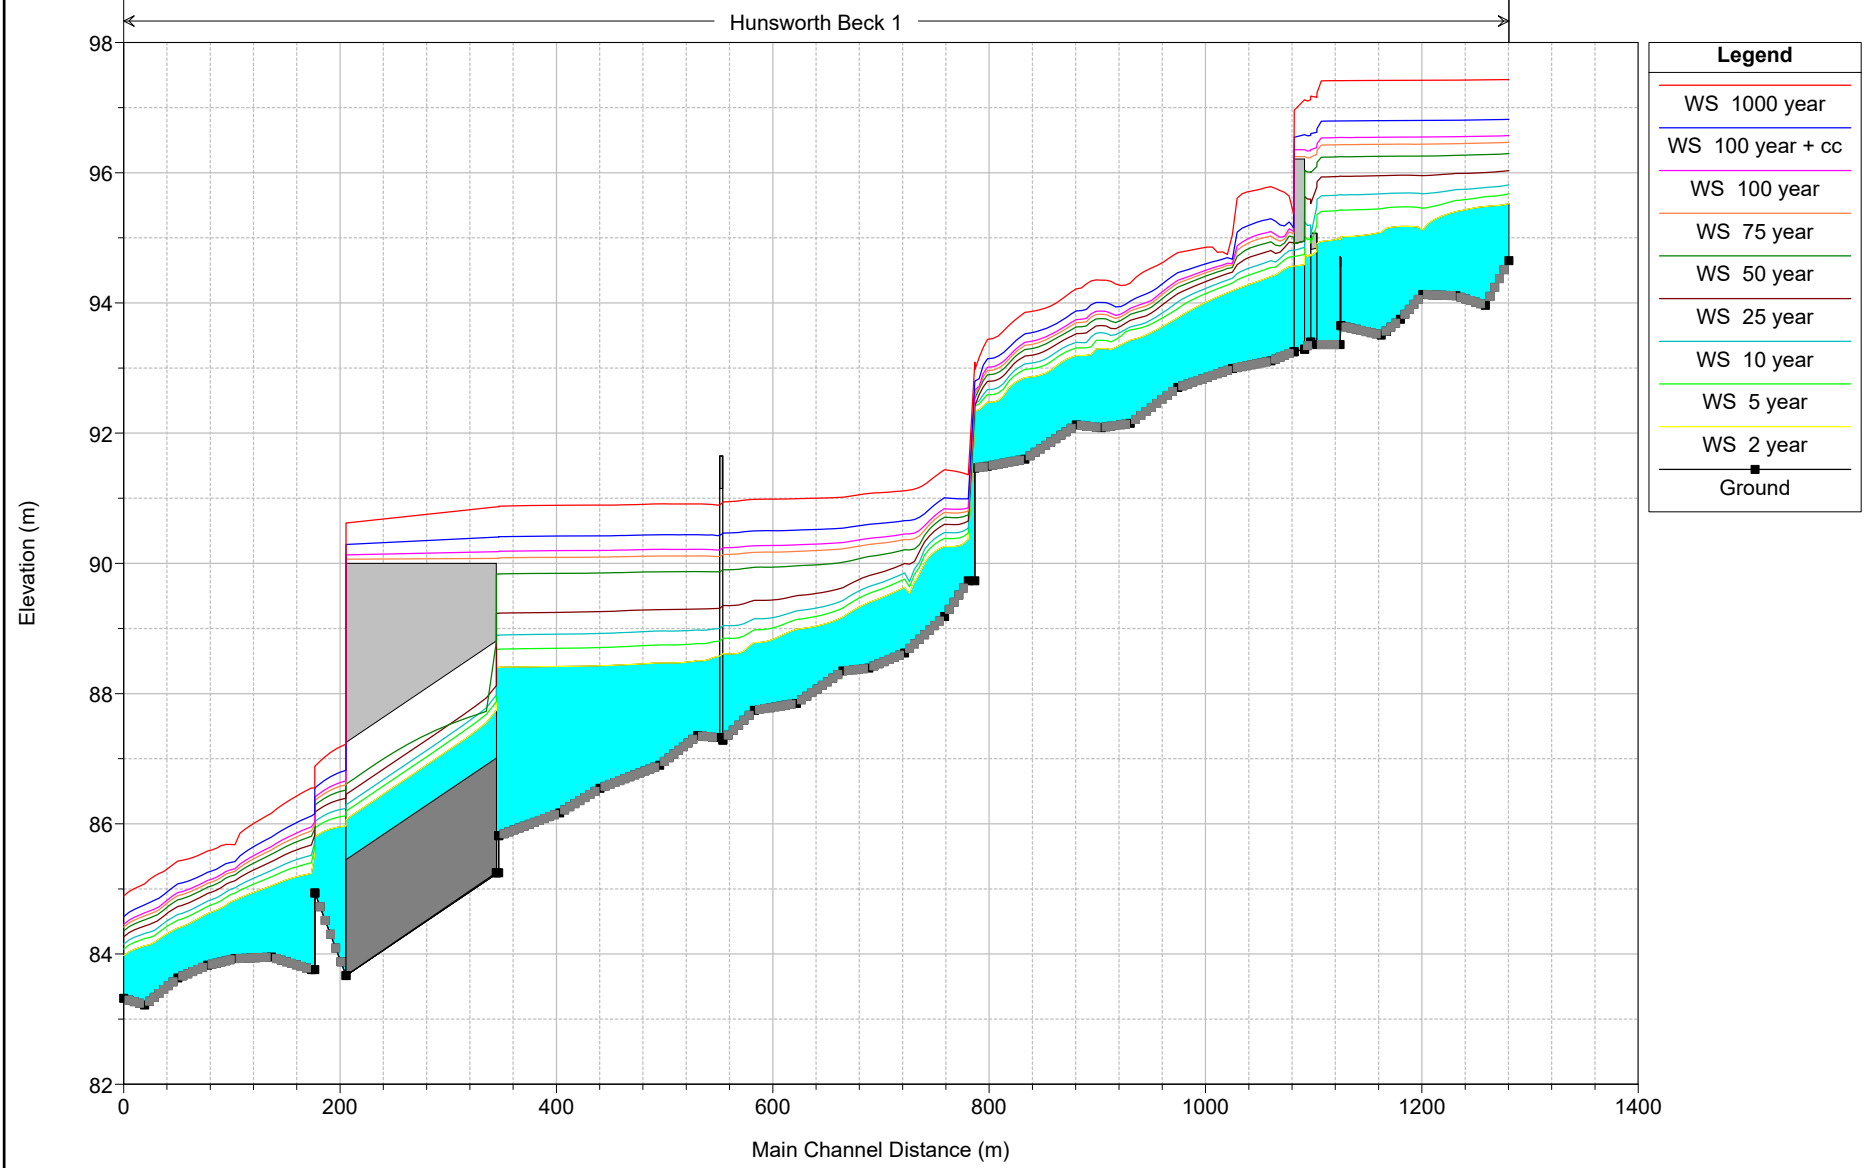


Hunsworth Beck 1st Oct Plan: Block at Culvert 9.5 02/10/2015

XS08

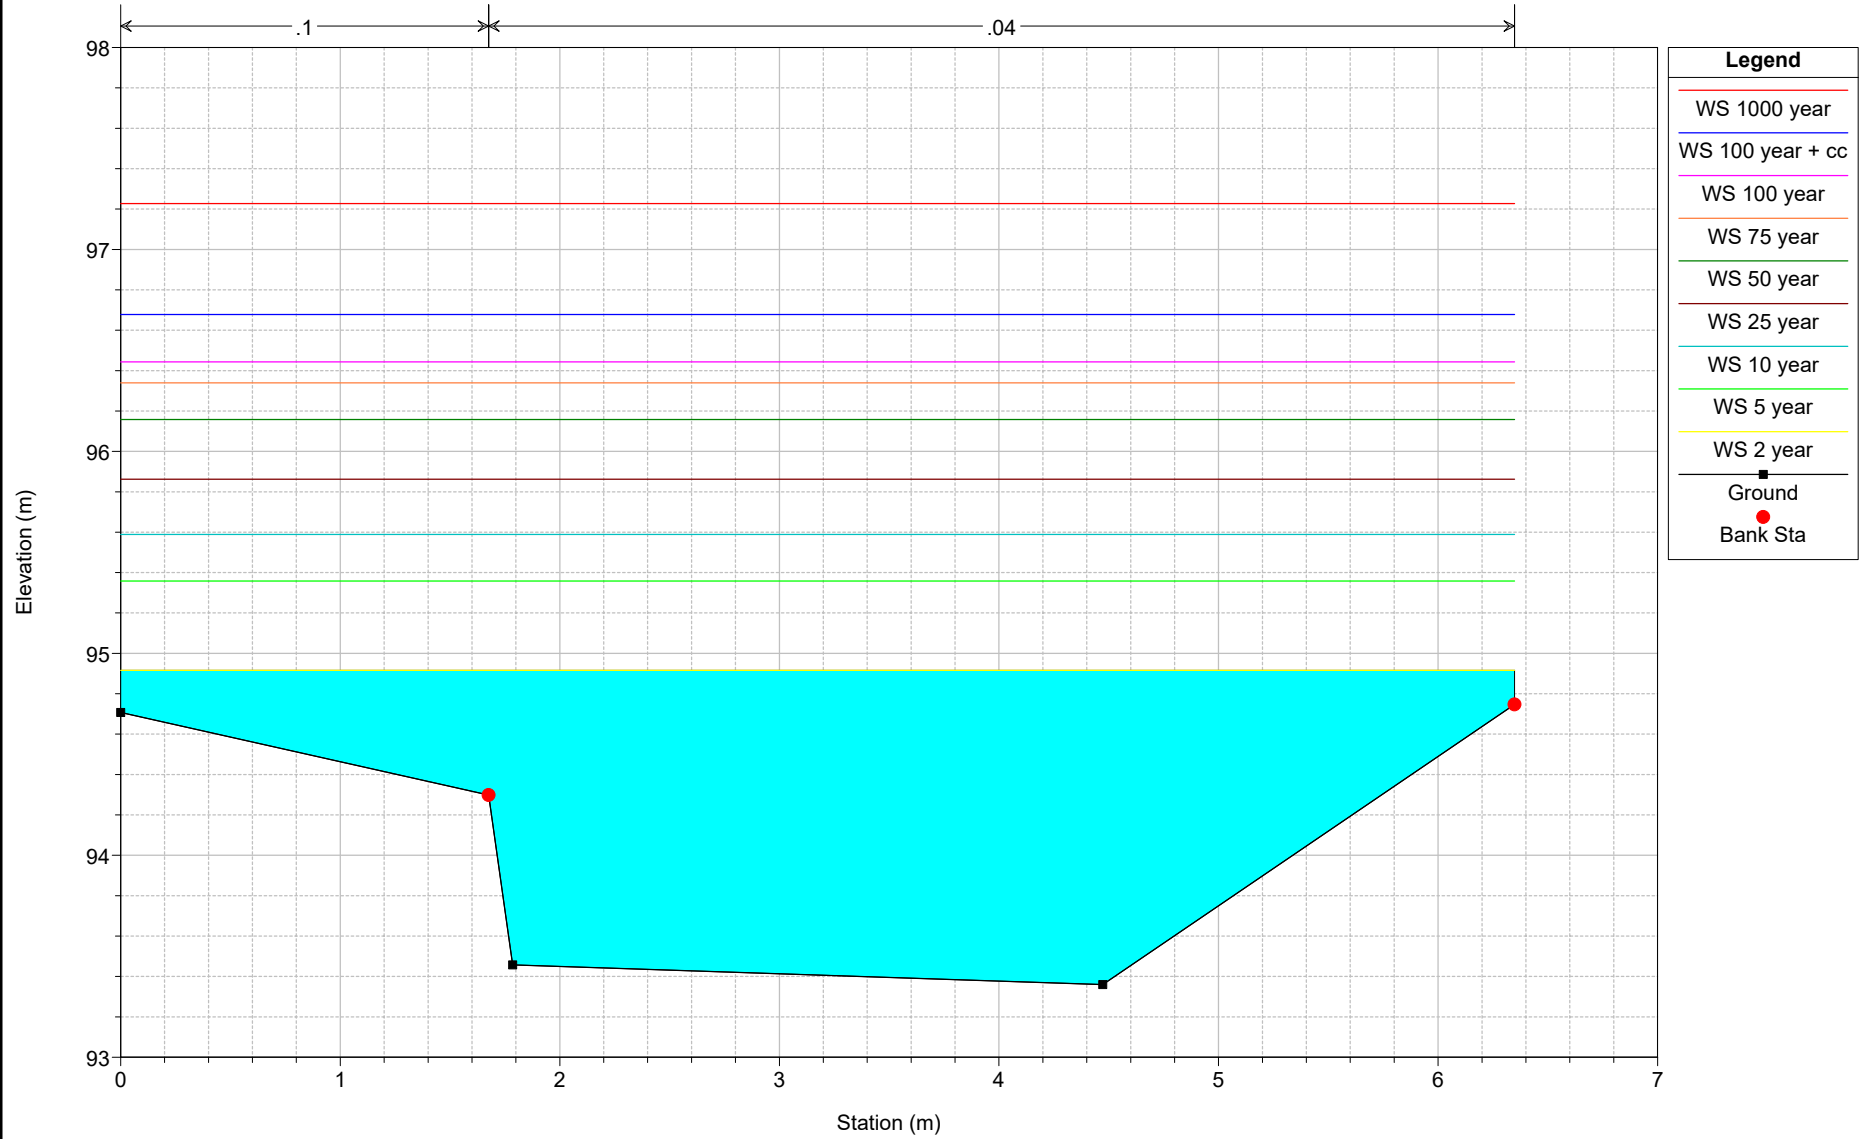


Hunsworth Beck 1st Oct Plan: Block at Culvert 9.5 02/10/2015  
XS14

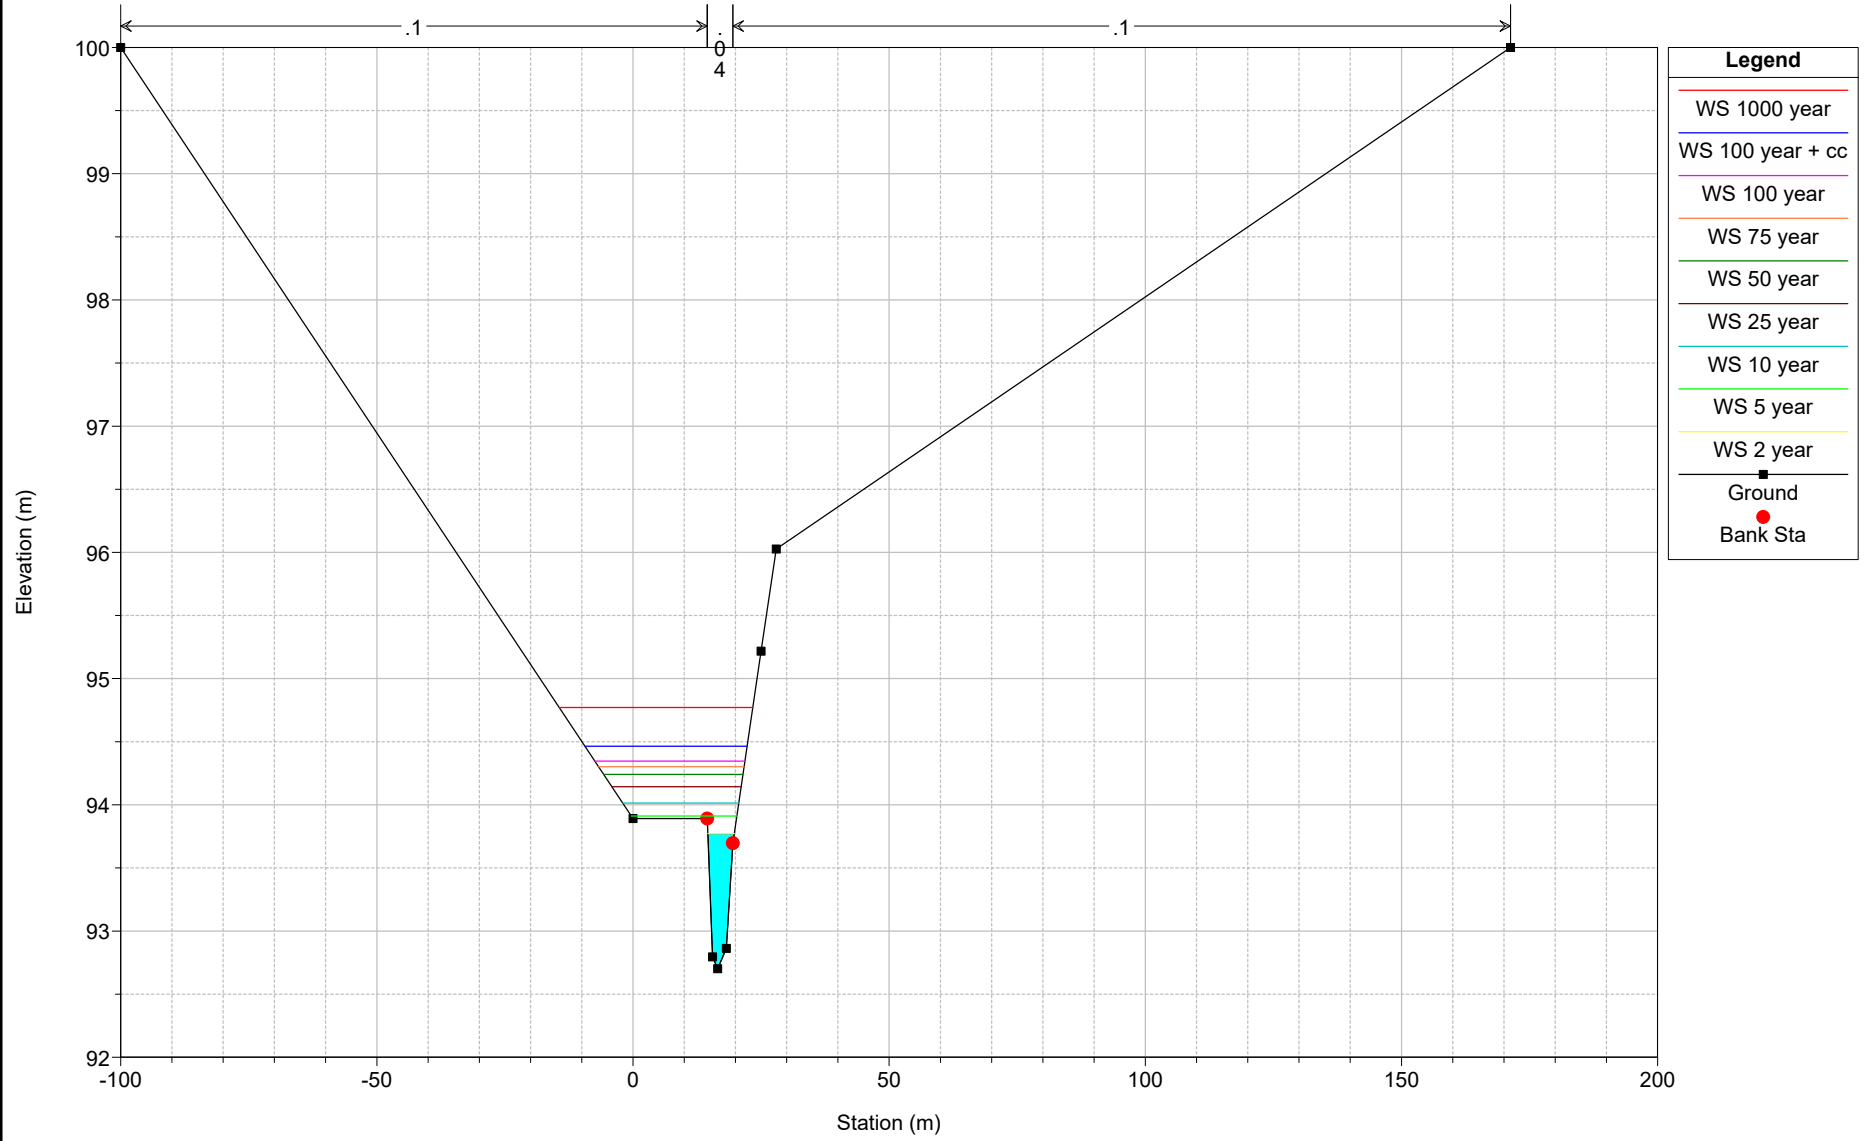



Hunsworth Beck 1st Oct Plan: Block at Culvert 9.5 02/10/2015  
XS 31

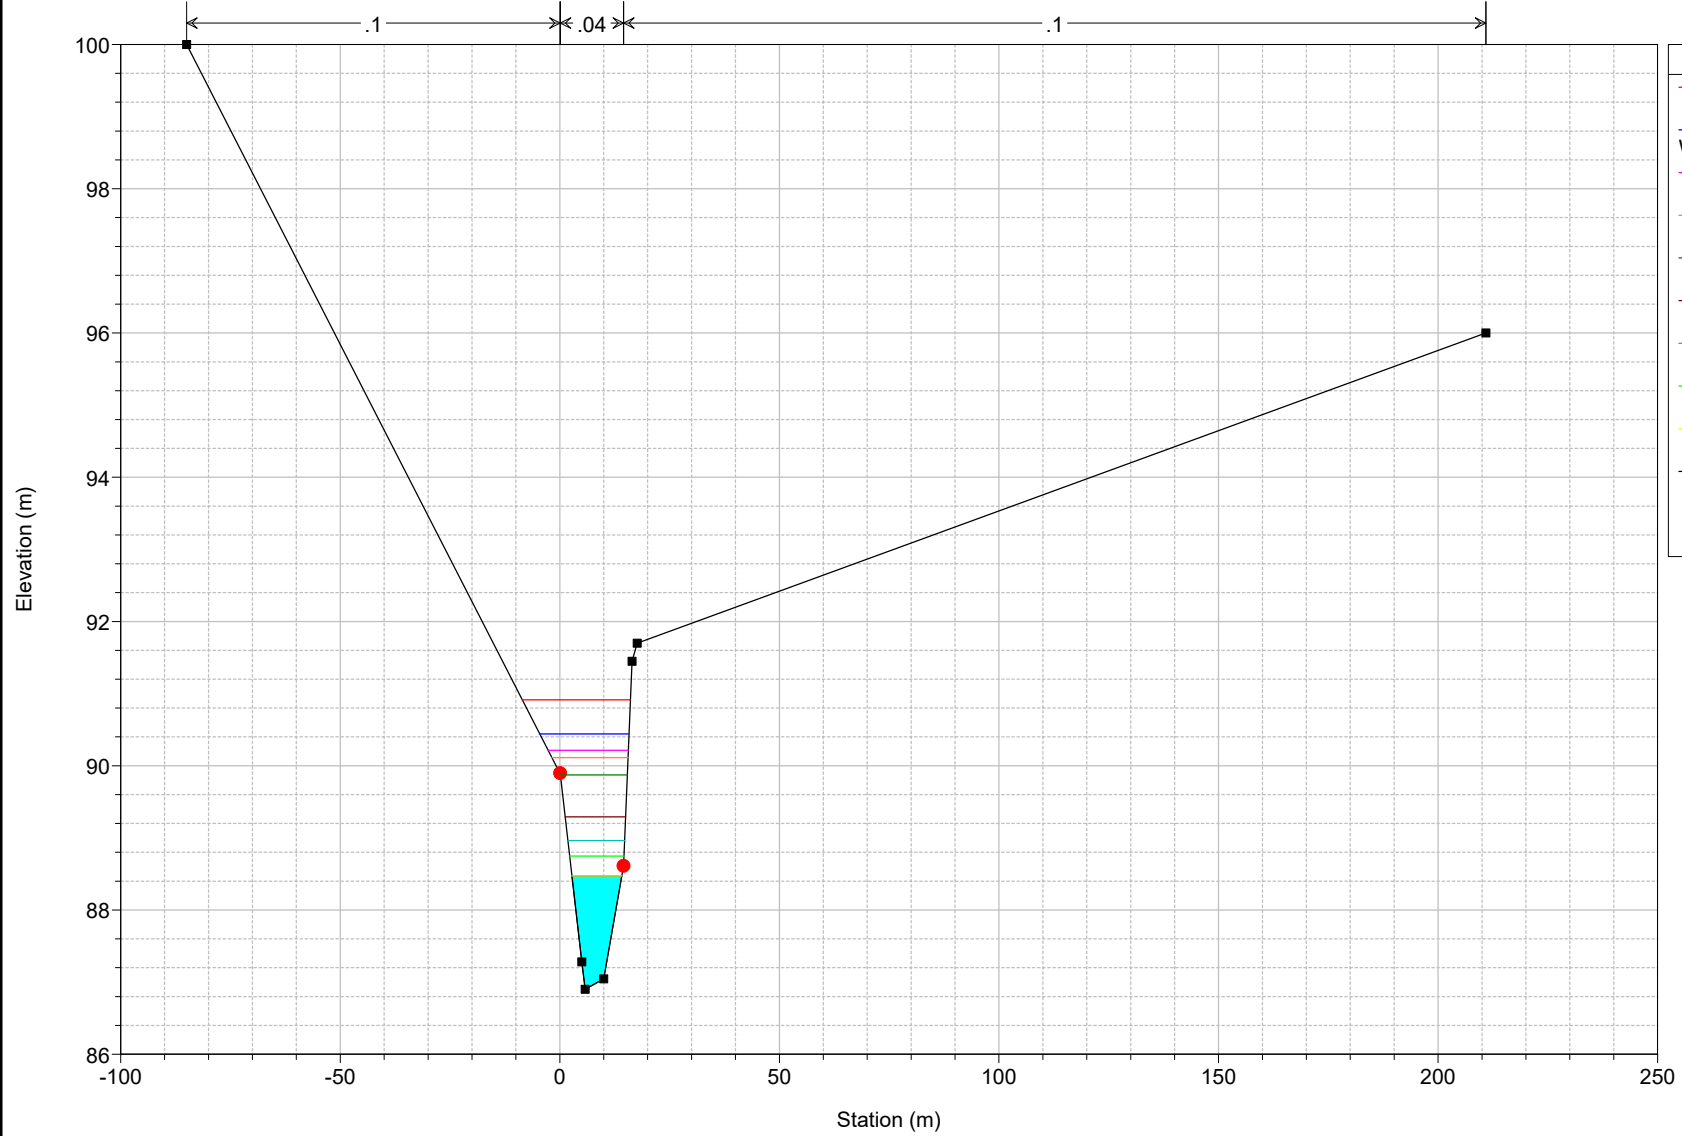

Legend	
—	WS 1000 year
—	WS 100 year + cc
—	WS 100 year
—	WS 75 year
—	WS 50 year
—	WS 25 year
—	WS 10 year
—	WS 5 year
—	WS 2 year
■	Ground
●	Bank Sta

# 1D Hydraulic River Model Summary Report

Bierley Wastewater Treatment Works

Report No: 2015-059-02

---

## Appendix C: -Hunsworth Beck Photographs

---

Appendix C: Hunsworth Beck Photographs

Footbridge XS36.55



Vehicular Bridge (XS35.5)



Stone Arch Culvert (XS33.5)



Stone Arch Culvert (XS33.5)



Weir (XS23.5)



Bridge (XS15.5)



Weir (XS10.4)



Culvert (XS9.5)



Weir (XS 7.5)



# 1D Hydraulic River Model Summary Report


Bierley Wastewater Treatment Works


Report No: 2015-059-02

---

## Appendix D: - Flood Extents Flood Zones 2 and 3


---

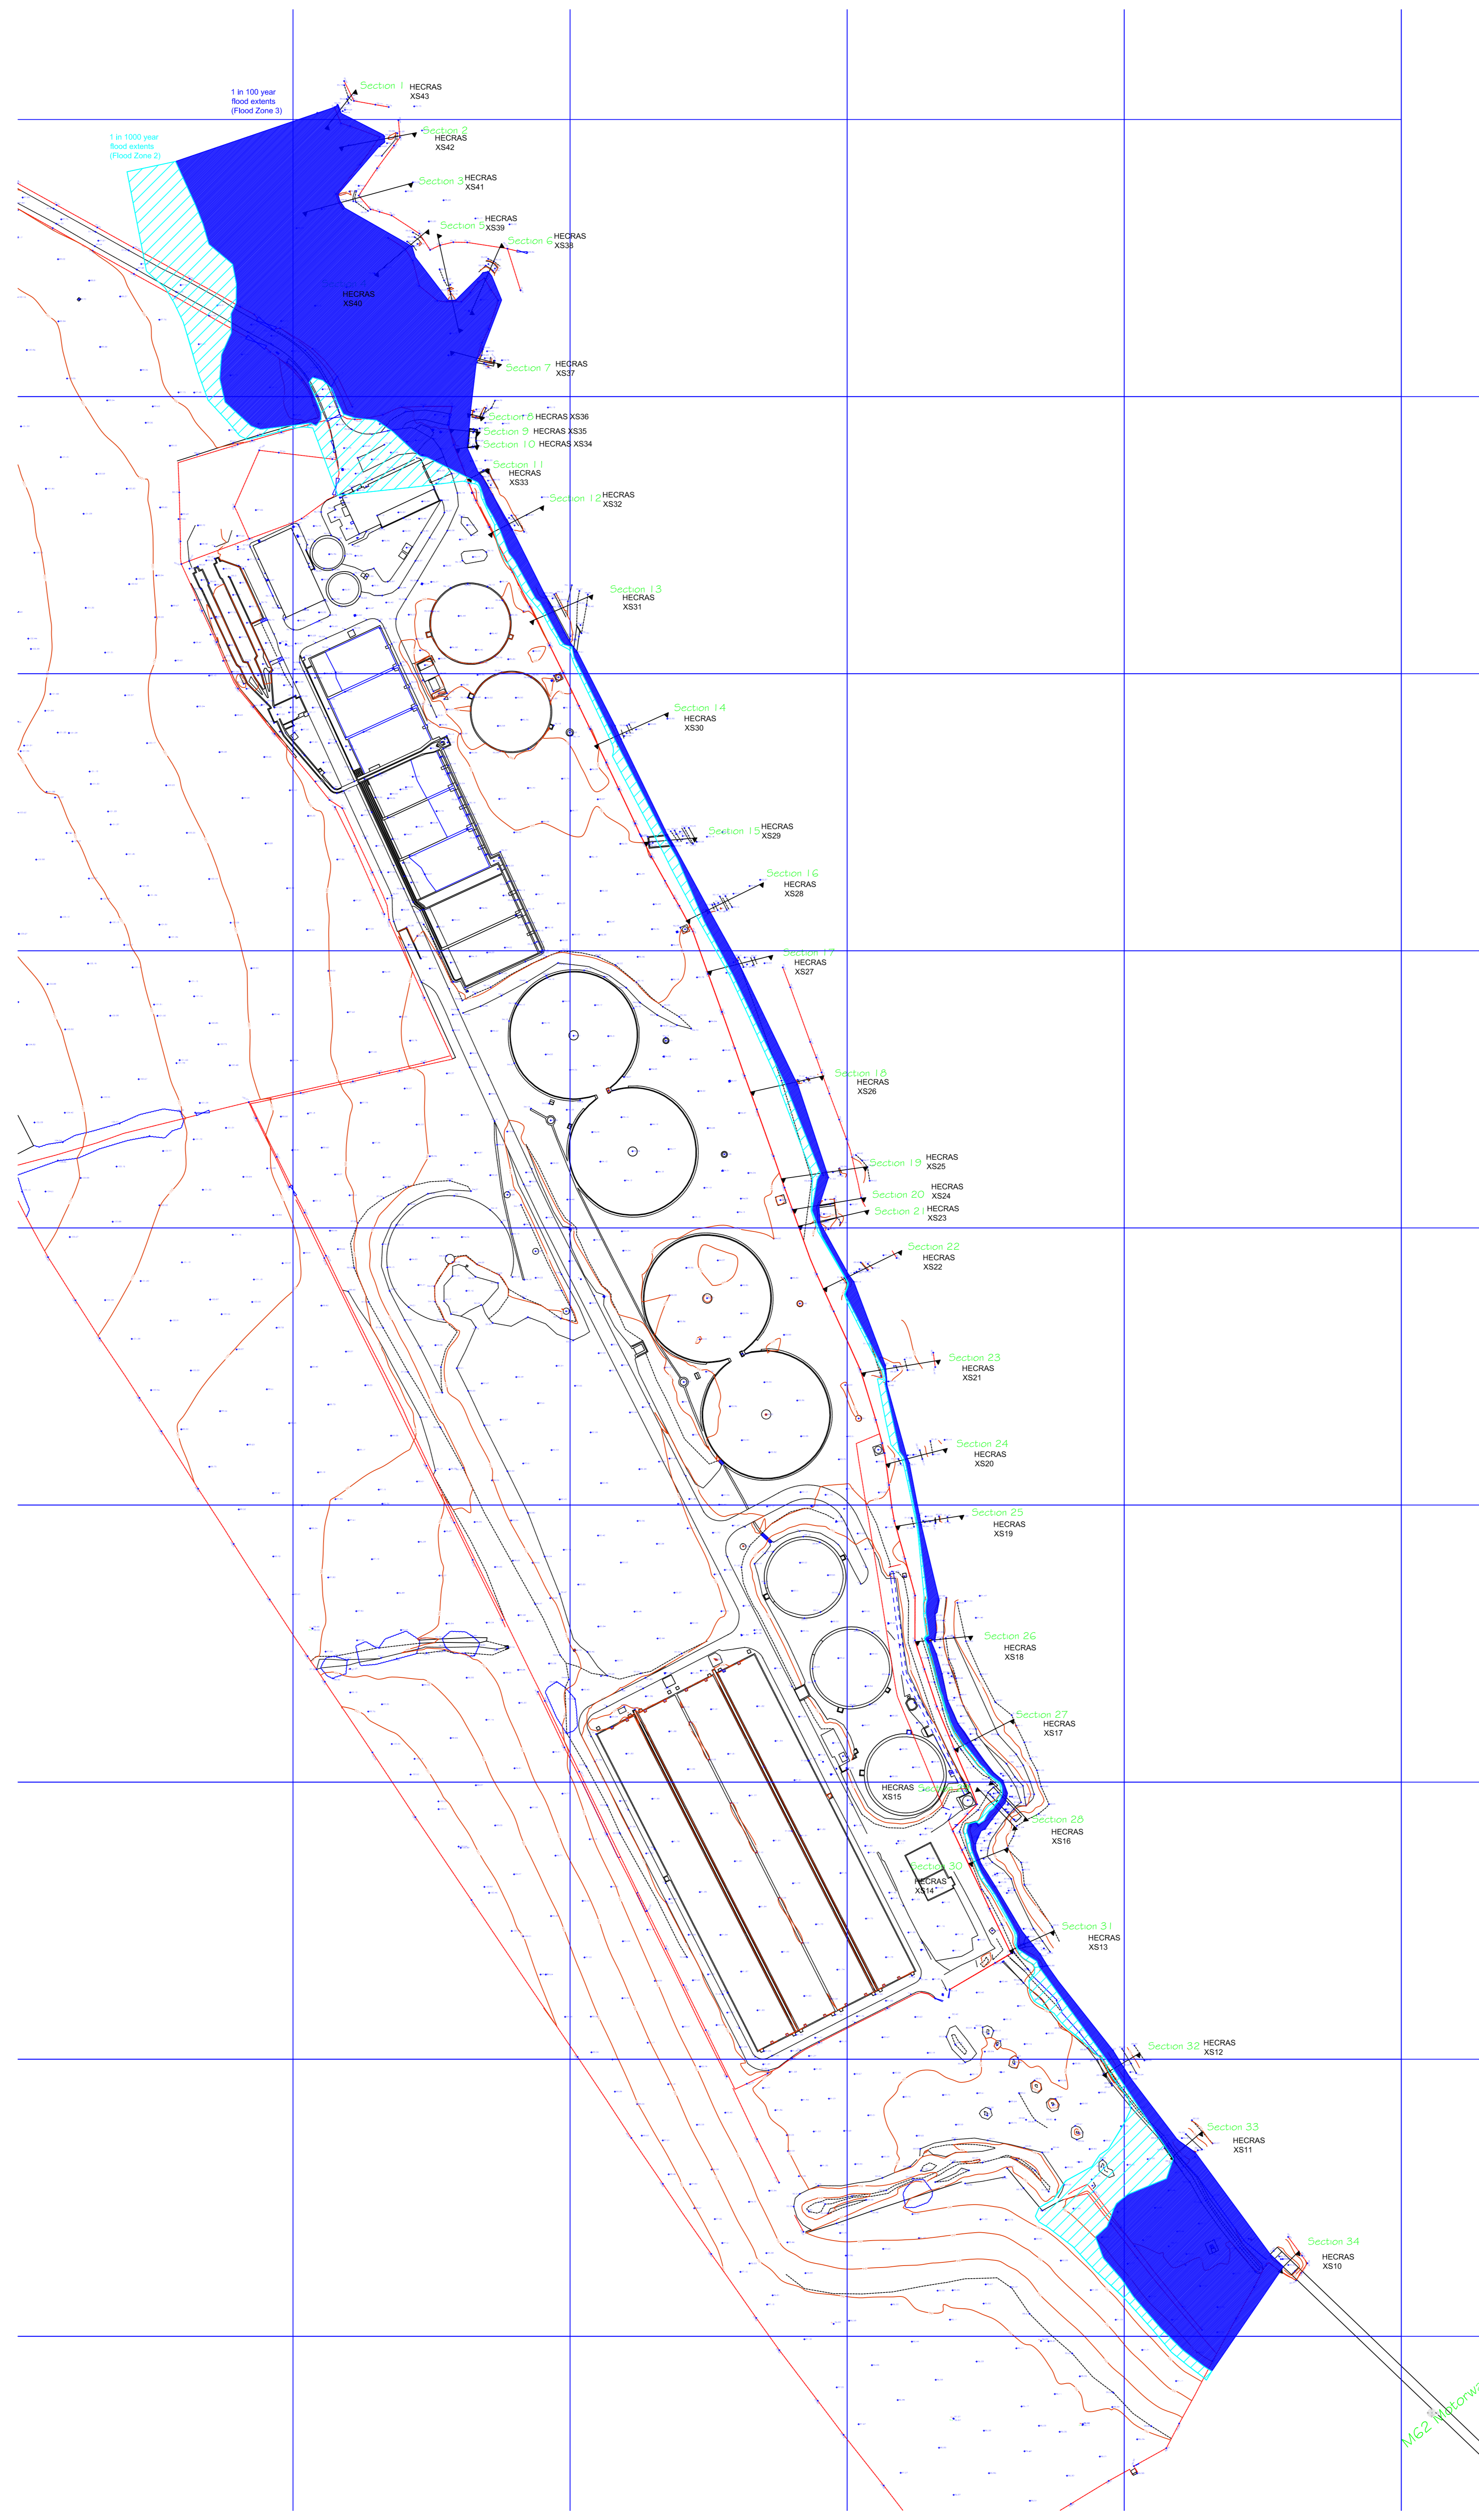



**NOTES:**


- 1. INFORMATION OBTAINED FROM FLOOD RISK CONSULTANCY LTD
- 2. DO NOT SCALE FROM DRAWING
- 3. THIS DRAWING SHOULD NOT BE USED FOR CONSTRUCTION PURPOSES

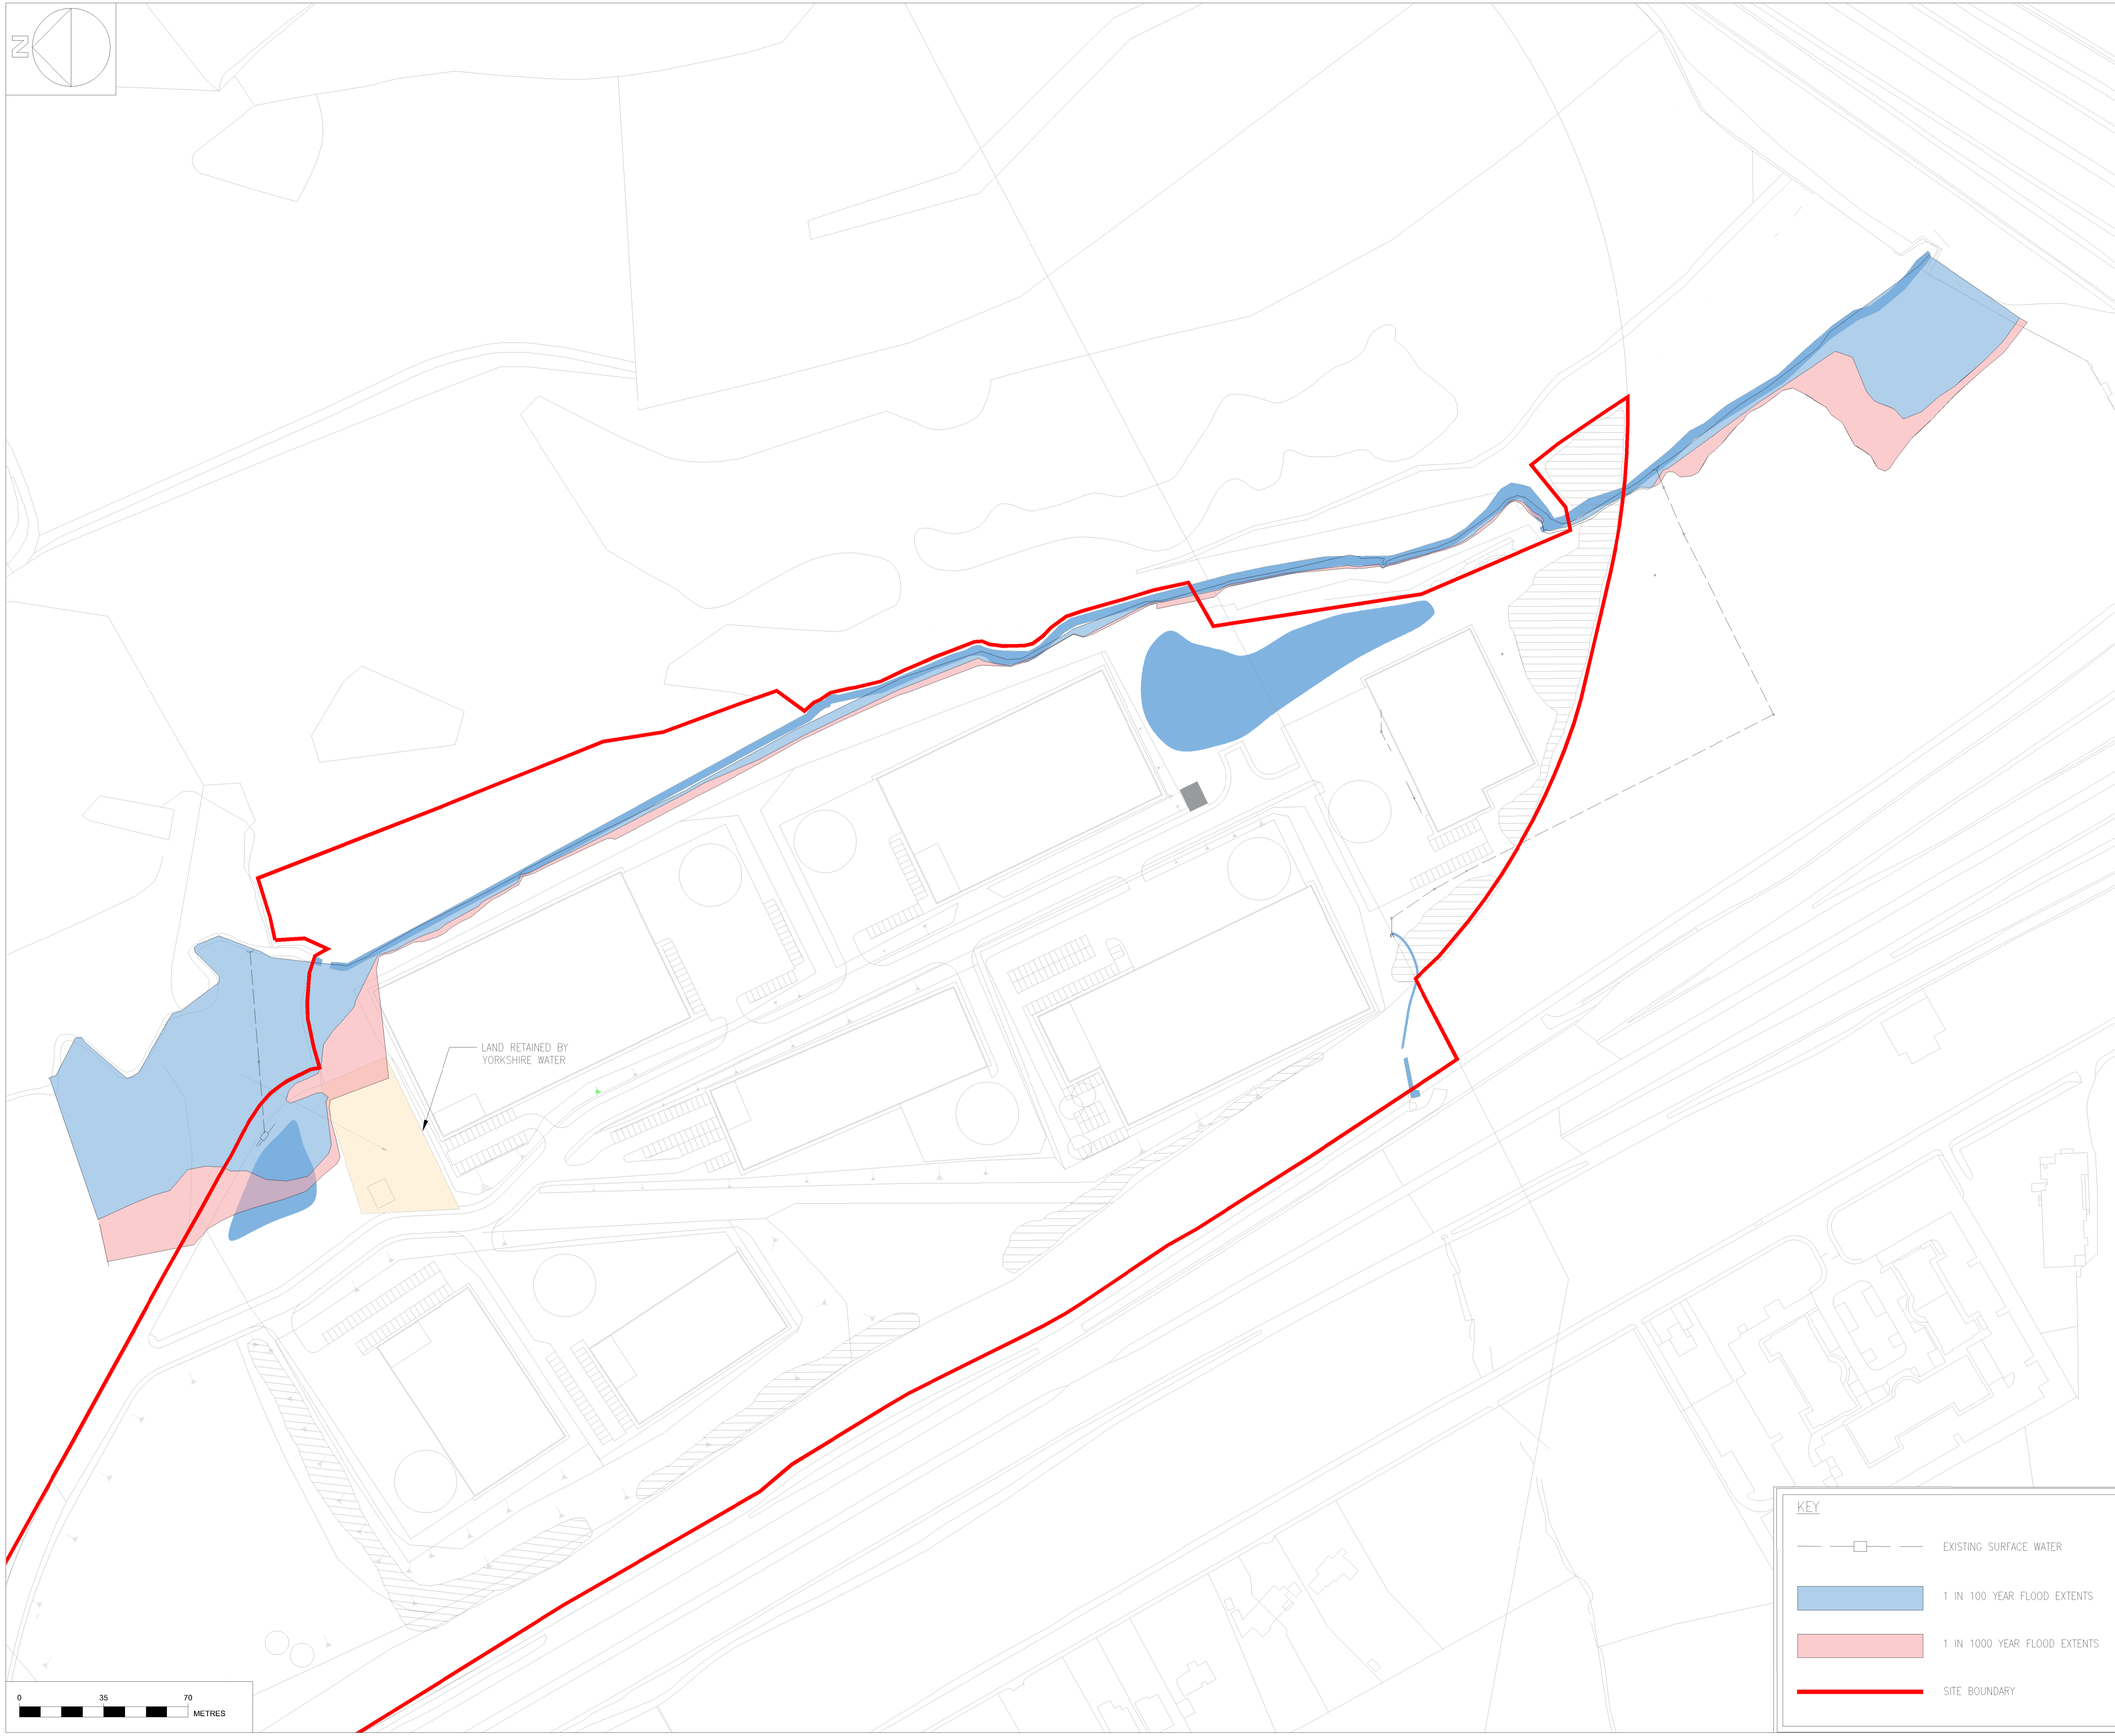

LAND RETAINED BY YORKSHIRE WATER

**KEY**

- EXISTING SURFACE WATER
- 1 IN 100 YEAR FLOOD EXTENTS
- 1 IN 1000 YEAR FLOOD EXTENTS
- SITE BOUNDARY



Rev:	Description:	Date:	By:	Chkd:
B	NEW SITE LAYOUT	05.10.17	AG	SB
A	NEW SITE LAYOUT ADDED	18.04.16	WB	SB



Curtins Consulting Ltd,  
 Rose Wharf, East Street, Leeds, LS9 8EE  
 t: 0113 274 8509  
 e: leeds@curtins.com  
 www.curtins.com

Structures • Civils • Environmental • Infrastructure • Transport Planning • Sustainability • Expert Advisory Services  
 Birmingham • Bristol • Cardiff • Douglas • Edinburgh • Kental • Leeds • Liverpool • London • Manchester • Nottingham

Status: **PLANNING**


Project: **RE-DEVELOPMENT OF NORTH BIERLY WASTE WATER TREATMENT WORKS**

Drg Title: **SITE MASTER PLAN WITH MODELLED FLOOD OUTLINES OVERLAID**

Scale:	Size:	First Issue:	Drawn:	Checked:
1:1250	A1	DEC 15	WB	SAB

Drg No:	Rev:
<b>065646-FRA-105</b>	<b>B</b>

## Appendix D

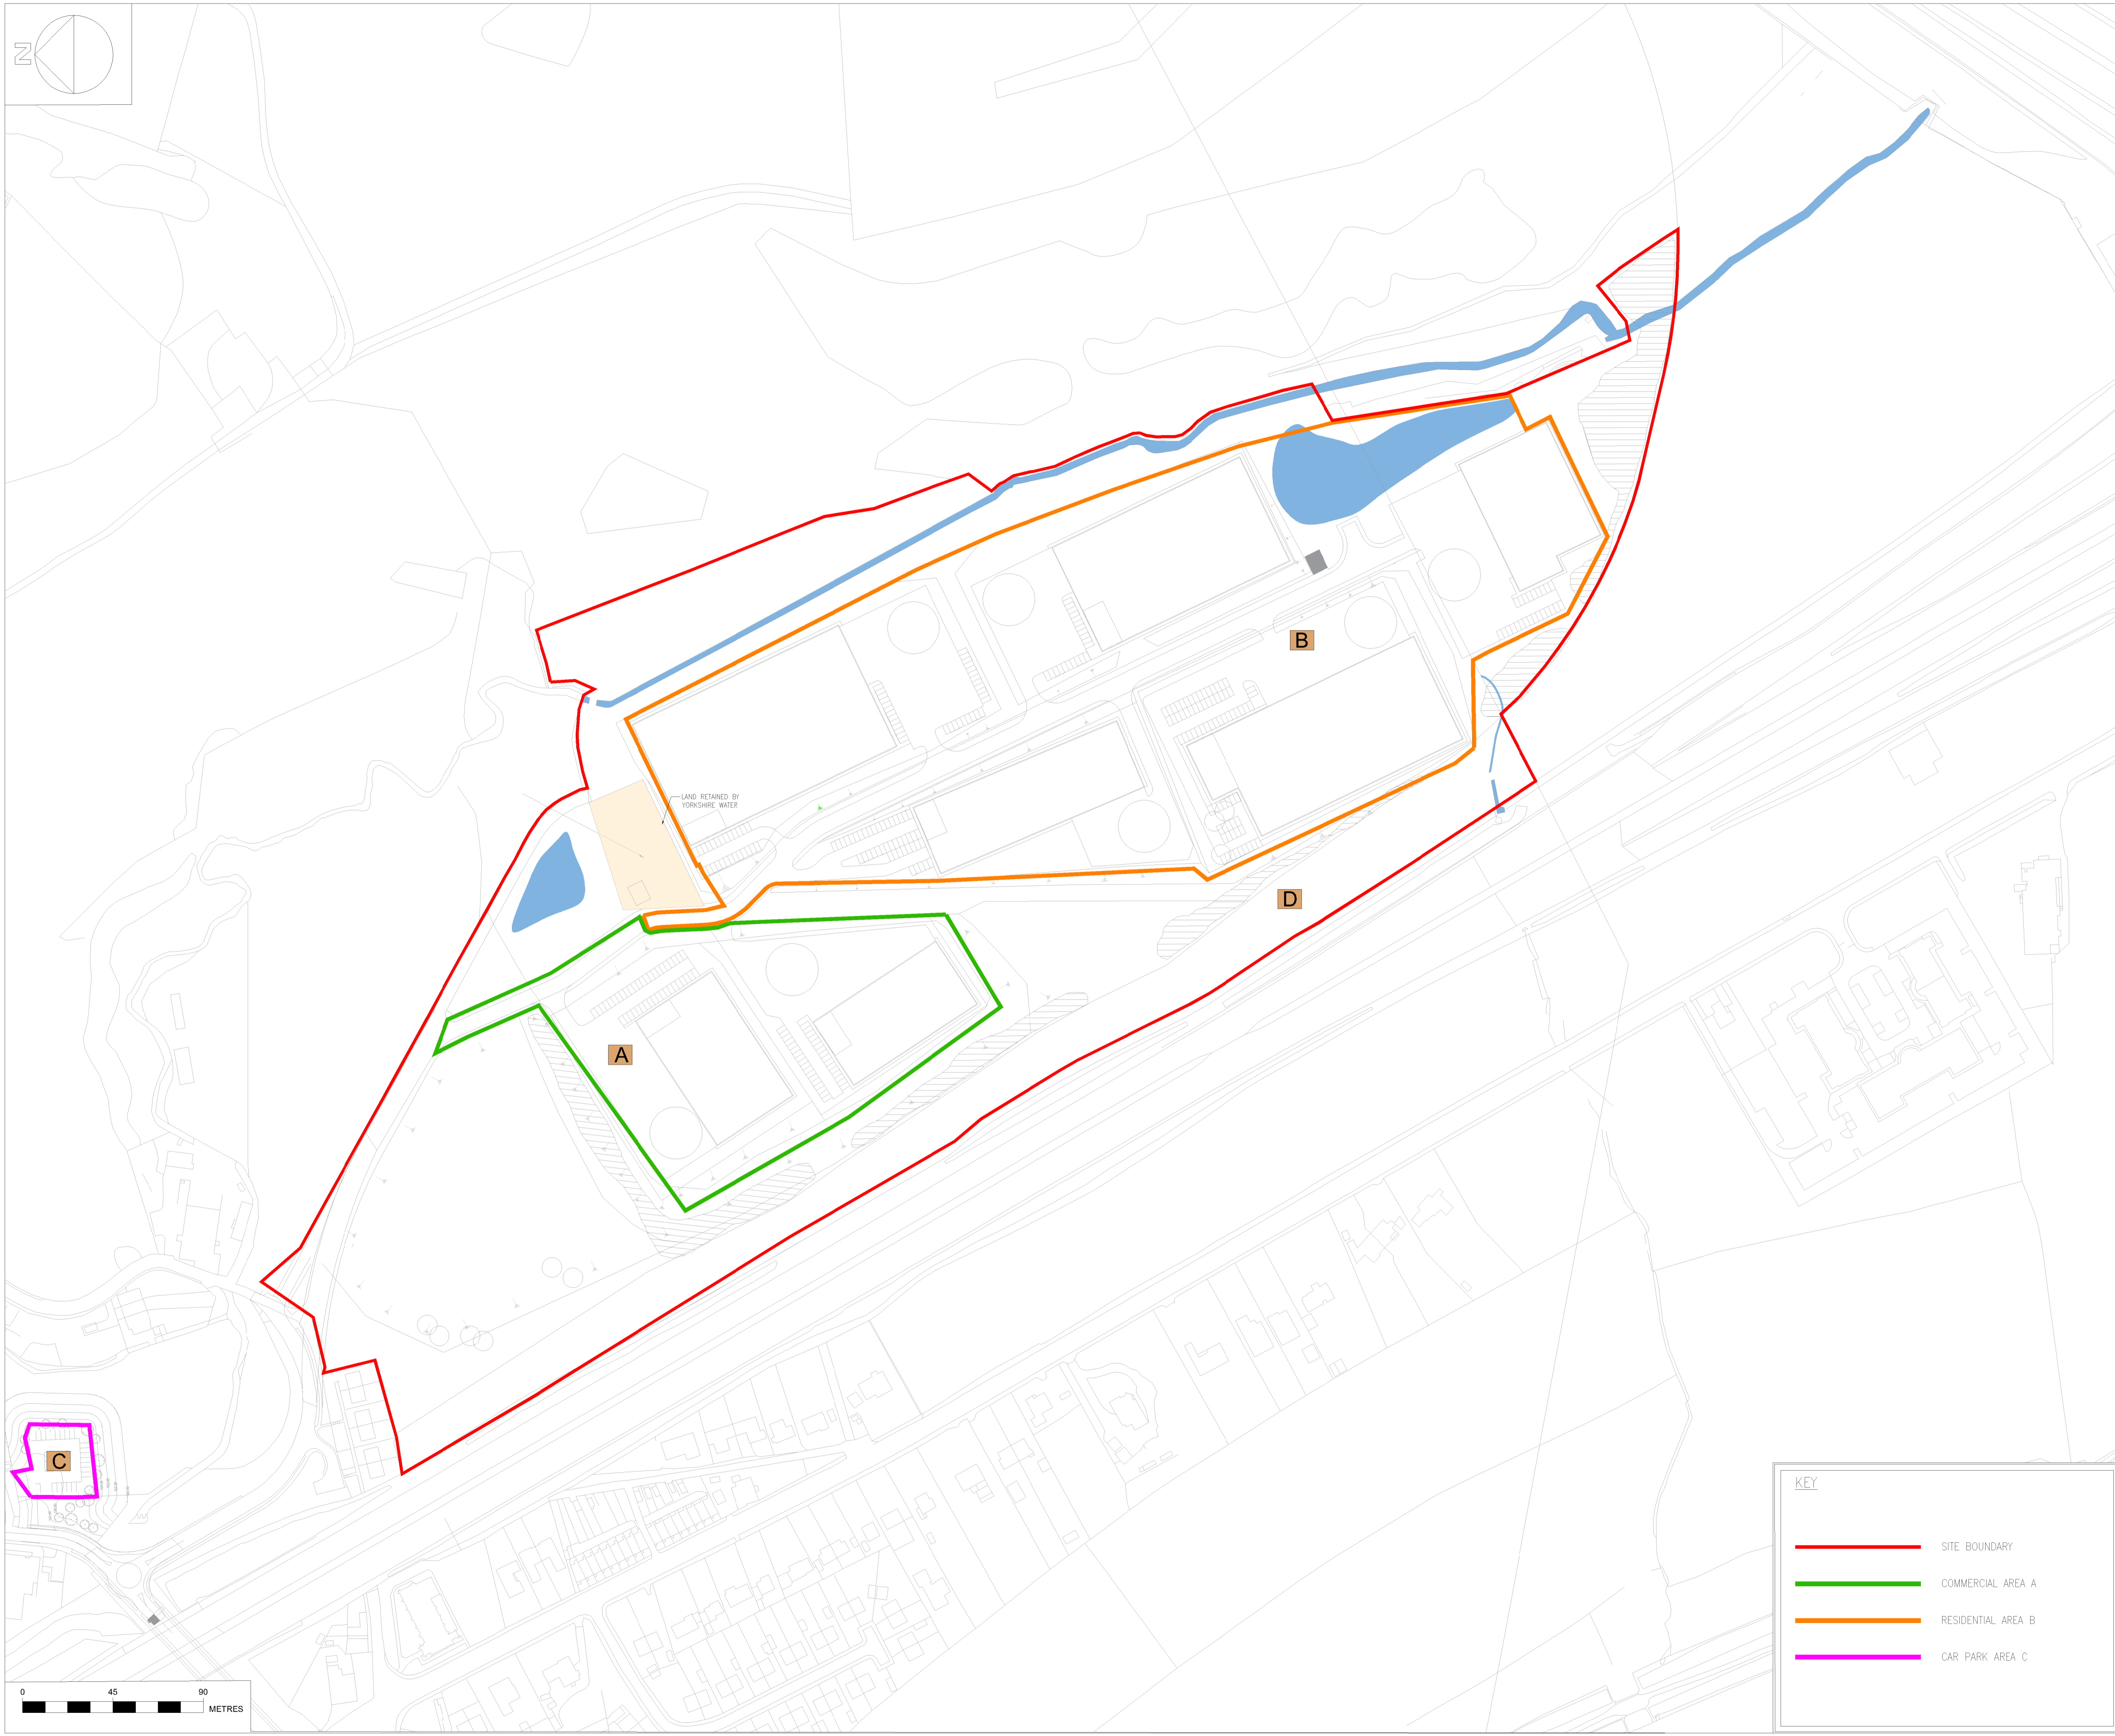

NOTES:

<b>A</b>	COMMERCIAL AREA-	21,300m <sup>2</sup>	=	2.13 Ha	Approx
<b>B</b>	COMMERCIAL AREA-	74,300m <sup>2</sup>	=	7.43 Ha	Approx
<b>C</b>	CAR PARK AREA-	1,200m <sup>2</sup>	=	0.12 Ha	Approx
<b>D</b>	OVERALL SITE AREA-	179,850m <sup>2</sup>	=	18.0 Ha	Approx

B	NEW SITE LAYOUT	05.10.17	AG	SB
A	NEW SITE LAYOUT ADDED	18.C4.16	WB	SB
Rev:	Description:	Date:	By:	Chkd:



Curtins Consulting Ltd,  
Rose Wharf, East Street, Leeds, LS9 8EE  
t: 0113 274 8509  
e: leeds@curtins.com  
www.curtins.com

Structures • Civils • Environmental • Infrastructure • Transport Planning • Sustainability • Expert Advisory Services  
Birmingham • Bristol • Cardiff • Douglas • Edinburgh • Kandal • Leeds • Liverpool • London • Manchester • Nottingham

Status: **PLANNING**

Project: **RE-DEVELOPMENT OF NORTH BIERLEY WASTE WATER TREATMENT WORKS**




Drg Title: **DRAINAGE AREA CATCHMENT PLAN**

Scale:	Size:	First Issue:	Drawn:	Checked:
1:1500	A1	DEC 15	WB	SAB

Drg No: **064656-FRA-100** Rev: **B**

KEY	
	SITE BOUNDARY
	COMMERCIAL AREA A
	RESIDENTIAL AREA B
	CAR PARK AREA C



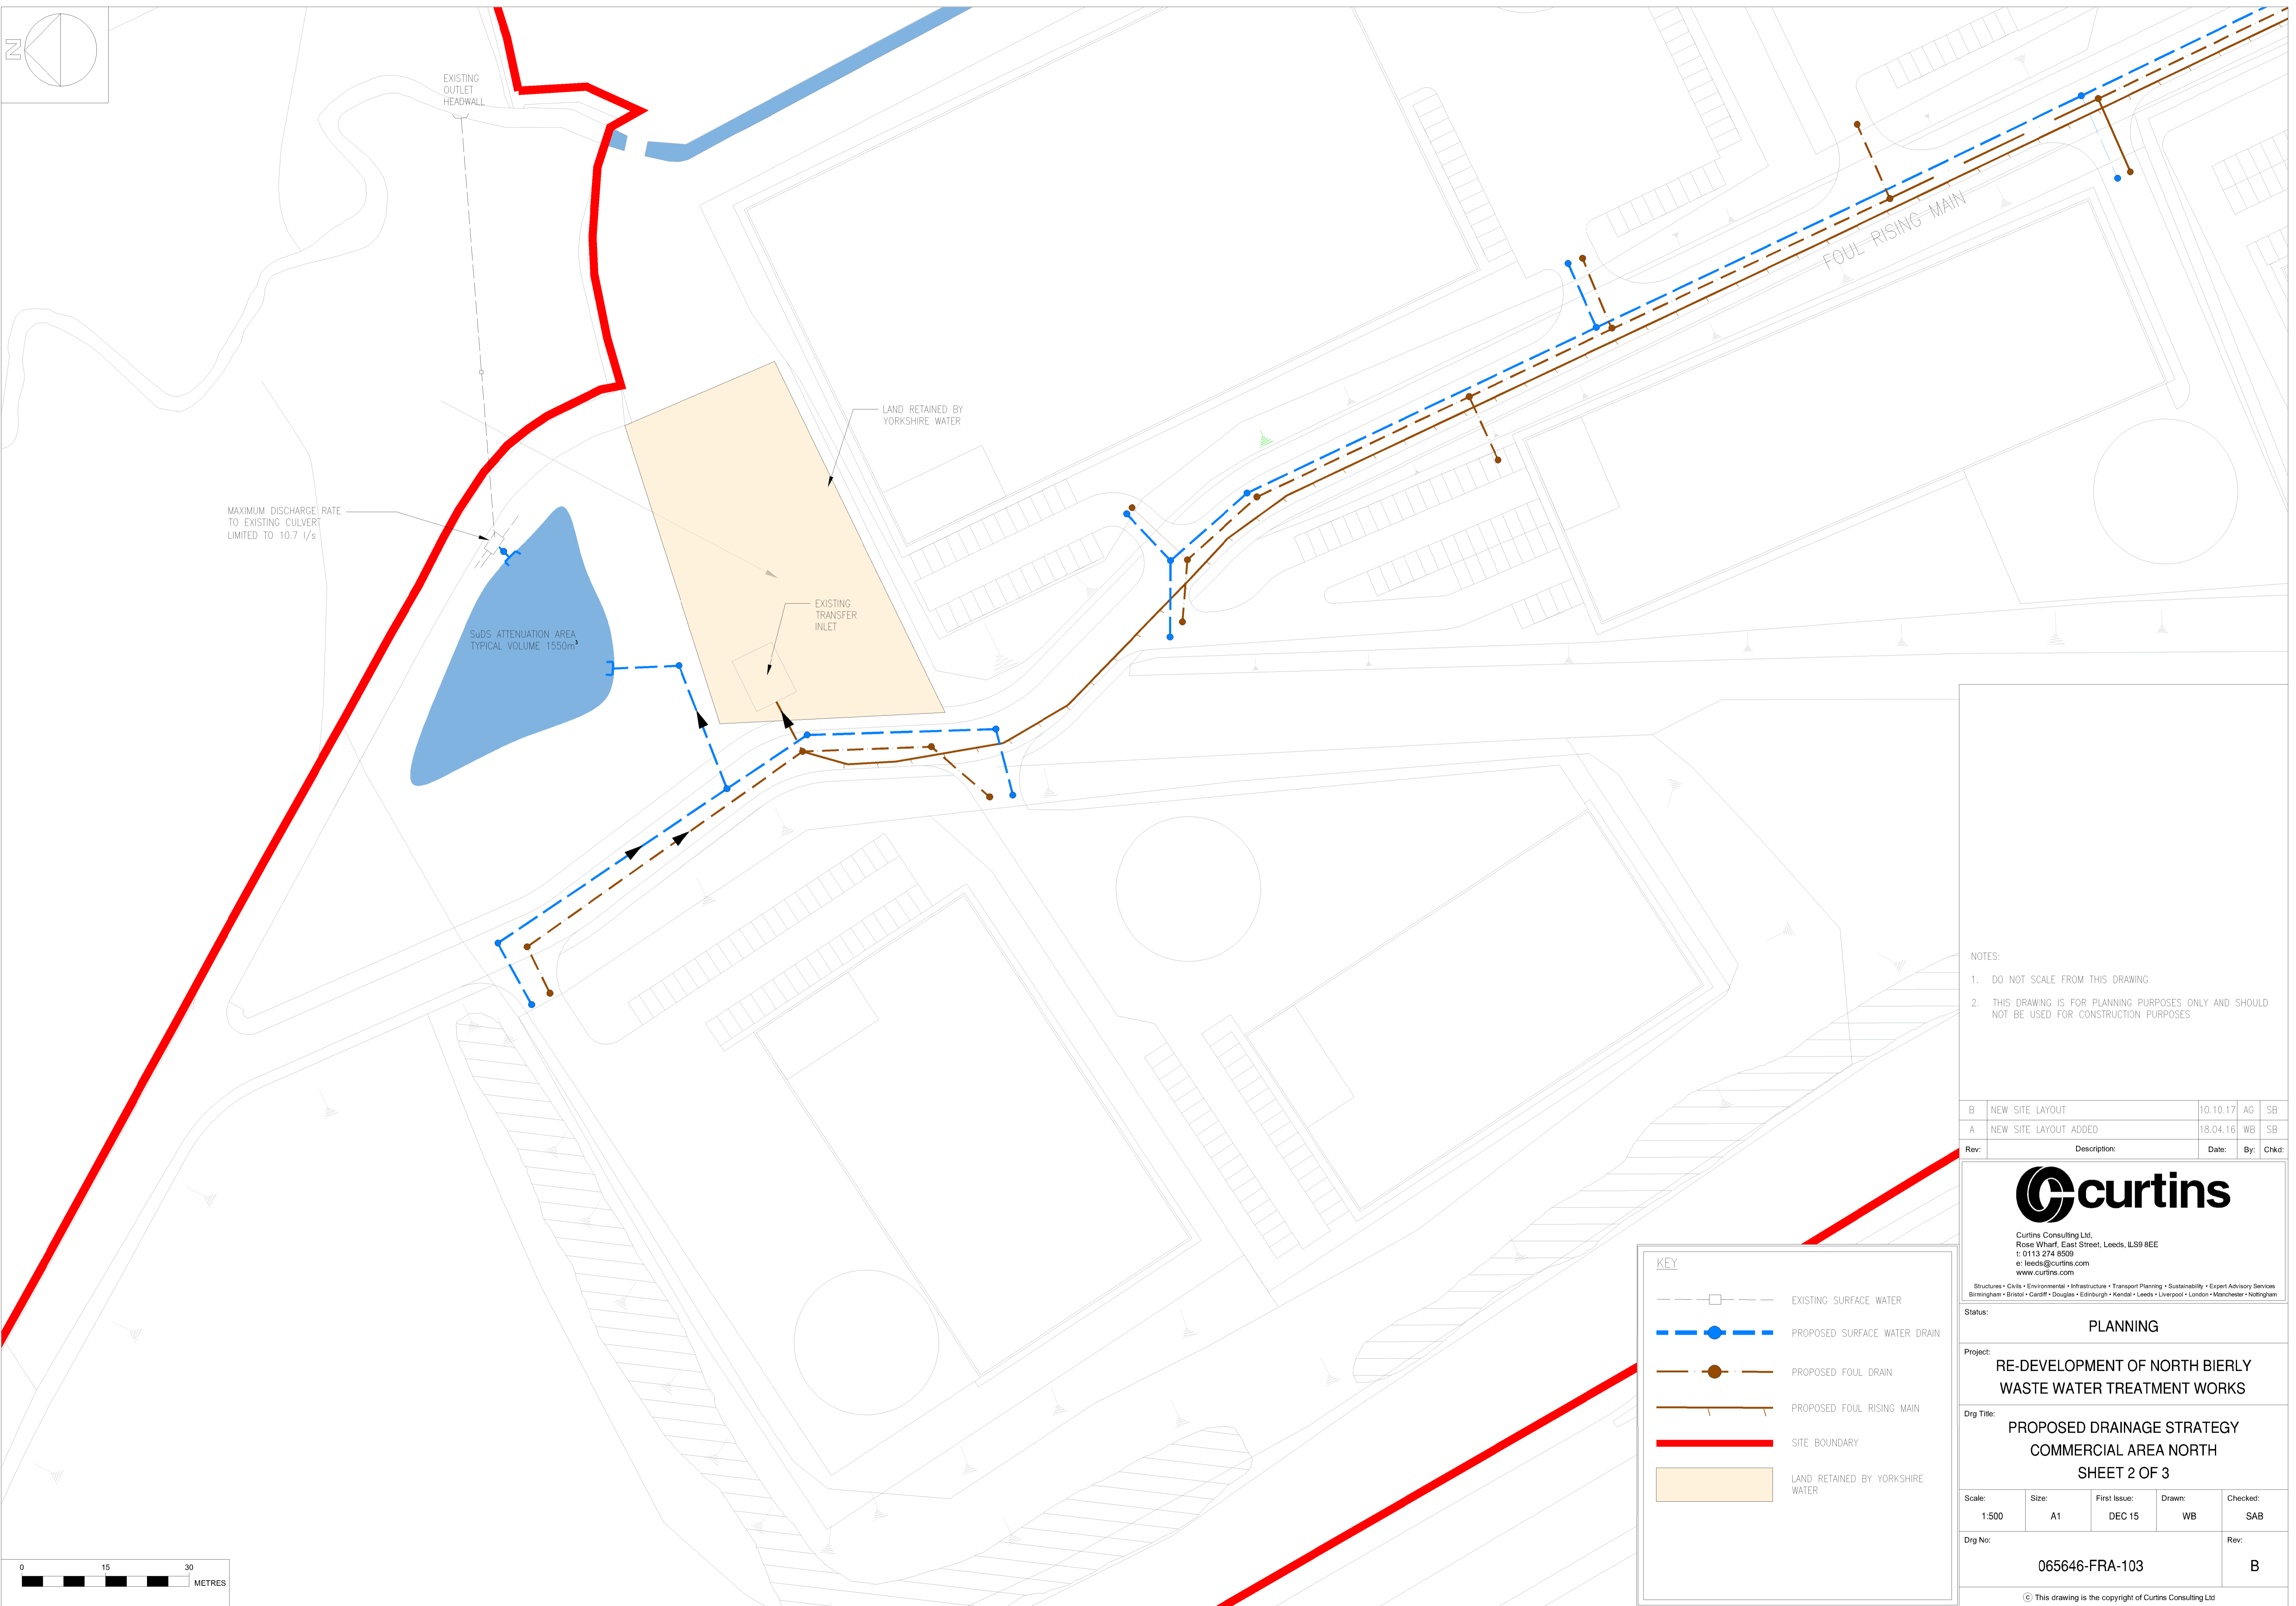

**KEY**

	EXISTING SURFACE WATER
	PROPOSED SURFACE WATER DRAIN
	PROPOSED FOUL DRAIN
	PROPOSED FOUL RISING MAIN
	SITE BOUNDARY
	LAND RETAINED BY YORKSHIRE WATER

- NOTES:
- DO NOT SCALE FROM THIS DRAWING
  - THIS DRAWING IS FOR PLANNING PURPOSES ONLY AND SHOULD NOT BE USED FOR CONSTRUCTION PURPOSES

B	NEW SITE LAYOUT	10.10.17	AG	SB
A	NEW SITE LAYOUT ADDED	18.04.16	WB	SB
Rev:	Description:	Date:	By:	Chkd:



Curtins Consulting Ltd.  
Rose Wharf, East Street, Leeds, LS9 8EE  
t: 0113 274 8509  
e: leeds@curtins.com  
www.curtins.com

Structures • Civils • Environmental • Infrastructure • Transport Planning • Sustainability • Expert Advisory Services  
Birmingham • Bristol • Cardiff • Douglas • Edinburgh • Kendal • Leeds • Liverpool • London • Manchester • Nottingham


Status: **PLANNING**

Project: **RE-DEVELOPMENT OF NORTH BIERLY WASTE WATER TREATMENT WORKS**

Dwg Title: **PROPOSED DRAINAGE STRATEGY COMMERCIAL AREA NORTH SHEET 2 OF 3**

Scale:	Size:	First Issue:	Drawn:	Checked:
1:500	A1	DEC 15	WB	SAB

Dwg No:	Rev:
065646-FRA-103	B



NOTES:

- 1. DO NOT SCALE FROM THIS DRAWING
- 2. THIS DRAWING IS FOR PLANNING PURPOSES ONLY AND SHOULD NOT BE USED FOR CONSTRUCTION PURPOSES



PERMEABLE PAVED CAR PARK  
WITH 30% VOID TANKED SUB-BASE  
APPROX 300mm DEEP  
APPROXIMATE AREA 1200m<sup>2</sup>  
THEREFORE:-  
ATTENUATION PROVIDED BY  
SUB BASE = 108m<sup>3</sup> APPROX  
(65m<sup>3</sup> APPROX REQUIRED)

2 1/2" FLOW CONTROL DEVICE  
PETROL INTERCEPTOR

NEW HEADWALL/OUTFALL  
TO WATERCOURSE

107.00  
106.00  
105.00  
104.00  
103.00  
102.00

KEY				
	PROPOSED SURFACE WATER DRAIN			
	SUB-BASE FIN DRAIN			
	CAR PARK SITE BOUNDARY			

B	NEW SITE LAYOUT	10.10.17	AG	SB
A	REDLINE BOUNDARY AMENDED	18.04.16	WB	SB
Rev:	Description:	Date:	By:	Chkd:



Curtins Consulting Ltd.  
Rose Wharf, East Street, Leeds, LS9 8EE  
t: 0113 274 8509  
e: leeds@curtins.com  
www.curtins.com

Structures • Civils • Environmental • Infrastructure • Transport Planning • Sustainability • Expert Advisory Services  
Birmingham • Bristol • Cardiff • Douglas • Edinburgh • Kendal • Leeds • Liverpool • London • Manchester • Nottingham

Status: **PLANNING**

Project: **RE-DEVELOPMENT OF NORTH BIERLEY  
WASTE WATER TREATMENT WORKS**

Dwg Title: **PROPOSED DRAINAGE STRATEGY  
CAR PARK AREA  
SHEET 3 OF 3**

Scale:	Size:	First Issue:	Drawn:	Checked:
1:200	A1	DEC 15	WB	SAB

Dwg No:	Rev:
065646-FRA-104	B

# Our Locations

## **Birmingham**

2 The Wharf  
Bridge Street  
Birmingham B1 2JS  
T. 0121 643 4694  
birmingham@curtins.com

## **Bristol**

Quayside  
40-58 Hotwell Road  
Bristol  
BS8 4UQ  
T. 0117 .03 7560  
bristol@curtins.com

## **Cardiff**

3 Cwrt-y-Parc  
Earlwood Road  
Cardiff  
CF14 5GH  
T. 029 2068 0900  
cardiff@curtins.com

## **Douglas**

Varley House  
29-31 Duke Street  
Douglas Isle of Man  
IM1 2AZ  
T. 01624 624 585  
douglas@curtins.com

## **Edinburgh**

1a Belford Road  
Edinburgh  
EH4 3BL  
T. 0131 225 2175  
edinburgh@curtins.com

## **Kendal**

28 Lowther Street  
Kendal  
Cumbria LA9 4DH  
T. 01539 724 823  
kendal@curtins.com

## **Leeds**

Rose Wharf  
78-80 East Street  
Leeds LS9 8EE  
T. 0113 274 8509  
leeds@curtins.com

## **Liverpool**

Curtin House  
Columbus Quay  
Riverside Drive  
Liverpool L3 4DB  
T. 0151 726 2000  
liverpool@curtins.com

## **London**

Units 5/6  
40 Compton Street  
London  
EC1V 0BD  
T. 020 73242240  
london@curtins.com

## **Manchester**

Merchant Exchange  
17-19 Whitworth Street  
Manchester M1 5WG  
T. 0161 236 2394  
manchester@curtins.com

## **Nottingham**

56 The Ropewalk  
Nottingham  
NG1 5DW  
T. 0115 941 5551  
nottingham@curtins.com