Softworks Layouts 2 of 2
1:200

REVISIONS

A	21/01/16	LM	MJB

Planting areas updated

Softworks Schedule (Refer to dwg. 9016-001 106 for Ornamental Planting)

Trees


Number	Species	Height	Specification	Density
690 No.	Corylus avellana	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
1937 No.	Crataegus monogyna	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
248 No.	Ilex aquifolium	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
9 No.	Sorbus aucuparia	400-450cm	Standard : Clear Stem 150-175 :RB	Counted
9 No.	Acer campestre	400-450cm	Standard : Clear Stem 150-175 :RB	Counted
222 No.	Acer campestre	150-175cm	Feather :BR	3Ctr
444 No.	Quercus robur	150-175cm	Feather :BR	3Ctr
444 No.	Sorbus aucuparia	150-175cm	Feather :BR	3Ctr
3543 No.	Crataegus monogyna	60-80cm	1+1: Transplant - seed raised: B	2/m²
3328 No.	Salix caprea	60-80cm	0/1: Cutting: Branched: 2 brks: B	2/m²
2777 No.	Corylus avellana	60-80cm	Transplant :BR	2/m²
3791 No.	Crataegus monogyna	60-80cm	Transplant :BR	2/m²
2777 No.	Malus sylvestris	60-80cm	Transplant :BR	2/m²

Shrubs

Number	Species	Height	Specification	Density
490 No.	Cornus sanguinea	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
690 No.	Ligustrum vulgare	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
729 No.	Prunus spinosa	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
690 No.	Rosa canina	60-80cm	BR	0.4Ctr Double Staggered at 0.4m offset
1328 No.	Corylus avellana	60-80cm	1+2: Transplant - seed raised: Branched: 3 brks: B	2/m²
2221 No.	Ilex aquifolium	40-60cm	Bushy: 3 brks: C	2/m²
2221 No.	Rosa arvensis	60-60cm	1+0: Seedlings: Branched: 2 brks: B	2/m²
2221 No.	Salix cinerea	60-80cm	0/1: Cutting: Branched: 2 brks: B	2/m²
3328 No.	Sambucus nigra	60-80cm	1+1: Transplant - seed raised: Branched: 3 brks: B	2/m²
2277 No.	Lonicera periclymenum	60-80cm	Bushy :BR	2/m²
2277 No.	Rosa arvensis	60-80cm	Bushy :BR	2/m²
2277 No.	Viburnum opulus	60-80cm	Bushy :BR	2/m²

Key Plan

NTS

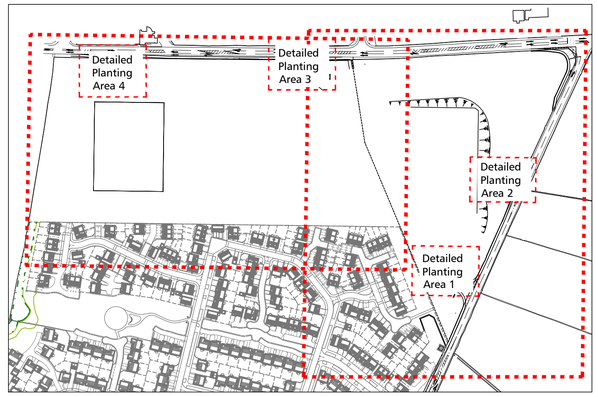

KEY

PROPOSED WOODLAND PLANTING
Comprising 150-175cm feathered trees and 60-80cm shrub transplants. Bare rooted (Unless otherwise specified). Trees planted at 3m centres. Shrubs planted @ 2No/m² in single species groups of 5-10 within the matrix. All Whips and transplants to be planted with shrub/tree shelter.
No tree species to be planted within 5m of the building or in service easement corridors. No Willow and Hawthorn species to be planted within 15m of a residential dwelling.

Refer to planting schedule.

PROPOSED WOODLAND EDGE STYLE PLANTING
To consist of 60-80cm shrub transplants, bare rooted (unless otherwise specified), planted @ 2No/m². All transplants to receive specified shrub shelter.

Refer to planting schedule.

PROPOSED HEDGEROW IN INDUSTRIAL AREAS
To consist of transplants 60-80cm high, bare rooted planted in double staggered row 400mm wide and @ 400mm centres. All planting to be mulched to 75mm depth and to receive specified tree/shrub shelters.

Refer to planting schedule.

PROPOSED ORNAMENTAL SHRUBS AND GRASSES
Refer to drawing: 9016-001 106 Detailed Planting Areas drawing and to planting schedules.

PROPOSED WILDFLOWER MEADOW GRASS
To consist of British Seed Houses WFG15 Countrylife grass seed mix sown at 5g per square meter or similar.

PROPOSED AMENITY GRASS AREA
To consist of grass seed mix A18 by BSH or similar approved. Sown at 35g per square meter.

PROPOSED TREES
To consist of a variety of extra heavy standard trees (14-16cm girth), heavy standard trees (12-14cm girth), standard trees (10-12cm girth).

Refer to planting schedule.

Planning

DLA LANDSCAPE & URBAN DESIGN
www.dla-landscape.co.uk
55 St Pauls Street
LEEDS | LS1 2TE
T : 0113 887 3100 E : info@dla-landscape.co.uk

PROJECT
LINDLEY MOOR

TITLE
LANDSCAPE PROPOSALS
SOFTWORKS LAYOUT 2 OF 2

SCALE	DATE
1:200 @ A1	21/01/16
DRAWN	REVIEWED
LM	MJB
DRAWING NO	REVISION
9016-001/105	A

FILE PATH
T:\9014\9014-006\CAD\05-Autocad\Dwgs\101