

Note:
For modular timber trestle platform construction refer to standard detail drawing ENH_131177-25067-ALL-00-DDR-C-040014

New lighting columns behind platform. Refer to standard drawing for Modular Timber Trestle Construction for more details.

Existing back of platform fence to be removed along the extension and tie in at the end of proposed top of ramp.

Proposed back of platform timber fence to match existing.

Nominal 1:50

GRP Deck.

Platform edge.

1182

Timber frame.

Concrete pad foundation. foundation levels to be confirmed at detail design. No timber to be below ground level.

Proposed stone filled trench along the extension to collect surface water from the extension.

Existing cable trough route.

M&E cable containment for light columns behind platforms - 4 way 100dia ducts with turning chambers to each lighting column. Route to extend to tap off point from existing supply. Details to be confirmed at detail design.

Min 700mm wide proposed walkway to provide access to the new lighting columns. Refer to NIR detail NR/CIV/SD/670. Walkway to be locally widened to provide access to the lighting column.

SECTION A
1:25


ISOMETRIC
NTS

Proposed
Existing
Existing to be modified
Existing to be removed

LEGEND

Legend/Notes

- Do not scale from this drawing.
- All dimensions and levels are in metres, unless specified otherwise.
- Drawing produced based on topographical survey undertaken by PBH Surveys (November 2017), on behalf of Arcadis Consulting (UK) Ltd. coordination system used TPEN16 snake grid.
- Buried services are taken from buried service searches provided by the Network Rail at the GRIP 3 stage. This information is to be supplemented by additional searches and investigation by the contractor prior to excavation in accordance with NR/L2/INI/CP1030 (formerly NR/L2/AMG/1030). Working safely in the vicinity of buried services. Additional buried/unidentified services may be present.
- This drawing is to be read in conjunction with the drawings listed below:
(ENH_131177-25067-MVL3-00-DDR-C-040111) - Multi-Disciplinary General Arrangement.
(ENH_131177-25067-MVL3-00-DDR-C-040112) - Platform 1 Proposed Extension.
(ENH_131177-25067-ALL-00-DDR-C-040014) - Modular Timber Platform Generic Drawing.

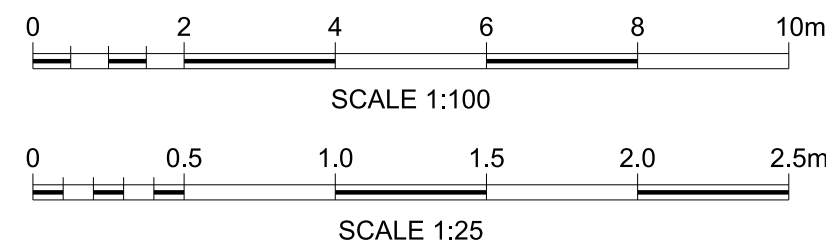

P01	14/12/17	Issued For IDC	AK	PS	JB
A01	12/01/18	F001 for Approval	SD	PS	GS
Rev	Date	Description of Revisions	Drawn	Chkd	Appr
Status					Suitability

Fit for Internal Review & Comment

S3



Authorised

Signed

Date

Contractor(s)

Arcadis (UK) Ltd

Location

STALYBRIDGE STN - HEATON LODGE JN (HUDD-MANC LINE)

Type

CAD Drawing

Sub-type

Role

Civil Engineer

Sub-Role

General

Zone

None

Phasing

Grip Stage

3

Project

Enhancements

Contract No.

131177

Contract Title

Northern Platform Lengthening

Drawing Title

SLAITHWAITE STATION

PROPOSED PLATFORM 2

EXTENSION

Designed

M. Shakanti

Signed

12/01/18

Drawn

S.DS

Signed

Electronically Signed

12/01/18

Checked

P.Stencel

Signed

12/01/18

Approved

G.Seex

Signed

12/01/18

Scale(s)

As Shown

ELR & Mileage

21.1633

to

21.1633

Alternative Reference

Sheet

1

of

1

Revision

A01

Drawing Number

ENH_131177-25067-MVL3-00-DDR-C-040113

Sheet Size A1 594 x 841