
From: Emma Thompson
Sent: 05 September 2018 14:00
To: Emma Thompson
Subject: FW: 2018/91283 - 9 Far Bank, Shelley.


From: Hamish Gledhill [<mailto:hamish@acumenarchitects.co.uk>]
Sent: 31 July 2018 08:48
To: Emma Thompson <Emma.Thompson@kirklees.gov.uk>
Subject: RE: 2018/91283 - 9 Far Bank, Shelley.

Hi Emma,

The trees to the south of the proposed development are separated from the site by a culvert, which is shown on the proposed site plan. The culvert provides a physical barrier which will prevent the works encroaching on the root protection area.

A tree protection barrier will be installed along the northern edge of the culvert up to the point where the culvert crosses the proposed site boundary. At this point the protection barrier will run to the south western corner of the existing dwelling at 9 Far Bank.

The protective barrier will be installed in accordance with BS5837: 2012. The default specification of BS 5837: 2012 (pictured below for reference) recommends a vertical and horizontal, scaffold framework, well braced to resist impacts, with vertical tubes at no more than 3m intervals. These should be driven into the ground. Weld mesh panels should be affixed to this framework with scaffold clamps.

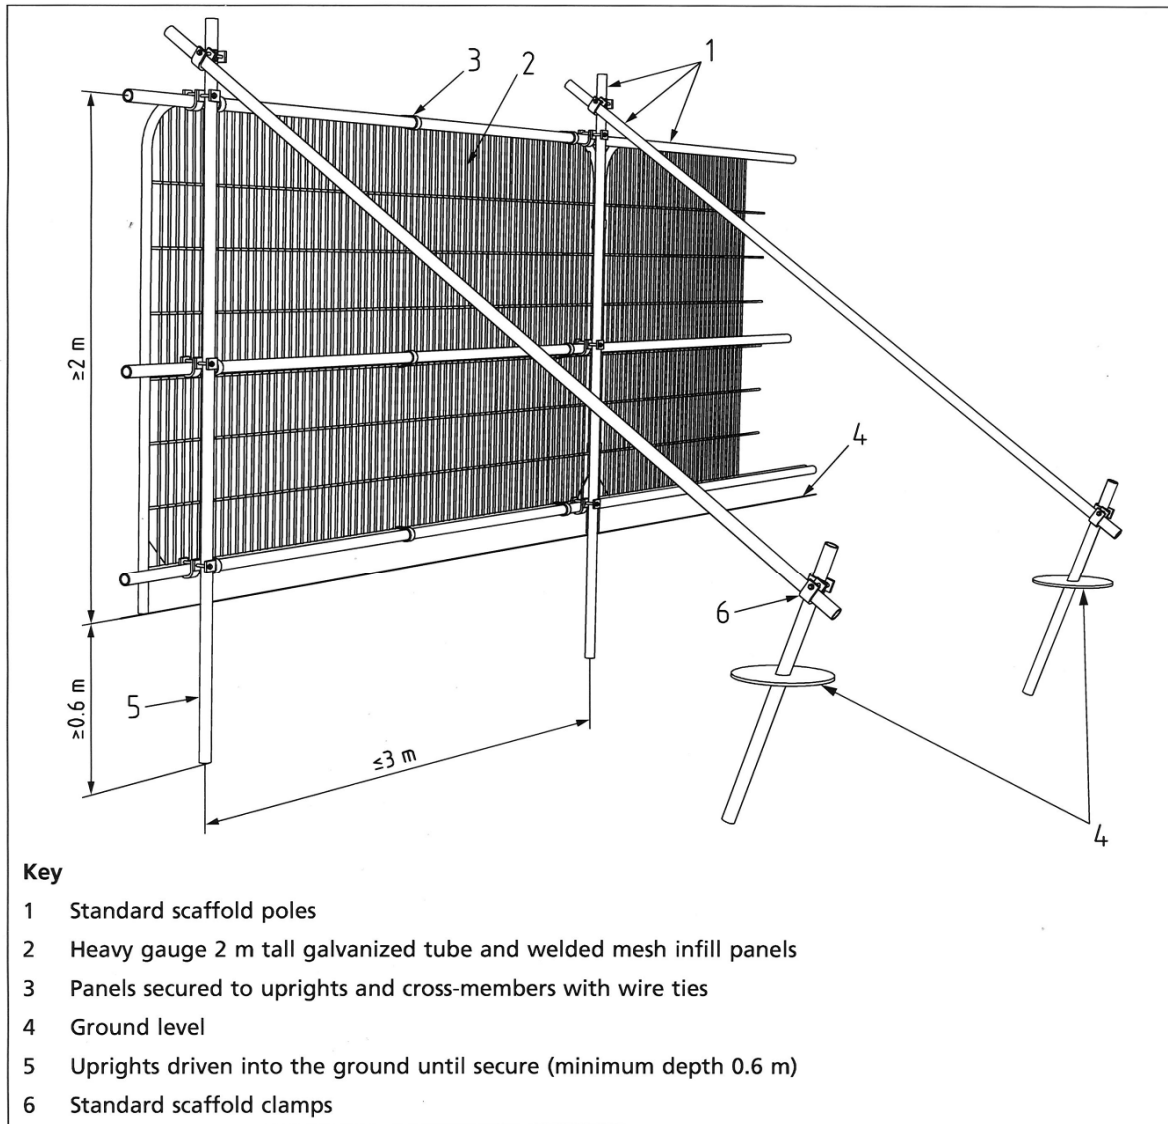

Kind
regards,

Hamish

Gledhill (MRTPI)
BSc (Hons) Dip TP

DIRECTOR OF PLANNING

For & on Behalf of

acumen designers & architects



ACUMEN DESIGNERS & ARCHITECTS LTD.

✉ Headrow House, old Leeds Road, Huddersfield, HD1 1SG

☎ 01484 546000 | 💻 www.acumenarchitects.co.uk