Luna

Surface Mounted

Innovation.
Collaboration.
Illumination.

Outdoor Lighting

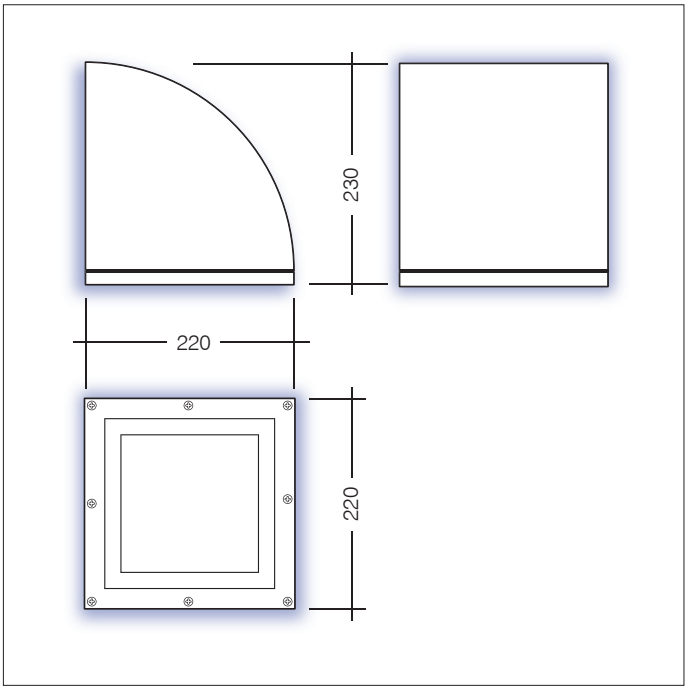

Overview

The Luna Wall luminaire is a highly efficient luminaire with excellent performance enabling, light levels to be achieved with spacing of up to 18m.The luminaire is manufactured from die cast aluminium and is fitted with a clear toughened glass lens.

Various lumen outputs are available and variants including integral emergency and dimmable are also available to enhance the range. Two colour finishes are available as standard, graphite or silver, and the utilisation of highly efficient LED optics produces excellent results to meet the highest levels of specification.

Key features

- *IP65 suitable for external environments*
- *Impact rating of IK08*
- *Efficacy of up to 124lm/W*
- *Nominal life-time of 50,000 h (L90/ B10)*
- *Emergency BLF = 276lm*

Options

For Emergency suffix **/EMR**
For DALI dimmable suffix **/DIM**
For Monitor Self-test Emergency suffix **/MON**
For Dali Em-pro Emergency suffix **/EMP**
For a Graphite finish suffix **/GRA**
For a Silver finish suffix **/SLV**

L4 Flood Lens

Part No.	Lm	W	Lm/W
LUN/L4/1500/74	1617	13	124
LUN/L4/2000/74	2199	18	122
LUN/L4/3000/74	3120	26	120
LUN/L4/4000/74	4101	36	114



L6 Wide Pathway

Part No.	Lm	W	Lm/W
LUN/L6/1500/74	1617	13	124
LUN/L6/2000/74	2199	18	122
LUN/L6/3000/74	3120	26	120
LUN/L6/4000/74	4101	35	117



More options available, see www.LDL.lighting

Please note *Due to the continuous development in LED technology, specification values may change and we reserve the right to amend the details without prior notification.*