

Portakabin®




Standard floor loading is 3kN/m². Any loading imposed on a floor that is greater than 3kN/m² may require strengthening. Please contact your hire centre if you expect to exceed 3kN/m².

Please note that this and any accompanying drawing(s) are for illustrative purposes only and as such, the building shown may vary from the actual finished building on site.

The position of windows, external doors and electrical fixtures (if shown) are dependent on stock availability at time of order.

EXTERNAL COLOUR SCHEME | Ultima

Walls - Goosewing Grey - nearest BS ref 10 A 05
Vertical wall trim - Goosewing Grey - nearest BS ref 10 A 05
Bottom wall trim - White - nearest BS ref 00 E 55
Long wall fascia (covering wall) - Goosewing Grey - nearest BS ref 10 /
Long wall fascia (covering beam) - White - nearest BS ref 00 E 55
Short wall composite fascia - Goosewing Grey - nearest BS ref 10 A 05
Roof - White - nearest BS ref 00 E 55
External Skirt - Goosewing Grey - nearest BS ref 10 A 05
Columns, external corners - Grey - BS 4800 00 A 05
Columns, intermediate - Grey - BS 4800 00 A 05
Windows - Blue Grey - nearest BS 4800 18 B 29
Doors (insulated door) - Slate grey - nearest BS 18 B 25

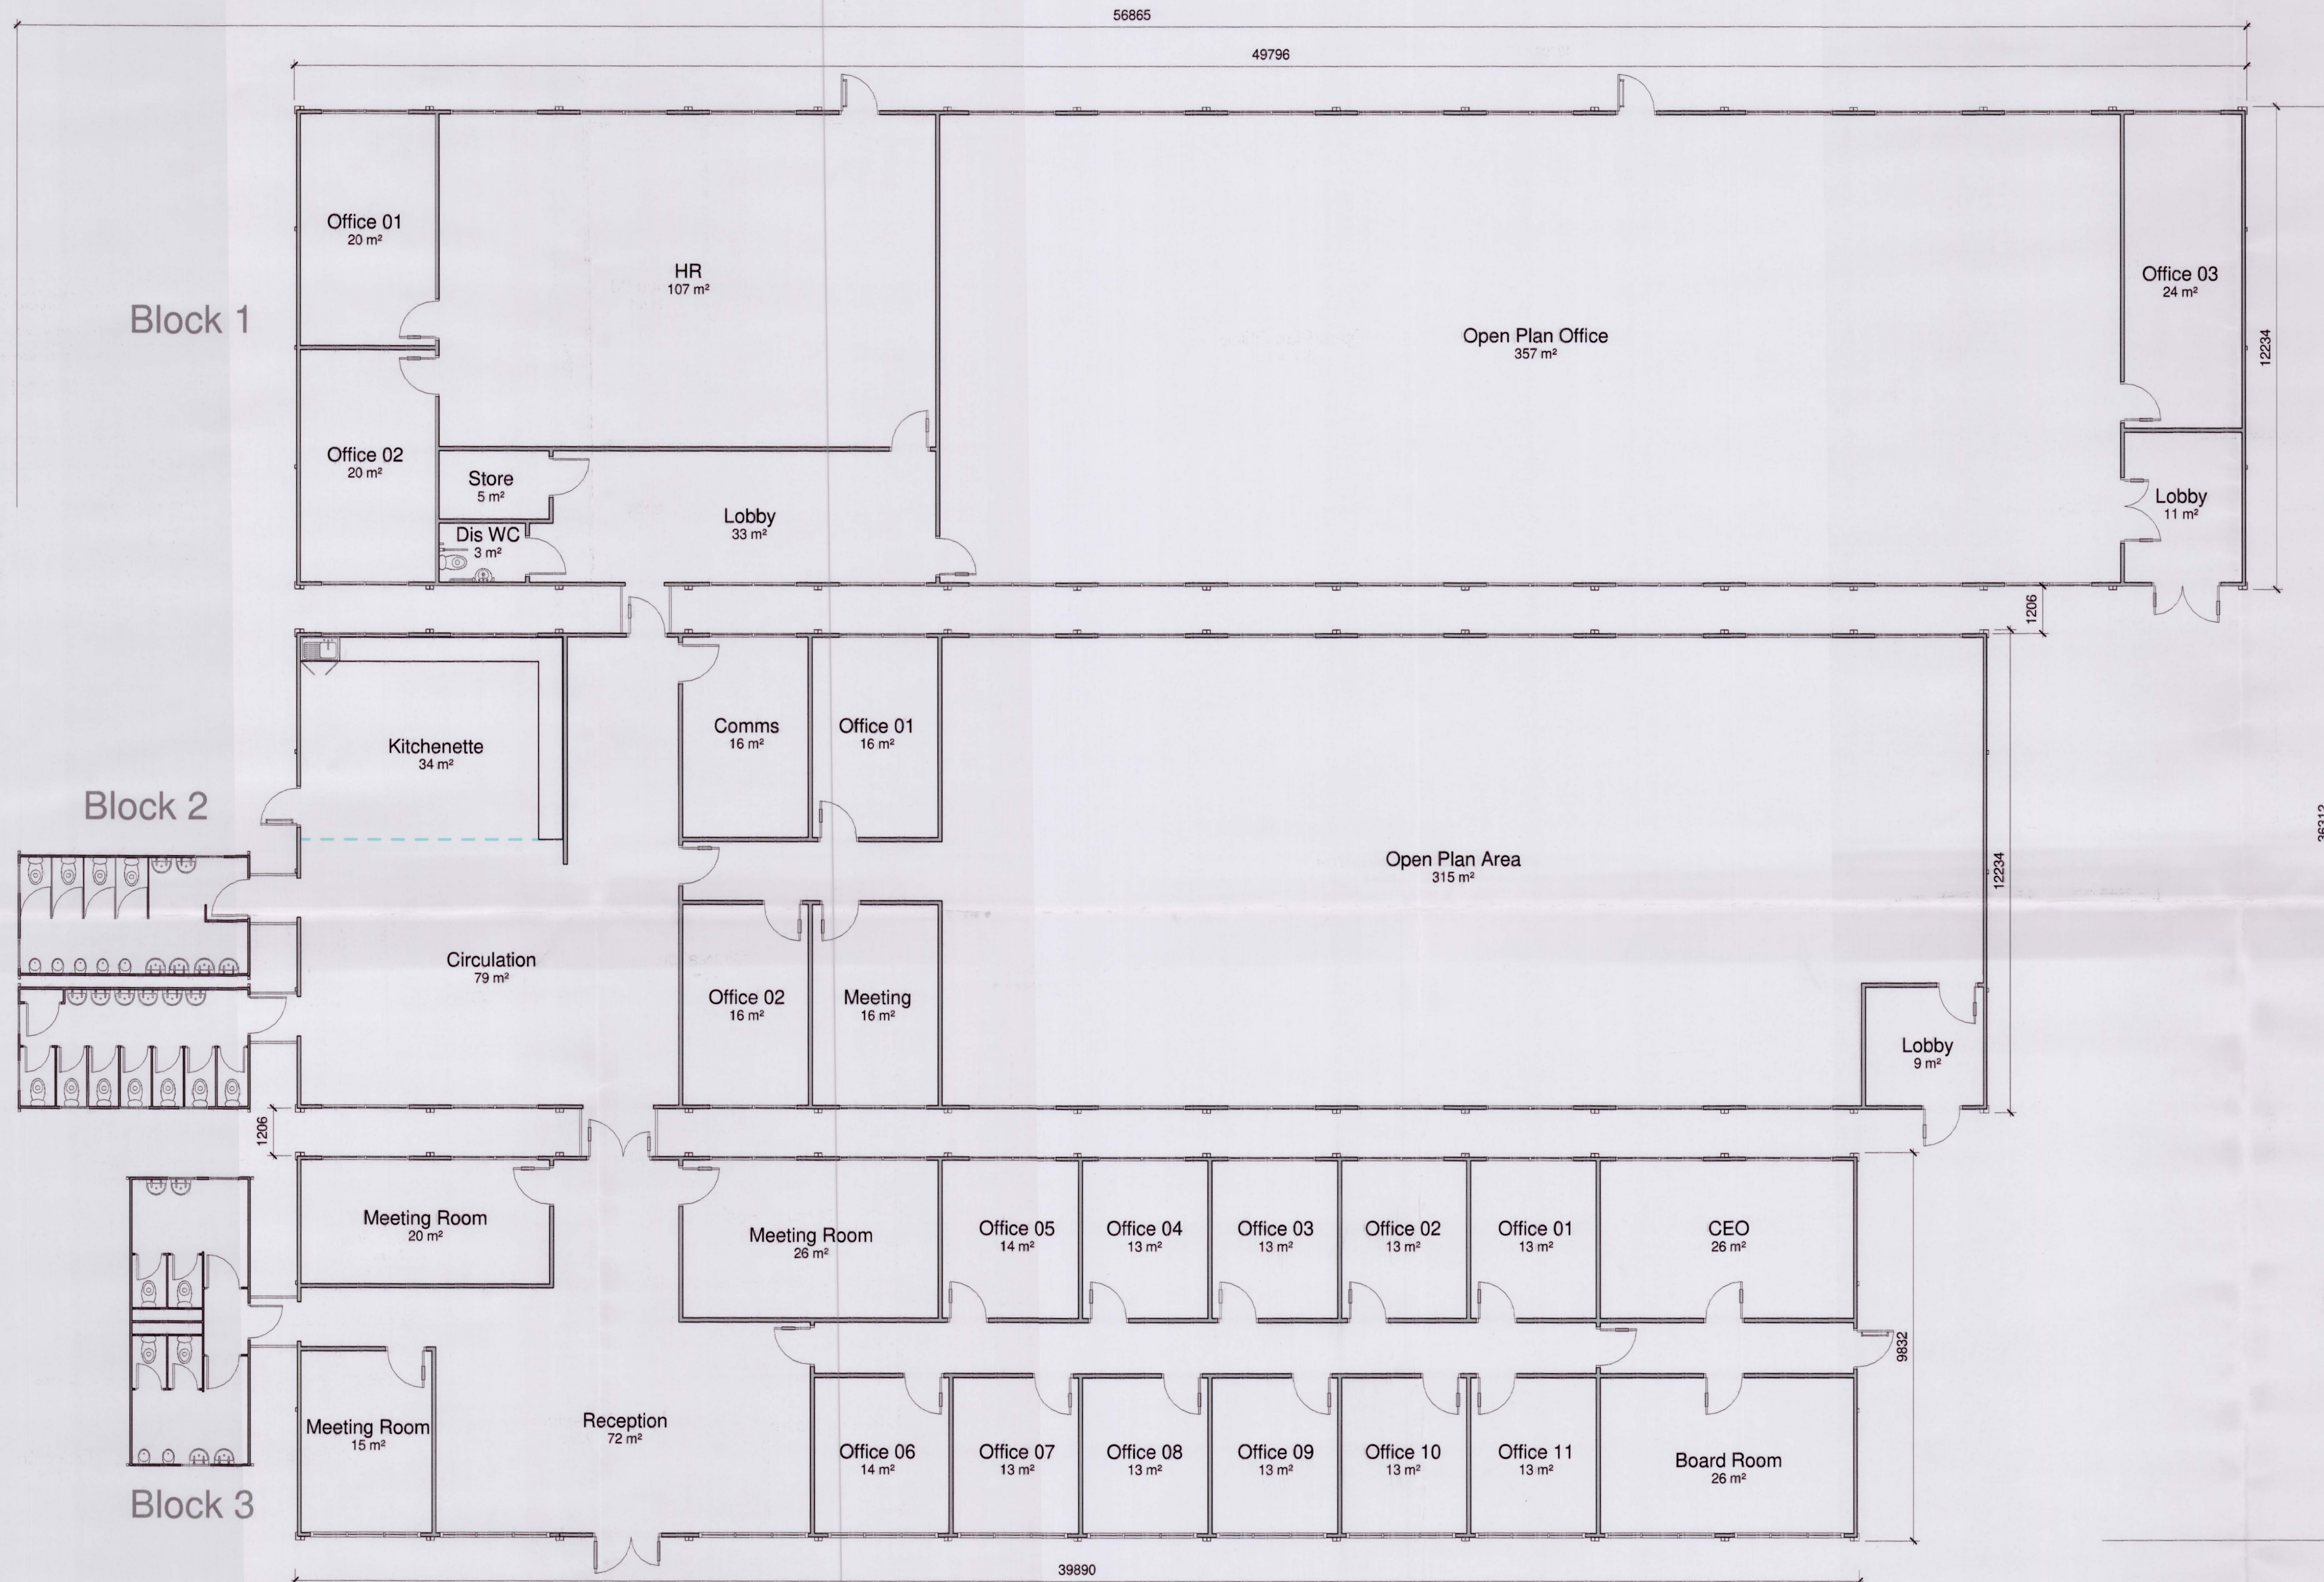

1 Proposed Layout
1 : 100

Total Floor Area: 1539m²

N.B. Fire exit provision is subject to Building Control approval

Rev	Revision Description	Date
1	Block 3 - Units changed to 1.5m length, Kitchen & Portakabin Units removed, Lobby entrance moved.	18.02.19
2	Block 1 Internal double doors to lobby changed to inward opening, Block 2 - 1m Units removed, Block 3 - 1m Units removed.	08.03.19
3	Some modules removed from Block 1 and 2, internal changes made to all blocks.	08.03.19

Project Name
Office Decant 2019

Client Name
Cummins Turbo Tech

Sheet Name
Proposed Layout - Ultima
Modules Complex - Including
a range of Vision Modules.

Date 26/02/19	Scale 1 : 100 @ A1
Drawing Number HD/8391.11	Rev. C
	Drawn by WEH