



Slip ties and movement joints to be used on every third panel at abutment with pier to allow for differential movement. Top slip tie to be positioned directly below header course and two remaining ties to be spaced equally from top tie to ground.

For clay brick a 16mm movement joint is required with first movement joint being no more than 6m from the end of the wall.


ELEVATION

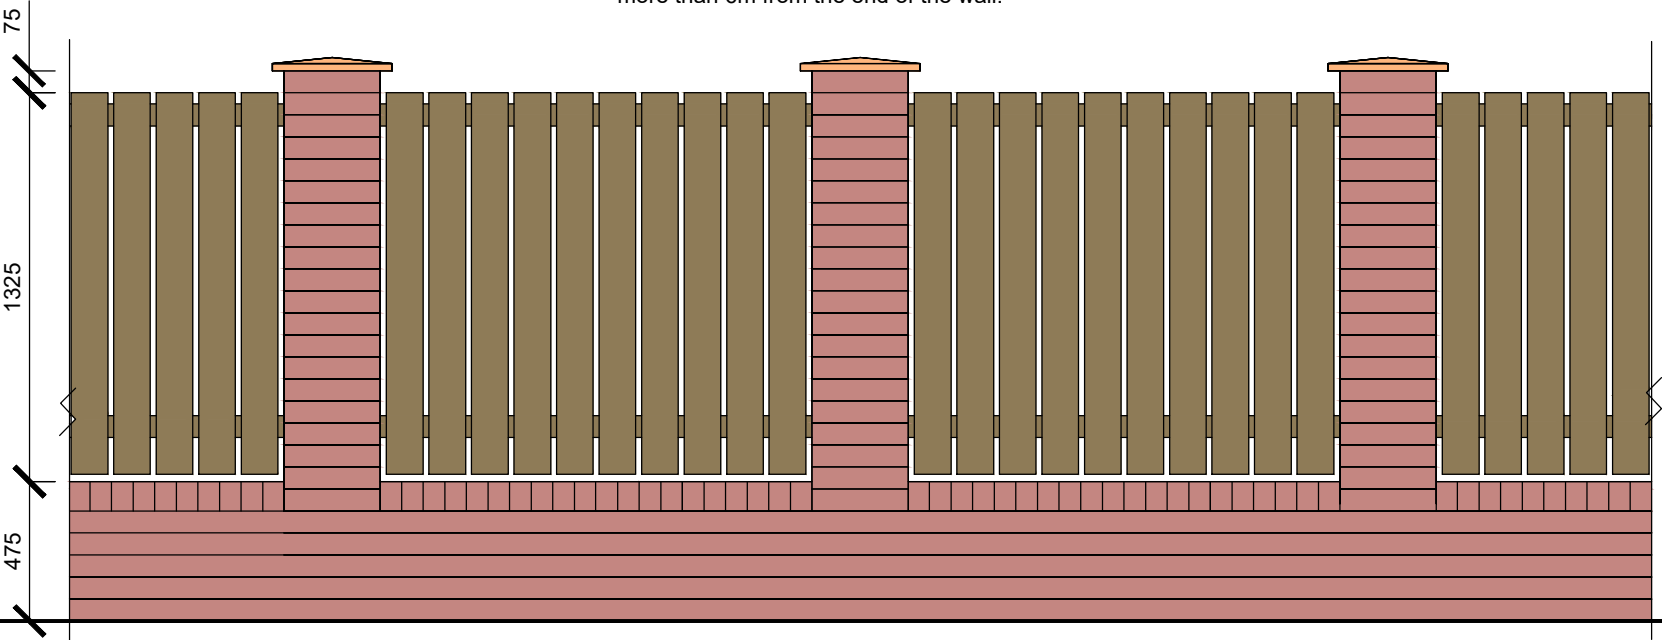

PLAN

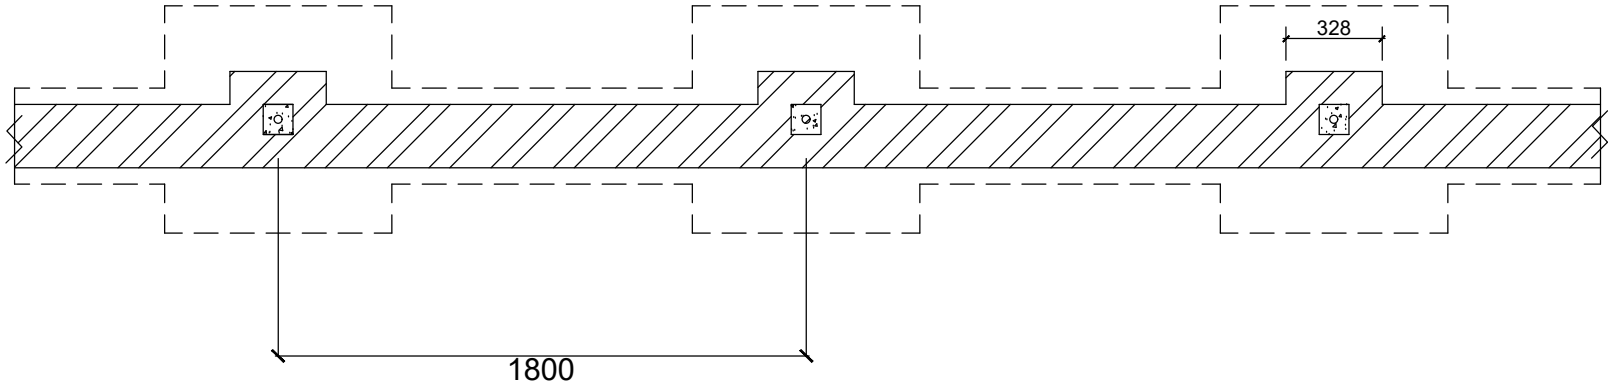

SECTION

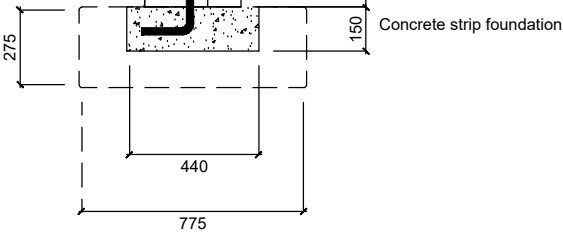

Avant Homes
Unit 2
Manner Court
Peel Avenue
Durkar
Wakefield
WF4 3FL