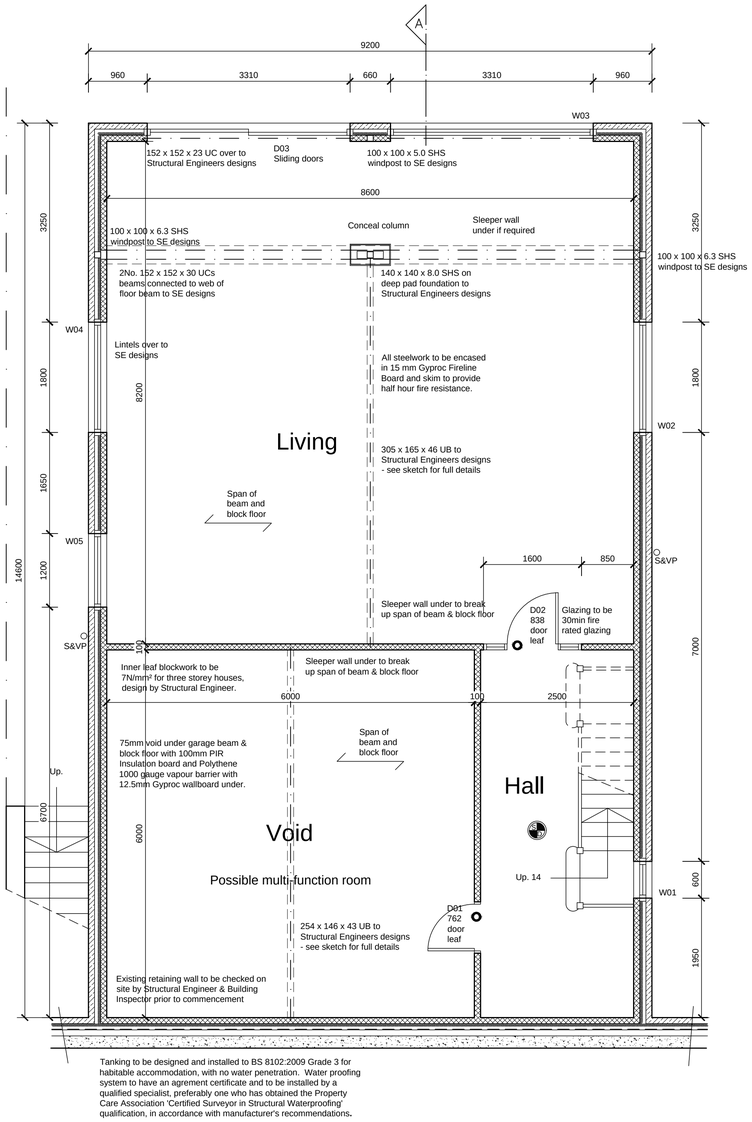

Lower Ground Floor Plan

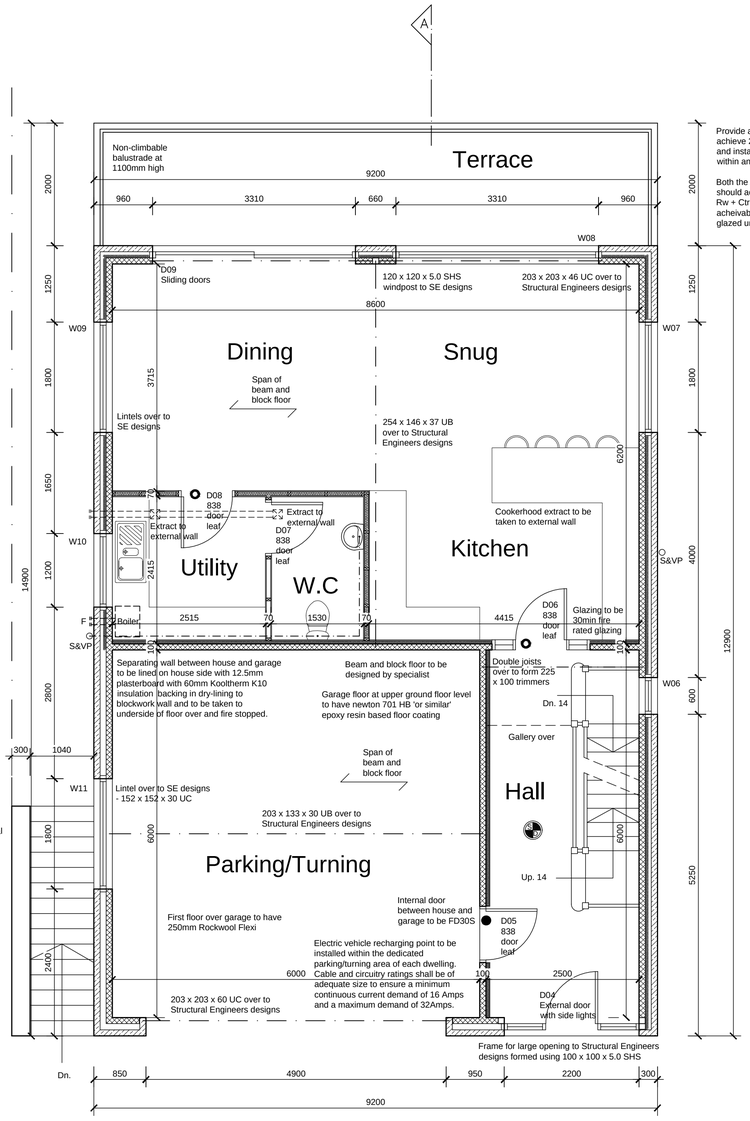

Upper Ground Floor Plan

Provide acoustic trickle vents to achieve 2 - 4 air changes per hour and installed along side windows within an acoustic rating.

Both the windows and trickle vents should achieve a minimum of 34dB Rw + Ctr rating and should easily be acheivable using standing double glazed unit.

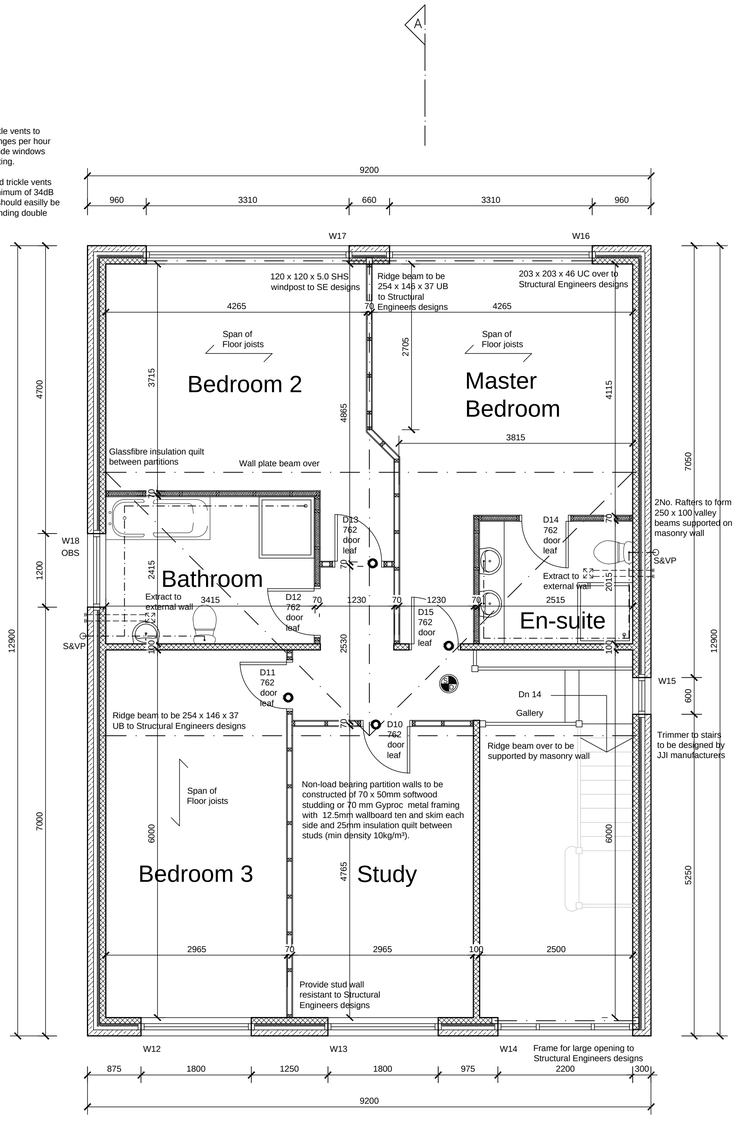

First Floor Plan

ARCHITECTURE | PLANNING | DESIGN

Malkin Farm
Brow Lane
Holmfirth
HD9 2RJ
07946872499
paul@paulmatthewsarchitectural.co.uk
www.paulmatthewsarchitectural.co.uk

Company Registration Number: 09898149 – Company Registered in England and Wales

Project
Erection of Two Detached Dwellings adj to 71, Woodhead Road, Honley, Holmfirth, HD9 6PP .
Client
Mr P Mitchell
Drawing Title/Issue
Plot 2 Working Drawing Plans

scale	date	sheet size	dwg. no.
1:50	02/20	A1	20/313/08a

Do not scale from drawing, use figured dimensions only.

All dimensions must be checked and verified on site prior to commencement of works and architect to be notified of any discrepancies.

The copyright for these drawings remains the property of Paul MatthewsArchitectural Ltd. They must not be reproduced in any way without prior written consent from the originator (Paul MatthewsArchitecturalLtd).



KEY

	Smoke alarm
	FD30 self closing fire door with smoke seals
	FD30 fire door
SG	Safety Glass
obs	Obscure Glazing
E	Extract Fan
F	Flue
SVP	Soil & Vent pipe
RWP	Rain water pipe
B.I.G	Back inlet gully
EW	Escape Window