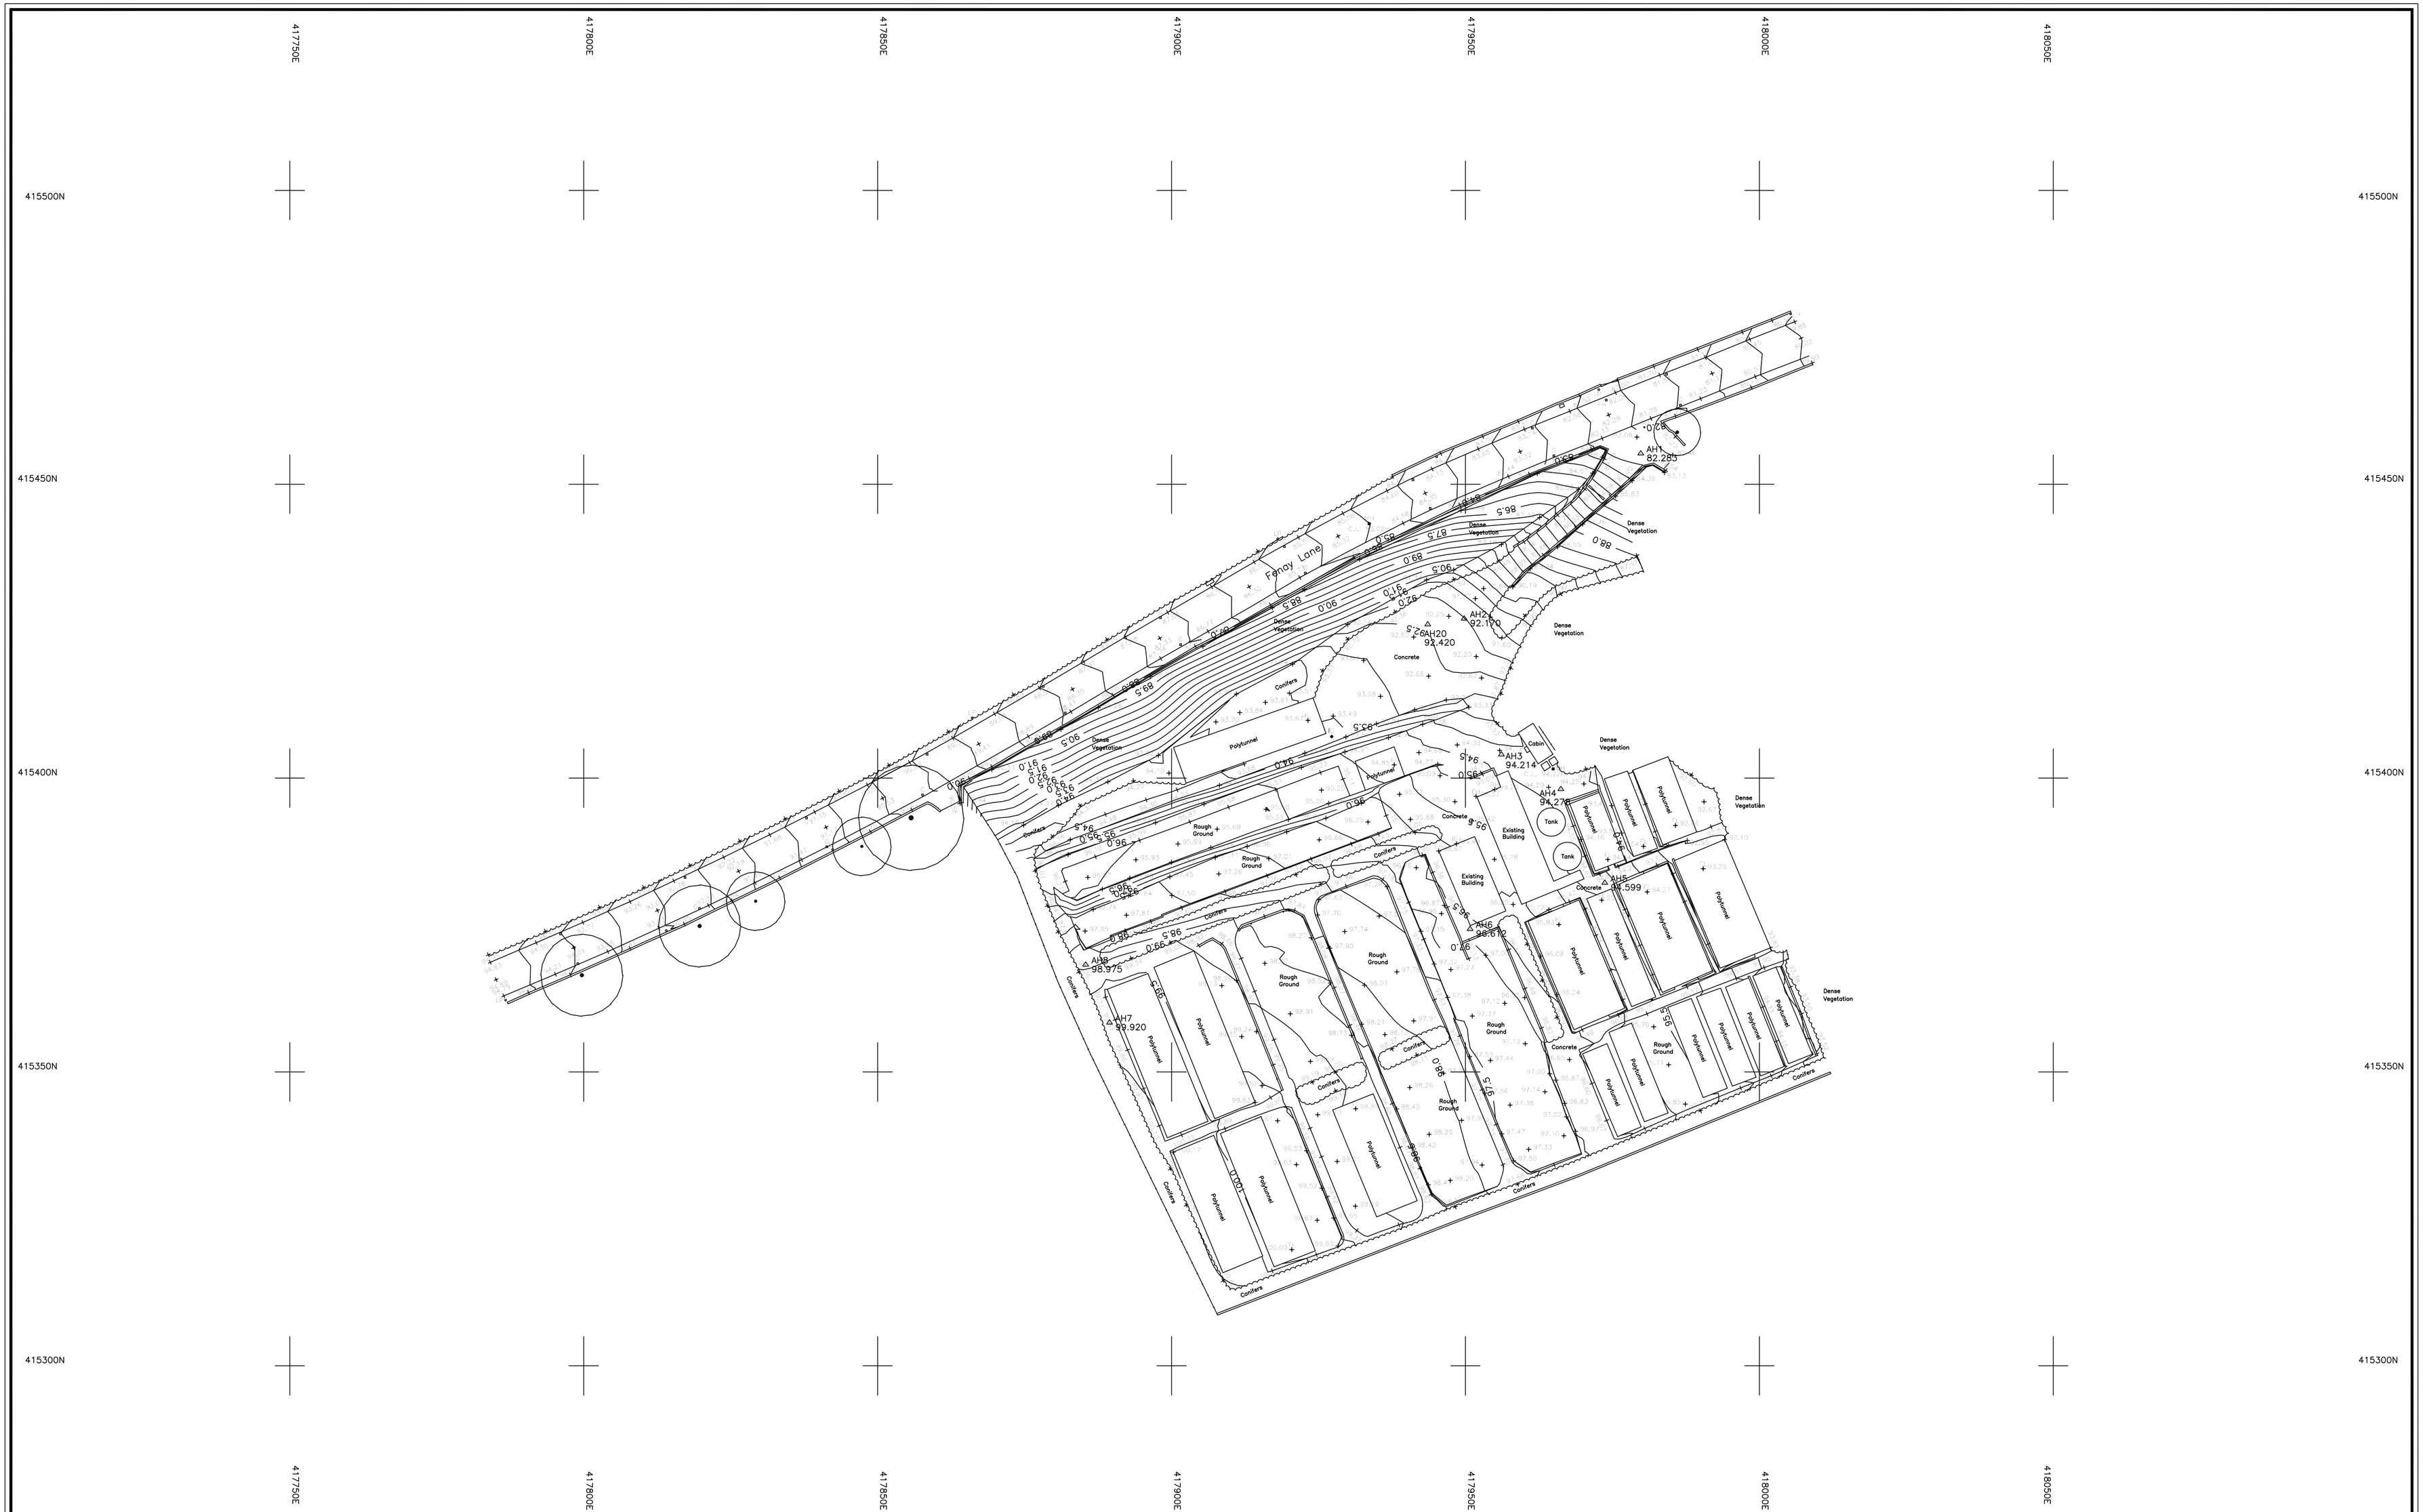


**Stamford Geomatics Ltd**

LAND SURVEYING AND VOLUMETRICS
Onward Business Park
Ackworth, Pontefract
WF7 7BE
Tel: 01977 613042, 07710 349592
email: surveys@stamfordgeomatics.co.uk

| Site Name: | | | Title | | |
|---|---|---|---|---|---|
| Fenay Lane, Almondbury, West Yorkshire. | | | Topographical Survey. | | |
| Surveyed: | Drawn: | Checked: | Plotted Scale: | Date: | Sheet Size: |
| AH | AH | CSm | 1:500 | 14 Jul 14 | A1 |

## Station Co-Ordinates:

| | | | |
|---|---|---|---|
| AH1 | 417879.833 | 415455.228 | 82.283 |
| AH2 | 417849.785 | 415427.130 | 92.176 |
| AH3 | 417829.137 | 415406.150 | 94.214 |
| AH4 | 417823.330 | 415399.172 | 94.276 |
| AH5 | 417823.156 | 415392.178 | 94.599 |
| AH6 | 417823.156 | 415386.178 | 96.612 |
| AH7 | 417805.455 | 415334.366 | 99.920 |
| AH8 | 417843.585 | 415326.140 | 98.975 |

## Survey Control Data:

Datum for Levels: OS GPS Datum (OSGM02)
Bench Mark: AH1
Value: 82.283m
Grid: Local Grid Based on OSGB36(02) at AH1

## Standard Symbols:

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| MH | Manhole Cover | FP | Flag Pole | EC | Electricity Cable | IL | Invert Level | R/W | Retaining Wall |
| IC | Inspection Cover | RTS | Road Traffic Sign | GP | Gas Pipe | B/W | Barbed Wire | EH | Eaves Height |
| WOH | Water Outlet Hydrant | TL | Traffic Light | RWP | Rain Water Pipe | C/B | Close Boarded | RH | Ridge Height |
| FH | Fire Hydrant | CB | Control Box (Traffic) | SVP | Soil and Vent Pipe | C/L | Chain Link | TH | Tree Height |
| SV | Stop Valve | G | Gully | SP | Soil Pipe | W/P | Wood Paling | | |
| GV | Gas Valve | RE | Rodding Eye | VP | Vent Pipe | H/R | Hand Rail | | |
| WM | Water Meter | BH | Borehole | WP | Waste Pipe | I/R | Iron Railing | | |
| UC | Unidentified Cover | TrP | Trial Pit | S/COB | Stone Cobbles | I/W | Interwoven | | |
| BT | Telecom Cover | JB | Junction Box | SPS | Stone Paving Slabs | O/B | Open Boarded | | |
| LP | Lamp Post | BOL | Bollard | CPS | Concrete Paving Slabs | WP/R | Wood Post and Rail | | |
| TP | Telegraph Pole | LB | Litter Bin | B/S | Brick Setts | CP/R | Concrete Post and Rail | | |
| EP | Electricity Pole | PB | Pillar Box | ELEC | Electricity Cover | CP/T | Concrete Post and Timber Panel | | |
| SIGN | Sign Post | TCB | Telephone Call Box | OhW | Overhead Wire | F/W | Post and Wire | | |
| BUS | Bus Stop | MILE | Milestone | FL | Floor Level | CP/D | Concrete Post and Dropper | | |
| | | MP | Marker Post | SL | Step Level | PAL | Palisade | | |
| | | | | CL | Cover Level | T/S | Tube Steel | | |

96.0 Existing Contour
Existing Tree
Tree Stump
Canopy Line

© Stamford Geomatics Ltd 2014

Notes:

1. The accuracy and content of this drawing are dependent on the surveyed scale and survey specification, care should be taken when working with other plotted scales or from CAD.

| Drawing No. | Revision |
|---|---|
| 1778/001 | - |