




APPENDIX A

Vehicle Categories

COBA VEHICLE CATEGORIES

CAR	 SALOON  ESTATE  PEOPLE CARRIER  CAR TOWING CARAVAN / TRAILER
LIGHT GOODS VEHICLE (LGV)	 VAN  <3.5 TONNES – single rear tyres  PICK-UP
OTHER GOODS VEHICLE (OGV1)	 > 3.5 TONNES – twin rear tyres  2-AXLES RIGID  2-AXLES RIGID  3 AXLES-RIGID
OTHER GOODS VEHICLE (OGV2)	 4 OR MORE AXLES RIGID  3-AXLES ARTIC  4 OR MORE AXLES ARTIC  OTHER GOODS VEHICLE WITH TRAILER
BUSES & COACHES (PSV)	 DOUBLE DECK BUS  SINGLE DECK BUS OR COACH

COBA VEHICLE CATEGORIES**Definition of Categories**

The various components of traffic have different characteristics in terms of operating costs, growth and occupancy. The most common categories into which the traffic is split in COBA; these are defined as:

Cars (CARS)

Including taxis, estate cars, 'people carriers' and other passenger vehicles (for example, minibuses and camper vans) with a gross vehicle weight of less than 3.5 tonnes, normally ones which can accommodate not more than 15 seats. Three-wheeled cars, motor invalid carriages, Land Rovers, Range Rovers and Jeeps and smaller ambulances are included. Cars towing caravans or trailers are counted as one vehicle unless included as a separate class.

Light Goods Vehicles (LGV)

Includes all goods vehicles up to 3.5 tonnes gross vehicle weight (goods vehicles over 3.5 tonnes have sideguards fitted between axles), including those towing a trailer or caravan. This includes all car delivery vans and those of the next larger carrying capacity such as transit vans. Included here are small pickup vans, three-wheeled goods vehicles, milk floats and pedestrian controlled motor vehicles. Most of this group is delivery vans of one type or another.

Other Goods Vehicles (OGV 1)

Includes all rigid vehicles over 3.5 tonnes gross vehicle weight with two or three axles. Includes larger ambulances, tractors (without trailers), road rollers for tarmac pressing, box vans and similar large vans. A two or three axle motor tractive unit without a trailer is also included.

Other Goods Vehicles (OGV 2)

This category includes all rigid vehicles with four or more axles and all articulated vehicles. Also included in this class are OGV1 goods vehicles towing a caravan or trailer.


Buses and Coaches (PSV)

Includes all public service vehicles and works buses with a gross vehicle weight of 3.5 tonnes or more, usually vehicles with more than 16 seats.



APPENDIX B

Manual Classified Count

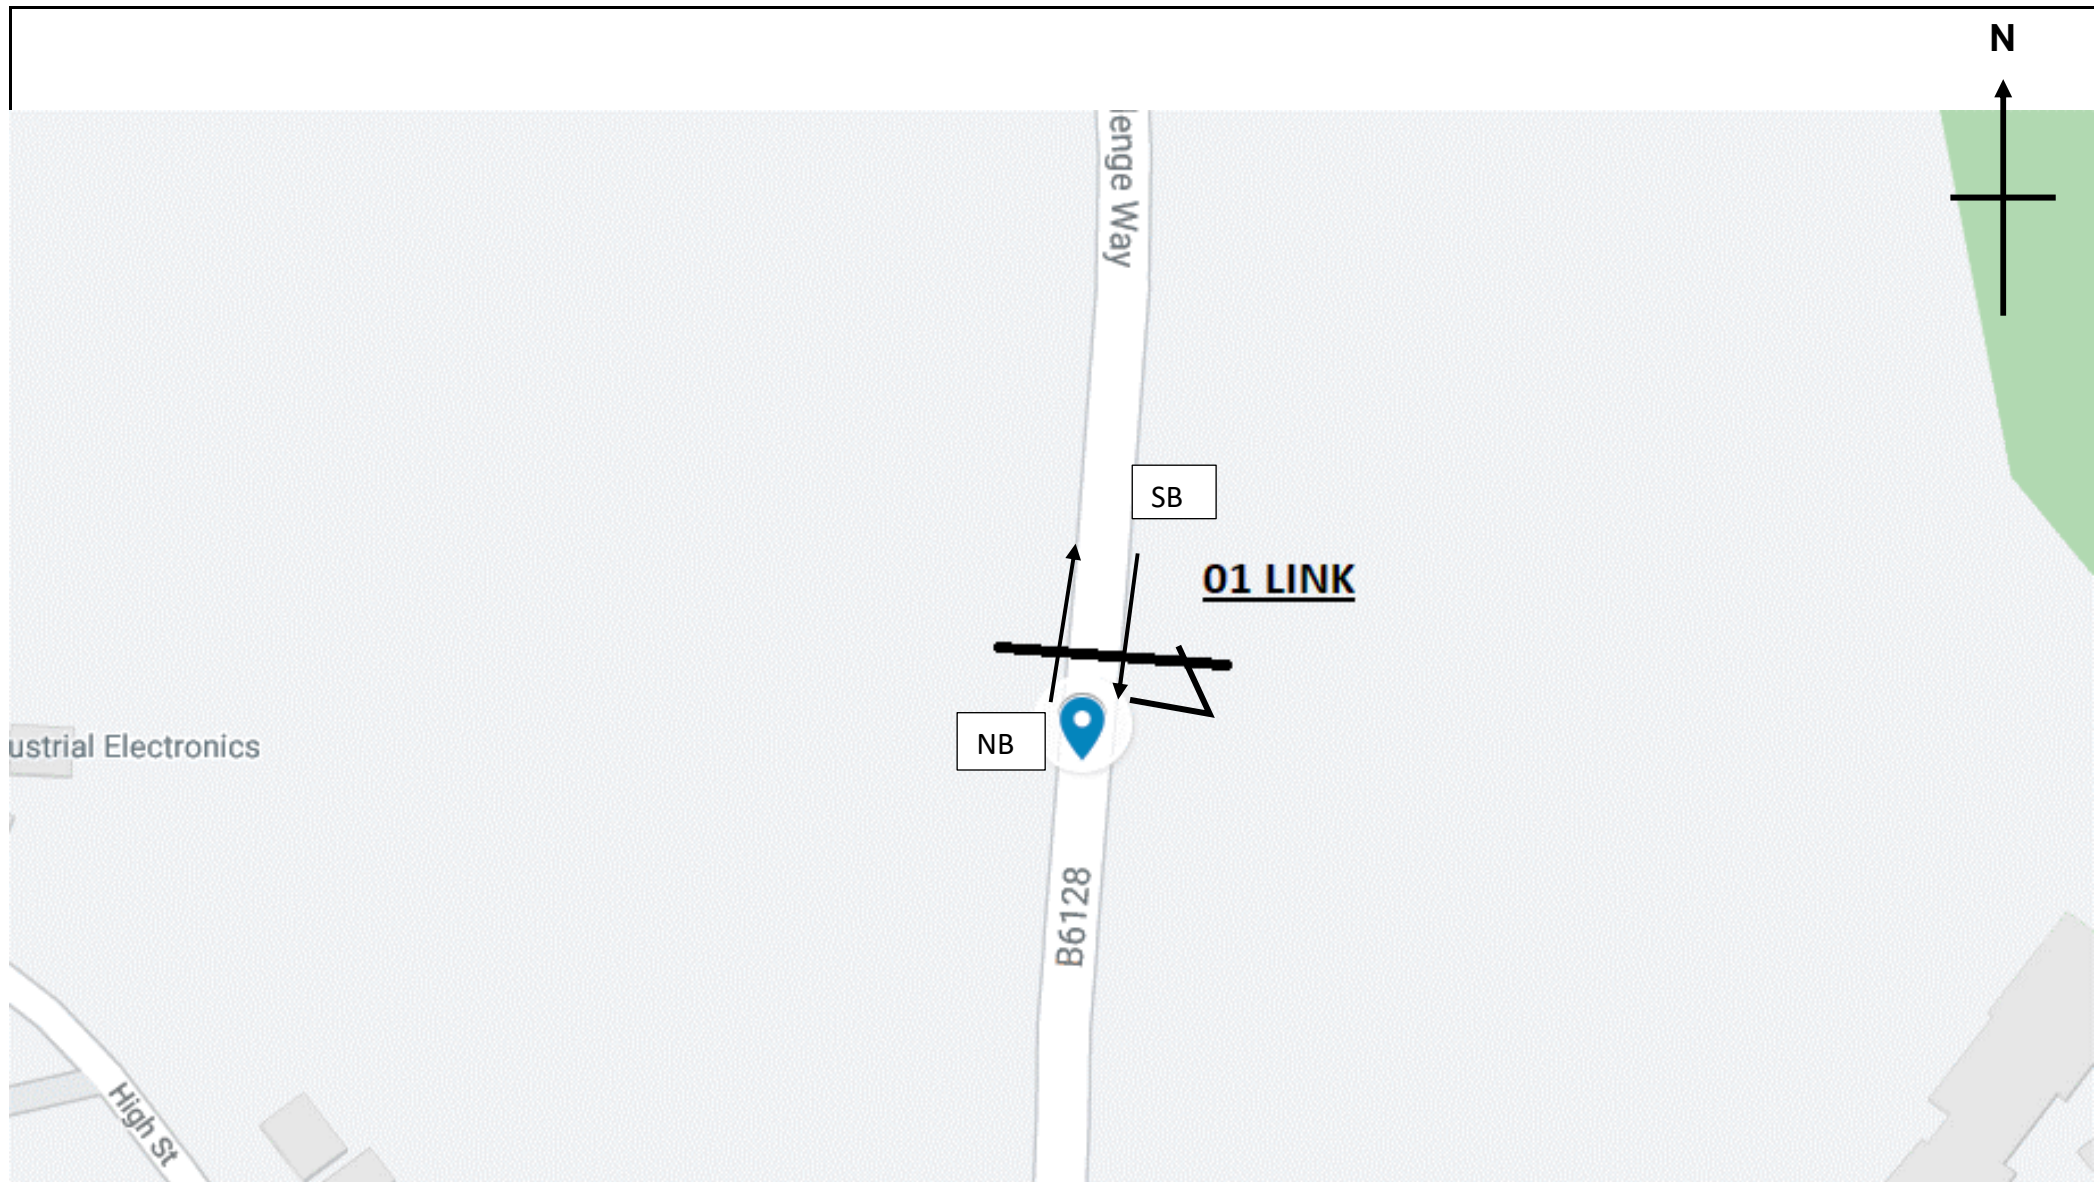

	Site / Location: Site 1 - Challenge Way	Project No: 12174	Drawing No: 12174/01	Drawn By:
	Survey Date: Thursday 21st October 2021	Project Name: Dewsbury		
	Survey Times: 16:00 TO 19:00	Drawing Title: Site Layout and Observed Movements		



SITE: 1

DATE: 21/10/2021

LOCATION:

DAY: Thursday

TIME	Northbound							TOT	Southbound							TOT
	CAR	LGV	OGV1	OGV2	PSV	MCL	PCL		CAR	LGV	OGV1	OGV2	PSV	MCL	PCL	
16:00	95	19	3	2	0	2	0	121	69	18	3	4	0	1	0	95
16:15	68	8	4	0	0	2	0	82	62	25	3	2	0	1	0	93
16:30	124	25	1	0	0	1	0	151	83	17	2	1	0	1	1	105
16:45	86	15	2	0	0	1	1	105	77	11	3	1	0	1	1	94
H/TOT	373	67	10	2	0	6	1	459	291	71	11	8	0	4	2	387
17:00	120	14	0	3	0	1	0	138	98	17	2	1	0	0	0	118
17:15	101	8	0	1	0	0	0	110	103	8	1	0	0	0	0	112
17:30	84	9	0	2	1	0	0	96	78	14	1	0	1	0	1	95
17:45	62	9	0	1	0	0	0	72	93	17	3	1	0	0	0	114
H/TOT	367	40	0	7	1	1	0	416	372	56	7	2	1	0	1	439
18:00	69	11	1	0	0	0	0	81	77	8	0	1	0	1	1	88
18:15	69	8	0	1	0	1	0	79	76	6	2	1	0	1	2	88
18:30	49	5	0	0	0	0	0	54	62	4	0	1	0	1	0	68
18:45	49	2	0	0	0	0	0	51	52	4	0	2	0	0	0	58
H/TOT	236	26	1	1	0	1	0	265	267	22	2	5	0	3	3	302
P/TOT	976	133	11	10	1	8	1	1140	930	149	20	15	1	7	6	1128