


Palisade Fencing

PCD16

Palisade Fencing is the most popular choice for locations requiring a relatively high level of security and vandal resistance. It is especially popular for schools and industrial sites because of its high damage resistance and the fact that it is so difficult to climb.

Available in 'W' section for higher security applications and 'D' section for medium to low security applications. Palisade can be supplied with galvanised finish or galvanised and powder coated green or black and a range of other colours on request.

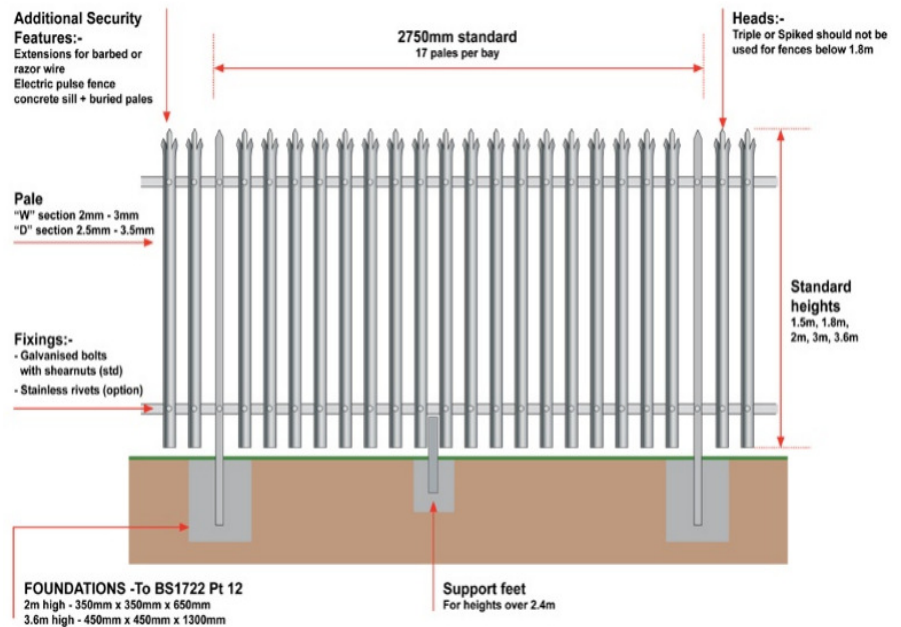

Applications

Utilities
Perimeter- high security
Perimeter- medium security
Airports
Retail
Industrial Units



Product Data

Finish	Hot dip Galvanised to BS EN ISO 1461:2009 and polyester coated to a range of RAL colours					
Fence Height m	W Section mm	D Section mm	Post Section mm	Pales / Bay	Fittings	
1.5 / 1.8 / 2.0 / 2.1	2.0	2.5 / 3.0	102 x 44	17	M 12 x 40	M8 x 40
2.4 / 3.0	2.0 - 3.0	3.0 - 3.5	Fish Plates	Rails mm	4	34
3.6	2.0 - 3.0	3.5	2	50 x 50 x 2.75		



Contracts Offices: Garforth (W.Yorkshire) - Bedwas (S.Wales) - Brentwood (Essex)

T: 02920 855 756

E: enquiries@proctercontracts.co.uk

W: www.proctercontracts.co.uk