
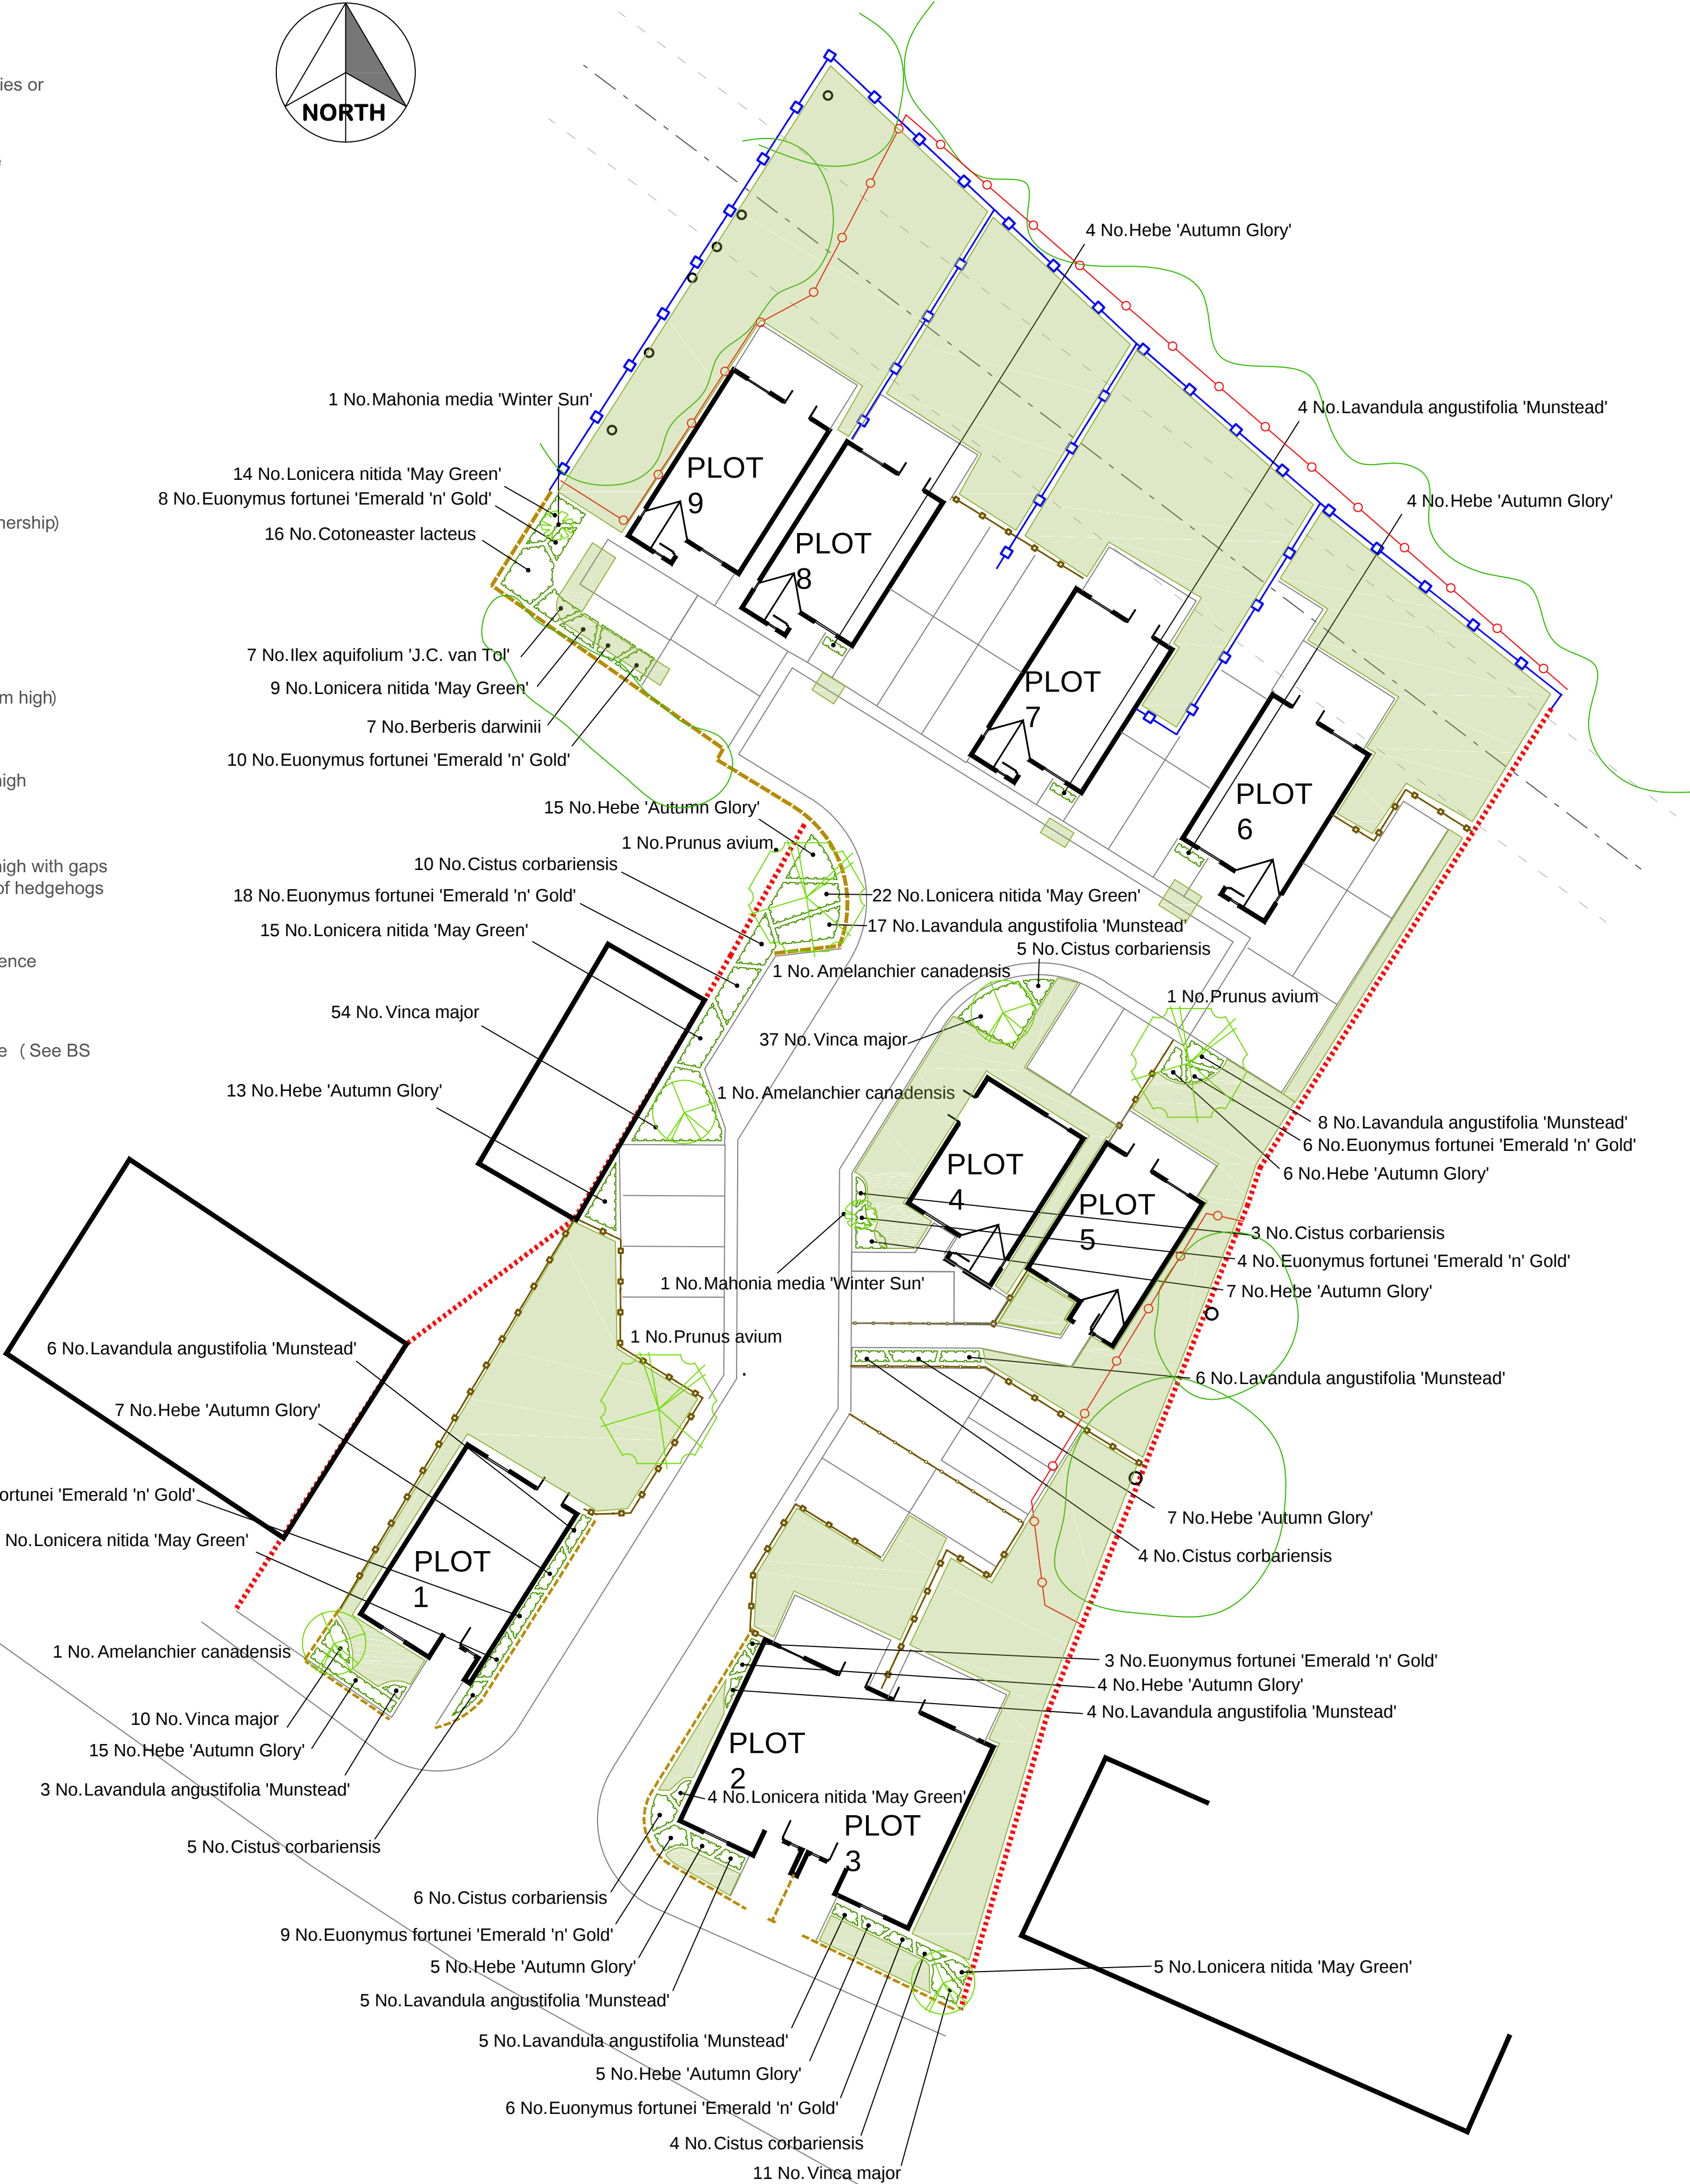
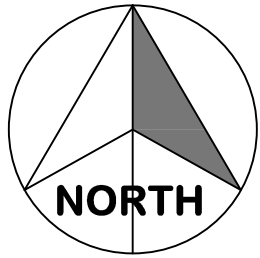


KEY

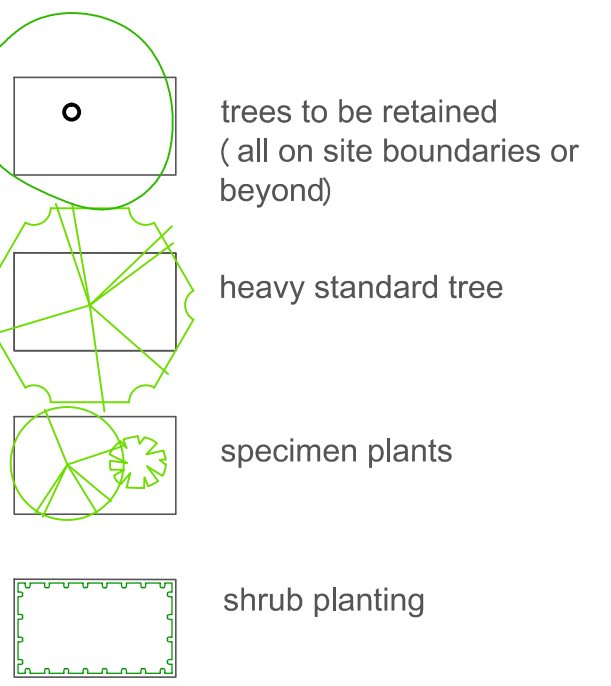

FENCE MODIFICATIONS FOR HEDGEHOGS

In gardens backing on to Kirklees Wildlife Habitat Network, 13 cm high by 13cm wide gap to be created beneath each 1.8m long fence panel, with remainder of gap beneath fence blocked with 10cm deep timber board to keep small dogs within rear gardens.

PLANT SCHEDULE

Trees					
Number of Plants	Species	Height	Girth	Specification	
3 No.	Prunus avium	3.0-4.0m	12-14cm	for birds	

Shrubs					
Number of Plants	Species	Height	Pot Size	Density	Specification
3 No.	Amelanchier canadensis	150-175cm	25L	Counted	for birds
7 No.	Berberis darwinii	30-40cm	3L	3/m ²	for pollinators and birds
37 No.	Cistus corbariensis	40-60cm	2L	3/m ²	
16 No.	Cotoneaster lacteus	40-60cm	3L	3/m ²	for pollinators and birds
73 No.	Euonymus fortunei 'Emerald 'n' Gold'	20-30cm	3L	5/m ²	
92 No.	Hebe 'Autumn Glory'	20-30cm	3L	4/m ²	for pollinators
7 No.	Ilex aquifolium 'J.C. van Tol'	40-60cm	3L	3/m ²	for pollinators and birds
58 No.	Lavandula angustifolia 'Munstead'	20-30cm	3L	4/m ²	for pollinators
77 No.	Lonicera nitida 'May Green'	30-40cm	2L	4/m ²	
2 No.	Mahonia media 'Winter Sun'	80-100cm	25L	Counted	for pollinators and birds
112 No.	Vinca major	10-20cm	2L	5/m ²	

PREPARATION AND PLANTING

All plant material shall conform to BS3936 Parts 1and 4 and BS 4428. Topsoil to comply with BS3882, 1994. Organic matter to be proprietary shrub planting compost, or approved compost derived from recycled organic matter. Slow release fertiliser to be 'Enmag' or similar.

Tree planting

- Trees to be planted into pits of an appropriate size to accommodate the root system without restriction.
- Heavy standard trees to be single staked using a 75mm diam machine rounded stake and single Tom tree tie or similar. Finished height of all stakes shall not exceed 1/3 height of tree above ground.
- Tree pits to be back-filled with imported topsoil mixed with compost at a ratio of 3 parts soil to 1 part compost. 150gms slow release fertiliser to be added to each pit.

Shrub and herbaceous planting.

- Shrubs and herbaceous plants to be planted into 400mm depth of high quality topsoil complying with BS3882, 1994.
- 100 mm depth organic matter to be spread over planting area and cultivated into soil to a min 400mm depth.
- Shrubs to be planted into prepared soil in pits large enough to accommodate full rootball.
- Finished beds to be lightly forked over and dressed with 75mm depth coarse forest bark mulch.

Amenity grass seeding.

- A minimum of 100mm of clean topsoil to be spread over all areas of proposed amenity grass seeding.
- Area to be cultivated using a disc harrow or rotovator, to 100mm depth then further cultivated to 50mm depth and rolled to produce a firm seed bed.
- Pre-seed fertiliser to be applied at 50gm/m² and incorporated.
- A low maintenance fescue/bent seed mix to be sown. Eg: Germinal, A4 at 35gm/square metre.

AFTERCARE - 5 YEARS

Trees

- Keep an area 1m in diam free from weed growth around all trees
- Annually apply a slow release fertiliser in spring in years 1 -4.
- Replace all failures.
- Prune all damaged or broken branches.
- Check and adjust as necessary all tree ties and stakes.

Shrub areas.

- Keep all area free from weed growth by hand pulling or herbicide treatment
- Annually apply a slow release fertiliser in spring in years 1 -4.
- Replace all failures.
- Prune all damaged or broken branches. Prune all shrubs overhanging footpaths.
- Top-up mulch in years 2 and 4 to maintain 75mm depth.

Grass and turf areas

- First cut to take place when sward is 4 to 8 cm high. Areas to be lightly rolled and stone-picked prior to cutting. Thereafter amenity grass and turf to be cut regularly throughout the growing season, wildflower areas to be left uncut between April and late June to allow flowering and seed set of wild flowers. All cuttings from wildflower areas to be raked up and disposed of off-site or placed into heaps at the base of hedge along southern boundary of site.

Watering

- In years 1-3, water plants in periods of prolonged dry weather at the following rates.
Trees 30 litres per tree
Hedging plants 10 litres per plant.
Watering to be undertaken in early morning or evening, avoiding periods of bright sunshine or windy conditions.

PHASING

All trees and to be planted in the first dormant season (Nov to March) after completion of construction. All bare root and container plants to be planted in the first March after completion of construction. All grass to be seeded in the first season following completion of construction. Between end May and End June or September.

Rev C: 170509. Information on biodiversity.
Rev B: 170321. Revision to layout Plot 1.
Rev A: 170316. Full planting details

 Landscape Oslington, Wetherby Road, Ossett, West Yorkshire WF7 8LN Tel 011324 281164. Mob 07960 515360. e-mail c@oslinglandscape.co.uk			
client	Westminster Luxury Homes		
project	360-366 Lees Hall Road, Ravensthorpe		
drawing title	LANDSCAPE PROPOSALS		
scale	1:200 at A1	date	16 March 2017
drawn by	KE	drawn no	LHR/477/01
		Rev C	