

PROPOSED INTERNAL FIRE DOOR DETAILS

Four-panel timber door with moulded detailing (FD30)

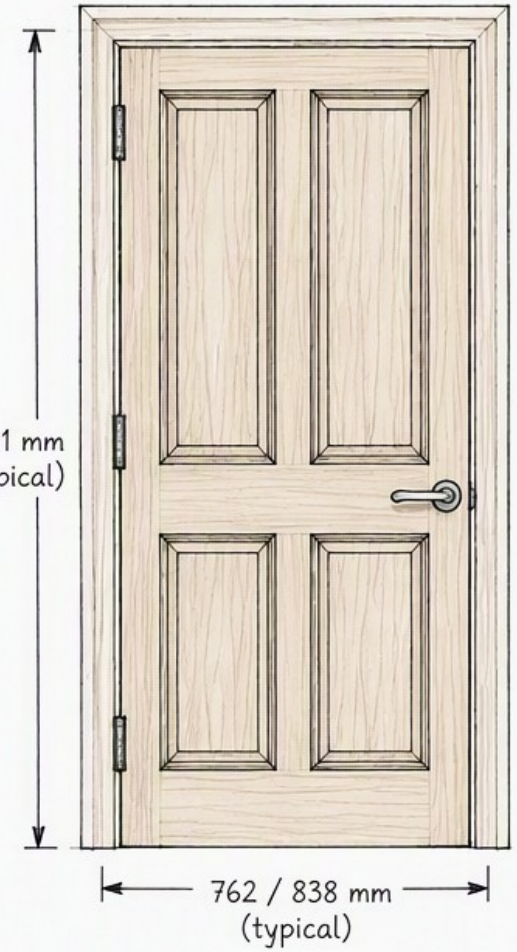


ELEVATION

Four-panel door with traditional moulded detailing

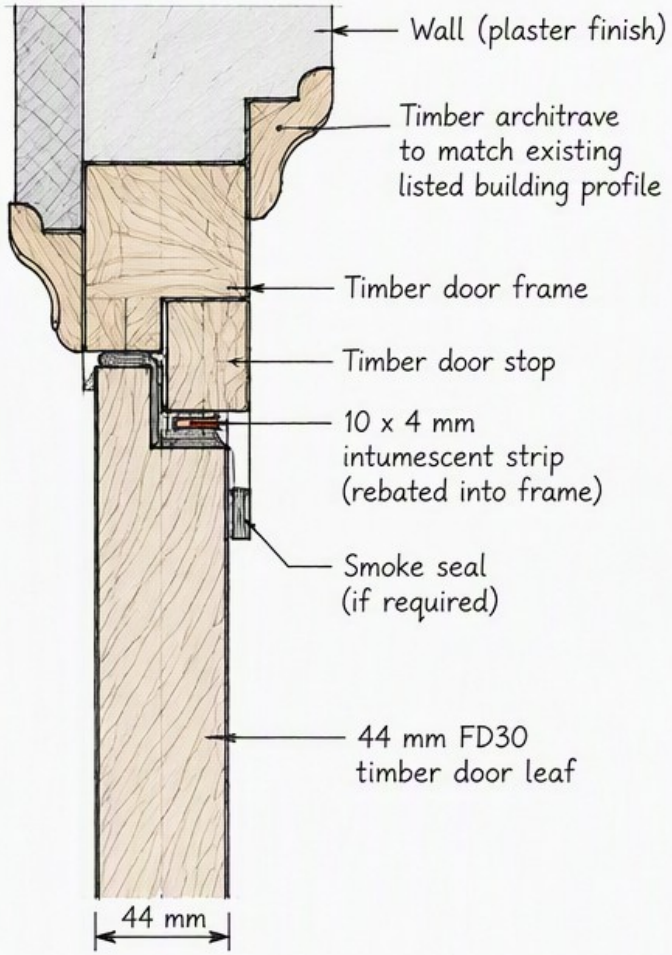


VERTICAL SECTION (Head detail)

Scale 1:2 (approx)

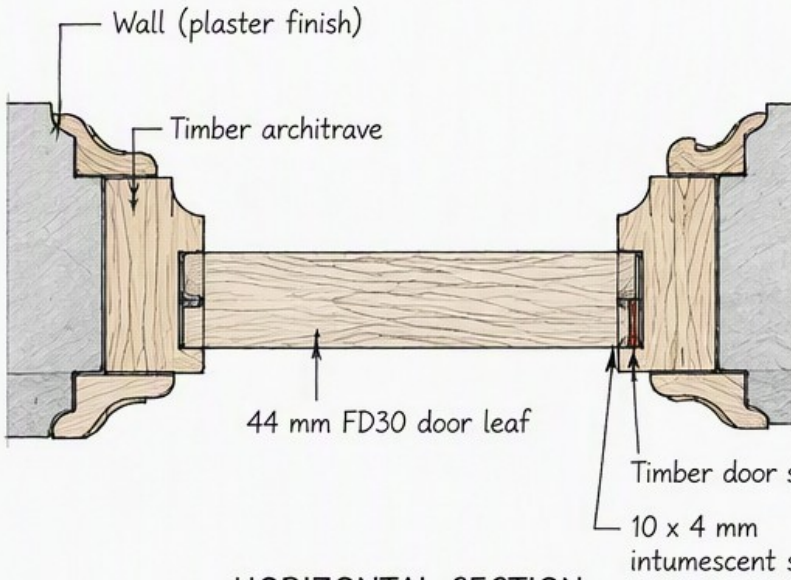

HORIZONTAL SECTION (Jamb detail)

Scale 1:2 (approx)

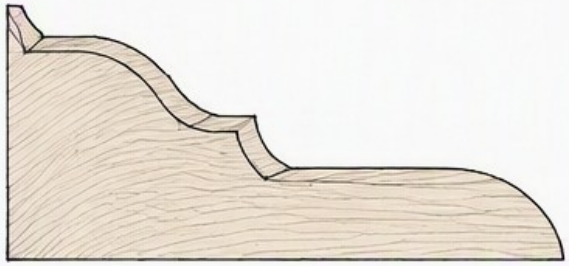

MOULDING PROFILE (TYPICAL)

Scale 1:1 (approx)

SUMMARY

- Internal fire doors to be four-panel timber doors with traditional moulded detailing to match the historic character of the listed building.
- FD30 fire resistance with 44 mm thick door leaf.
- Intumescent strip (10 x 4 mm) rebated into frame and smoke seal (if required) to ensure fire and smoke performance.
- Timber door frame, stop and architrave to replicate existing profiles within the building.
- Cross-sectional drawings to be submitted to the Local Planning Authority prior to installation in accordance with Condition 7, Policy LP35 of the Kirklees Local Plan and Chapter 16 of the National Planning Policy Framework.

Note: Dimensions are typical and to be confirmed on site. Details to be matched with existing joinery within the listed build