


Road 2

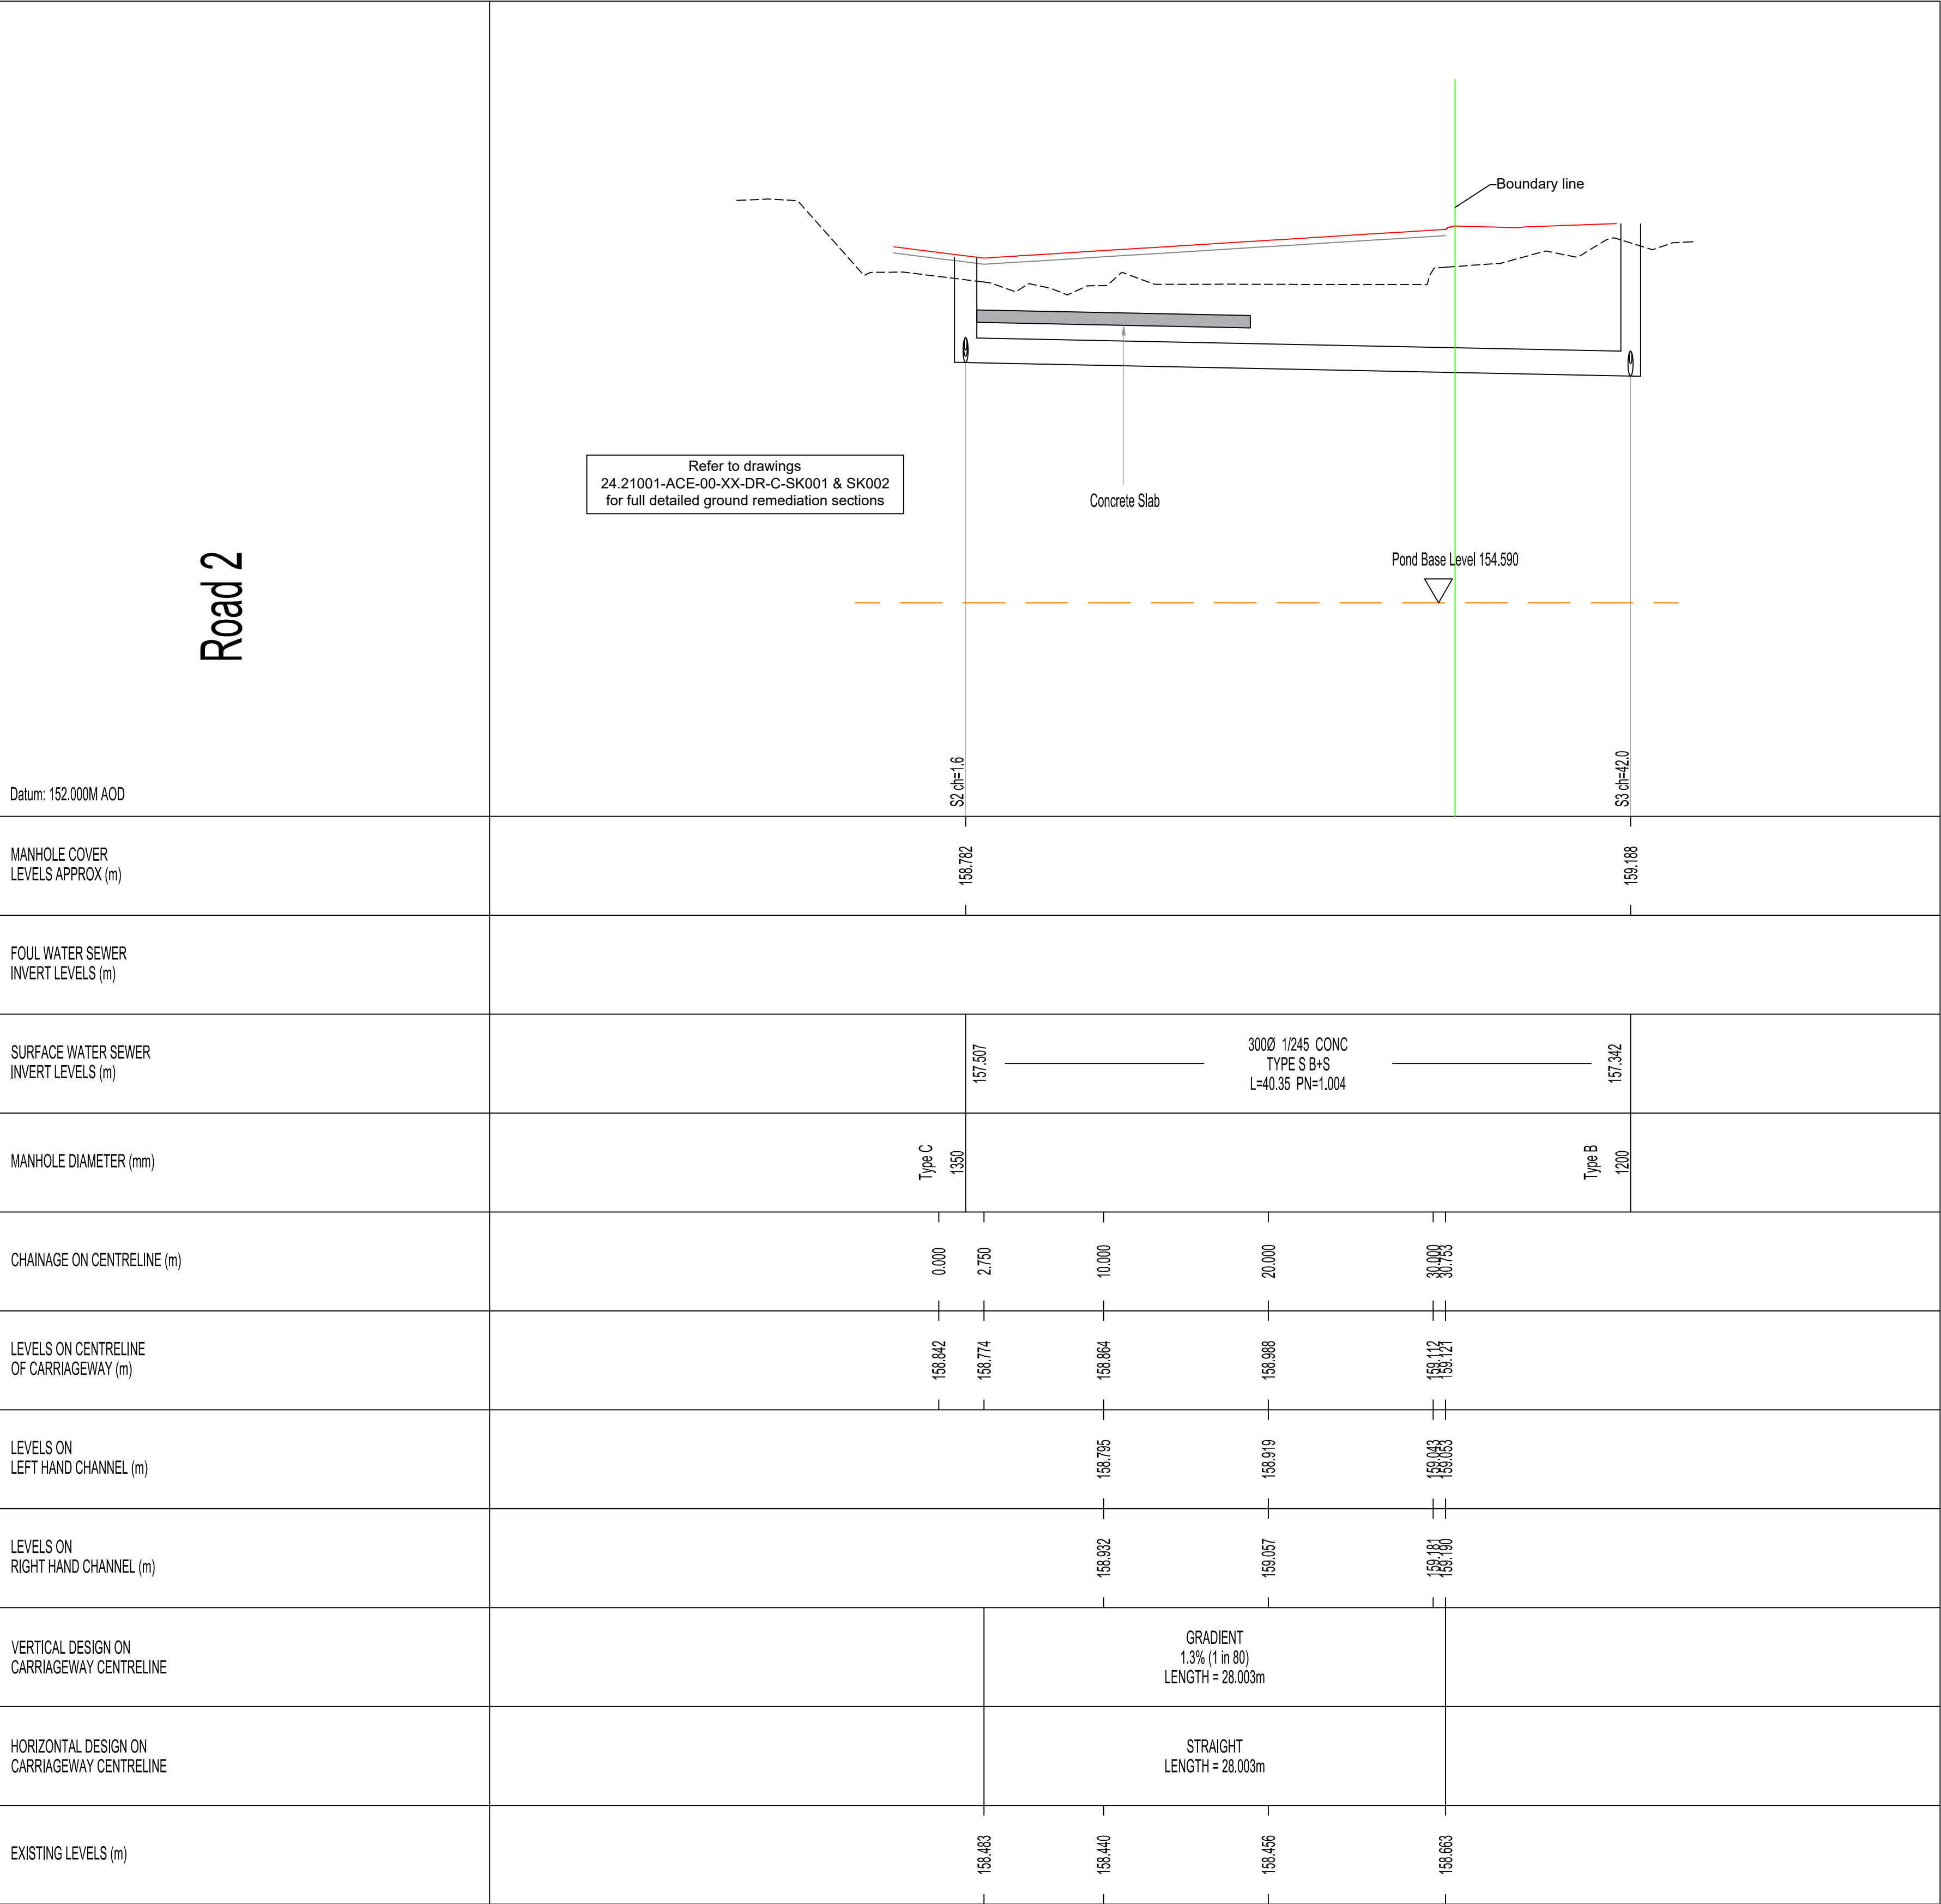

Do Not Scale

DESIGN REVIEW

Design review by:

**

Checked by:

**

Residual hazards:

Health, Safety & Environmental Notes

NOTES

1. Please do not scale from this drawing.

2. All works to be in accordance with Kirklees Council (KC) Highways Specification.

Legend:

Proposed ground profile

Existing ground profile

Proposed Adopted Drainage

T.P.

Tangent Point

I.P.

Intersection Point

Boundary line

Kirklees Highways Notes

All oversize precast concrete manhole circular vertical units and cover slabs including all ancillary concrete products are in full compliance with "BS EN 1917" & "BS 5911-3+A1"

Contractor to confirm Design Chemical Class (DC-Class) of concrete in the precast concrete manhole circular vertical units and cover slabs including all ancillary concrete products for an intended working life of 100 years (min).

All precast concrete manhole shaft units, circular cover, reducing, landing and corbel slabs together with all other ancillary concrete units intended for installation in the highway are marked with "BS EN 1917" & "BS 5911-3" R to confirm that the products represent a manufacture's declaration that their products meet the requirement of these standards.

Cover slabs are to be installed with a minimum of 300 mm cover to finished levels to comply with National Specifications.

Drawing subject to Kirklees Council Section 38 Approval

15.09.23

Added boundary line to suit S38 comment

ASe

AL

C4

04.08.23

Update to S38 comments

JZG

AL

C3

15.05.23

Update to S38 comments

JZG

AL

C2

05.10.22

Issued for construction

JZG

AL

C1

14.02.22

Initial Issue

JZG

AL

P1

Date

Description

By

Chk

Rev

ADEPT

CIVIL AND STRUCTURAL CONSULTING ENGINEERS

Web: www.adeptcsce.com

Email: inbox@adeptcsce.com

Tel: 0113 239 4518 (Leeds)

Tel: 0161 974 3620 (Manchester)

Originating Office 1912 Mills, Sunny Bank Mills, Farsley, Leeds, LS28 5UJ

Project

Newsome Road, Huddersfield

Title

S38 Highway Longsection Sh.2 of 2

Client

Urban Group

Scale @ A1

Initial author

Initial checker

Approver

Initial Date

1:250

JZG

AL

RP

10.21

Status

Purpose

Adapt Ref

A

Construction

24.21001

Project Number

Originator

Volume

Level

Type

Role

Drp. No.

Rev.

24.21001-ACE-00-XX-DR-C-2031

C4