


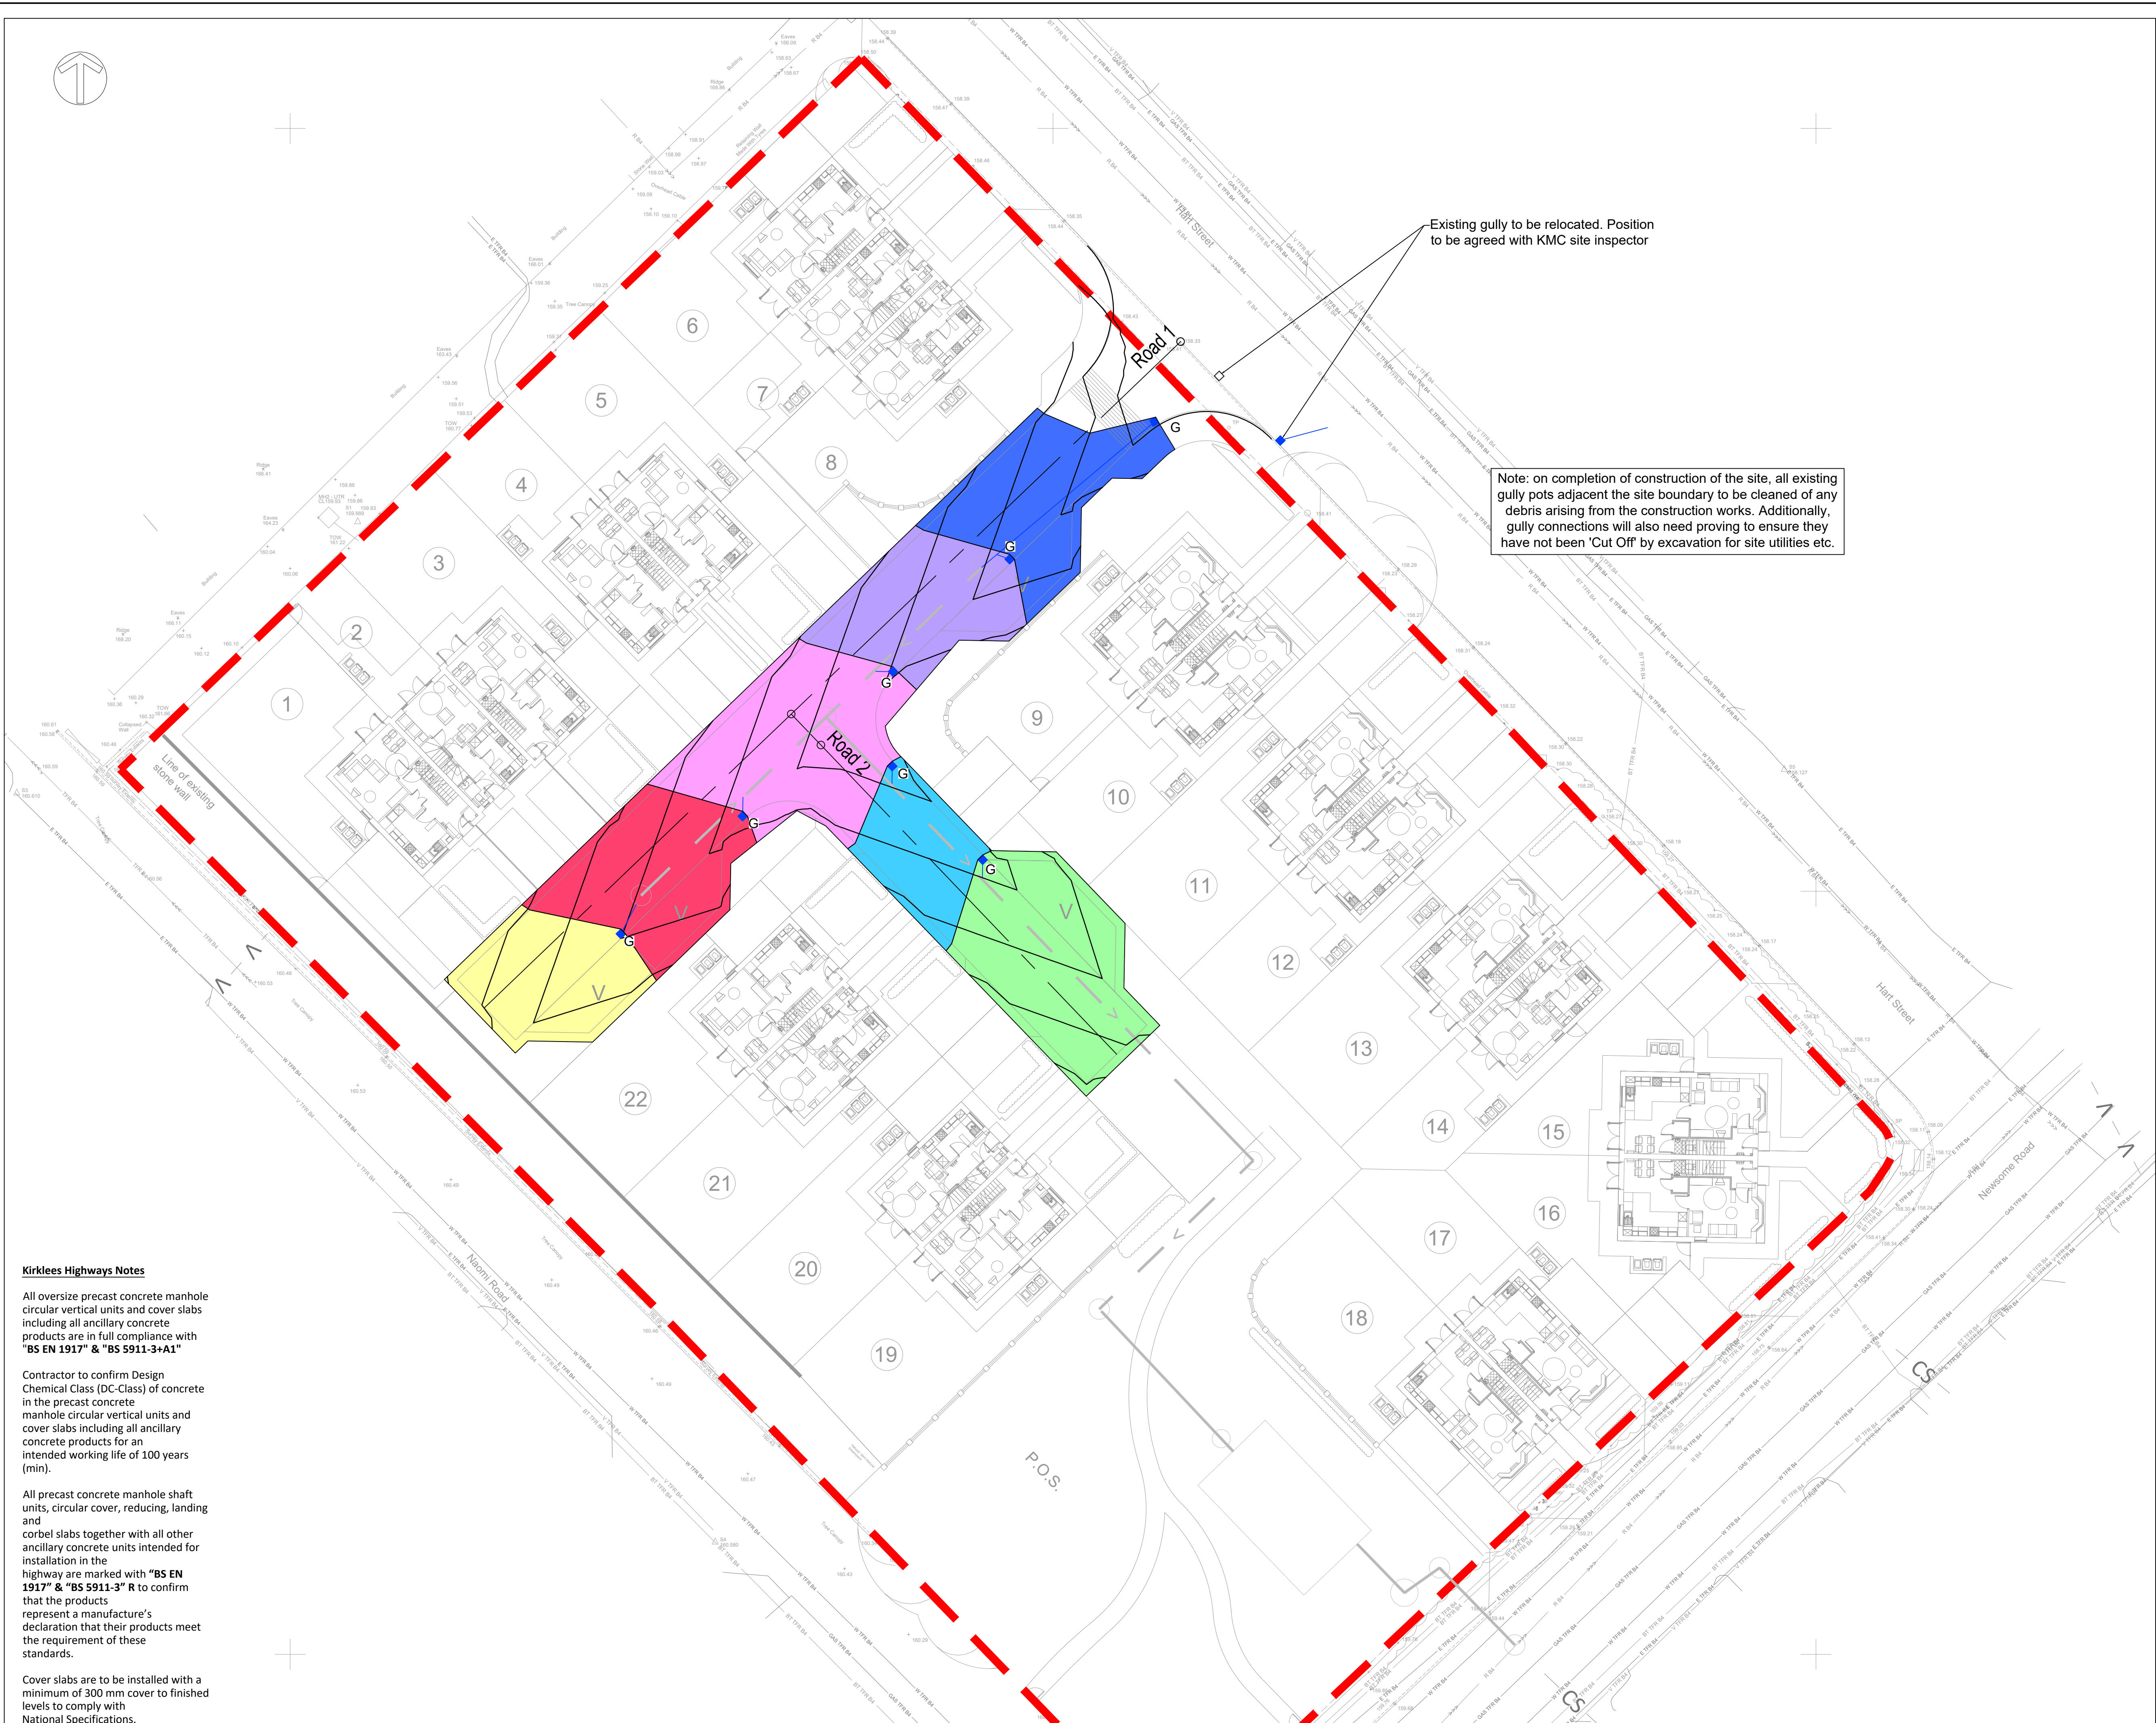

**Kirklees Highways Notes**

All oversize precast concrete manhole circular vertical units and cover slabs including all ancillary concrete products are in full compliance with "BS EN 1917" & "BS 5911-3+A1"

Contractor to confirm Design Chemical Class (DC-Class) of concrete in the precast concrete manhole circular vertical units and cover slabs including all ancillary concrete products for an intended working life of 100 years (min).

All precast concrete manhole shaft units, circular cover, reducing, landing and corbel slabs together with all other ancillary concrete units intended for installation in the highway are marked with "BS EN 1917" & "BS 5911-3" R to confirm that the products represent a manufacture's declaration that their products meet the requirement of these standards.

Cover slabs are to be installed with a minimum of 300 mm cover to finished levels to comply with National Specifications.

Do Not Scale

**DESIGN REVIEW**

|                   |    |             |    |
|-------------------|----|-------------|----|
| Design review by: | ** | Checked by: | ** |
|-------------------|----|-------------|----|

Residual hazards:

Health, Safety & Environmental Notes

**NOTES**

**Drawing Ref:**

- Architectural Master Plan File
- Topographical Survey File

**Notes**

- All existing levels, dimensions and gradients are to be confirmed on site by a competent engineer.
- Retaining wall / boundary treatment style to Architects details subject to the Design Criteria specified

Minor onsite adjustment permitted to suit site conditions whilst maintaining the stated design standards. All changes to be recorded in detail and reported back to the engineer for As Built record.

**Key**

Site Boundary

Gully 1: 128m<sup>2</sup>

Gully 2: 59m<sup>2</sup>

Gully 3: 83m<sup>2</sup>

Gully 4: 102m<sup>2</sup>

Gully 5: 132m<sup>2</sup>

Gully 6: 87m<sup>2</sup>

Gully 7: 98m<sup>2</sup>

Cumulative Area: 689m<sup>2</sup>

Drawing subject to Kirklees Council Section 38 Approval

|          |                               |     |     |     |
|----------|-------------------------------|-----|-----|-----|
| 04.08.23 | Updated to Council's Comments | ASe | AL  | C2  |
| 15.05.23 | Initial Issue (Construction)  | ASe | AL  | C1  |
| Date     | Description                   | By  | Chk | Rev |

**ADEPT**  
CIVIL AND STRUCTURAL CONSULTING ENGINEERS

Web: www.adeptcsce.com  
Email: info@adeptcsce.com  
Tel: 0113 239 4518 (Leeds)  
Tel: 0161 974 3620 (Manchester)

Originating Office  
1912 Mills, Sunny Bank Mills,  
Farsley, Leeds, LS28 5UJ

Project  
**Newsome Road,  
Huddersfield**

Title  
**S38 Gully Catchment Plan**

Client  
**Urban Group**

Scale @ A1  
1:250

Initial author  
ASe

Initial checker  
AL

Approver  
RP

Initial Date  
MAY 23

Status  
A

Purpose  
Construction

Adapt Ref  
24.21001

Project Number  
24.21001-ACE-00-XX-DR-C-2084

Originator  
KMC

Volume  
1

Level  
DR

Type  
C

Role  
DR

Rev.  
C2