


PROW FINISHING KEY & SPECIFICATION


PROW FINISH 1

1. Tarmacadam to adoptable pavement finish with pin kerbs and concrete kerbs. (see typical specification over)

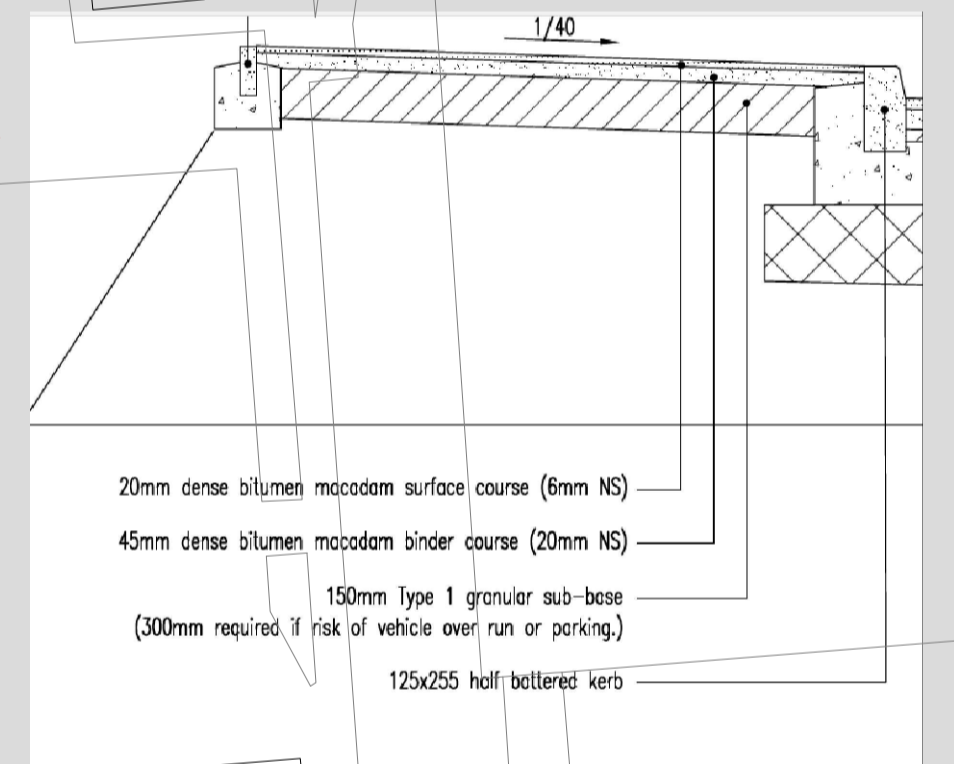


PROW FINISH 2 - to be in accordance with KCC Right-of way Footpath Specification

2. Ensure path route is free of mud etc. by scraping off and levelling
3. Sandstone finish consisting of a 100mm deep base course of 40mm to dust DoT Type 1 stone, overlain with a 20mm deep wearing course of 6mm to dust stone for footpaths.
4. Paths should be rolled and compacted and edged with pre-cast concrete or treated timber as appropriate. Where necessary a cross fall for drainage or appropriate camber should be provided to prevent surface erosion.
5. If poor ground conditions require extra support for a footpath a stone sub base of large clean stone and geo-textile membrane, such as terram, should be used.
6. PROW width 2.0m except where running along side of The Priory. This footpath width is as existing and Tree Officer consulted as new finish to be placed on geo-grid to prevent damage to tree root systems.

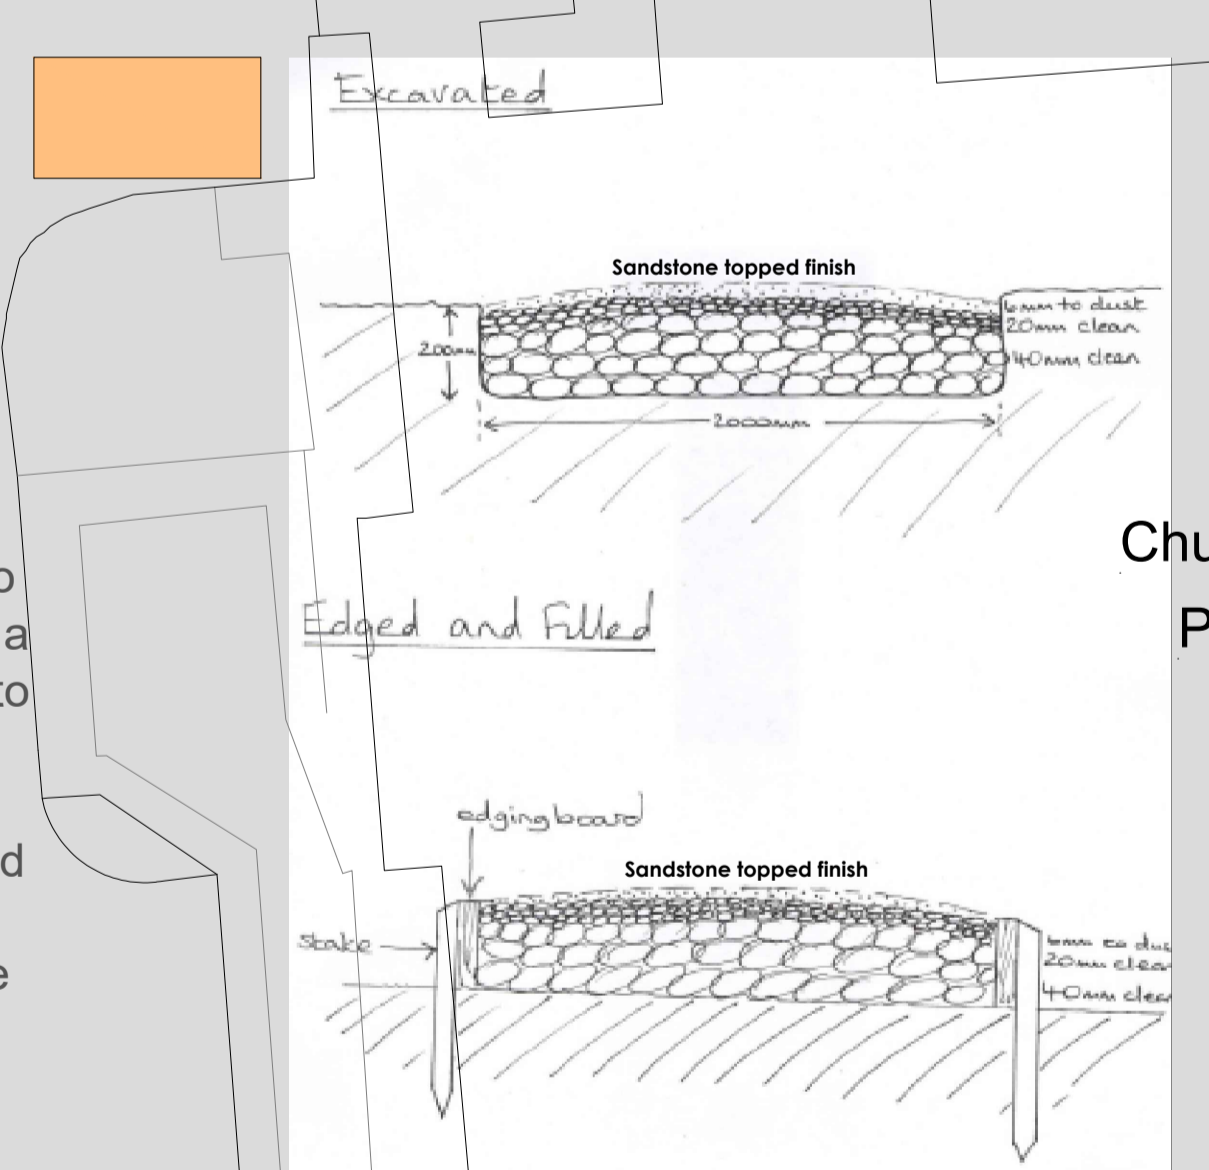

FINGER BOARD DIRECTIONAL PUBLIC FOOTPATH SIGNS TO K.C.C PROW OFFICER SPECIFICATION

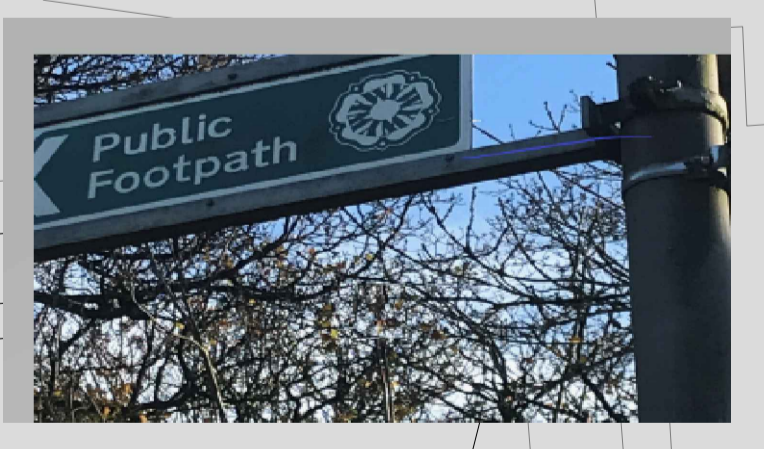

- DEFINITIVE FOOTPATH ROUTE SPE / 24/40
- PROPOSED DIVERTED FOOTPATH ROUTE SPE / 24/40

REVISION: A
 TO BE REVIEWED AND APPROVED FOLLOWING COMMENT
 BY THE CLIENT AND APPROVED BY THE DESIGNER AND K.C.C. PROW OFFICER

DRAWING TITLE: **PROW FINISHES PLAN**


PROJECT: RESIDENTIAL DEVELOPMENT

PROJECT ADDRESS: WHITECHAPEL ROAD, WHITECHAPEL

DATE	SCALE	REVISION
NOV 2021	1:250 @ A0	A

DRAWN: AJC

H8040 PROW / 01 A

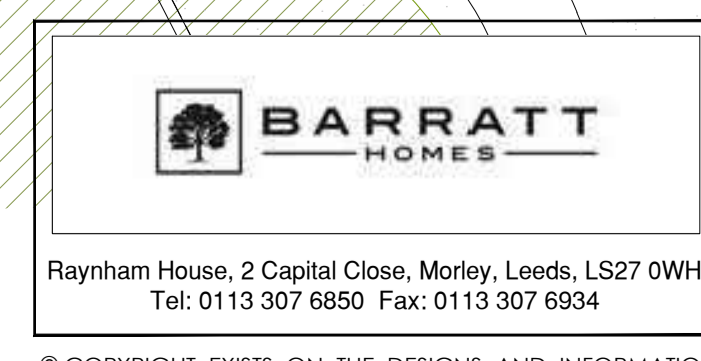

The Priory at Whitechapel

Whitechapel Church of England Primary School

© COPYRIGHT EXISTS ON THE DESIGNS AND INFORMATION SHOWN ON THIS DRAWING. • DO NOT SCALE FROM DRAWING. ALL DIMENSIONS TO BE VERIFIED ON SITE PRIOR TO COMMENCING ANY WORK.