


low energy lights above access doors are to be provided such as photo electric cell or dusk until dawn lights with warm white led bulbs.

House security.
Doors and windows will comply with building regulations.
Any doors which include euro cylinder should include 3 star rated locks to standards TS007, STS 217 or Sold Secure Diamond which provides more resistance to attack.

This can be achieved by either;
Installing a 3 star rated lock to TS007, STS 217, Sold Secured Diamond Standard (this would be the preferred option).
Alternatively a TS007 1 star rated euro cylinder lock accompanied by TS007 2 star rated security door handle or security escutcheon hardware.

All the plots have an intruder fitted to standards BS EN 50131 (60 1) standards, which provides residents with additional security to alarm properties at night or when unoccupied.

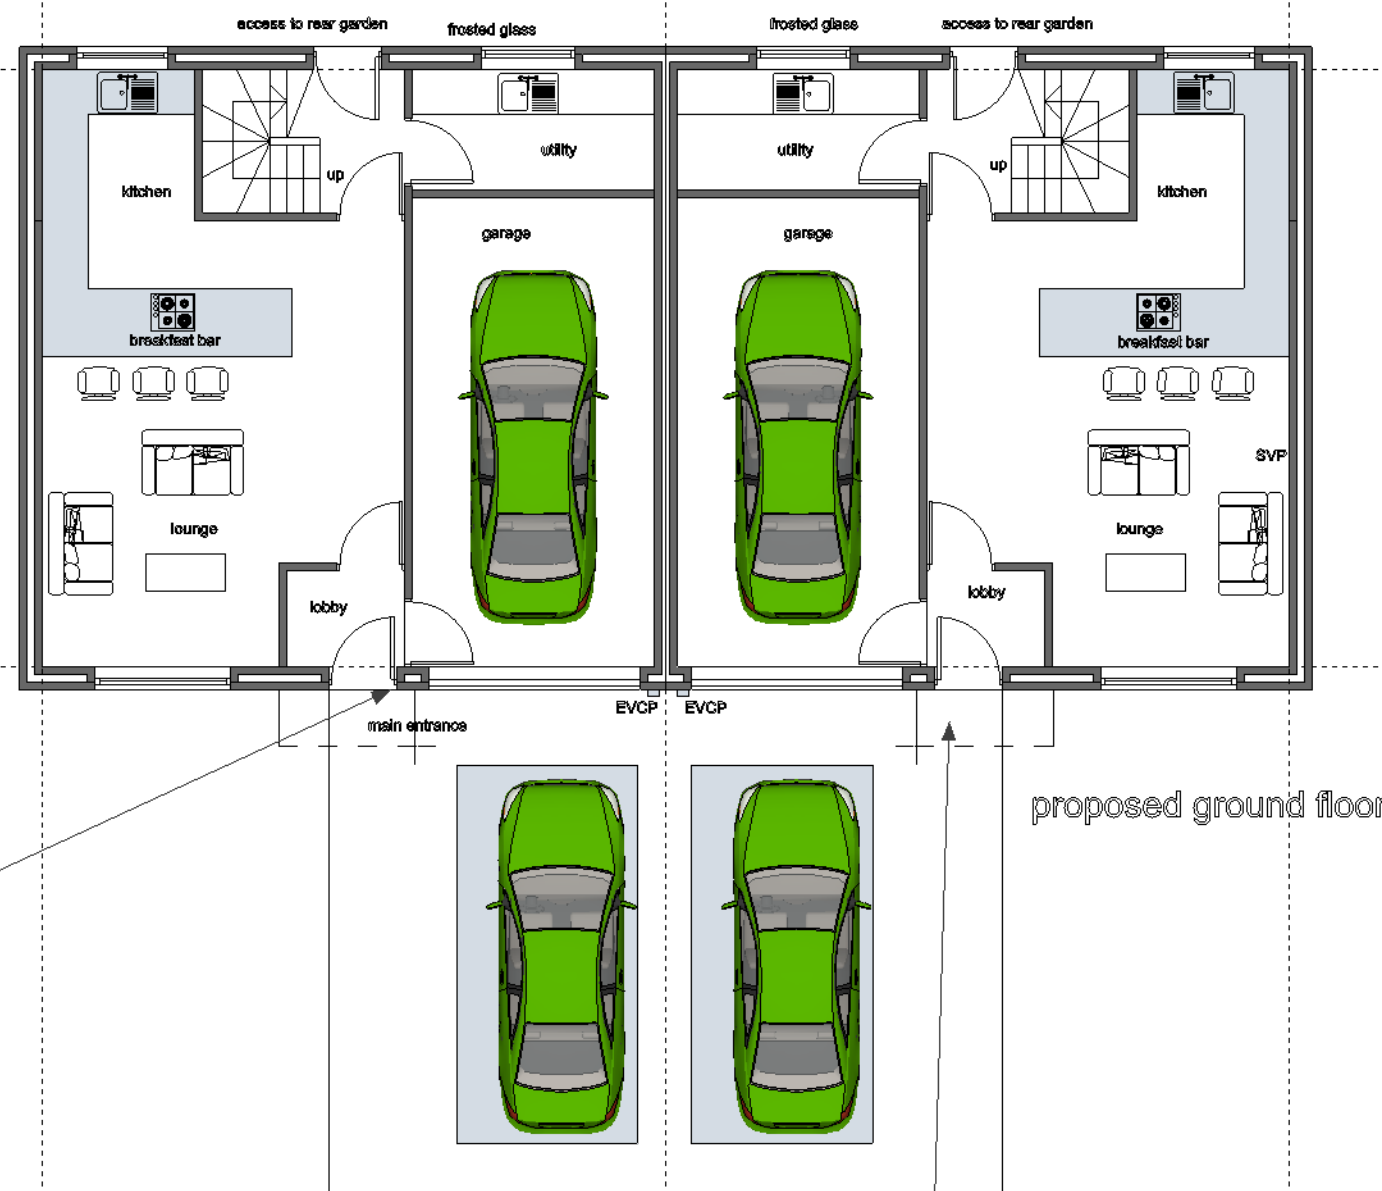

revisions
A 24-3-2022
layout updated and all rear windows on first floor are to be in frosted glass



Jade3 Architecture Ltd

Jade3 Architecture Ltd, Studio 12, Silver Street, Wakefield, WF1 1UY
Cellphone : 07535 740097 www.jade3architecture.co.uk

1 Una Place, Huddersfield

Project No.
2021
Enquiry 93

Project Title
proposed ground floor

Drawn By

Reviewed By
MC

Scale
1:100
@A3 size

Date
09/01/2022

Drawn No.
103

Reviewed Title

Revision
A

Important Notice
Do not scale off this drawing. Critical dimensions should be checked on site prior to works commencing. Dimensional conflicts should be brought to the company's attention as soon as they become apparent. Failure to do so could render the contractor liable for subsequent losses. Copyright in this drawing and any work executed from this drawing remains the property of Jade3 Architecture Ltd.

© Copyright Jade3 Architecture Ltd.