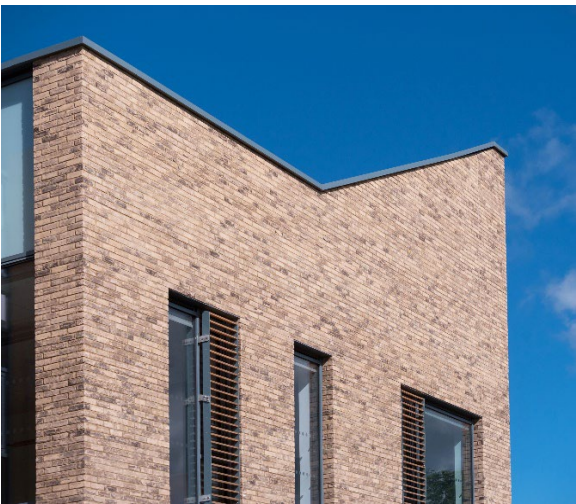
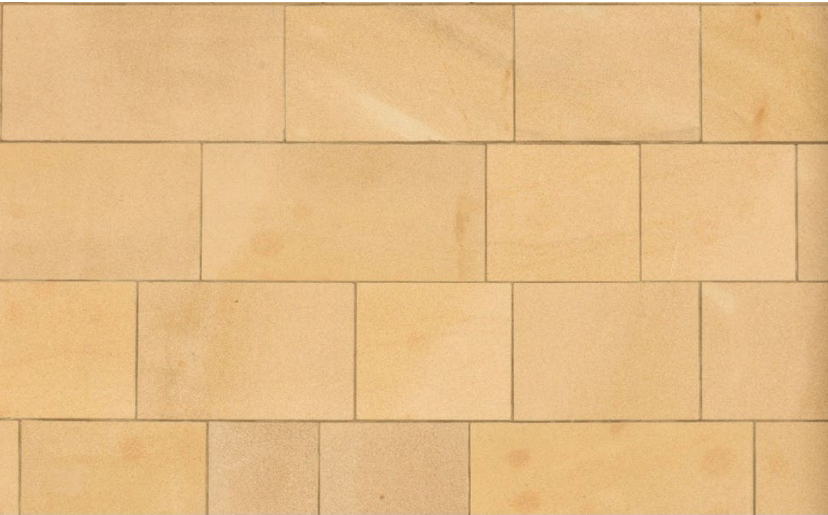
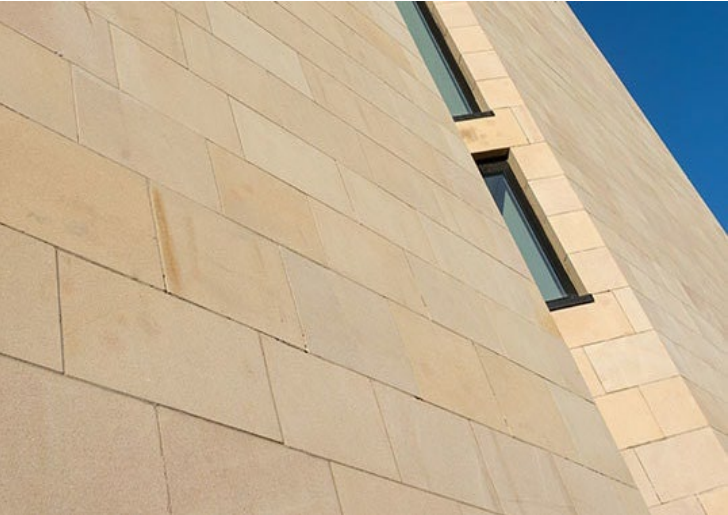
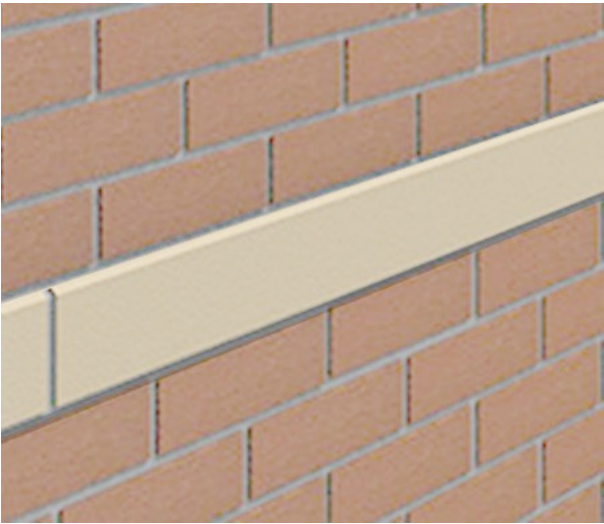
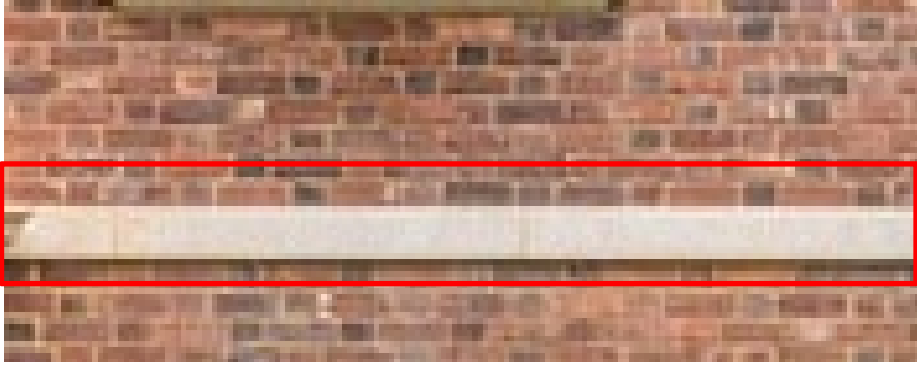


Planning Elevation reference number	Planning Elevation key reference	Additional Description	Swatch/Sample Image	Example Image	Image Source and notes
01	Brickwork	Buff Brick - Carsington Cream with natural (uncoloured) cement mortar. Stretcher bond			Sample: https://taylor-maxwell.imgix.net/uploads/generic/gallery/Carsington-Cream.jpg?crop=focalpoint&fit=crop&fm=jpg&fp-x=0.5&fp-y=0.5&h=750&q=75&w=1200&s=f230bd370f94b2013edeb581288a0fbc Example Image:https://www.forterra.co.uk/files/Irvine_Community_Hub_-_Carsington_Cream_Brick_4.jpg
02, 04 & 05	Window system with aluminium frames and opening lights, spandrels and louvre panels where indicated	Window frames to be RAL 7016 with matching louvers and flashings.			Sample reference colour swatch: https://fascias.com/Durasid-Original-Elegance-Natural-Lacquered-Aluminium-Corner-Profile-Anthracite-Grey-95 Example image of RAL 7016 frames of window system at English Martyrs School, Hartlepool (not proposed brick type)
03, 04, 05 & 06	Curtain wall system with aluminium frames. Opening lights, spandrels and louvre panels where indicated	Curtain Walling frames to be RAL 7016 with matching louvers and flashings			Sample reference colour swatch: https://fascias.com/Durasid-Original-Elegance-Natural-Lacquered-Aluminium-Corner-Profile-Anthracite-Grey-95 Example image of RAL 7016 frames to typical curtain wall system within masonry (Carsington Cream): Photo of Queen Elizabeth School, Hexham
07	Cast stone (75mm) once weathered coping with soldier course below, with alternating recessed (30mm) / flush bricks. Flush bricks to be fill and faced to frog/perforation	Buff Brick - Carsington Cream with natural (uncoloured) cement mortar. Soldier bond. Cast stone coping to be colour reference: 9909	Not Applicable		Example image of coping and soldier course masonry (not proposed brick type): Photo of similar approach from Marvic House, Emil Eve Architects (edited to show intended approach)

08	Plant enclosure - screening louvres	Frames, louvers and flashings to be RAL 7016			Sample reference colour swatch: https://fascias.com/Durasid-Original-Elegance-Natural-Lacquered-Aluminium-Corner-Profile-Anthracite-Grey-95 Example image of Ruth Gorse Academy rooftop plant enclosure louvres
11	College date sign to be recessed/cut as date stone	Cast stone signage to suit the recessed stone panels. Cast stone colour reference: 9909			Sample reference: Cast stone date/signage block (not proposed masonry type) Example image of cast signage stone (not proposed masonry type)
15	Cast stone cill with overhang, cill length to match width of opening	Cast stone colour reference: 9909			Sample: Cast stone cills with aluminium frames and masonry (not proposed masonry type) Example image of cast stone cills and masonry (not proposed masonry type or proposed cill length)
17	Recessed large format stone panel. Coursing set back 30mm from main brickwork façade	Natural ashlar stone. 225mm high random length coursing			Sample: Large format natural stonework Example image of large format ashlar stone at Edinburgh University

18	140mm course dressed stone band set flush with main brick facade	String Course - Cast stone. Colour reference: 9909			Example: Photo of string course in similar finish to proposed cast stone product (not a photo of actual product or proposed masonry).
As indicated on roof plans	Roof Access Hatch	Not Applicable	Not Applicable		Example image of roof access hatch. Photo from New College Doncaster (not proposed roof finish type)
As indicated on roof plans	Rooflights to roofs.	Frames to be Anthracite / RAL 7016			Sample reference colour swatch: https://fascias.com/Durasid-Original-Elegance-Natural-Lacquered-Aluminium-Corner-Profile-Anthracite-Grey-95 Example image of non-fragile system type