

Air Quality Assessment
New Hey Road, Outlane

Client: Mr Dom Waterson

Reference: 6042r1

Date: 3rd October 2022



Report Issue

Report Title: Air Quality Assessment - New Hey Road, Outlane

Report Reference: 6042

Field	Report Version			
	1	2	3	4
Prepared by	Imogen Bartlett			
Position	Air Quality Consultant			
Reviewed by	Emily Macey			
Position	Senior Air Quality Consultant			
Authorised by	Jethro Redmore			
Position	Director			
Date of Issue	3 rd October 2022			
Comment	-			

Taylor Road, Urmston, Manchester, M41 7JQ

info@red-env.co.uk | 0161 706 0075 | www.red-env.co.uk

This report has been prepared by Redmore Environmental Ltd in accordance with the agreed terms and conditions of appointment. Redmore Environmental Ltd cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

Executive Summary

Redmore Environmental Ltd was commissioned by Mr Dom Waterson to undertake an Air Quality Assessment in support of a residential development on land off New Hey Road, Outlane.

The proposals have the potential to cause air quality impacts as a result of fugitive dust emissions during construction, as well as expose future residents to elevated pollutant levels. As such, an Air Quality Assessment was undertaken in order to determine baseline conditions and consider site suitability for the proposed end-use.

Potential construction phase air quality impacts from fugitive dust emissions were assessed as a result of demolition, earthworks, construction and trackout activities. It is considered that the use of good practice control measures would provide suitable mitigation for a development of this size and nature and reduce potential impacts to an acceptable level.

During the operational phase of the development there is the potential for the exposure of future residents to elevated pollutant levels due to the proximity of the site to the M62 and associated road traffic emissions. Dispersion modelling was therefore undertaken in order to predict pollutant concentrations across the proposed development. Outputs were subsequently verified using local monitoring data.

The results of the dispersion modelling assessment indicated that predicted pollutant levels were below the relevant criteria across the development. As such, the site is considered suitable for the proposed end use from an air quality perspective and mitigation is not required.

Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.

Table of Contents

1.0	INTRODUCTION	1
1.1	Background	1
1.2	Site Location and Context	1
2.0	LEGISLATION AND POLICY	2
2.1	Legislation	2
2.2	Local Air Quality Management	4
2.3	Dust	4
2.4	National Planning Policy	5
2.5	National Planning Practice Guidance	6
2.6	Local Planning Policy	7
3.0	BASELINE	9
3.1	Introduction	9
3.2	Local Air Quality Management	9
3.3	Air Quality Monitoring	9
3.4	Background Pollutant Concentrations	10
3.5	Sensitive Receptors	11
4.0	METHODOLOGY	14
4.1	Introduction	14
4.2	Construction Phase Assessment	14
	Step 1	15
	Step 2	15
	Step 3	22
	Step 4	22
4.3	Future Exposure Assessment	22
	Dispersion Model	22
	Assessment Area	23
	Traffic Flow Data	23
	Emission Factors	25
	Meteorological Data	26
	Roughness Length	26
	Monin-Obukhov Length	26
	Background Concentrations	27
	NO _x to NO ₂ Conversion	27
	Verification	27

5.0	ASSESSMENT	30
5.1	Introduction	30
5.2	Construction Phase Assessment	30
	Step 1	30
	Step 2	30
	Step 3	33
	Step 4	34
5.3	Future Exposure Assessment	34
5.4	West Yorkshire Technical Planning Guidance	35
6.0	CONCLUSION	37
7.0	ABBREVIATIONS	38

Appendices

Appendix 1 - Assessment Input Data

Appendix 2 - Curricula Vitae

1.0 INTRODUCTION

1.1 Background

1.1.1 Redmore Environmental Ltd was commissioned by Mr Dom Waterson to undertake an Air Quality Assessment in support of a residential development on land off New Hey Road, Outlane.

1.1.2 The proposals have the potential to cause air quality impacts as a result of fugitive dust emissions during construction, as well as expose future residents to elevated pollutant levels. As such, an Air Quality Assessment was undertaken in order to determine baseline conditions, consider site suitability for the proposed end use and assess potential effects as a result of the scheme.

1.2 Site Location and Context

1.2.1 The site is located on land off New Hey Road, Outlane, at approximate National Grid Reference (NGR): 408730, 417955. Reference should be made to Figure 1 for a map of the site and surrounding area.

1.2.2 The proposals comprise the conversion of two existing barns to provide two residential dwellings alongside construction of one new dwelling and associated infrastructure.

1.2.3 The development has the potential to cause air quality impacts during the construction phase, as well as expose future residents to elevated pollutant levels due to the proximity of the site to the M62 and associated road traffic emissions. As such, an Air Quality Assessment was requested by the Environmental Health Department at Kirklees Council (KC)¹ in order to determine baseline conditions, consider location suitability for the proposed end use and assess potential effects as a result of the scheme. This is detailed in the following report.

¹ Email Correspondence, New Hey Road, Outlane, Emma Hetherington Business Support Officer at KC, 1st September 2022.

2.0 LEGISLATION AND POLICY

2.1 Legislation

2.1.1 The Air Quality Standards Regulations (2010) and subsequent amendments include Air Quality Limit Values (AQLVs) for the following pollutants:

- Nitrogen dioxide (NO₂);
- Sulphur dioxide;
- Lead;
- Particulate matter with an aerodynamic diameter of less than 10µm (PM₁₀);
- Particulate matter with an aerodynamic diameter of less than 2.5µm (PM_{2.5});
- Benzene; and,
- Carbon monoxide.

2.1.2 Air Quality Target Values have also been provided for several additional pollutants. It should be noted that the AQLV for PM_{2.5} stated in the Air Quality Standards Regulations (2010) was amended in the Environment (Miscellaneous Amendments) (EU Exit) Regulations (2020).

2.1.3 The Air Quality Strategy (AQS) was produced by Department for Environment, Food and Rural Affairs (DEFRA) and published in July 2007². The document contains standards, objectives and measures for improving ambient air quality including a number of Air Quality Objectives (AQOs). These are maximum ambient pollutant concentrations that are not to be exceeded either without exception or with a permitted number of exceedences over a specified timescale. These are generally in line with the AQLVs, although the requirements for the determination of compliance vary.

2.1.4 Table 1 presents the AQOs and AQLVs for pollutants considered within this assessment.

² The AQS for England, Scotland, Wales and Northern Ireland, DEFRA, 2007.

Table 1 Air Quality Objectives/Air Quality Limit Values

Pollutant	Air Quality Objective/Air Quality Limit Value	
	Concentration (µg/m ³)	Averaging Period
NO ₂	40	Annual mean
	200	1-hour mean, not to be exceeded on more than 18 occasions per annum
PM ₁₀	40	Annual mean
	50	24-hour mean, not to be exceeded on more than 35 occasions per annum
PM _{2.5}	20	Annual mean

2.1.5 The Environment Act (2021) was published on 9th November 2021 and makes provision for the setting of lower PM_{2.5} targets. The final criteria will be included in legislation to be put before parliament by 31st October 2022. Prior to this time the AQLV outlined in Table 1 remains the adopted air quality standard within the UK.

2.1.6 Table 2 summarises the advice provided in DEFRA guidance³ on where the AQOs for pollutants considered within this report apply.

Table 2 Examples of Where the Air Quality Objectives Apply

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
Annual mean	All locations where members of the public might be regularly exposed Building façades of residential properties, schools, hospitals, care homes etc.	Building façades of offices or other places of work where members of the public do not have regular access Hotels, unless people live there as their permanent residence Gardens of residential properties Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term

³ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
24-hour mean	All locations where the annual mean objective would apply, together with hotels Gardens of residential properties	Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term
1-hour mean	All locations where the annual mean and 24 and 8-hour mean objectives apply. Kerbside sites (for example, pavements of busy shopping streets) Those parts of car parks, bus stations and railway stations etc which are not fully enclosed, where members of the public might reasonably be expected to spend one hour or more Any outdoor locations where members of the public might reasonably be expected to spend one hour or longer	Kerbside sites where the public would not be expected to have regular access

2.2 Local Air Quality Management

2.2.1 Local Authorities (LAs) are required to periodically review and assess air quality within their area of jurisdiction under the system of Local Air Quality Management (LAQM). This review and assessment of air quality involves comparing present and likely future pollutant concentrations against the AQOs. If it is predicted that levels at locations of relevant exposure, as summarised in Table 2, are likely to be exceeded, the LA is required to declare an Air Quality Management Area (AQMA). For each AQMA the LA is required to produce an Air Quality Action Plan, the objective of which is to reduce pollutant concentrations in pursuit of the AQOs.

2.3 Dust

2.3.1 The main requirements with respect to dust control from industrial or trade premises not regulated under the Environmental Permitting (England and Wales) Regulations (2016) and subsequent amendments, such as construction sites, is that provided in Section 79 of Part III of the Environmental Protection Act (1990). The Act defines nuisance as:

"any dust, steam, smell or other effluvia arising on industrial, trade or business premises and being prejudicial to health or a nuisance."

2.3.2 Enforcement of the Act, in regard to nuisance, is currently under the jurisdiction of the local Environmental Health Department, whose officers are deemed to provide an independent evaluation of nuisance. If the LA is satisfied that a statutory nuisance exists, or is likely to occur or happen again, it must serve an Abatement Notice under Part III of the Environmental Protection Act (1990). The only defence is to show that the process to which the nuisance has been attributed and its operation are being controlled according to best practicable means.

2.4 National Planning Policy

2.4.1 The revised National Planning Policy Framework⁴ (NPPF) was published in July 2021 and sets out the Government's planning policies for England and how these are expected to be applied.

2.4.2 The purpose of the planning system is to contribute to the achievement of sustainable development. In order to ensure this, the NPPF recognises three overarching objectives, including the following of relevance to air quality:

c) an environmental objective - to protect and enhance our natural, built and historic environment; including making effective use of land, improving biodiversity, using natural resources prudently, minimising waste and pollution, and mitigating and adapting to climate change, including moving to a low carbon economy."

2.4.3 Chapter 15 of the NPPF details objectives in relation to conserving and enhancing the natural environment. It states that:

"174. Planning policies and decisions should contribute to and enhance the natural and local environment by:

[...]

e) preventing new and existing development from contributing to, being put at unacceptable risk from, or being adversely affected by, unacceptable levels of soil, air, water or noise pollution or land instability. Development should, wherever

⁴ NPPF, Ministry of Housing, Communities and Local Government, 2021.

possible, help to improve local environmental conditions such as air and water quality [...]"

2.4.4 The NPPF specifically recognises air quality as part of delivering sustainable development and states that:

"186. Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic and travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan."

2.4.5 The implications of the NPPF have been considered throughout this assessment.

2.5 National Planning Practice Guidance

2.5.1 The National Planning Practice Guidance⁵ (NPPG) web-based resource was launched by the Department for Communities and Local Government on 6th March 2014 and updated on 1st November 2019 to support the NPPF and make it more accessible. The air quality pages are summarised under the following headings:

1. What air quality considerations does planning need to address?
2. What is the role of plan-making with regard to air quality?
3. Are air quality concerns relevant to neighbourhood planning?
4. What information is available about air quality?
5. When could air quality considerations be relevant to the development management process?
6. What specific issues may need to be considered when assessing air quality impacts?

⁵ <https://www.gov.uk/guidance/air-quality--3>.

7. How detailed does an air quality assessment need to be?
8. How can an impact on air quality be mitigated?

2.5.2 These were reviewed and the relevant guidance considered as necessary throughout the undertaking of this assessment.

2.6 Local Planning Policy

2.6.1 The Kirklees Local Plan (KLP)⁶ was adopted by KC on 27th February 2019. The KLP sets out the spatial vision and strategy for the development of Kirklees for the period up to 2031 and is used to guide decisions on planning, development and regeneration.

2.6.2 A review of the document indicated the following policies in relation to air quality which are relevant to this assessment:

"Policy LP47 - Healthy, active and safe lifestyles

The council will, with its partners, create an environment which supports healthy, active and safe communities and reduces inequality.

Healthy, active and safe lifestyles will be enabled by:

[...]

g. ensuring that the current air quality in the district is monitored and maintained and, where required, appropriate mitigation measures included as part of new development proposals; [...]"

"Policy LP51 - Protection and improvement of local air quality

1. Development will be expected to demonstrate that it is not likely to result, directly or indirectly, in an increase in air pollution which would unacceptably affect or cause a nuisance to the national or build environment or to people.

⁶ Kirklees Local Plan, KC, 2019.

2. Proposals that have the potential to increase local air pollution either individually or cumulatively must be accompanied by evidence to show that the impact of the development has been assessed in accordance with the relevant guidance. Development which has the potential to cause levels of local air pollution to increase to unsafe levels must incorporate sustainable mitigation measures that reduce this impact to a safe level. If sustainable measures cannot be introduced the development will not be permitted.

3. Where the development introduces new receptors into Air Quality Management Areas or Areas of Concern or near other areas of relatively poor air quality, for example near roads or junctions, the development must incorporate sustainable mitigation measures that protect the new receptors from unacceptable levels of air pollution. Where sustainable mitigation measures cannot be introduced which prevent receptors from being exposed to unsafe levels of air pollution, development will not be permitted."

2.6.3 The above policies were taken into consideration throughout the undertaking of the assessment.

3.0 BASELINE

3.1 Introduction

- 3.1.1 Existing air quality conditions in the vicinity of the development site were identified in order to provide a baseline for assessment. These are detailed in the following Sections.

3.2 Local Air Quality Management

- 3.2.1 As required by the Environment Act (1995), KC has undertaken Review and Assessment of air quality within their area of jurisdiction. This process has indicated that pollutant concentrations are above the AQOs within the district. As such, ten AQMA's have been declared. The closest of these to the development has been declared due to exceedences of the annual mean AQO for NO₂ and is described as follows:

"Kirklees AQMA 8 - The designated area incorporates New Hey Road and Round Ings Road, which is in close proximity to the M62 at Outlane."

- 3.2.2 The development is located approximately 900m north-east of the AQMA. It is considered unlikely that the proposal would affect air quality over a distance of this magnitude. As such, the AQMA has not been considered further in the context of the assessment.
- 3.2.3 KC have concluded that concentrations of all other pollutants considered within the AQS are currently below the relevant AQOs. As such, no further AQMA's have been designated.

3.3 Air Quality Monitoring

- 3.3.1 Monitoring of pollutant concentrations is undertaken by KC throughout their area of jurisdiction. Recent annual mean NO₂ results recorded in the vicinity of the development are shown in Table 3. Exceedences of the relevant AQO are shown in **bold**.

Table 3 Monitoring Results

Monitoring Site		Monitored NO ₂ Concentration (µg/m ³)		
		2018	2019	2020
K24	Lindley Moor Road	40.00	34.13	27.54
K72	Lindley Moor Road 2	35.27	32.20	24.31
K73	Lindley Moor Road 3	46.73	34.18	19.43
K74	Lindley Moor Road 4	30.53	23.67	20.09

3.3.2 As shown in Table 3, annual mean NO₂ concentrations were above the relevant AQO at the K24 and K73 Lindley Moor Road monitors in 2018. Levels have since dropped below the AQO. Concentrations were also below 40µg/m³ at the remaining locations in recent years. Reference should be made to Figure 2 for a map of the survey positions.

3.3.3 Pollutant concentrations recorded during 2020 are lower than previous years due to a reduction in traffic and associated emissions caused by the COVID-19 pandemic. The results should therefore be viewed with caution.

3.3.4 KC do not undertake PM₁₀ or PM_{2.5} monitoring within the vicinity of the proposed development.

3.4 Background Pollutant Concentrations

3.4.1 Predictions of background pollutant concentrations on a 1km by 1km grid basis have been produced by DEFRA for the entire of the UK to assist LAs in their Review and Assessment of air quality. The proposed development site is located in grid square NGR: 408500, 417500. Data for this location was downloaded from the DEFRA website⁷ for the purpose of the assessment and is summarised in Table 4.

⁷ <http://uk-air.defra.gov.uk/data/laqm-background-maps?year=2018>.

Table 4 Background Pollutant Concentration Predictions

Pollutant	Predicted Background Pollutant Concentration (µg/m³)		
	2019	2022	2024
NO ₂	16.15	13.60	12.23
PM ₁₀	12.07	11.65	11.45
PM _{2.5}	7.87	7.538	7.38

3.4.2 As shown in Table 4, predicted background NO₂, PM₁₀ and PM_{2.5} concentrations are below the relevant AQOs and AQLV at the development site.

3.5 Sensitive Receptors

3.5.1 A sensitive receptor is defined as any location which may be affected by changes in air quality as a result of a development. Receptors sensitive to potential dust impacts during demolition, earthworks and construction were identified from a desk-top study of the area up to 350m from the development boundary. These are summarised in Table 5.

Table 5 Demolition, Earthworks and Construction Dust Sensitive Receptors

Distance from Site Boundary (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	10 - 100	0
Up to 50	10 - 100	0
Up to 100	10 - 100	-
Up to 350	More than 100	-

3.5.2 Receptors sensitive to potential dust impacts from trackout were identified from a desk-top study of the area up to 50m from the road network within 500m of the site access. These are summarised in Table 6.

Table 6 Trackout Dust Sensitive Receptors

Distance from Site Access Route (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	10 - 100	0

Distance from Site Access Route (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 50	10 - 100	0

3.5.3 There are no ecological receptors within 50m of the development boundary or the access route within 500m of the site entrance. As such, ecological impacts have not been assessed further within this report.

3.5.4 A number of additional factors have been considered when determining the sensitivity of the surrounding area. These are summarised in Table 7.

Table 7 Additional Area Sensitivity Factors to Potential Dust Impacts

Guidance	Comment
Whether there is any history of dust generating activities in the area	The baseline review did not indicate any dust generating activities in the local area
The likelihood of concurrent dust generating activity on nearby sites	A review of the planning portal did not indicate any additional development proposals likely to result in concurrent dust generation in the vicinity of the site
Pre-existing screening between the source and the receptors	Trees and shrubs are located along the western and southern boundaries of the site. These may act as a barrier between emission sources and receptors should they be retained during construction
Conclusions drawn from analysing local meteorological data which accurately represent the area: and if relevant the season during which works will take place	As shown in Figure 4, the predominant wind bearing at the site is from the west with significant frequencies from the south-west. As such, receptors to the east and north-east are most likely to be affected by dust releases
Conclusions drawn from local topography	There are no significant topographical constraints to dust dispersion
Duration of the potential impact, as a receptor may become more sensitive over time	Currently it is unclear as to the duration of the construction phase. However, it is likely that it will extend over one year. The sensitivity of the surrounding area is unlikely to change during this period due to the already established nature of the area
Any known specific receptor sensitivities which go beyond the classifications given in the document	No specific receptor sensitivities identified during the baseline assessment

3.5.5 Based on the criteria shown in Table 10, the sensitivity of the receiving environment to potential dust impacts was determined as **high**. This was because the identified receptors included residential properties.

3.5.6 The sensitivity of the receiving environment to specific potential dust impacts, based on the criteria shown in Section 4.2, is shown in Table 8.

Table 8 Sensitivity of the Surrounding Area to Potential Dust Impacts

Potential Impact	Sensitivity of the Surrounding Area			
	Demolition	Earthworks	Construction	Trackout
Dust Soiling	High	High	High	High
Human Health	Low	Low	Low	Low

4.0 METHODOLOGY

4.1 Introduction

- 4.1.1 The proposed development has the potential to cause air quality impacts during construction as well as expose future residents to elevated pollutant concentrations. These issues have been assessed in accordance with the following methodology, which was agreed with Rebecca Muff, Principal Technical Officer at KC, on 28th September 2022.

4.2 Construction Phase Assessment

- 4.2.1 There is the potential for fugitive dust emissions to occur as a result of construction phase activities. These have been assessed in accordance with the methodology outlined within the Institute of Air Quality Management (IAQM) document 'Guidance on the Assessment of Dust from Demolition and Construction V1.1'⁸.
- 4.2.2 Activities on the proposed construction site have been divided into four types to reflect their different potential impacts. These are:
- Demolition;
 - Earthworks;
 - Construction; and,
 - Trackout.
- 4.2.3 The potential for dust emissions was assessed for each activity that is likely to take place and considered three separate dust effects:
- Annoyance due to dust soiling;
 - Harm to ecological receptors; and,
 - The risk of health effects due to a significant increase in exposure to PM₁₀.
- 4.2.4 The assessment steps are detailed below.

⁸ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

Step 1

4.2.5 Step 1 screens the requirement for a more detailed assessment. Should human receptors be identified within 350m from the boundary or 50m from the construction vehicle route up to 500m from the site entrance, then the assessment proceeds to Step 2. Additionally, should ecological receptors be identified within 50m of the site or the construction vehicle route up to 500m from the site entrance, then the assessment also proceeds to Step 2.

4.2.6 Should sensitive receptors not be present within the relevant distances then **negligible** impacts would be expected and further assessment is not necessary.

Step 2

4.2.7 Step 2 assesses the risk of potential dust impacts. A site is allocated a risk category based on two factors:

- The scale and nature of the works, which determines the magnitude of dust arising as: small, medium or large (Step 2A); and,
- The sensitivity of the area to dust impacts, which can be defined as low, medium or high sensitivity (Step 2B).

4.2.8 The two factors are combined in Step 2C to determine the risk of dust impacts without mitigation applied.

4.2.9 Step 2A defines the potential magnitude of dust emission through the construction phase. The relevant criteria are summarised in Table 9.

Table 9 Construction Dust - Magnitude of Emission

Magnitude	Activity	Criteria
Large	Demolition	• Total volume of building to be demolished greater than 50,000m³ • Potentially dusty material (e.g. concrete) • On-site crushing and screening • Demolition activities more than 20m above ground level

Magnitude	Activity	Criteria
	Earthworks	- Total site area greater than 10,000m² - Potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size) - More than 10 heavy earth moving vehicles active at any one time - Formation of bunds greater than 8m in height - More than 100,000 tonnes of material moved
	Construction	- Total building volume greater than 100,000m³ - On site concrete batching - Sandblasting
	Trackout	- More than 50 Heavy Duty Vehicle (HDV) trips per day - Potentially dusty surface material (e.g. high clay content) - Unpaved road length greater than 100m
Medium	Demolition	- Total volume of building to be demolished between 20,000m³ and 50,000m³ - Potentially dusty construction material - Demolition activities 10m to 20m above ground level
	Earthworks	- Total site area 2,500m² to 10,000m² - Moderately dusty soil type (e.g. silt) 5 to 10 heavy earth moving vehicles active at any one time - Formation of bunds 4m to 8m in height - Total material moved 20,000 tonnes to 100,000 tonnes
	Construction	- Total building volume 25,000m³ to 100,000m³ - Potentially dusty construction material (e.g. concrete) - On site concrete batching
	Trackout	10 to 50 HDV trips per day - Moderately dusty surface material (e.g. high clay content) - Unpaved road length 50m to 100m
Small	Demolition	- Total volume of building to be demolished less than 20,000m³ - Construction material with low potential for dust release (e.g. metal cladding or timber) - Demolition activities less than 10m above ground and during wetter months

Magnitude	Activity	Criteria
	Earthworks	- Total site area less than 2,500m² - Soil type with large grain size (e.g. sand) - Less than 5 heavy earth moving vehicles active at any one time - Formation of bunds less than 4m in height - Total material moved less than 20,000 tonnes - Earthworks during wetter months
	Construction	- Total building volume less than 25,000m³ - Construction material with low potential for dust release (e.g. metal cladding or timber)
	Trackout	- Less than 10 HDV trips per day - Surface material with low potential for dust release - Unpaved road length less than 50m

4.2.10 Step 2B defines the sensitivity of the area around the development to potential dust impacts. The influencing factors are shown in Table 10.

Table 10 Construction Dust - Examples of Factors Defining Sensitivity of an Area

Receptor Sensitivity	Examples	
	Human Receptors	Ecological Receptors
High	- Users expect high levels of amenity - High aesthetic or value property - People expected to be present continuously for extended periods of time - Locations where members of the public are exposed over a time period relevant to the AQO for PM₁₀. e.g. residential properties, hospitals, schools and residential care homes	Internationally or nationally designated site e.g. Special Area of Conservation
Medium	- Users would expect to enjoy a reasonable level of amenity - Aesthetics or value of their property could be diminished by soiling - People or property wouldn't reasonably be expected to be present here continuously or regularly for extended periods as part of the normal pattern of use of the land e.g. parks and places of work	Nationally designated site e.g. Sites of Special Scientific Interest

Receptor Sensitivity	Examples	
	Human Receptors	Ecological Receptors
Low	• Enjoyment of amenity would not reasonably be expected • Property would not be expected to be diminished in appearance • Transient exposure, where people would only be expected to be present for limited periods. e.g. public footpaths, shopping streets, playing fields, farmland, short term car parks and roads	• Locally designated site e.g. Local Nature Reserve

4.2.11 The guidance also provides the following factors to consider when determining the sensitivity of an area to potential dust impacts:

- Any history of dust generating activities in the area;
- The likelihood of concurrent dust generating activity on nearby sites;
- Any pre-existing screening between the source and receptors;
- Any conclusions drawn from analysing local meteorological data which accurately represent the area; and if relevant the season during which works will take place;
- Any conclusions drawn from local topography;
- Duration of the potential impact, as a receptor may become more sensitive over time; and,
- Any known specific receptor sensitivities which go beyond the classifications given in the document.

4.2.12 These factors were considered in the undertaking of this assessment.

4.2.13 The criteria for determining the sensitivity of the area to dust soiling effects on people and property is summarised in Table 11.

Table 11 Construction Dust - Sensitivity of the Area to Dust Soiling Effects on People and Property

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 350
High	More than 100	High	High	Medium	Low
	10 - 100	High	Medium	Low	Low

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 350
	1 - 10	Medium	Low	Low	Low
Medium	More than 1	Medium	Low	Low	Low
Low	More than 1	Low	Low	Low	Low

4.2.14 Table 12 outlines the criteria for determining the sensitivity of the area to human health impacts.

Table 12 Construction Dust - Sensitivity of the Area to Human Health Impacts

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)				
			Less than 20	Less than 50	Less than 100	Less than 200	Less than 350
High	Greater than 32µg/m ³	More than 100	High	High	High	Medium	Low
		10 - 100	High	High	Medium	Low	Low
		1 - 10	High	Medium	Low	Low	Low
	28 - 32µg/m ³	More than 100	High	High	Medium	Low	Low
		10 - 100	High	Medium	Low	Low	Low
		1 - 10	High	Medium	Low	Low	Low
	24 - 28µg/m ³	More than 100	High	Medium	Low	Low	Low
		10 - 100	High	Medium	Low	Low	Low
		1 - 10	Medium	Low	Low	Low	Low
	Less than 24µg/m ³	More than 100	Medium	Low	Low	Low	Low
		10 - 100	Low	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
Medium	Greater than 32µg/m ³	More than 10	High	Medium	Low	Low	Low
		1 - 10	Medium	Low	Low	Low	Low

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)				
			Less than 20	Less than 50	Less than 100	Less than 200	Less than 350
	28 - 32µg/m ³	More than 10	Medium	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
	24 - 28µg/m ³	More than 10	Low	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
	Less than 24µg/m ³	More than 10	Low	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
Low	-	1 or more	Low	Low	Low	Low	Low

4.2.15 Table 13 outlines the criteria for determining the sensitivity of the area to ecological impacts.

Table 13 Construction Dust - Sensitivity of the Area to Ecological Impacts

Receptor Sensitivity	Distance from the Source (m)	
	Less than 20	Less than 50
High	High	Medium
Medium	Medium	Low
Low	Low	Low

4.2.16 Step 2C combines the dust emission magnitude with the sensitivity of the area to determine the risk of unmitigated impacts.

4.2.17 Table 14 outlines the risk category from demolition activities.

Table 14 Construction Dust - Dust Risk Category from Demolition Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Medium
Medium	High	Medium	Low
Low	Medium	Low	Negligible

4.2.18 Table 15 outlines the risk category from earthworks and construction activities.

Table 15 Construction Dust - Dust Risk Category from Earthworks and Construction Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Low
Medium	Medium	Medium	Low
Low	Low	Low	Negligible

4.2.19 Table 16 outlines the risk category from trackout activities.

Table 16 Construction Dust - Dust Risk Category from Trackout Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Low
Medium	Medium	Low	Negligible
Low	Low	Low	Negligible

Step 3

4.2.20 Step 3 requires the identification of site specific mitigation measures within the IAQM guidance⁹ to reduce potential dust impacts based upon the relevant risk categories identified in Step 2. For sites with **negligible** risk, mitigation measures beyond those required by legislation are not required. However, additional controls may be applied as part of good practice.

Step 4

4.2.21 Once the risk of dust impacts has been determined and the appropriate mitigation measures identified, the final step is to determine the significance of any residual impacts. For almost all construction activity, the aim should be to control effects through the use of effective mitigation. Experience shows that this is normally possible. Hence the residual effect will normally be **not significant**.

4.2.22 The determination of significance relies on professional judgement and reasoning should be provided as far as practicable. The IAQM guidance suggests the provision of details of the assessor's qualifications and experience. These are provided in Appendix 2.

4.3 **Future Exposure Assessment**

4.3.1 The proposed development has the potential to expose future residents to elevated pollutant levels. In order to assess NO₂, PM₁₀ and PM_{2.5} concentrations across the site, detailed dispersion modelling was undertaken in accordance with the following methodology.

Dispersion Model

4.3.2 Dispersion modelling was undertaken using the ADMS-Roads dispersion model (version 5.0.1.3). ADMS-Roads is developed by Cambridge Environmental Research Consultants (CERC) and is routinely used throughout the world for the prediction of pollutant dispersion from road sources. Modelling predictions from this software package are accepted within the UK by the Environment Agency and DEFRA.

⁹ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

4.3.3 The model requires input data that details the following parameters:

- Assessment area;
- Traffic flow data;
- Vehicle emission factors;
- Spatial co-ordinates of emissions;
- Street width;
- Meteorological data;
- Roughness length (z_0); and,
- Monin-Obukhov length.

4.3.4 The relevant inputs are detailed in the following Sections.

Assessment Area

4.3.5 The assessment area was defined based on the location of the development and roads likely to impact pollutant levels across the site. Ambient concentrations were predicted over NGR: 408650, 417845 to 408850, 418045. One Cartesian grid was used within the model to produce data suitable for contour plotting using the Surfer software package. It should be noted that although the grid only covered the proposed site, source geometries were extended in order to ensure the impact of all relevant emissions in the vicinity of the scheme were considered.

4.3.6 Reference should be made to Figure 3 for a graphical representation of the assessment grid extents.

Traffic Flow Data

4.3.7 Baseline traffic data for use in the assessment, including 24-hour Annual Average Daily Traffic (AADT) flows and fleet composition as HDV proportion, was obtained from the Department for Transport (DfT)¹⁰. The DfT web tool enables the user to view and download traffic flows on every link of the 'A' road and motorway network, as well as selected minor roads, in Great Britain for the years 1999 to 2020. It should be noted that the DfT web tool

¹⁰ <https://roadtraffic.dft.gov.uk/#16/51.4518/-0.9760/basemap-countpoints>.

is referenced in DEFRA guidance¹¹ as being a suitable source of data for air quality assessments and it is therefore considered to provide a reasonable estimate of traffic flows in the vicinity of the site.

4.3.8 The baseline traffic data was converted to the site opening year utilising a factor obtained from TEMPro (version 7.2). This software package has been developed by the DfT to calculate future traffic growth throughout the UK.

4.3.9 Road widths and vehicle speeds were estimated from aerial photography and UK highway design standards. A summary of the traffic data used in the assessment is provided in Table 17.

Table 17 Traffic Data

Link		24-hour AADT Flow		HDV Prop. of Fleet (%)	Road Width (m)	Mean Vehicle Speed (km/h)
		2019	2024			
L1	A640 New Hey Road	12,422	13,424	3.46	14.2	45
L2	A640 New Hey Road roundabout approach - Slow Phase (SP)	12,422	13,424	3.46	12.6	25
L3	A640 New Hey Road, northbound (NB) roundabout approach - SP	6,085	6,576	3.45	6.9	20
L4	A640 New Hey Road, southbound (SB) roundabout exit - SP	6,337	6,848	3.49	7.0	20
L5	A640 New Hey Road roundabout - SP	4,115	4,447	17.26	8.9	20
L6	A640 New Hey Road slip road to M62, westbound (WB) - SP	2,115	2,286	17.26	6.7	25
L7	A643 Lindley Moor Road between Old Lindley Road and Laund Road	12,873	13,911	2.29	7.7	40
L8	A643 Lindley Moor Road between Laund Road and Moorland Road - SP	12,873	13,911	2.29	7.9	30
L9	A643 Lindley Moor Road	12,873	13,911	2.29	7.9	40
L10	A643 Lindley Moor Road junction approach - SP	12,873	13,911	2.29	9.0	25

¹¹ Local Air Quality Management (TG22) Technical Guidance, DEFRA, 2022.

Link		24-hour AADT Flow		HDV Prop. of Fleet (%)	Road Width (m)	Mean Vehicle Speed (km/h)
		2019	2024			
L11	A643 Lindley Moor Road, eastbound (EB) junction - SP	6,402	6,918	2.64	10.6	20
L12	A643 Lindley Moor Road, WB junction - SP	6,471	6,993	1.96	6.6	20
L13	A640 New Hey Road, NB roundabout exit - SP	698	754	2.72	8.0	20
L14	A640 New Hey Road, SB roundabout approach - SP	698	754	2.72	7.2	20
L15	A640 New Hey Road roundabout exit - SP	1,396	1,509	2.72	16.0	25
L16	A640 New Hey Road adjacent to junction 23 exit	1,396	1,509	2.72	16.0	45
L17	M62 motorway slip road, EB - SP	6,089	6,580	18.47	8.0	25
L18	M62 motorway, EB	47,259	51,071	18.47	10.7	100
L19	M62 motorway, EB south of A640 New Hey Road	53,348	57,651	18.84	11.8	100
L20	A640 New Hey Road	1,396	1,509	2.72	9.5	45
L21	M62 motorway, WB	48,576	52,494	17.26	11.6	100
L22	M62 motorway, WB south of A640 New Hey Road	50,691	54,779	19.42	11.6	100

4.3.10 Reference should be made to Figure 3 for a graphical representation of the road link locations.

Emission Factors

4.3.11 Emission factors for each link were calculated using the relevant traffic flows and the Emissions Factor Toolkit (version 11.0). This has been produced by DEFRA and incorporates COPERT 5.3 vehicle emission factors and fleet information.

4.3.12 There is current uncertainty over NO₂ concentrations within the UK, with the implementation of new vehicle emission standards not resulting in the previously expected reduction in roadside levels. Therefore, 2019 emission factors were utilised in preference to the development opening year in order to provide robust model outputs.

As predictions for 2019 were verified, it is considered the results are a robust indication of worst case concentrations for the future year.

Meteorological Data

4.3.13 Meteorological data used in the assessment was taken from Bingley meteorological station over the period 1st January 2019 to 31st December 2019 (inclusive). Bingley meteorological station is located at NGR: 408874, 435015, which is approximately 17km north of the development. It is anticipated that conditions would be reasonably similar over a distance of this magnitude. The data was therefore considered suitable for an assessment of this nature.

4.3.14 All meteorological records used in the assessment were provided by Atmospheric Dispersion Modelling (ADM) Ltd, which is an established distributor of data within the UK. Reference should be made to Figure 4 for a wind rose of utilised meteorological data.

Roughness Length

4.3.15 The z_0 is a modelling parameter applied to allow consideration of surface height roughness elements. A z_0 of 0.5m was used to describe the modelling extents. This is considered appropriate for the morphology of the area and is suggested within ADMS-Roads as being suitable for 'parkland, open suburbia'.

4.3.16 A z_0 of 0.3m was used to describe the meteorological site. This value is considered appropriate for the morphology of the area and is suggested within ADMS-Roads as being suitable for 'agricultural areas (max)'.

Monin-Obukhov Length

4.3.17 The Monin-Obukhov length provides a measure of the stability of the atmosphere. A minimum Monin-Obukhov length of 10m was used to describe the modelling extents. This value is considered appropriate for the nature of the area and is suggested within ADMS-Roads as being suitable for 'small towns, <50,000'.

- 4.3.18 A minimum Monin-Obukhov length of 1m was used to describe the meteorological site. This value is considered appropriate for the nature of the area and is suggested within ADMS-Roads as being suitable for a 'rural area'.

Background Concentrations

- 4.3.19 Annual mean NO₂, PM₁₀ and PM_{2.5} background concentrations for use in the assessment were taken from the grid square containing the development site, as shown in Table 4.

NO_x to NO₂ Conversion

- 4.3.20 Predicted annual mean NO_x concentrations were converted to NO₂ concentrations using the spreadsheet (version 8.1) provided by DEFRA, which is the method detailed within DEFRA guidance¹².

Verification

- 4.3.21 The predicted results from a dispersion model may differ from measured concentrations for a large number of reasons, including:
- Estimates of background concentrations;
 - Uncertainties in source activity data such as traffic flows and emission factors;
 - Variations in meteorological conditions;
 - Overall model limitations; and,
 - Uncertainties associated with monitoring data, including locations.
- 4.3.22 Model verification is the process by which these and other uncertainties are investigated and where possible minimised. In reality, the differences between modelled and monitored results are likely to be a combination of all of these aspects.
- 4.3.23 For the purpose of the assessment, model verification was undertaken for 2019 using traffic data, meteorological data and monitoring results from this year. The choice of 2019

¹² Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

as the verification year aligns with the IAQM position statement 'Use of 2020 and 2021 Monitoring Datasets'¹³, which states:

"If you are carrying out an air quality study that includes validation against monitoring data, use 2019 monitoring data as the last typical year"

4.3.24 KC undertook monitoring of NO₂ concentrations at four locations within the modelling extents during 2019. The results were obtained and the road contribution to total NO_x concentrations calculated following the methodology contained within DEFRA guidance¹⁴. The monitored annual mean NO₂ concentrations and calculated road NO_x concentrations are summarised in Table 18.

Table 18 NO_x Verification - Monitoring Results

Monitoring Location		Monitored NO ₂ Concentration (µg/m ³)	Calculated Road NO _x Concentration (µg/m ³)
K24	Lindley Moor Road	34.13	35.61
K72	Lindley Moor Road 3	32.20	31.52
K73	Lindley Moor Road 4	34.18	35.72
K74	Lindley Moor Road 5	23.67	14.24

4.3.25 The annual mean road NO_x concentrations predicted from the dispersion model and the 2019 road NO_x concentrations calculated from the monitoring result are summarised in Table 19.

Table 19 NO_x Verification - Modelling Results


Monitoring Location		Calculated Road NO _x Concentration (µg/m ³)	Modelled Road NO _x Concentration (µg/m ³)
K24	Lindley Moor Road	35.61	30.05
K72	Lindley Moor Road 3	31.52	34.10
K73	Lindley Moor Road 4	35.72	40.11
K74	Lindley Moor Road 5	14.24	28.50

¹³ Use of 2020 and 2021 Monitoring Datasets, IAQM, 2021.

¹⁴ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

4.3.26 The monitored and modelled road NO_x concentrations were graphed and the equation of the trendline based on linear progression through zero calculated. This indicated that a verification factor of 0.8878 was required to be applied to all NO_x modelling results, as shown in Graph 1.

Graph 1 NO_x Verification Factor

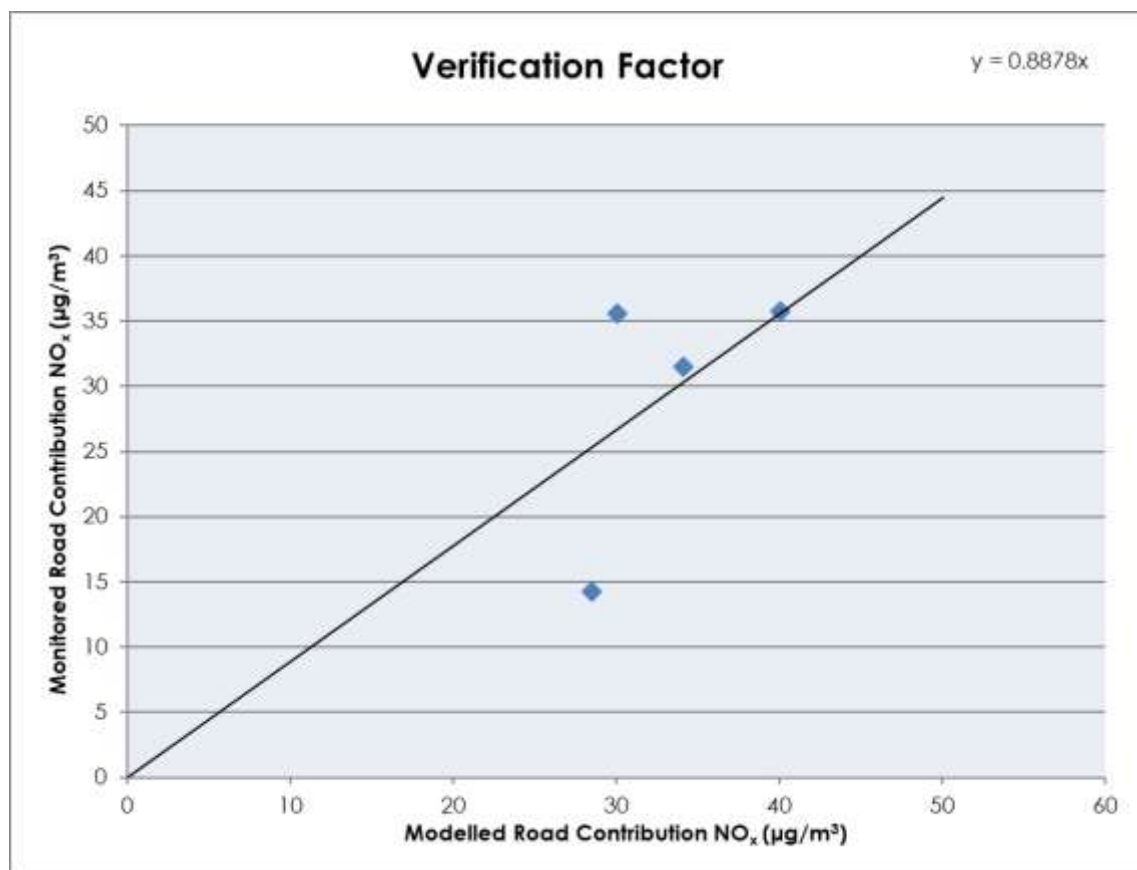

4.3.27 Monitoring of PM₁₀ and PM_{2.5} concentrations is not undertaken within the assessment extents. The NO_x verification factor was therefore used to adjust model predictions of these species in lieu of more accurate data in accordance with DEFRA guidance¹⁵.

¹⁵ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

5.0 ASSESSMENT

5.1 Introduction

- 5.1.1 The proposed development has the potential to cause air quality impacts during construction as well as expose future residents to elevated pollutant concentrations. These issues are assessed in the following Sections.

5.2 Construction Phase Assessment

Step 1

- 5.2.1 The undertaking of activities such as demolition, excavation, ground works, cutting, construction and storage of materials has the potential to result in fugitive dust emissions throughout the construction phase. Vehicle movements on the local road network also have the potential to result in the re-suspension of dust from highway surfaces.
- 5.2.2 The potential for impacts at sensitive locations depends significantly on local meteorology during the undertaking of dust generating activities, with the most significant effects likely to occur during dry and windy conditions.
- 5.2.3 The desk-study undertaken to inform the baseline identified a number of sensitive receptors within 350m of the site boundary. As such, a detailed assessment of potential dust impacts was required.

Step 2

Demolition

- 5.2.4 Demolition will be undertaken at the start of the construction phase and will involve clearance of existing buildings on site. It is estimated that the total building volume to be demolished is less than 20,000m³. In accordance with the criteria outlined in Table 9, the magnitude of potential dust emissions from demolition is therefore **small**.

5.2.5 Table 8 indicates the sensitivity of the area to dust soiling effects on people and property is **high**. In accordance with the criteria outlined in Table 14 the development is considered to be a **medium** risk site for dust soiling as a result of demolition activities.

5.2.6 Table 8 indicates the sensitivity of the area to human health impacts is **low**. In accordance with the criteria outlined in Table 14 the development is considered to be a **negligible** risk site for human health impacts as a result of demolition activities.

Earthworks

5.2.7 Earthworks may involve excavating material, haulage, tipping and stockpiling. The area of the proposed development site is less than 20,000m³. In accordance with the criteria outlined in Table 9, the magnitude of potential dust emissions from earthworks is therefore **small**.

5.2.8 Table 8 indicates the sensitivity of the area to dust soiling effects on people and property is **high**. In accordance with the criteria outlined in Table 15, the development is considered to be a **low** risk site for dust soiling as a result of earthworks.

5.2.9 Table 8 indicates the sensitivity of the area to human health impacts is **low**. In accordance with the criteria outlined in Table 15, the development is considered to be a **negligible** risk site for human health impacts as a result of earthworks.

Construction

5.2.10 It is anticipated that the total building volume will be less than 25,000m³. In accordance with the criteria outlined in Table 9, the magnitude of potential dust emissions from construction is therefore **small**.

5.2.11 Table 8 indicates the sensitivity of the area to dust soiling effects on people and property is **high**. In accordance with the criteria outlined in Table 15, the development is considered to be a **low** risk site for dust soiling as a result of construction activities.

5.2.12 Table 8 indicates the sensitivity of the area to human health impacts is **low**. In accordance with the criteria outlined in Table 15, the development is considered to be a **negligible** risk site for human health impacts as a result of construction activities.

Trackout

5.2.13 Based on the site area and existing hardstanding, it is anticipated that the unpaved road length will be less than 50m. In accordance with the criteria outlined in Table 9, the magnitude of potential dust emissions from trackout is therefore **small**.

5.2.14 Table 8 indicates the sensitivity of the area to dust soiling effects to people and property is **high**. In accordance with the criteria outlined in Table 16, the development is considered to be a **low** risk site for dust soiling as a result of trackout activities.

5.2.15 Table 8 indicates the sensitivity of the area to human health impacts is **low**. In accordance with the criteria outlined in Table 16, the development is considered to be a **negligible** risk site for human health impacts as a result of trackout activities.

Summary of the Risk of Dust Effects

5.2.16 A summary of the risk from each dust generating activity is provided in Table 20.

Table 20 Summary of Potential Unmitigated Dust Risks

Potential Impact	Risk			
	Demolition	Earthworks	Construction	Trackout
Dust Soiling	Medium	Low	Low	Low
Human Health	Negligible	Negligible	Negligible	Negligible

5.2.17 As indicated in Table 20, the potential risk of dust soiling is **medium** from demolition and **low** from earthworks, construction and trackout. The potential risk of human health effects is **negligible** from demolition, earthworks, construction and trackout.

5.2.18 It should be noted that the potential for impacts depends significantly on the distance between the dust generating activity and receptor location. Risk was predicted based on a worst-case scenario of works being undertaken at the site boundary closest to each sensitive area. Therefore, actual risk is likely to be lower than that predicted during the majority of the construction phase.

Step 3

5.2.19 The IAQM guidance¹⁶ provides potential mitigation measures to reduce impacts as a result of fugitive dust emissions during the construction phase. These have been adapted for the development site as summarised in Table 21. These may be reviewed prior to the commencement of construction works and incorporated into a Construction Environmental Management Plan or similar if required by the LA.

Table 21 Fugitive Dust Emission Mitigation Measures

Issue	Control Measure
Communications	- Develop and implement a stakeholder communications plan that includes community engagement before work commences on site. - Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager - Display the head or regional office contact information
Site management	- Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken - Make the complaints log available to the LA upon request - Record any exceptional incidents that cause dust and/or air emissions, either on- or off- site, and the action taken to resolve the situation in the log book
Monitoring	- Carry out regular site inspections, record inspection results, and make an inspection log available to the LA upon request - Increase the frequency of site inspections when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions
Site preparation	- Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible - Avoid site runoff of water or mud - Remove materials that have a potential to produce dust from site as soon as possible, unless being re-used - Cover, seed or fence stockpiles to prevent wind whipping
Operating vehicle/machinery and sustainable travel	- Ensure all vehicles switch off engines when stationary - no idling vehicles - Avoid the use of diesel or petrol powered generators and use mains electricity or battery powered equipment where practicable

¹⁶ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2017.

Issue	Control Measure
Operations	• Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques • Ensure an adequate water supply on the site for effective dust suppression, using non-potable water where possible and appropriate • Use enclosed chutes and conveyors and covered skips • Minimise drop heights and use fine water sprays wherever appropriate • Ensure equipment is available to clean any dry spillages, and clean up spillages as soon as reasonably practicable using wet cleaning methods
Waste management	• Avoid bonfires and burning of waste materials
Demolition	• Avoid using explosive blasting, using appropriate manual or mechanical alternatives • Bag and remove any biological debris
Construction	• Avoid scabbling (roughening of concrete surfaces), if possible • Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out
Trackout	• Ensure vehicles entering and leaving site are covered to prevent escape of materials

Step 4

5.2.20 Assuming the relevant mitigation measures outlined in Table 21 are implemented, the residual impact from all dust generating activities is predicted to be **not significant**, in accordance with the IAQM guidance¹⁷.

5.3 Future Exposure Assessment

5.3.1 The proposed development has the potential to expose future residents to elevated pollution levels. Dispersion modelling was therefore undertaken with the inputs described in Appendix 1 to quantify air quality conditions at the site. Reference should be made to Figures 5, 6 and 7 for graphical representations of predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations.

¹⁷ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

- 5.3.2 As shown in Figure 5, annual mean NO₂ concentrations were predicted to be below the AQO of 40µg/m³ at all locations across the site. The maximum level at the boundary was 34.37µg/m³.
- 5.3.3 As shown in Figure 6, annual mean PM₁₀ concentrations were predicted to be below the AQO of 40µg/m³ at all locations across the site. The maximum level at the boundary was 16.25µg/m³.
- 5.3.4 As shown in Figure 7, annual mean PM_{2.5} concentrations were predicted to be below the AQLV of 20µg/m³ at all locations across the site. The maximum level at the boundary was 10.27µg/m³.
- 5.3.5 Based on the assessment results, future residents are not predicted to be exposed to pollutant concentrations above the relevant AQOs and AQLV. As such, the site is considered suitable for the proposed use from an air quality perspective.

5.4 West Yorkshire Technical Planning Guidance

- 5.4.1 The West Yorkshire LAs have produced air quality technical guidance¹⁸ as part of an overarching low emission strategy to reduce road transport emissions in the county. It is aimed at helping LAs deliver AQO compliance through cost effective service planning brought about by the joint working and relevant Local Plan policies.
- 5.4.2 The guidance¹⁹ provides a methodology for determining the scale of a development as minor, medium or major and the required air quality mitigation for the relevant banding. Review of the relevant criteria indicated the proposals were classified as **minor** due to the following reasons:
- The proposals are for less than 50 residential units.

¹⁸ Air Quality and Emissions: Technical Planning Guidance, West Yorkshire Low Emissions Group, 2014.

¹⁹ Air Quality and Emissions: Technical Planning Guidance, West Yorkshire Low Emissions Group, 2014.

5.4.3 The guidance²⁰ provides a number of mitigation options that should be included on **minor** scale developments. The measures were reviewed and those identified for the proposals can be summarised as follows:

- Provision of one Electric Vehicle (EV) charging point per unit.

5.4.4 It is recommended that the above measure will be incorporated into the scheme in order to reduce the potential effects on health and the local environment.

5.4.5 The mitigation measure outlined above can be secured by planning condition if required by KC.

²⁰ Air Quality and Emissions: Technical Planning Guidance, West Yorkshire Low Emissions Group, 2014.


6.0 CONCLUSION


- 6.1.1 Redmore Environmental Ltd was commissioned by Mr Dom Waterson to undertake an Air Quality Assessment in support of a residential development on land off New Hey Road, Outlane.
- 6.1.2 The proposals have the potential to cause air quality impacts as a result of fugitive dust emissions during construction as well as expose future residents to elevated pollutant levels. As such, an Air Quality Assessment was undertaken in order to determine baseline conditions and consider site suitability for the proposed end use.
- 6.1.3 Potential construction phase air quality impacts from fugitive dust emissions were assessed as a result of demolition, earthworks, construction and trackout activities. It is considered that the use of good practice control measures would provide suitable mitigation for a development of this size and nature and reduce potential impacts to an acceptable level.
- 6.1.4 During the operational phase there is the potential for the exposure of future residents to elevated pollutant levels due to the proximity of the site to the M62 and associated road traffic emissions. Dispersion modelling was therefore undertaken in order to predict pollutant concentrations across the proposed development. Outputs were subsequently verified using local monitoring data.
- 6.1.5 The results of the dispersion modelling assessment indicated that predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations were below the relevant AQOs and AQLV at all locations across the development. As such, the site is considered suitable for the proposed end use from an air quality perspective and mitigation is not required.
- 6.1.6 Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.


7.0 **ABBREVIATIONS**


AADT	Annual Average Daily Traffic
ADM	Atmospheric Dispersion Modelling
AQLV	Air Quality Limit Value
AQMA	Air Quality Management Area
AQO	Air Quality Objective
AQS	Air Quality Strategy
CERC	Cambridge Environmental Research Consultants
DEFRA	Department for Environment, Food and Rural Affairs
DfT	Department for Transport
DMP	Dust Management Plan
EB	Eastbound
EV	Electric Vehicle
HDV	Heavy Duty Vehicle
IAQM	Institute of Air Quality Management
KC	Kirklees Council
KLP	Kirklees Local Plan
LA	Local Authority
LAQM	Local Air Quality Management
NGR	National Grid Reference
NB	Northbound
NO ₂	Nitrogen dioxide
NO _x	Oxides of nitrogen
NPPF	National Planning Policy Framework
NPPG	National Planning Policy Guidance
PM ₁₀	Particulate matter with an aerodynamic diameter of less than 10µm
PM _{2.5}	Particulate matter with an aerodynamic diameter of less than 2.5µm
SP	Slow Phase
SB	Southbound
WB	Westbound
Z ₀	Roughness length

Figures

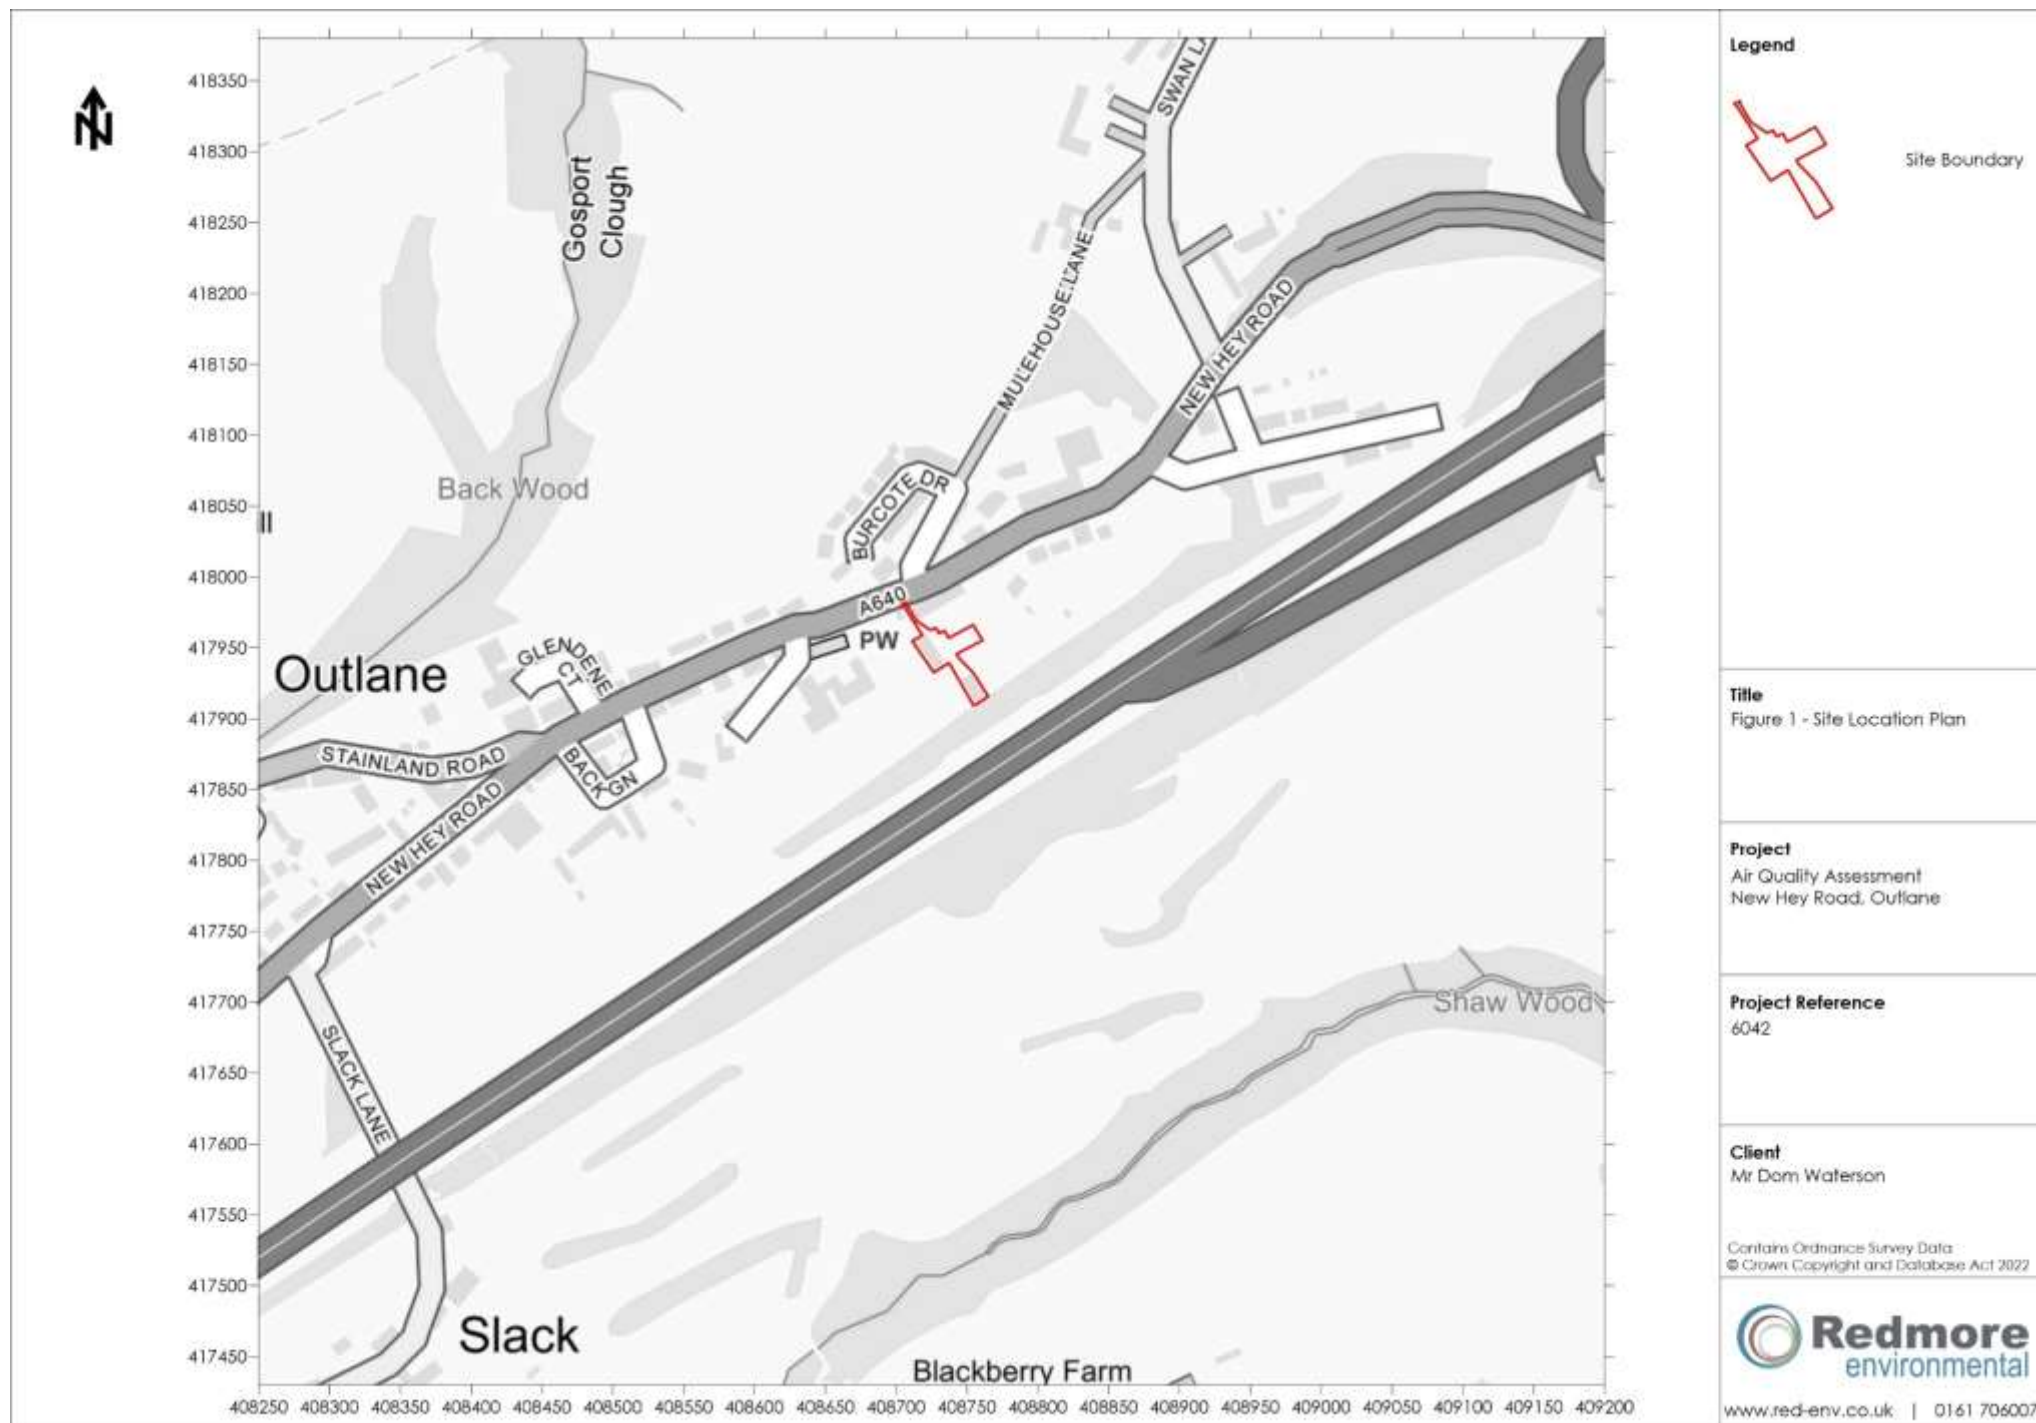

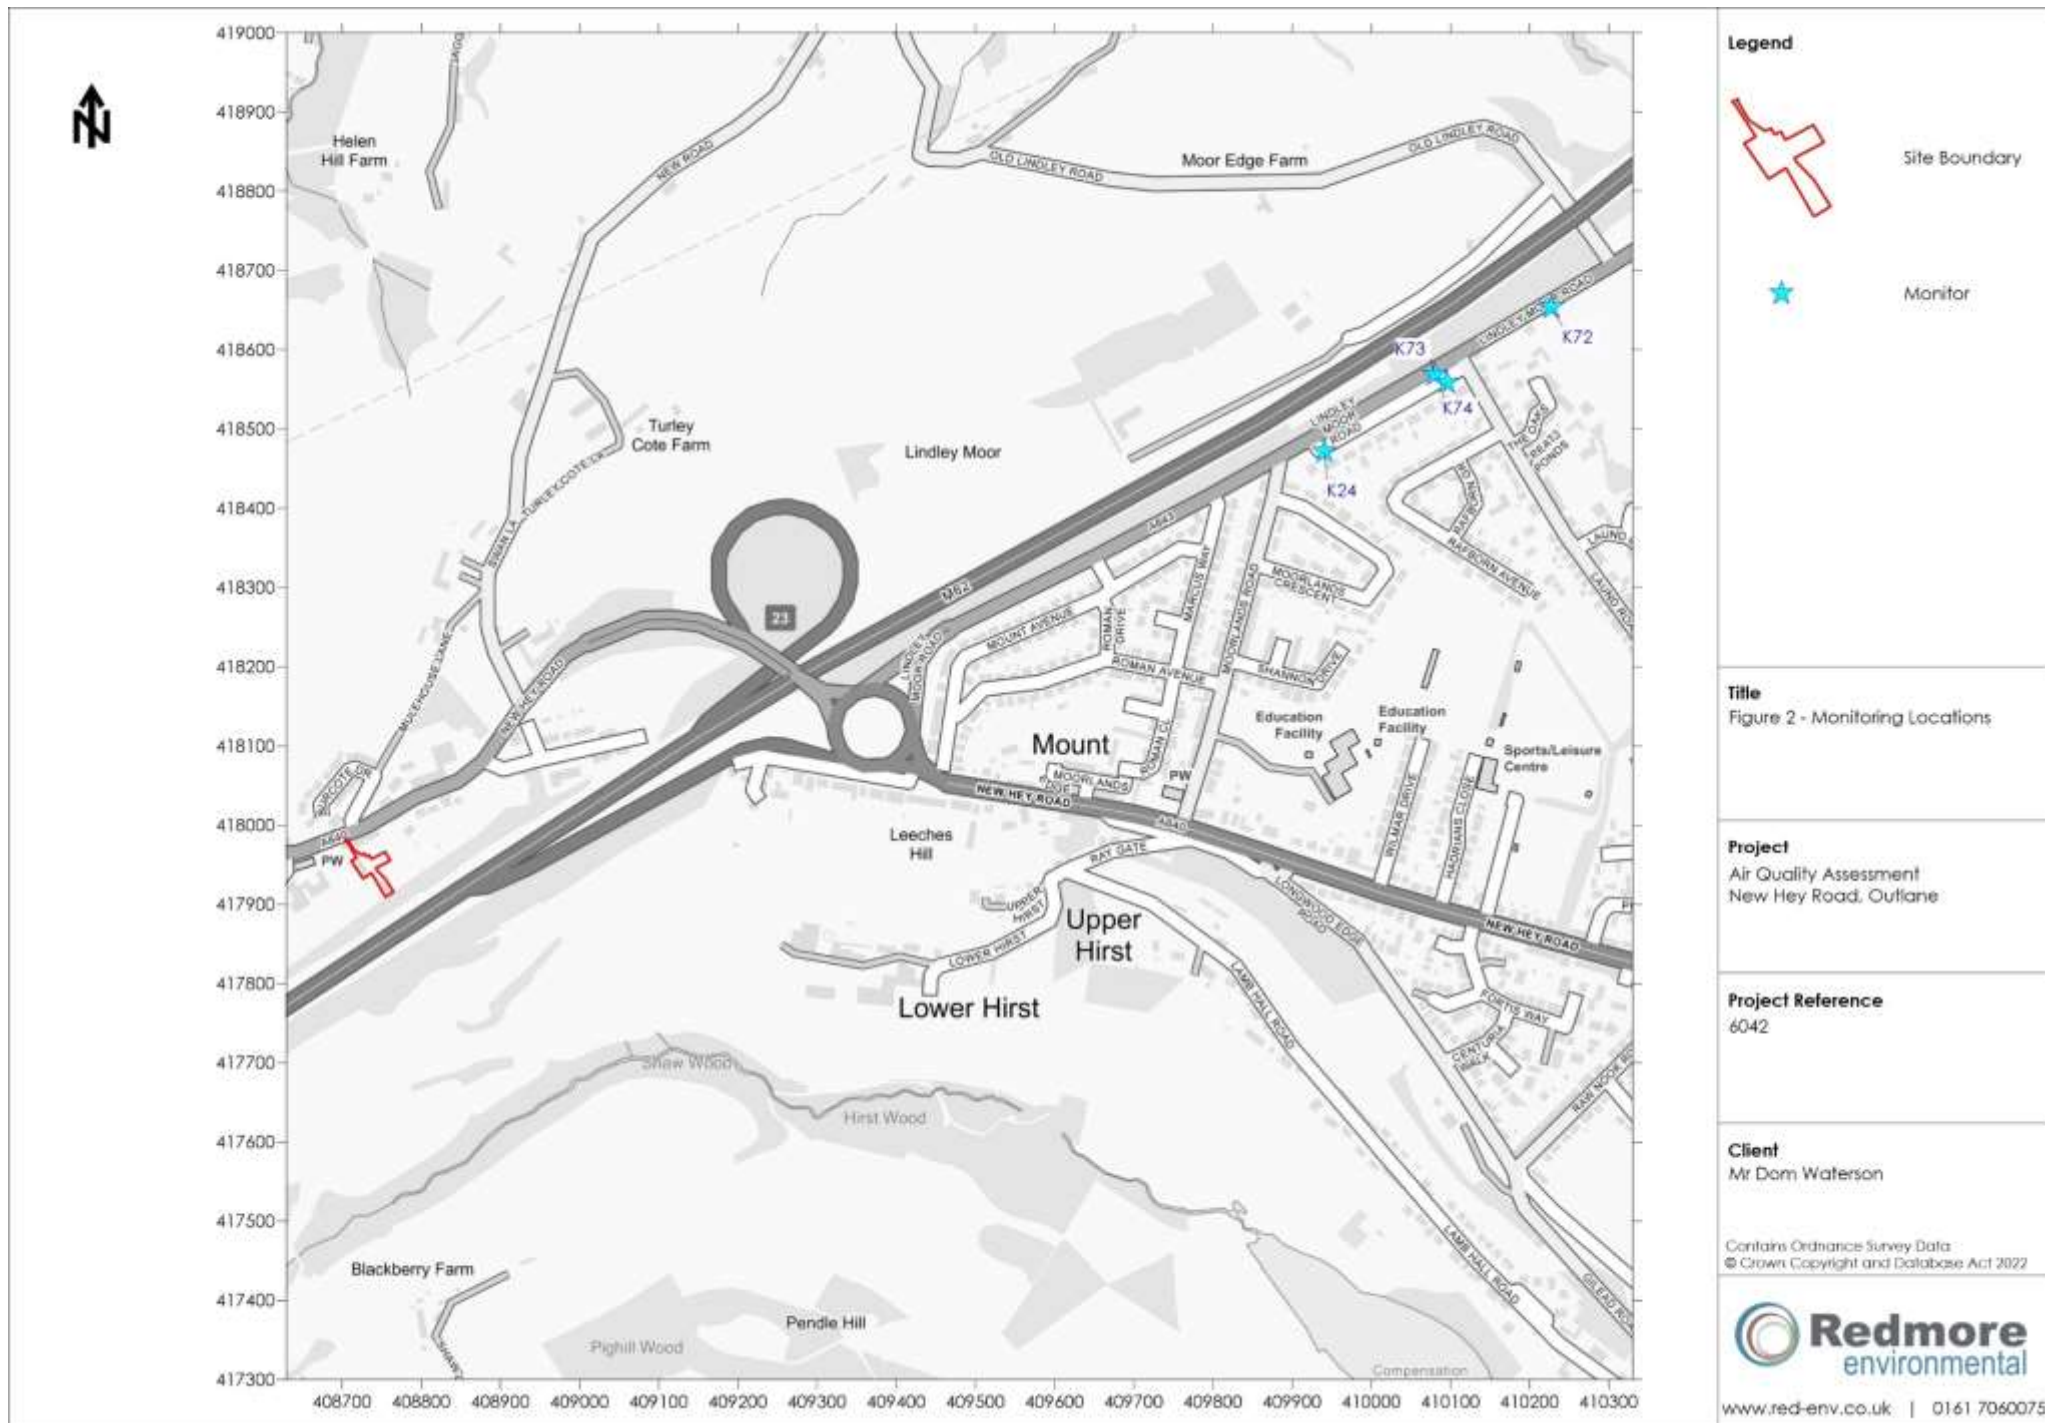

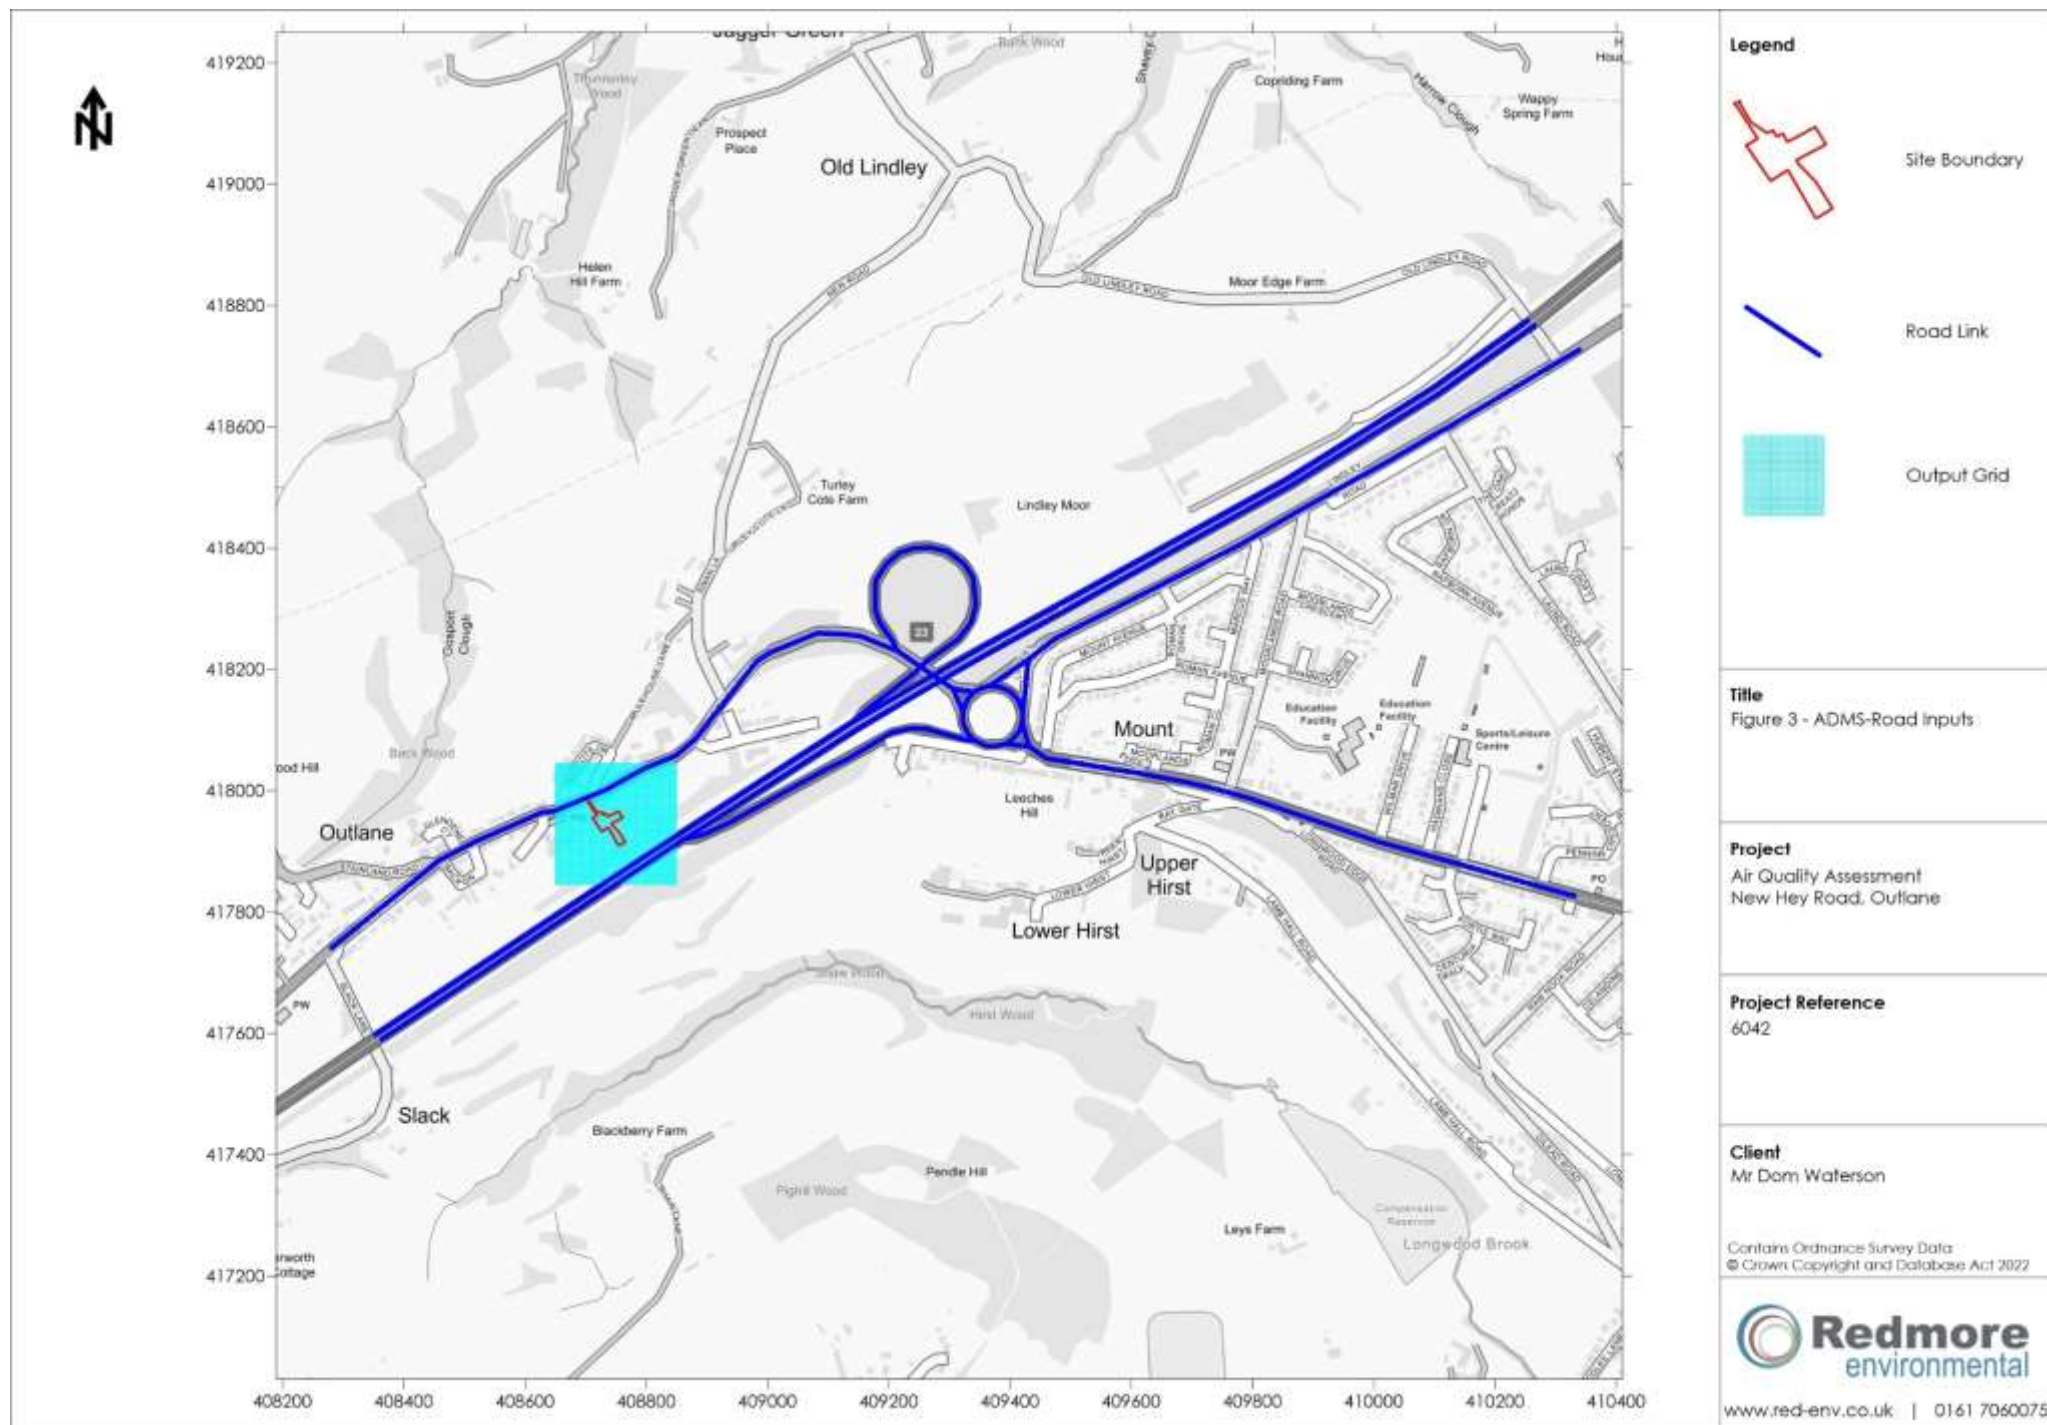

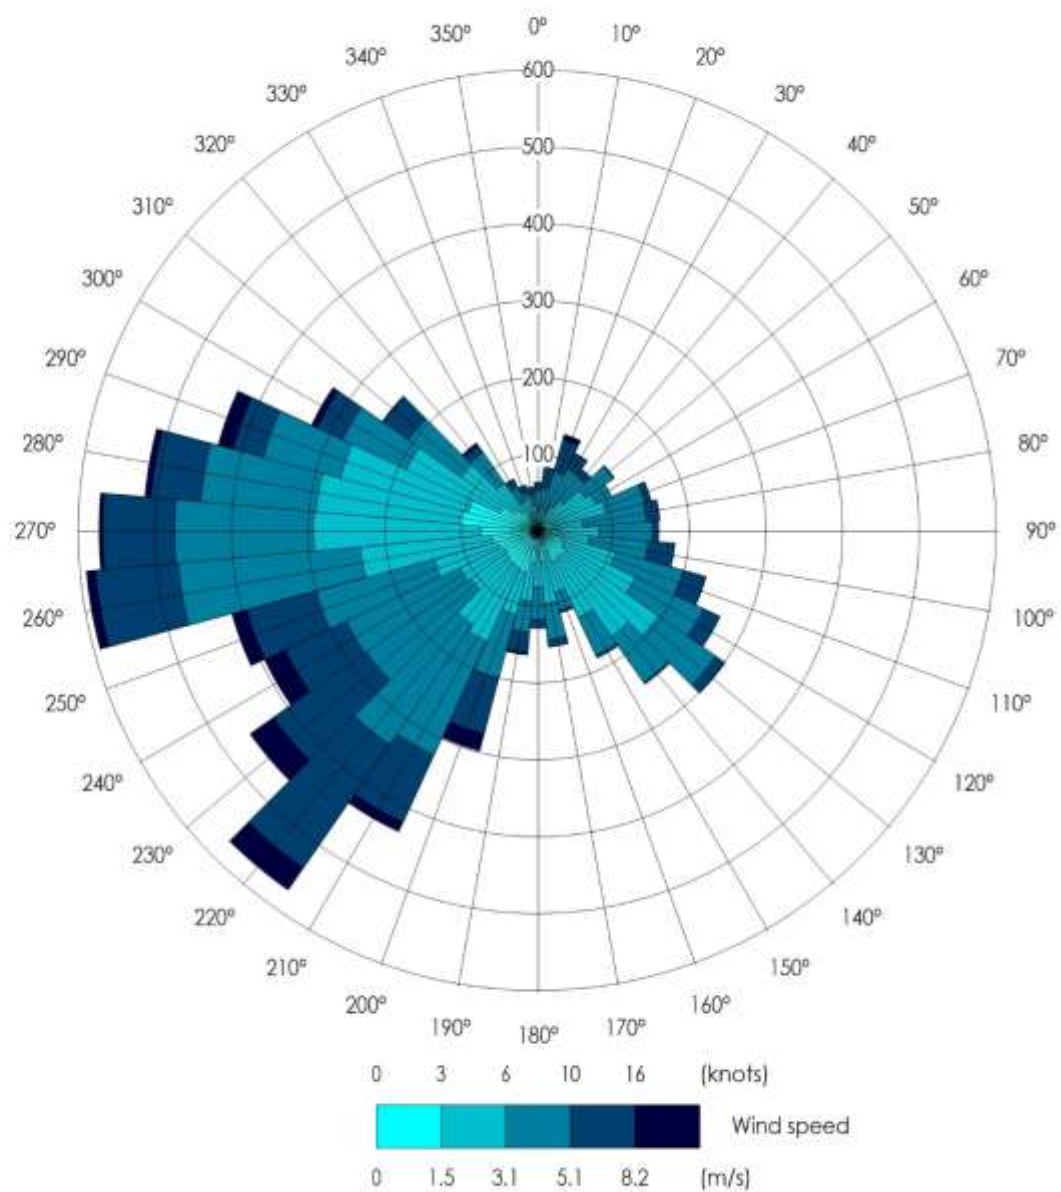

Legend

Title

Figure 4 - Wind Rose of 2019
Bingley Meteorological Data

Project

Air Quality Assessment
New Hey Road, Outlane

Project Reference


6042


Client


Mr Don Waterson



www.red-env.co.uk | 0161 7060075

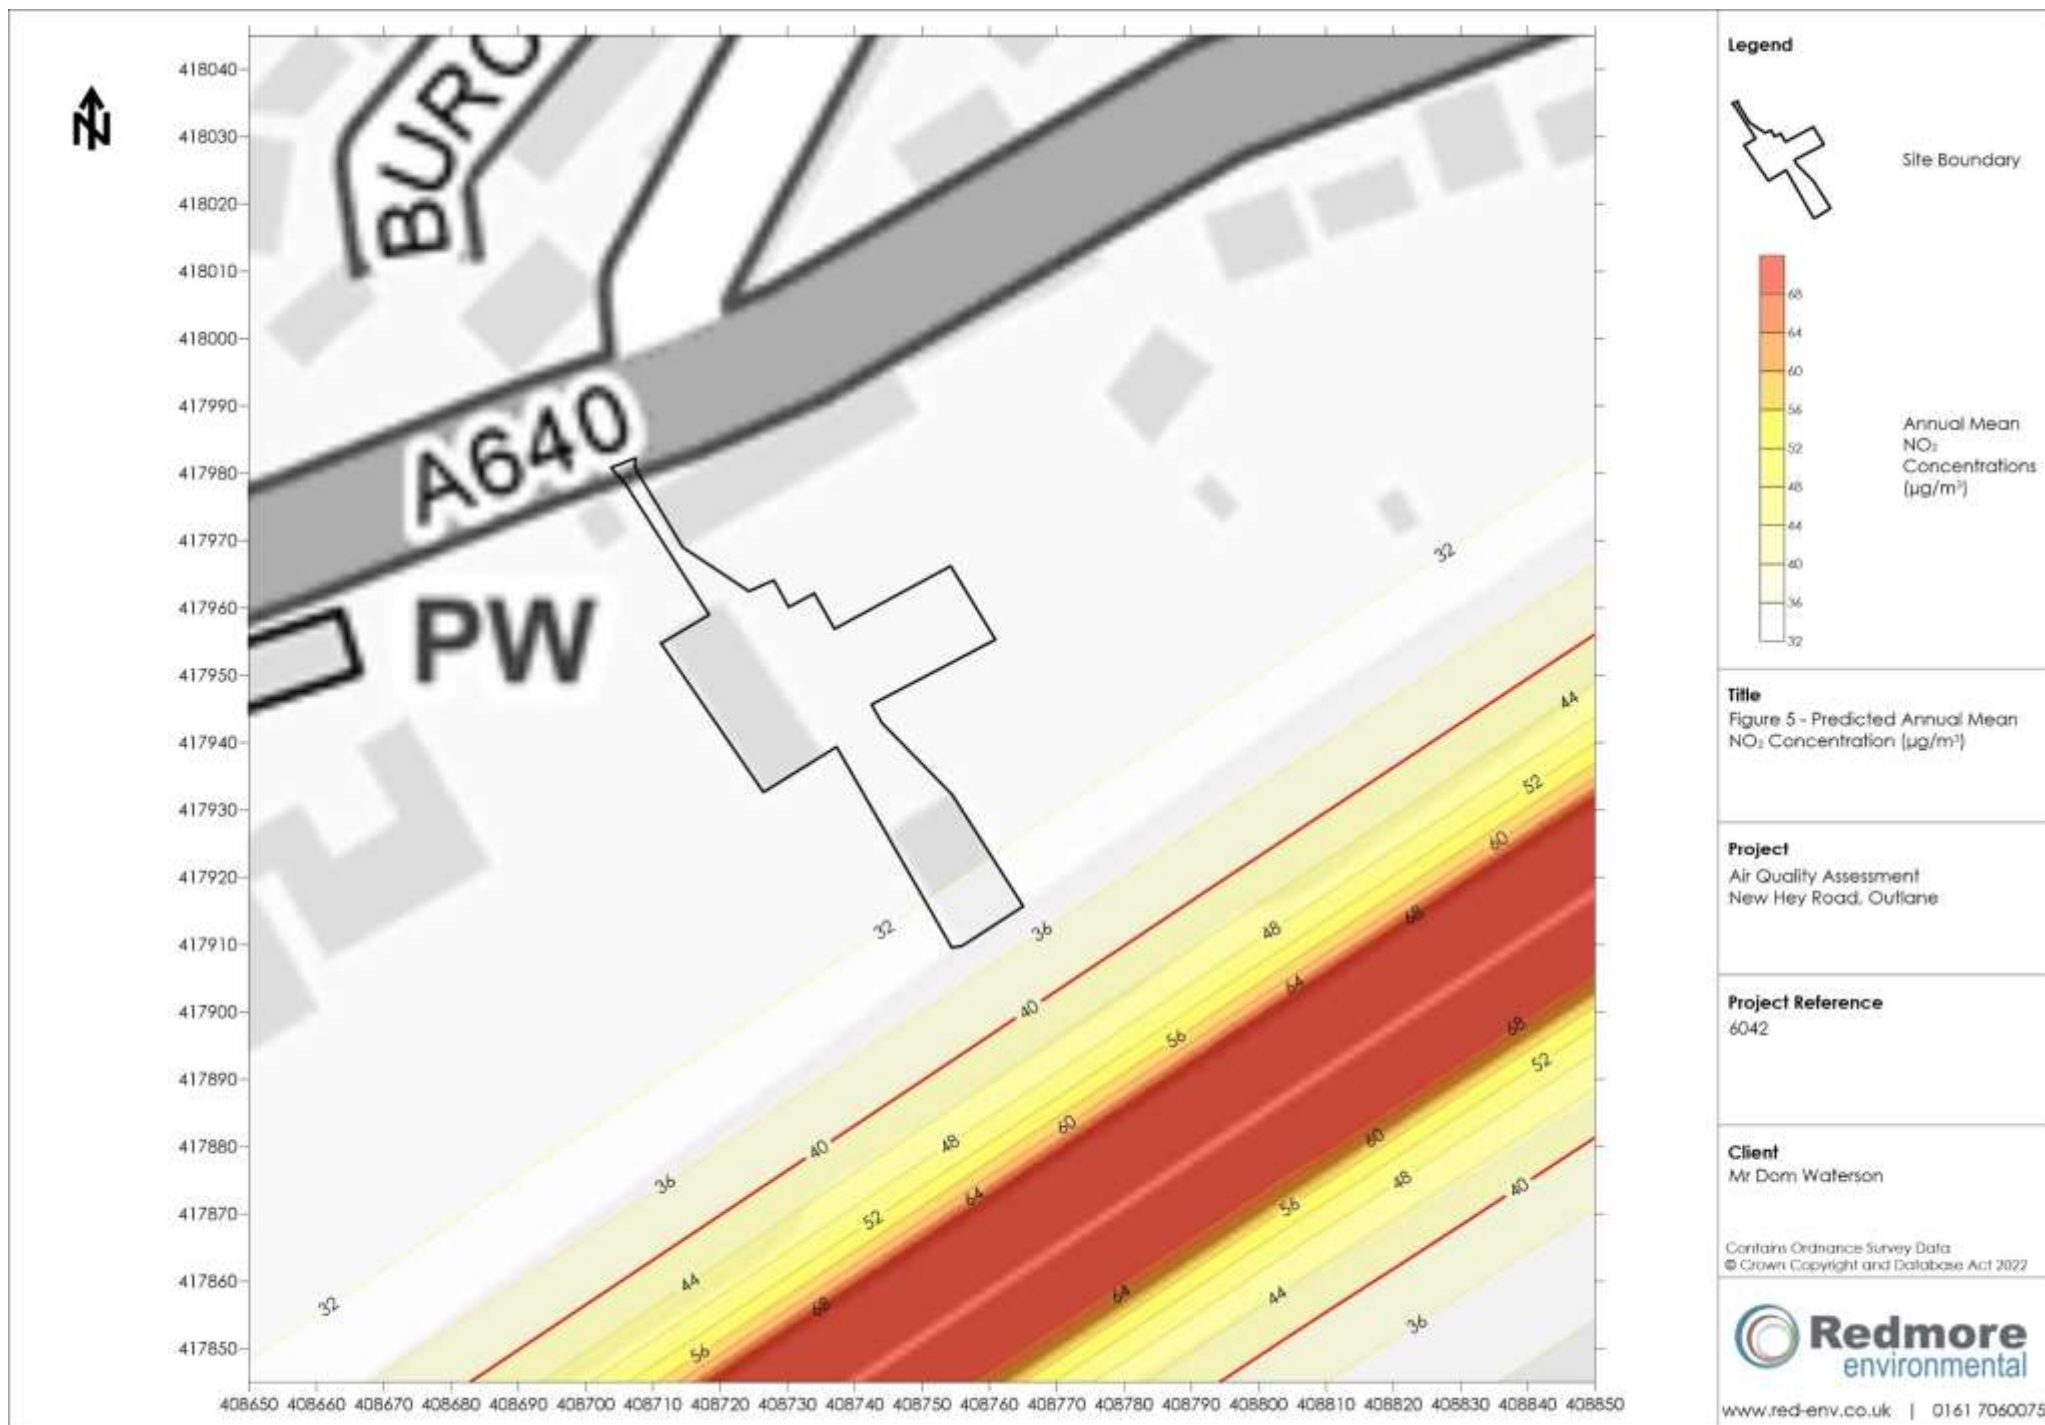

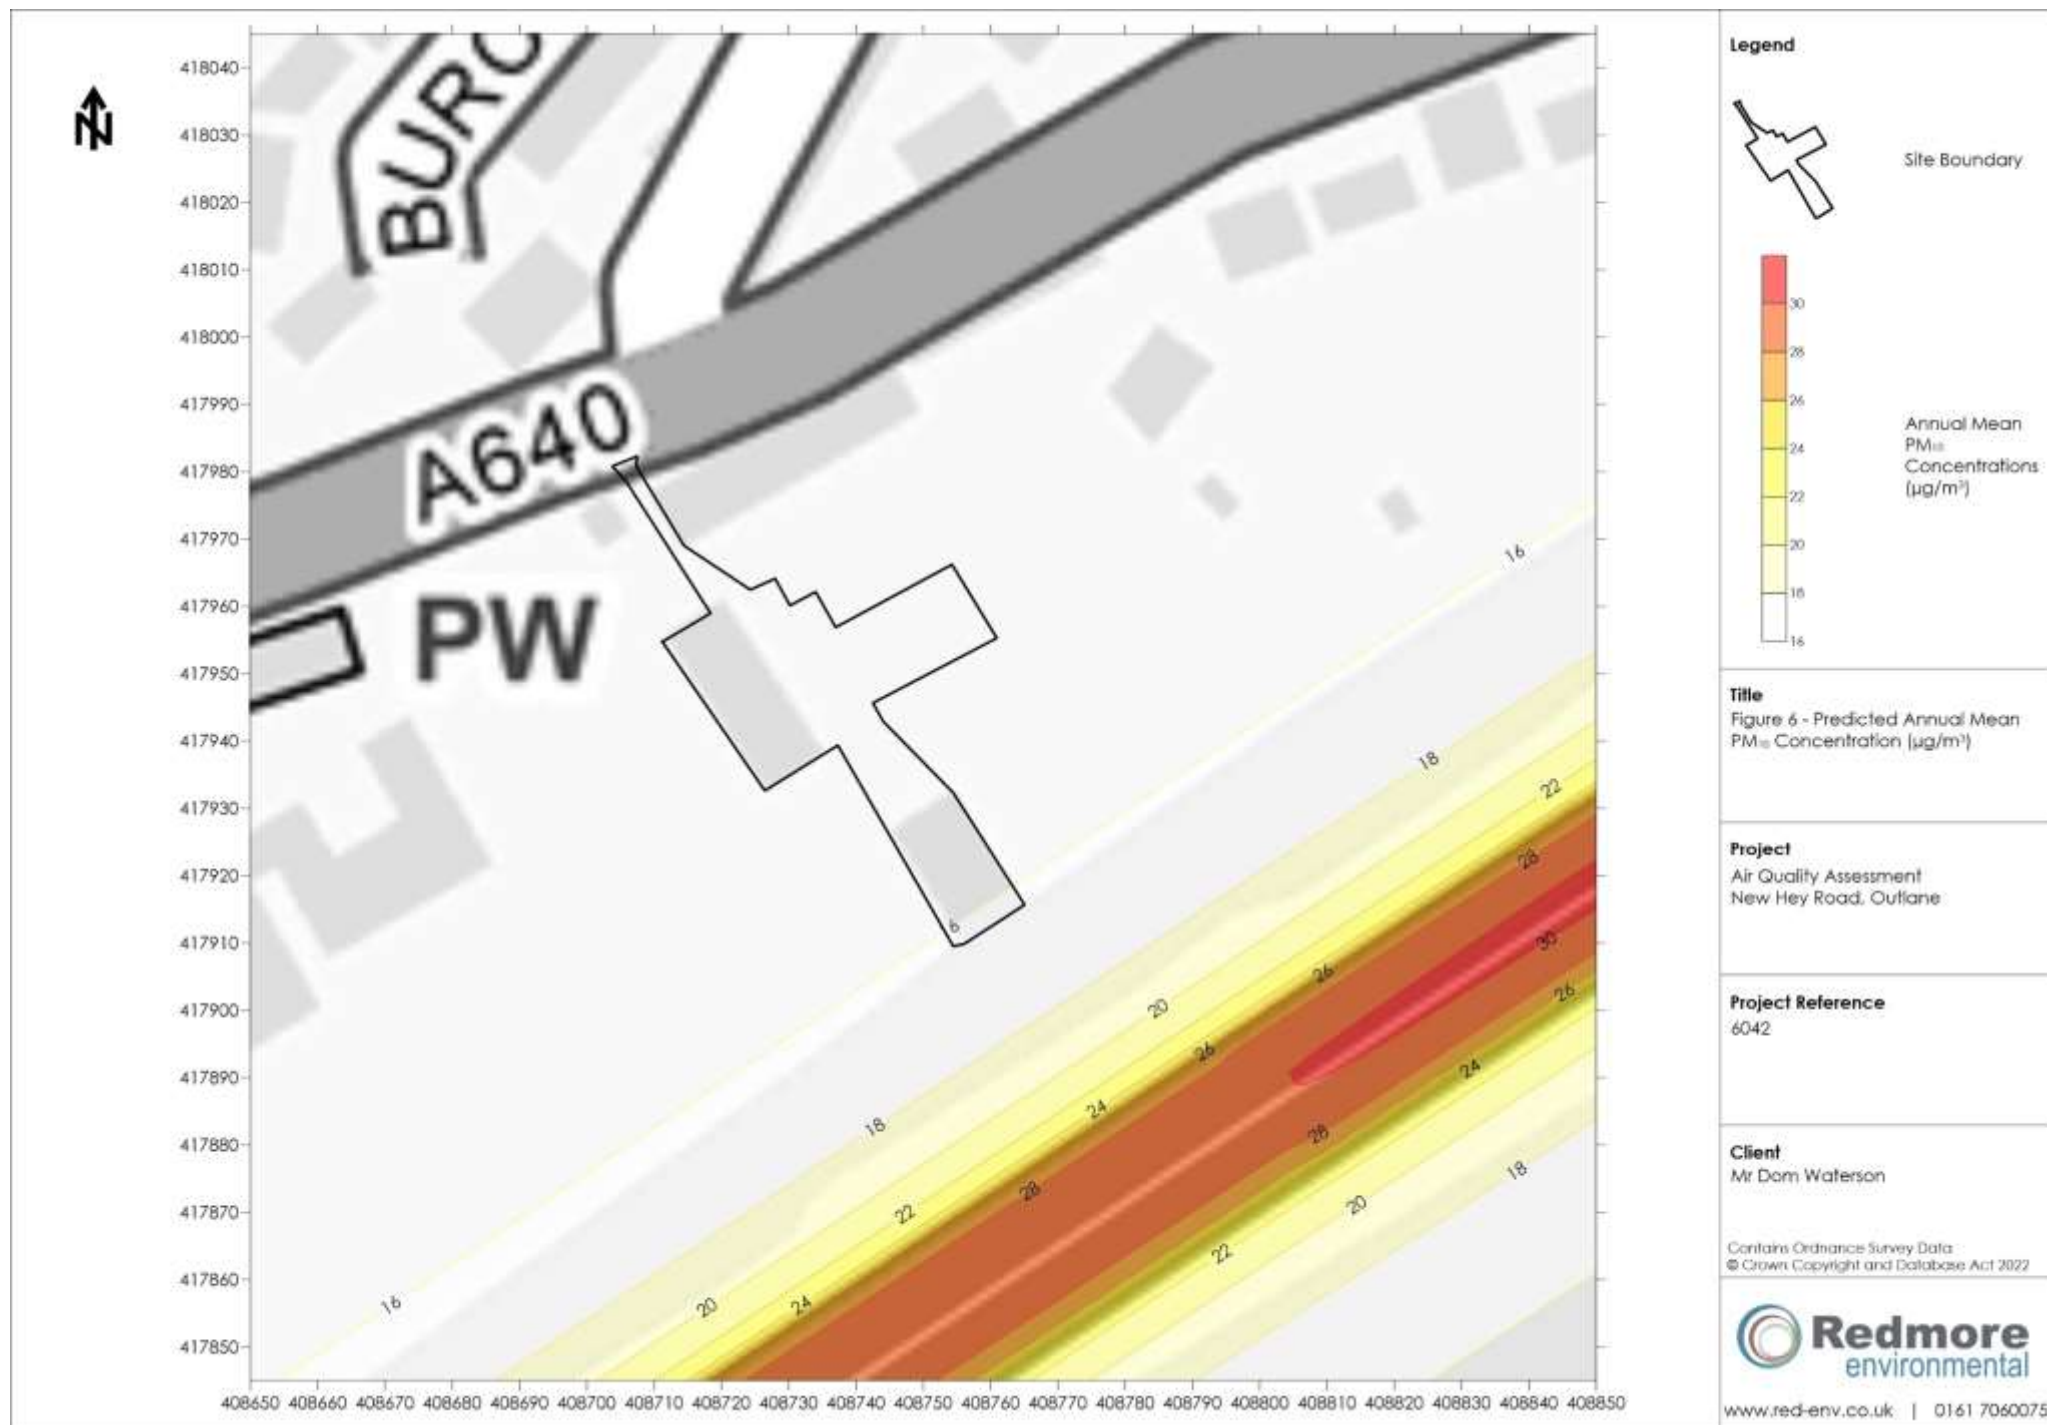

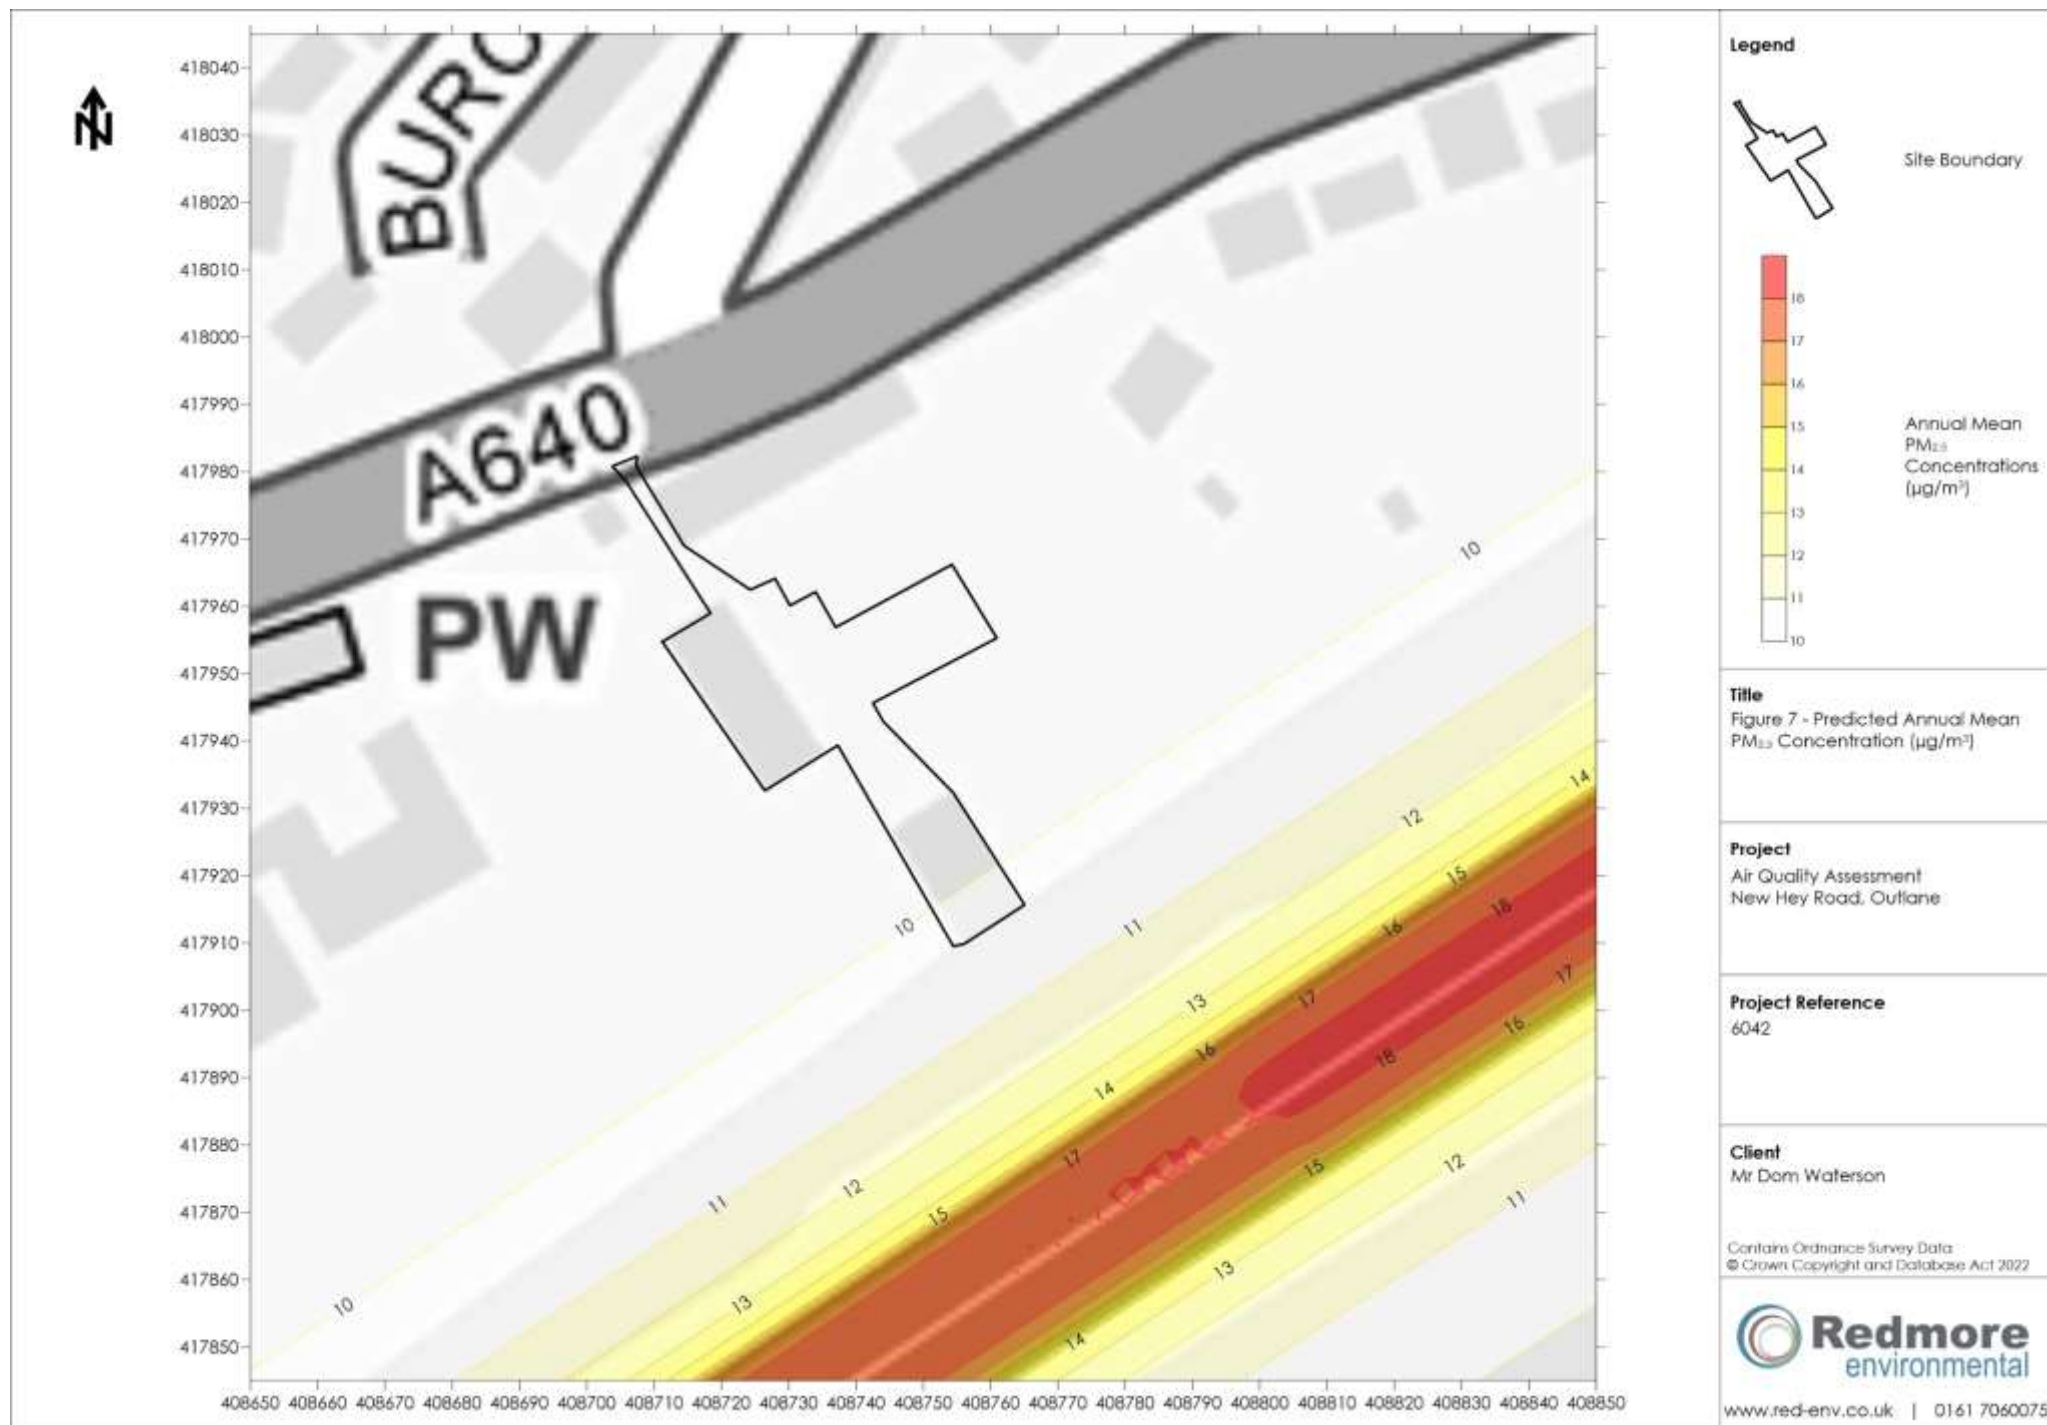

Appendix 2 - Curricula Vitae

KEY EXPERIENCE:

Jethro is a Chartered Environmentalist and Director of Redmore Environmental with specialist experience in the air quality and odour sectors. His key capabilities include:

- Production and management of Air Quality, Dust and Odour Assessments for a wide-range of clients from the retail, residential, infrastructure, commercial and industrial sectors.
- Production and co-ordination of Environmental Permit applications for a variety of industrial sectors.
- Detailed dispersion modelling of road vehicle and industrial emissions using ADMS-Roads, ADMS-5, AERMOD-PRIME and BREEZE-ROADS. Studies have included impact assessment of ground level pollutant and odour concentrations and assessment of suitability of development sites for proposed end-use.
- Project management and co-ordination of Environmental Impact Assessments and scoping reports for developments throughout the UK.
- Provision of expert witness services at Planning Inquiries.
- Design and project management of pollutant monitoring campaigns.
- Co-ordination and management of large-scale multi-disciplinary projects and submissions.
- Provision of expert advice to local government and international environmental bodies, as well as involvement in production of industry guidance.

SELECT PROJECTS SUMMARY:

Industrial

Shanks Waste Management - Odour Assessments of two waste management facilities to support Environmental Permit Applications.

Tatweer Petroleum - dispersion modelling of Bahrain oil field.

Doha South Sewage Treatment Works - AQA for works extension in Qatar.

IRIS Environmental Appraisal Report Reviews, Isle of Man Government - odour assessment reviews.

Lankem, Greater Manchester - Environmental Permit Application for chemical manufacturing plant.

Newport Docks Bulk Drying, Pelleting and CHP Facility - air quality EIA for gas CHP.

Springshades, Leicester - Environmental Permit Variation Application for textile manufacturing plant.

Valspar, Chester - Odour Assessment and production of Odour Management Plan for a paint manufacturing plant in response to neighbour complaints.

Agrivert - dispersion modelling of odour and CHP emissions from numerous AD plants.

James Cropper Paper Mill, Cumbria - air quality EIA, Environmental Permit Variation and Human Health Risk Assessment for new biomass boiler adjacent to SSSI.

Rigg Approach, Leyton - Air Quality Assessment in support of waste transfer site.

Lynchford Lane Waste Transfer Station - biomass facility energy recovery plant.

Barnes Wallis Heat and Power, Cobham - biomass facility adjacent to AQMA.

Residential

Wood St Mill, Bury - residential development adjacent to scrap metal yard.

Hyams Lane, Holbrook - Odour Assessment to support residential development adjacent to sewage works.

North Wharf Gardens, London - peer review of EIA undertaken for large residential development.

Loxford Road, Alford - Air Quality EIA for residential development, included consideration of impacts from associated package sewage works

Elephant and Castle Leisure Centre - baseline AQA for redevelopment.

Carr Lodge, Doncaster - EIA for large residential development.

Queensland Road, Highbury - residential scheme including CHP.

Bicester Ecotown - dispersion modelling of energy centre.

Castleford Growth Delivery Plan - baseline air quality constraints assessment for town redevelopment.

York St, Bury - residential development adjacent to AQMA.

Temple Point Leeds - residential development adjacent to M1.

Commercial and Retail

Etihad Stadium - Air Quality EIA for the extension to the capacity of the Etihad Stadium, Manchester.

Wakefield College - redevelopment of city centre campus in AQMA.

Manchester Airport Cargo Shed - commercial development.

Manchester Airport Apron Extension - EIA including aircraft emission modelling.

National Youth Theatre, Islington - redevelopment to provide new arts space and accommodation.

KEY EXPERIENCE:

Imo is a Graduate Environmental Consultant with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included assessment of road traffic exhaust emissions on sensitive receptors and exposure of new residents to poor air quality.
- Assessment of construction dust impacts from a range of development sizes.
- Measurement and assessment of indoor air quality in support of BREEAM accreditation. She has conducted Total Volatile Organic Compound (TVOC) and formaldehyde monitoring at numerous commercial developments throughout the UK in pursuit of the relevant credit specified under BREEAM category Hea 02 'Indoor Air Quality'.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.

KEY EXPERIENCE:

Imo is a Graduate Environmental Consultant with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included assessment of road traffic exhaust emissions on sensitive receptors and exposure of new residents to poor air quality.
- Assessment of construction dust impacts from a range of development sizes.
- Measurement and assessment of indoor air quality in support of BREEAM accreditation. She has conducted Total Volatile Organic Compound (TVOC) and formaldehyde monitoring at numerous commercial developments throughout the UK in pursuit of the relevant credit specified under BREEAM category Hea 02 'Indoor Air Quality'.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.

KEY EXPERIENCE:

Imo is a Graduate Environmental Consultant with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included assessment of road traffic exhaust emissions on sensitive receptors and exposure of new residents to poor air quality.
- Assessment of construction dust impacts from a range of development sizes.
- Measurement and assessment of indoor air quality in support of BREEAM accreditation. She has conducted Total Volatile Organic Compound (TVOC) and formaldehyde monitoring at numerous commercial developments throughout the UK in pursuit of the relevant credit specified under BREEAM category Hea 02 'Indoor Air Quality'.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.

KEY EXPERIENCE:

Emily is a Senior Environmental Consultant with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included assessment of road traffic exhaust emissions on sensitive receptors and exposure of new residents to poor air quality.
- Advanced canyon modelling to evaluate the impact of altered urban topography on air quality in built up areas.
- Assessment of construction dust impacts from a range of development sizes.
- Definition of baseline air quality and identification of sensitive areas across the UK.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.
- Air quality monitoring at industrial sites to quantify pollutant concentrations
- Odour surveys to assess amenity and suitability of sites for potential future development for residential use.

SELECT PROJECTS SUMMARY:

Bowlers Yard, Manchester

Air Quality Assessment in support of an eleven storey residential development to provide circa 65 units on land known as Bowlers Yard, Manchester. The site was located in an Air Quality Management Area (AQMA) and concerns were raised regarding the exposure of future occupants to poor air quality due to road traffic emissions. Detailed dispersion modelling was undertaken using ADMS-roads to assess PM_{2.5}, PM₁₀ and NO₂ concentrations across the site. Results indicated that pollution levels were below the air quality objectives across the development.

Freemasons Arms Hotel, Heywood

Air Quality Assessment to support a residential-led development in an AQMA. Detailed dispersion modelling was undertaken with the inclusion of advanced canyon modelling to evaluate the impact of the urban topography within the locality on the dispersion of traffic related pollutants. Predicted concentrations of NO₂ were found to exceed air quality criteria at the building façade fronting Market Place at first floor level. As such, mitigation was specified for the affected units to ensure future residents would not be exposed to poor air quality.

Griffin Road, London

Air Quality Assessment in support of a residential development located in an AQMA. Detailed dispersion modelling was undertaken using ADMS-roads to assess PM₁₀ and NO₂ concentrations across the site. Results indicated that pollution levels were classified as APEC - A in accordance with the London Councils Air Quality and Planning Guidance.

High Street, Dudley

Odour Impact Assessment in support of a proposed residential-led development. Due to the location of the site, being above an existing hot food takeaway, odour surveys were required to assess the level of odour across the development. A risk assessment was also undertaken in accordance with the relevant odour guidance. An appropriate ventilation system was identified on the basis of the assessment results.

East Common Lane, Selby

Air Quality Assessment in support of an industrial development on land associated with Access 63 Business Park, East Common Lane Selby. Due to the size of the development it was possible that traffic generated from the scheme may cause negative impacts on sensitive receptors nearby. NO₂ and PM₁₀ concentrations were quantified at specific receptor points to ensure there would be no significant increases in pollution levels. Results revealed negligible impacts at all locations.

Wharton Road, Winsford

Air Quality Assessment in support of a residential development of 138 units on land off Wharton Road, Winsford. Using sensitive receptors, a comparison was made between overall concentrations with and without the development in place. Results revealed pollutant concentrations were below the relevant standards across the site and impacts associated with the development were not significant.