



5000EA

Slotvent

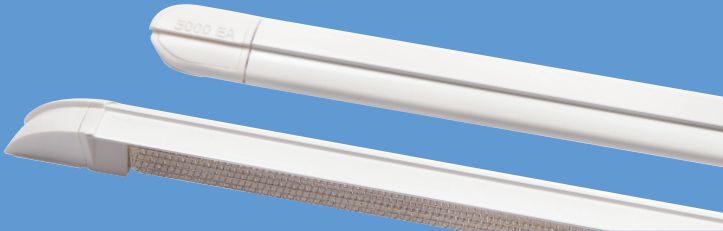

Physical specification

All measurements in millimetres unless otherwise indicated

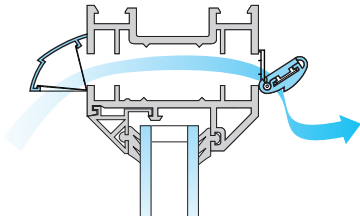

5000EA

Features and benefits

- Smallest 5000mm² equivalent area vent on the market – just 410mm long
- Easy to apply 13mm rout for installation on window profile
- Suitable for use where a high level of equivalent area is required and to achieve the minimum room requirements under Building Regulations (min 5000mm² ea per room)
- Manufactured from aluminium alloy
- Excellent air tightness performance, increasingly important with dwelling air pressure tests
- Aesthetically pleasing design – unobtrusive when installed

Configurations

5000EAW-IO
Internal unit only (White only)

5000EA
Complete unit with front control

Models, control options and key data

Product Code	Equivalent area (mm²)	Slot height (mm)	Slot size (mm)			Air Permeability		Watertightness		Airborne Sound Insulation
			Length	Central gap	Length	@ 50 Pa (m³/hr)	@ 50 Pa (l/s)	Pressure @ no leakage (Pa)	Classification	Dn,e,w (dB) Open
5000EAW-IO *	–	13	165	10	165	–	–	–	–	–
5000EA *	5000	13	165	10	165	0.61	0.17	900	E900	33

Colours available W

* Pricing is variable depending on quantity ordered - please call for details

Scottish Building Regulations: Free Area performance (see page 14 for full details)
5000EA = 4420mm²

Example order:

5000EA + colour option **W**hite = **5000EAW**