

## Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	2.185	71.200
Flush-Flo™	0.675	71.200
Kick-Flo®	1.471	58.811
Mean Flow		61.142

Hydro-Brake® Optimum Flow Control including:

- 8 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 260 kg



[hydro-int.com/patents](http://hydro-int.com/patents)

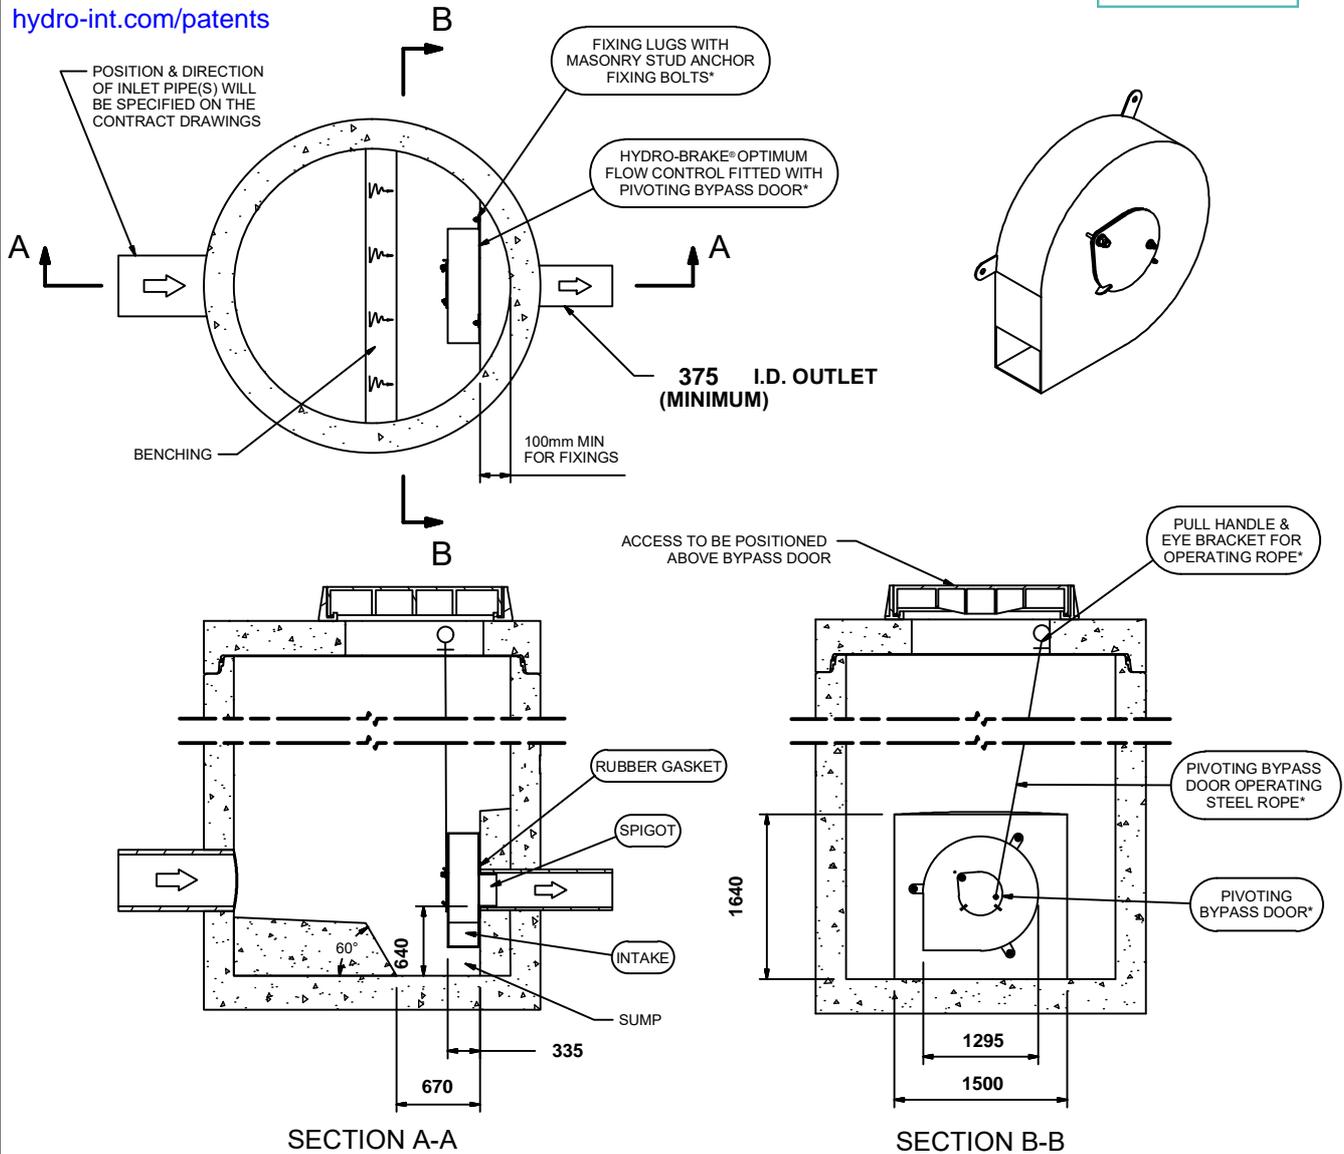

**IMPORTANT:** ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY  
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS  
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL  
 ALL CIVIL AND INSTALLATION WORK BY OTHERS  
 \* WHERE SUPPLIED  
 HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

**THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.**

### DESIGN ADVICE



The head/flow characteristics of this SHE-0327-7120-2185-7120 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.  
**The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

**Hydro International**

DATE 07/08/2023 08:55

SITE David Brown

DESIGNER jake curtis

REF P3748

SHE-0327-7120-2185-7120

Hydro-Brake® Optimum