


Conservation windows

- Roof windows in this category are designed to meet planning requirements in conservation areas, or for the development of historic buildings.
- Its characteristic feature is a black vertical mullion bar down the middle of the window. Making it suitable for traditional construction.
- Ultimately, this maintains the character of unique, stylised buildings from the outside while simultaneously creating a comfortable, modern interior.
- Most of our standard windows are available in this version, including: centre pivot, preSelect, roof access and raised axis windows.
- Conservation windows are manufactured in P2 and P5 as standard glazing options but other glazing types can be requested.



Three of these conservation options (the FTP and FTW) come complete as a kit with flashing and insulation collars. There are two choices when selecting a kit: ‘V’ and ‘J’. These indicate varying levels at which the roof window can be installed within the roof structure. For example, when choosing a flashing to lift the window by 3cm from the standard ‘V’ level, the N variations will be suitable. On the other hand, ‘V’ is a standard installation level whereas ‘J’ is recessed – 3cm below the ‘N’ level.

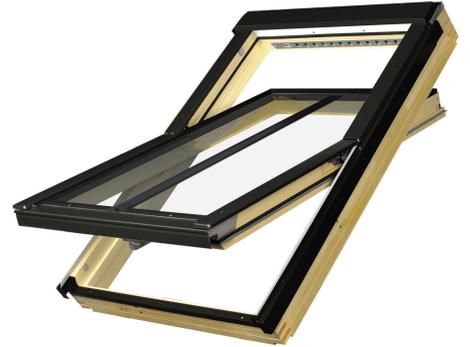

FPW-V preSelect

- V40P** automatic air V40P
- P2** P2 - Energy saving double glazed unit. Toughened outer pane. U-value of window 1.3W/m²K
- P5** P5 - Energy saving triple. U-value of 0.97 W/m²K
-  High quality close-grain vacuum - impregnated redwood pine guaranteed to be knot-free

Our website and mobile app use cookies to provide content and functionalities that the Users find interesting. In addition, we use cookies for analytical and advertising purposes. You can change it in your browser settings or using the button.

FPW-V P2 preSelect Cookie settings I accept cookies ✓

1.3 W/m ² K window U-value
1.0 W/m ² K glazing U-value
35dB acoustic insulation Rw
4H-Tg15Ar-33.2T glazing unit
argon inert gas filled panes
+ external glass toughened
V40P air inlet type
up to 49m ³ /h air inlet air flow
twice varnishing
four seals
+ multi-point opening
Elegant handle

Our websites and mobile apps use cookies to provide content and functionalities that the Users find interesting. In addition, we use cookies for analytical and advertising purposes. You can change it in your browser settings or using the button.

[Cookie settings](#)

[I accept cookies](#)