



advant
ENGINEERS

**YEW TREE ROAD
BIRCHENCLIFFE
HUDDERSFIELD
HD2 2FY**

**SUDS DRAINAGE OPERATION &
MAINTENANCE STRATEGY**

DOCUMENT No:
22046-DSR-002-B

22nd November 2024

Issue Sheet.

Prepared	Date		Checked	Date
MJM	08.08.24		MJM	08.08.24

Revisions	Comment	Date
A	Initial Issue	08.08.24
B	Updated to LLFA comments	22.11.24

The report is based on the information that has been acquired and / or made available to Advant Engineers via the various searches and consultations undertaken as part of the Drainage Strategy. In some cases, anecdotal information has been relied upon, where documented evidence has been lacking.

The conclusions drawn in the above report are considered correct although any subsequent additional information may allow refinement of the conclusions.

All work carried out in preparing this report has utilised and is based upon Advant Engineers current professional knowledge and understanding of current UK standards and codes, technology and legislation. Changes in this legislation and guidance may occur at any time in the future and cause any conclusions to become inappropriate or incorrect.

This report has been prepared using information contained in maps and documents prepared by others. Advant Engineers can accept no responsibility for the accuracy of such information.

Table of Contents

Table of Contents.....	3
1. Introduction.....	4
2. SUDS Drainage Layout	4
3. SUDS Operations and Maintenance	5
4. Post Adoption SUDS Operations and Maintenance	6
APPENDIX A Drainage Layout.....	7
APPENDIX B Hydrobrake Details.....	8
APPENDIX C Carlow Concrete Details.....	9

1. Introduction

- 1.1. Advant Engineers Ltd has been commissioned by North Park Homes to undertake the drainage design at the scheme off Yew Tree Road in Birchendcliffe.
- 1.2. This report is to outline the SUDS drainage operations and maintenance strategy, this will determine the different SUDS features on the site, the necessary maintenance of the SUDS features and the frequency in which they should be inspected.
- 1.3. This report should be read in conjunction with drawings 22046-113 & 22046-115 and associated architectural and engineering drawings. (See Appendix A)

2. SUDS Drainage Layout

- 2.1. Surface water from the roofs will be collect by means of guttering and rainwater down pipes, and runoff from the driveways will be collected via linear drainage such as and ACO drain, these will then be connected directly into the adopted surface water system.
- 2.2. The surface water drainage for the site consists below ground pipes and chambers that discharge to the public sewer, the attenuation on site is provided within a concrete tank and the flow is restricted by a Vortex Flow Control, specifically a Hydro Brake Unit by Hydro International. (See Drawing 22046-113 for drainage layout plan.
- 2.3. The tank on site has been sized to accommodate the 1 in 100 year + 40% climate change rainfall event, and it has been located under a shared private drive, it has been located here to prevent a large structure being located under the Kirklees adopted highway.
- 2.4. Details of the tank can be found in Appendix C and show the inspection and entry points on either end of the tank.

3. SUDS Operations and Maintenance

- 3.1. Responsibility of the adopted drainage system, flow control and attenuation tank will be with Yorkshire Water post adoption, however during construction and up to the point of adoption the developer will be responsible for the operation and maintenance of the drainage system and its various SUDS elements.
- 3.2. The convention drainage system, consisting of standard manholes and pipework, are maintained by sub-contractors using specialist machinery to clear gullies, pipework and storage zones of rubbish and sediment. The frequency of this task is determined by the need, this can be identified by a reduced flow through the pipework, water surcharging or the visible sight of sediment or buildup in the manholes.
- 3.3. Across the adoptable drainage system corrective maintenance should be undertaken on an ad hoc basis defendant on need, these task should include:
- Repair to access chambers / manhole covers
 - Jetting and clearing of blockages
 - Repair any broken pipes, manhole sections, step irons
- 3.4. Beyond the convention drainage manholes and pipework, the adoptable system also has a Flow Control manhole and a concrete attenuation tank that requires routine inspection and maintenance as outlined below.

FLOW CONTROL MANHOLE – HYDROBRAKE UNIT

- 3.5. Inspect the sump on an annual basis and clear out the sump using a Jetvac
- 3.6. Gaskets and seals on the unit have a design life exceeding the drainage design life and should not need replacing unless the unit is removed, if the unit is removed then new neoprene seals should be installed.
- 3.7. The above is scheduled maintenance, additional inspections and cleaning of the hydrobrake chamber should be undertaken in the event of a failure or after every extreme flood event.
- 3.8. See Appendix B for the Hydrobrake technical data and company brochure.

CONCRETE ATTENUATION TANK – CARLOW CONCRETE

- 3.9. Annual inspection of the tank and jetting out of the tank to clear through any sediment or debris.

- 3.10. The above is scheduled maintenance, additional inspections and cleaning of the tank should be undertaken in the event of a failure or after every extreme flood event.

- 3.11. See Appendix C for the Tank technical data and company brochure.

4. Post Adoption SUDS Operations and Maintenance

- 4.1. The above operation and maintenance requirements are a minimum guidance and as it is noted above both of these SUDS features are to be adopted by Yorkshire Water who will have their own maintenance schedule that we have faith will be concise and robust to maintain their own assets.

- 4.2. In addition, it is expected that Yorkshire Water will have a standard set of Risk Assessments and Health & Safety guidance on the maintenance of all of their drainage assets to ensure a safe working environment for their employees when undertaking such tasks.

- 4.3. In the event of a blockage or asset failure then Yorkshire Water should be contacted who will then be responsible for the timely repair of the failure and reinstating the asset to its working status.

APPENDIX A
Drainage Layout

YW REF NO:
H-3-264-976


YW NOTES:

- ALL ADOPTABLE SEWER WORKS AND MATERIAL TO BE IN ACCORDANCE WITH 'CODE FOR ADOPTION'. THE RELEVANT BRITISH/EUROPEAN AND YORKSHIRE WATER'S STANDARDS/REQUIREMENTS/ADDENDUM TO THE MECHANICAL AND ELECTRICAL SPECIFICATION AND KITEMARKED.
- MANHOLE COVERS SHALL HAVE A CLEAR OPENING OF 600mm AND SHALL BE CLASS D400 TO BS EN 124 WITH 150mm DEEP FRAMES IN HIGHWAYS.
- FILLED GROUND MUST BE FILLED AND CONSOLIDATED UNDER THE SUPERVISION AND TO THE SATISFACTION OF YORKSHIRE WATER BEFORE ANY SEWER WORKS ARE CARRIED OUT.
- YORKSHIRE WATER IS NOT OBLIGED TO ACCEPT FILTER DRAIN/LAND DRAINAGE RUN-OFF INTO THE PUBLIC SEWER NETWORK OR ADOPTABLE DRAINAGE SYSTEM (DIRECTLY OR INDIRECTLY). AN ALTERNATIVE METHOD OF DISPOSAL OF THE LAND DRAINAGE RUN-OFF WILL THEREFORE BE REQUIRED AND YOU WILL HAVE TO LIAISE WITH THE LOCAL AUTHORITY, LAND DRAINAGE SECTION REGARDING THE DISPOSAL OF THE FILTER/LAND DRAINAGE RUN-OFF.
- THE ADOPTABLE SEWERS SHOULD BE A MINIMUM OF 1.0m AND MANHOLES 0.5m FROM KERB FACES AND SERVICE MARGINS.
- SEWERS MUST HAVE A 5.0m CLEARANCE FROM TREES AND HEDGES OR THE WIDTH OF THE CANOPY AT MATURE HEIGHT.
- SEWERS TO BE LAID IN CLASS 'S' BEDDING (150mm GRANULAR BED AND SURROUND), WHERE DEPTH OF COVER TO TOP OF THE SEWER IS LESS THAN 1.2m IN HIGHWAYS AND VERGES (OR LESS THAN 0.9m IN NON VEHICULAR ACCESS AREAS) THEN A CONCRETE SLAB SHOULD BE PROVIDED ABOVE GRANULAR BED AND SURROUND.
- BEDDING AND BACKFILL MATERIAL TO CONFORM TO THE REQUIREMENT OF WATER INDUSTRY SPECIFICATION 4-08-02 (TABLE A2).
- YORKSHIRE WATER POLICY IS THAT TYPE 'C' BRICK MANHOLES AND 1050mm DIAMETER MANHOLES RINGS ARE NOT PREFERRED. INSTEAD, IT IS PREFERRED THAT YOU USE A TYPE 'B' MANHOLE WITH 1200mm DIAMETER OR 1500mm DIAMETER RINGS, WITH THE OPENING SITED OVER THE CHANNEL WHERE THE DEPTH OF COVER TO THE PIPE IS 1.0m - 1.5m.
- ADOPTABLE PLASTIC SEWER PIPES TO BE BSI KITEMARKED (CERTIFIED TO WIS 4-35-01 AND BS EN 13476). ADOPTABLE PLASTIC SEWER PIPES TO BE LAID IN MAXIMUM 3 METRE LENGTHS UNLESS THERE IS A SPECIFIC OPERATIONAL NEED TO LAY LONGER LENGTHS. PLASTIC CHANNEL SECTIONS IN MANHOLES ARE NOT ACCEPTABLE AND YORKSHIRE WATER WOULD REQUIRE CLAYWARE CHANNELS IN MANHOLES.
- THE MINIMUM CRUSHING STRENGTH FOR CLAY PIPES SHOULD BE AS FOLLOWS: 100mm DIA 40kN/M, 150mm DIA 40kN/M, 225mm DIA 45kN/M, 300mm DIA 72kN/M. THE MINIMUM CRUSHING STRENGTH FOR CONCRETE PIPES SHOULD BE - (CLASS 120 TO EN 1916 / BS 5911-1 2002), PLASTIC PIPES SHOULD CONFORM TO WIS 4-35-01 AND BS EN 13476.
- WHERE A B125 COVER AND FRAME HAS BEEN APPROVED, THIS MUST NOT BE COATED IN PLASTIC AND MUST HAVE LIFTING EYES SUITABLY SIZED TO ACCOMMODATE STANDARD LIFTING KEYS. SCREW DOWN COVERS ARE NOT ACCEPTABLE.
- THERE MUST BE ENOUGH CLEARANCE AT CROSSOVERS TO ACCOMMODATE BEDDING TO BOTH PIPES, APPROX. 300mm - IF CROSSOVER IS NEAR THE ROCKER THEN THE CLEARANCE NEEDED MAY NEED TO BE INCREASED.

PHASE: 0							
MH No.	MANHOLE DIAMETER (mm)	MANHOLE TYPE	COVER LEVEL (m)	INVERT LEVEL (m)	DEPTH TO SOFFIT (m)	EASTING (m)	NORTHING (m)
EXMH	-	-	168.850	167.300	1.400	412010.904	418916.266
PS1	450	Type E	179.600	178.300	1.100	411912.360	419004.388
PS2	450	Type E	179.100	178.200	0.750	411924.962	419004.851
PS3	450	Type E	179.700	178.450	1.100	411943.641	419033.876
PS4	900	Type D	178.379	175.800	2.429	411941.763	418990.951
PS5	900	Type D	178.000	174.875	2.975	411956.680	418996.139
PS6	900	Type D	177.320	174.750	2.420	411966.799	418996.858
PS7	450	Type E	176.200	175.000	1.050	412007.457	419013.613
PS8	900	Type D	175.750	173.150	2.150	411993.491	418981.483
S1	1200	Type B	179.372	177.400	1.672	411922.478	418993.525
S2	1350	Type C	179.419	178.000	1.269	411948.915	419032.394
S3	1350	Type C	179.025	177.350	1.375	411944.734	419017.516
S4	1500	Type B	178.372	175.300	2.772	411942.705	418995.628
S5	1200	Type A	177.681	174.200	3.181	411956.262	418992.898
S6	1200	Type A	177.460	174.125	3.035	411960.461	418991.822
S7	1350	Type B	177.173	173.900	2.823	411966.343	418991.437
S8	1200	Type B	176.200	173.700	0.400	412011.553	419020.025
S9	1200	Type B	177.370	173.650	3.270	411991.640	419022.841
S10	1500	Type A	177.492	173.600	3.442	411982.614	419023.341
S11	1800	Type B	176.486	173.500	2.536	411980.222	418990.293
S12	-	-	-	-	-	411994.098	418989.084
S13	1200	Type B	174.600	172.500	1.950	412016.434	418994.669
S14	1200	Type C	173.145	171.800	1.194	412021.457	418998.710
S15	1200	Type B	179.659	178.000	1.509	411920.979	419004.344
S16	1350	Type C	171.517	170.100	1.267	412019.407	418948.556
F1	1200	Type B	178.351	176.557	1.644	411944.664	418998.083
F2	1350	Type C	177.595	176.000	1.445	411959.128	418994.218
F3	1200	Type B	177.099	175.000	1.949	411969.072	418993.323
F4	1350	Type C	175.865	174.350	1.365	411994.073	418991.371
F5	1200	Type B	174.600	172.100	2.350	412016.813	418986.588
F6	1350	Type C	173.220	171.600	1.470	412022.321	418970.511
F7	1350	Type C	171.659	170.309	1.200	412020.687	418949.607
F8	1350	Type C	169.300	167.950	1.200	412013.898	418923.206
PF1	900	Type D	179.000	177.550	2.150	411937.148	419004.480
PF2	450	Type D	178.270	177.300	0.820	411944.145	418990.520
PF3	900	Type D	177.213	175.330	1.733	411969.349	418996.623
PF4	450	Type E	177.078	175.300	1.628	411968.463	418996.071
PF5	900	Type D	174.700	172.940	2.350	412012.253	418983.474
PF6	900	Type D	175.200	173.500	1.570	412016.214	418993.106

NOTES:

- THIS DRAWING IS PRODUCED FOR USE IN THIS PROJECT ONLY AND MAY NOT BE USED FOR ANY OTHER PURPOSE. THE CONSULTING ENGINEERS ACCEPT NO LIABILITY FOR THE USE OF THIS DRAWING OTHER THAN THE PURPOSE FOR WHICH IT WAS INTENDED IN CONNECTION WITH THIS PROJECT AS RECORDED ON THE TITLE BLOCK FIELDS 'PURPOSE FOR ISSUE' AND 'FILE STATUS CODE'.
- THIS DRAWING MAY NOT BE REPRODUCED IN ANY FORM WITHOUT PRIOR WRITTEN AGREEMENT FROM ADVANT ENGINEERS.
- DO NOT SCALE FROM THE DRAWING. USE WRITTEN DIMENSIONS ONLY.
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED.
- DISCREPANCIES MUST BE REPORTED BACK TO THE ENGINEER PRIOR TO CONSTRUCTION.
- THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL RELEVANT ADVANT ENGINEERS DRAWINGS AND SPECIFICATIONS.

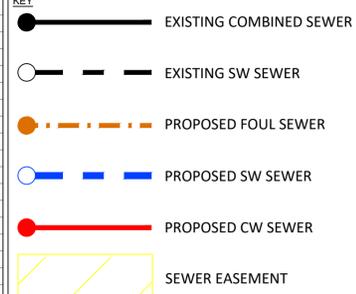

REV	DESCRIPTION	BY	DATE
K	UPDATED TO YW COMMENTS	MJM	08.11.24
J	UPDATED TO YW COMMENTS	MJM	19.10.24
I	UPDATED TO YW COMMENTS	MJM	30.09.24
H	UPDATED TO YW COMMENTS	MJM	12.09.24
G	UPDATED TO YW COMMENTS	MJM	24.07.24
F	DRAINAGE UPDATED	MJM	25.05.24
E	DRAINAGE UPDATED	MJM	17.04.24
D	DRAINAGE UPDATED	MJM	05.04.24
C	DRAINAGE UPDATED	MJM	01.03.24
B	DRAINAGE UPDATED	MJM	24.07.23
A	INITIAL ISSUE	MJM	13.06.23
REV	AMENDMENTS	BY	DATE

FOR APPROVAL

STATUS	CHK'D
PRELIMINARY	MJM
FOR COMMENT	MJM
FOR APPROVAL	MJM
FOR CONSTRUCTION	
AS BUILT	



Building 3 Leeds City West Business Park,
Geldard Road, Leeds, LS12 6LN
0113 873 0607
leeds@advantengineers.co.uk

CLIENT
NORTH PARK HOMES LTD


CONTRACT
YEW TREE ROAD BIRCHENCLIFFE HUDDERSFIELD

TITLE
S104 DRAINAGE LAYOUT PLAN

DRAWN	MJM	CHK'D	MJM
SCALE	1:250 @ A1	DATE	13.06.23

JOB No	DRG No	REV
22046	113	K

EXISTING MANHOLE WILL BE NEED TO BE INSPECTED BY A YORKSHIRE WATER INSPECTOR TO ENSURE IT CAN ACCOMMODATE THE PROOSED CONNECTION AND TO CHECK IF ANY REMEDIAL WORKS ARE REQUIRED

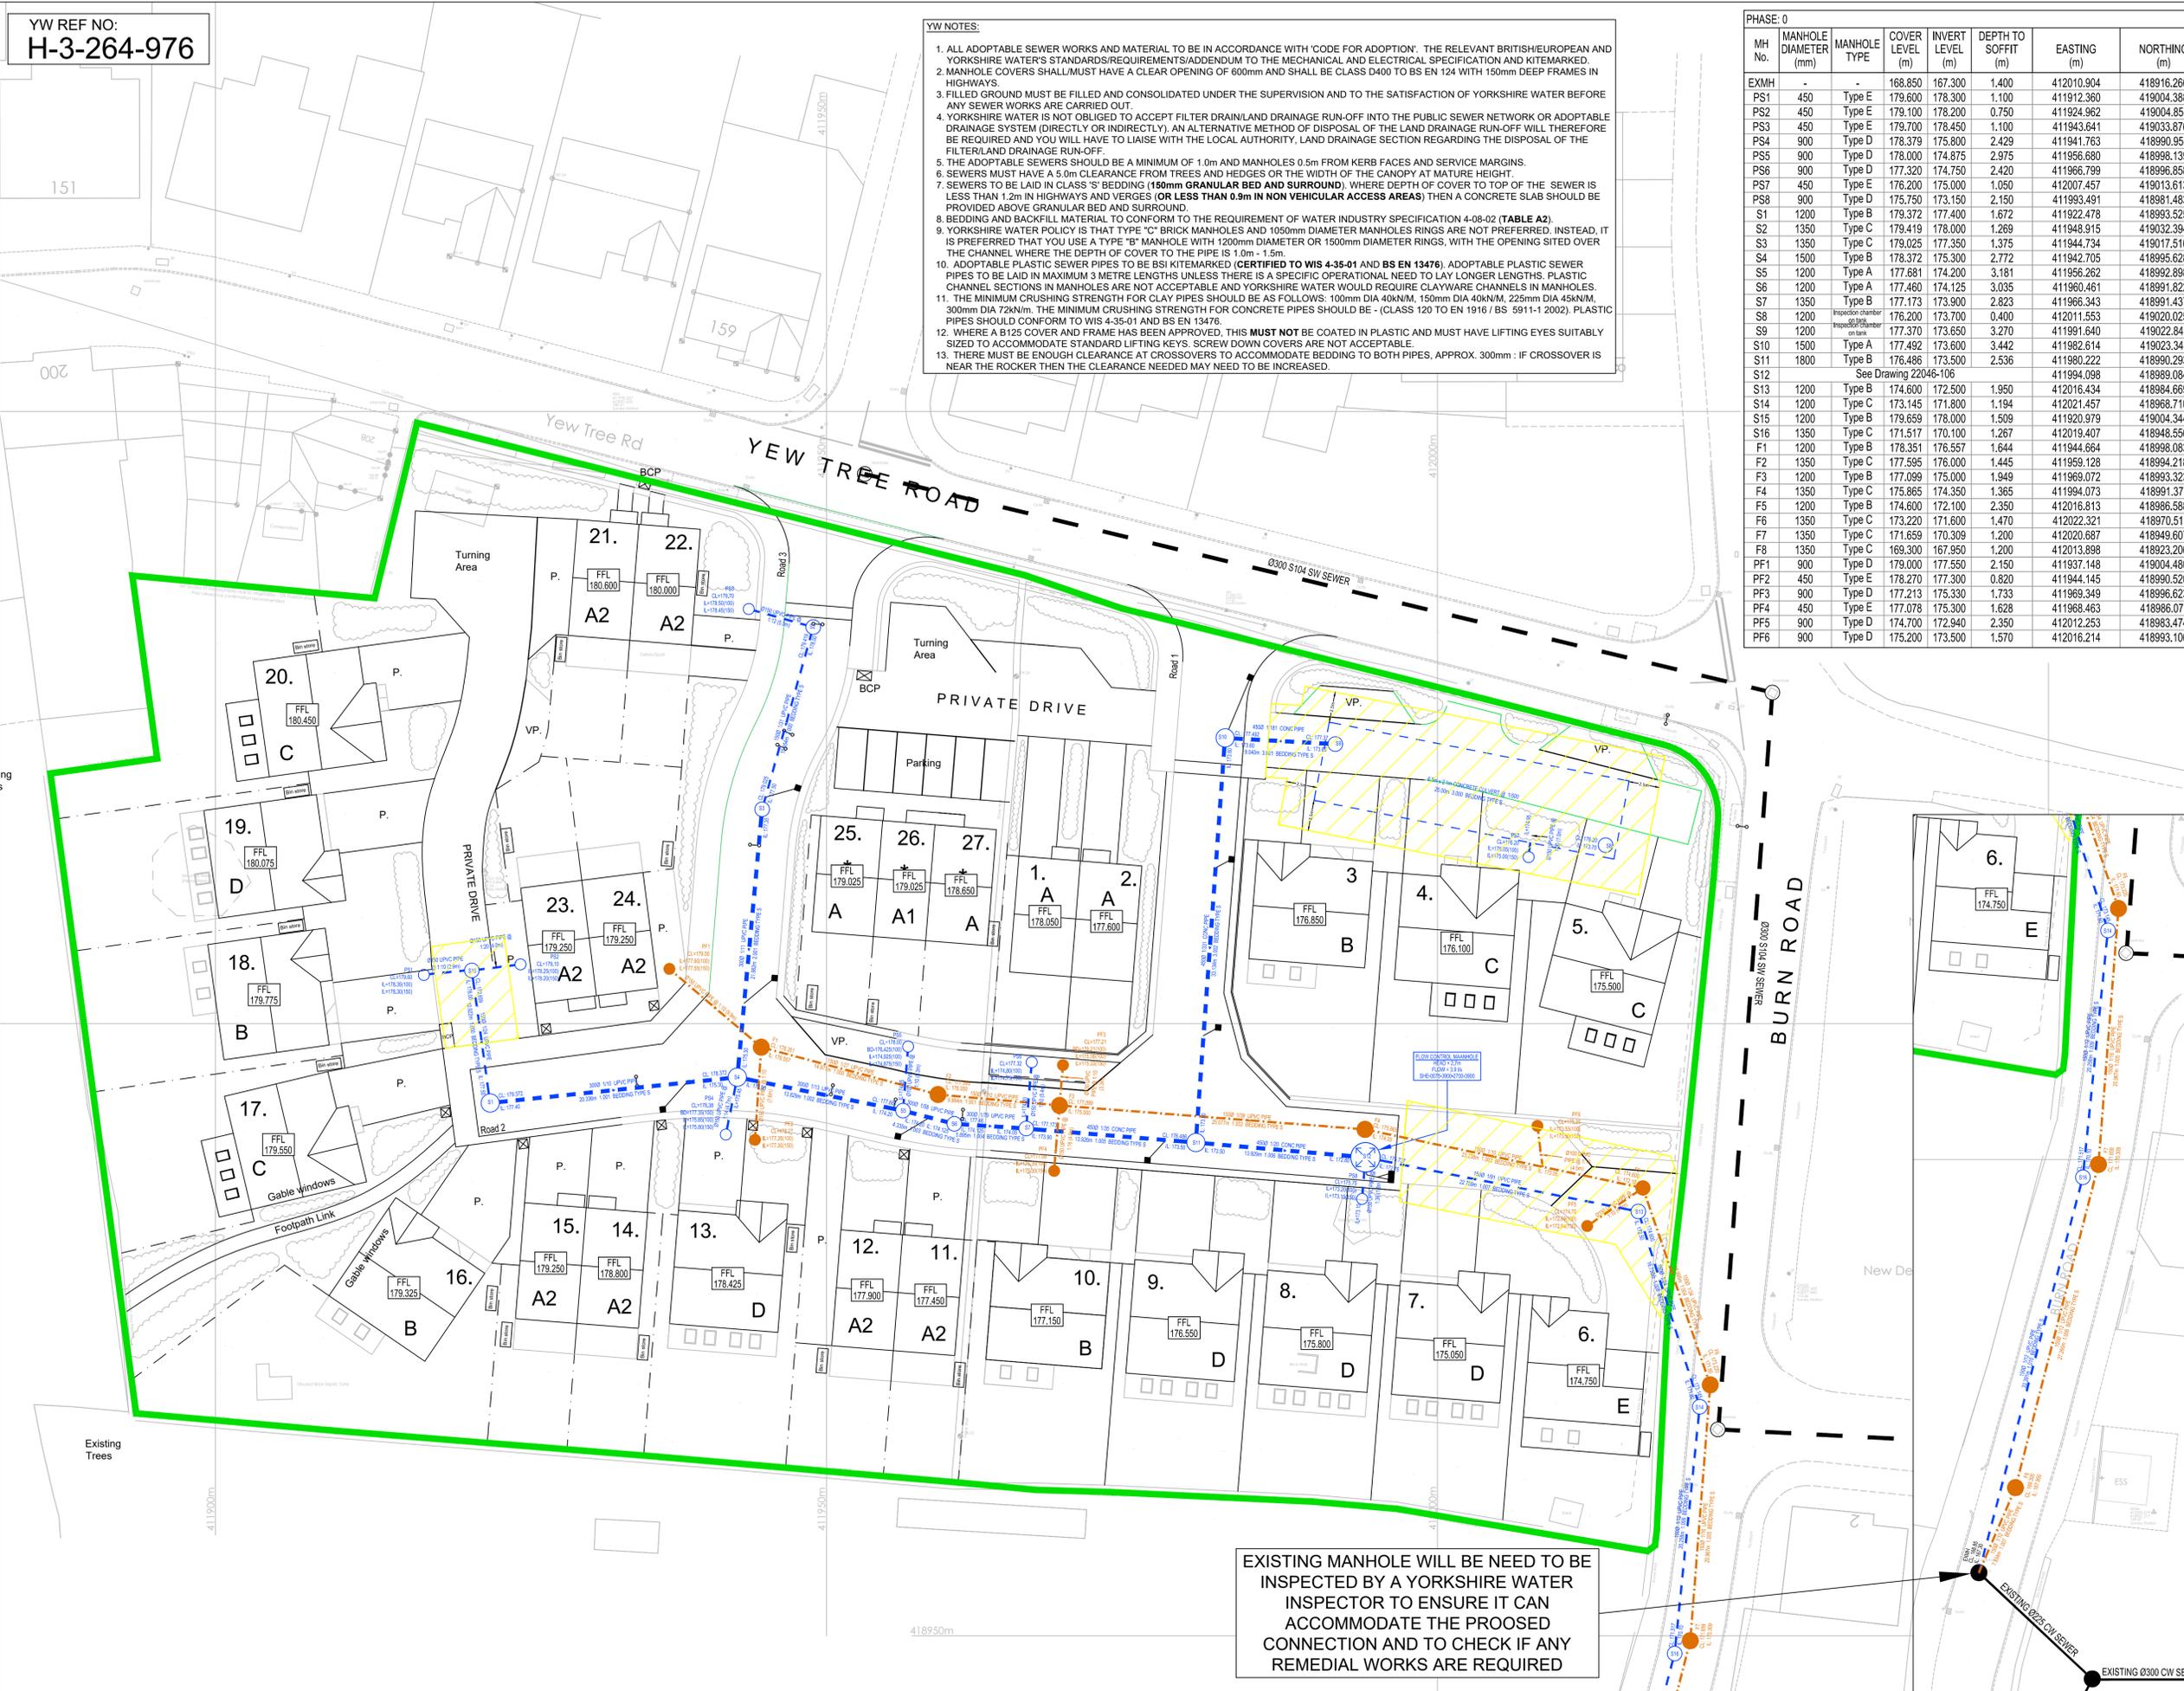

APPENDIX B
Hydrobrake Details

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	2.700	3.900
Flush-Flo™	0.323	2.563
Kick-Flo®	0.669	2.051
Mean Flow		2.866

Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Variable flow rate post installation via adjustable inlet
- Indicative Weight: 10 kg



hydro-int.com/patents

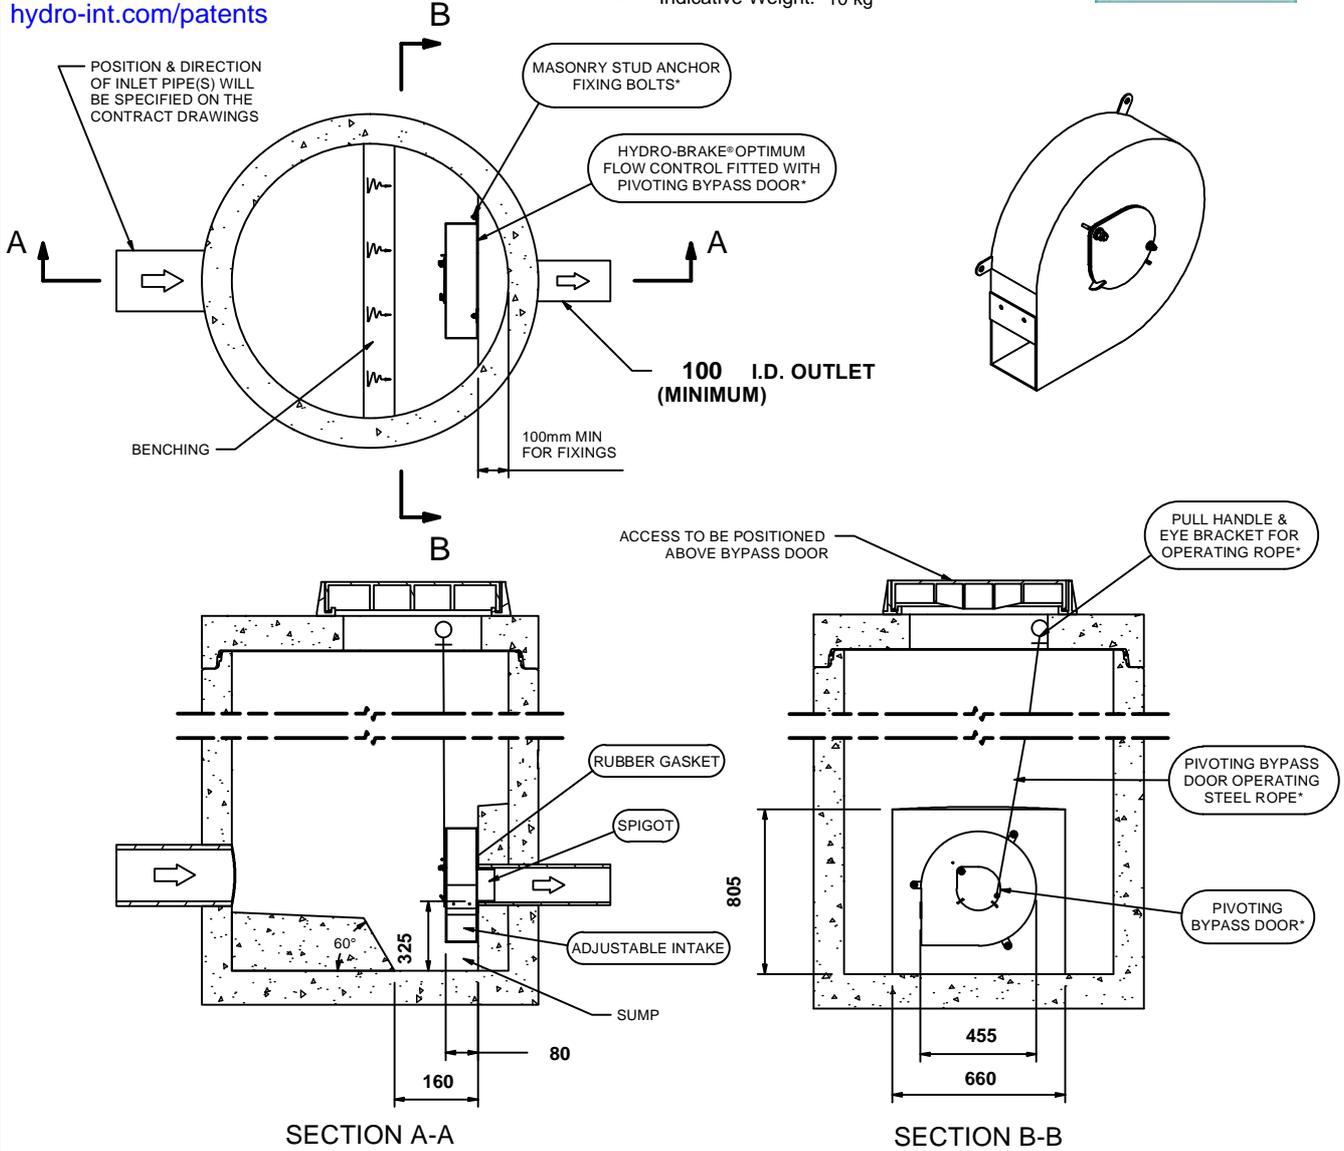

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.


DESIGN ADVICE 	The head/flow characteristics of this SHE-0075-3900-2700-3900 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve. The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.			
	DATE	30/09/2024 15:21		SHE-0075-3900-2700-3900 Hydro-Brake® Optimum
	SITE	Yew Tree Road, Birchencliffe		
	DESIGNER	Michael Micklethwaite		
REF	22046			

Technical Specification

Control Point	Original Setting		Minimum Setting		Maximum Setting	
	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)
Primary Design	2.700	3.900	2.700	3.504	2.700	4.224
Flush-Flo™	0.323	2.563	0.400	2.111	0.303	2.914
Kick-Flo®	0.669	2.051	0.671	1.841	0.670	2.239
Mean Flow		2.866		2.540		3.137



hydro-int.com/patents

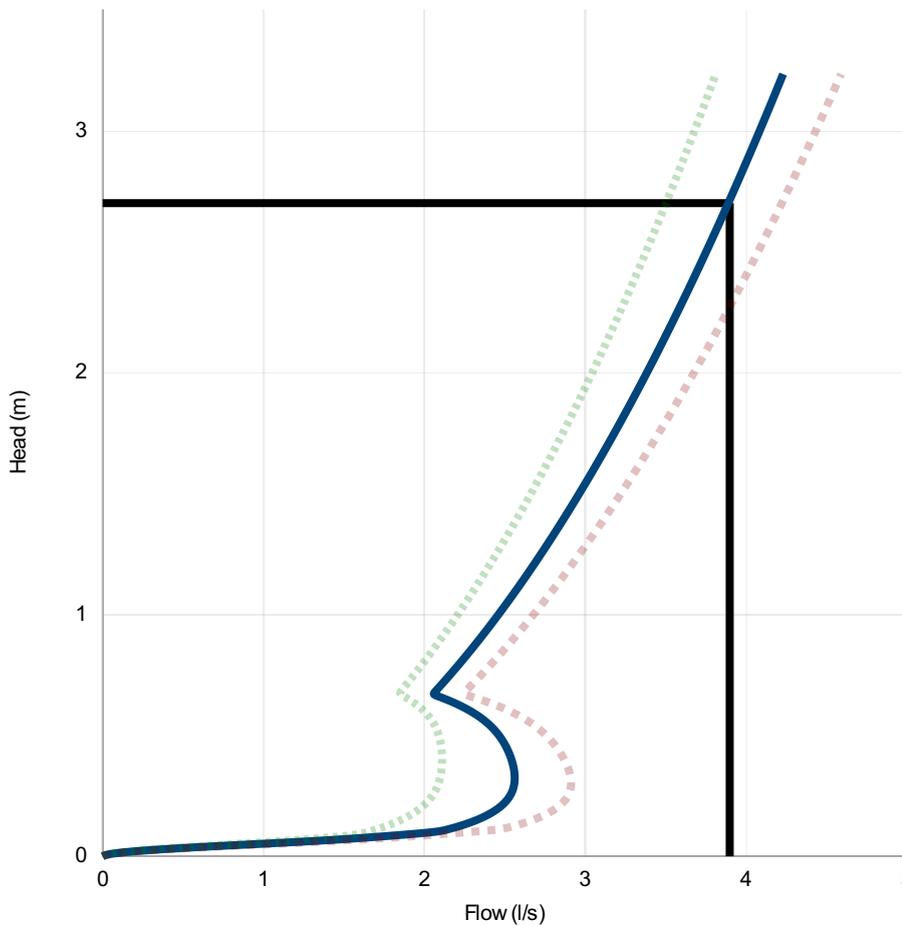

Head (m)	Flow (l/s)
0.000	0.000
0.093	1.945
0.186	2.434
0.279	2.553
0.372	2.554
0.466	2.499
0.559	2.379
0.652	2.124
0.745	2.154
0.838	2.272
0.931	2.383
1.024	2.489
1.117	2.590
1.210	2.687
1.303	2.779
1.397	2.869
1.490	2.955
1.583	3.039
1.676	3.120
1.769	3.199
1.862	3.275
1.955	3.350
2.048	3.423
2.141	3.494
2.234	3.564
2.328	3.632
2.421	3.698
2.514	3.764
2.607	3.828
2.700	3.891

DESIGN ADVICE

The head/flow characteristics of this SHE-0075-3900-2700-3900 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.



The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.




DATE	30/09/2024 15:21
Site	Yew Tree Road, Birchencliffe
DESIGNER	Michael Micklethwaite
Ref	22046

 SHE-0075-3900-2700-3900 Hydro-Brake® Optimum
--



The Hydro-Brake[®] Flow Control Series

Hydro-Brake[®]
Flood

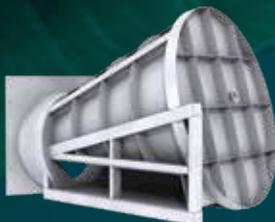

Hydro-Brake[®]
Optimum



Hydro-Brake[®]
Agile




Hydro-Brake[®]
Orifice



The element of control


Turning Water Around[®]

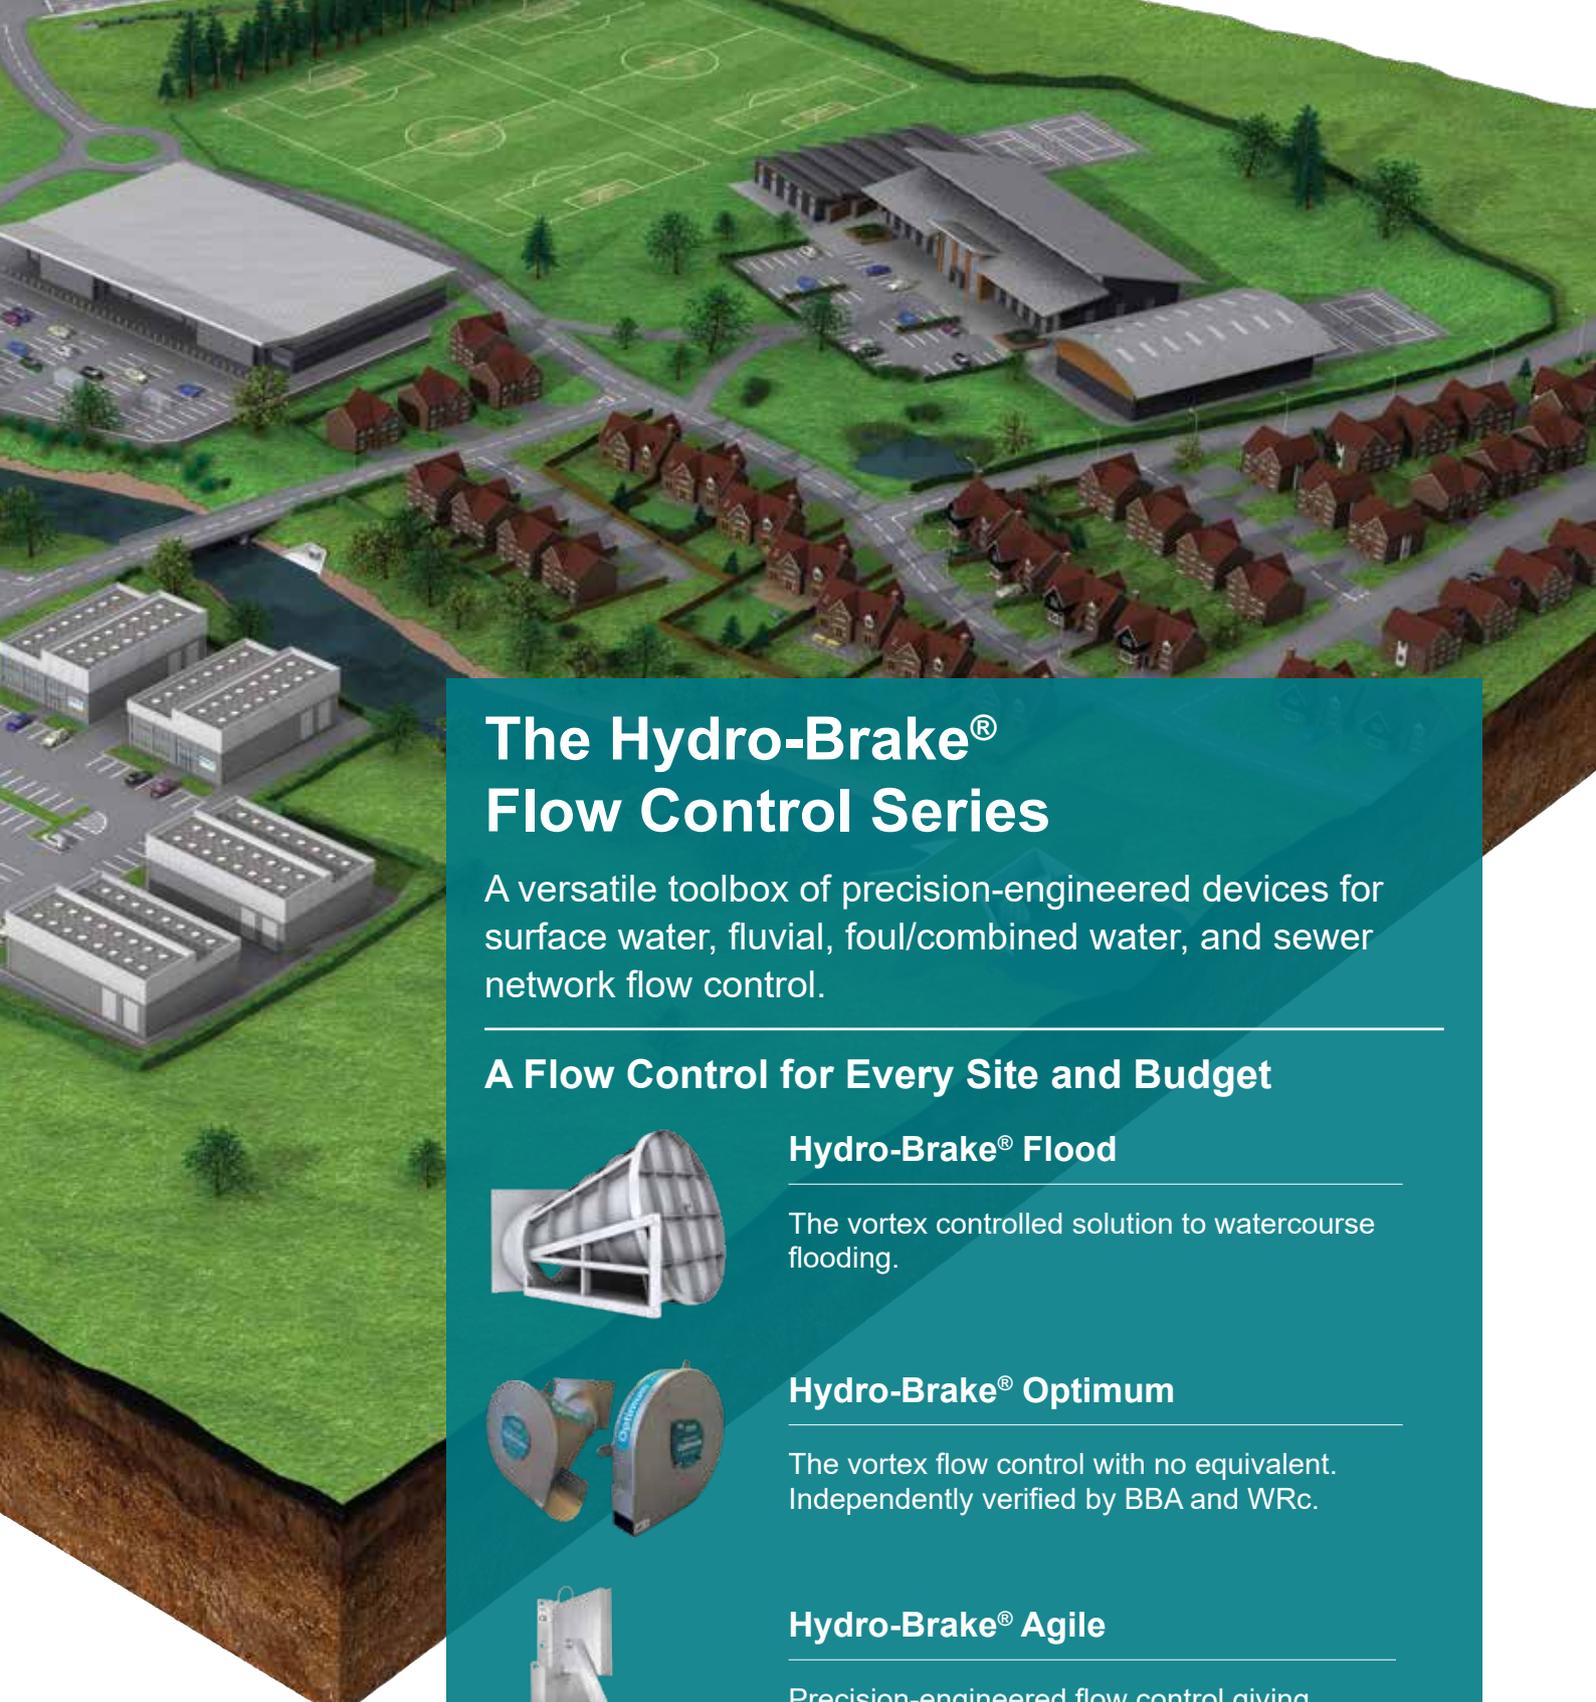

The Hydro-Brake® Flow Control Series

A versatile toolbox of precision-engineered devices for surface water, fluvial, foul/combined water, and sewer network flow control.

A Flow Control for Every Site and Budget



Hydro-Brake® Flood

The vortex controlled solution to watercourse flooding.



Hydro-Brake® Optimum

The vortex flow control with no equivalent. Independently verified by BBA and WRc.




Hydro-Brake® Agile

Precision-engineered flow control giving reduced on-site storage for highly constrained applications.



Hydro-Brake® Orifice

The low cost option for unconstrained sites.

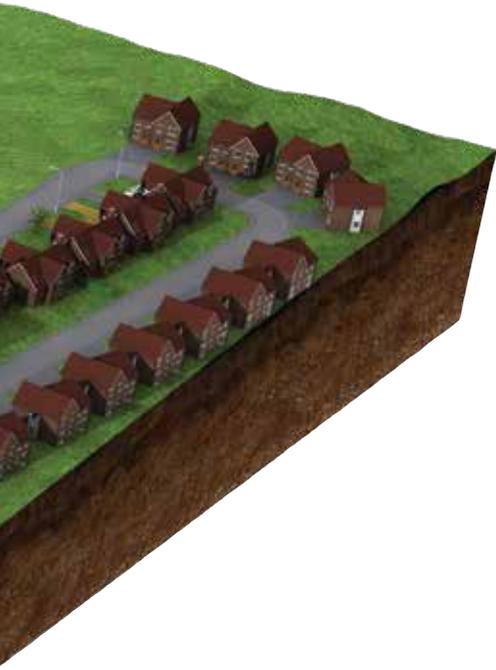

The Element of Control

Hydro International has set the highest standards in flow control technology during more than 40 years of specialist water engineering. When it comes to understanding, predicting and controlling the flow of water, Hydro works with scientific rigour.

Our customers are constantly challenged to deliver imaginative solutions, despite tough commercial and physical constraints. Committed to precision in product development and manufacture, we partner with you to engineer the best-possible water management solutions.

Hydro International's unrivalled knowledge and outstanding technical design support give our customers complete reassurance of system performance and value.

We give you the element of control.

Precision-Engineered for Reliable, Repeatable Performance

The Hydro-Brake® Flow Control Series offers a comprehensive choice for sustainable, performance-optimised attenuation and control whatever the project. Fully scalable and adaptable to your site conditions, there is no need to compromise on your project requirements.

All Hydro International flow controls are manufactured to the same exacting standards of quality. Tested, proven and independently accredited by regulatory bodies across the world, they offer the reassurance of reliable, repeatable performance.

Technical Design Support

Faced with increasingly varied environmental and planning stipulations, engineers need to adapt their solutions accordingly and balance flow rates with storage requirements and optimise the drainage system performance over the duration of a storm. In these circumstances, Hydro International's expert design support can advise on the correct flow control selection and design.

A full range of technical services, including detailed hydraulic modelling, easy-to-use design tools and integration into industry-standard software, all help engineers to achieve optimum hydraulic performance.

Buildable, Maintainable, Adoptable

Hydro International flow controls are designed and manufactured for ease of installation and reliable through-life performance with minimum intervention. Simple, predictable, low-maintenance regimes make them straightforward for management organisations to take on, and remove any concerns for adopting authorities.

For peace of mind and to make maintenance easier and more cost effective Hydro-Logic® Smart Maintenance can be added to any of our flow control chambers. This sophisticated sensor and telemetry package enables remote, monitoring of water levels and alerts will be triggered when abnormal water level activity is detected.


Hydro-Brake® Flood

Hydro-Brake® Flood is a highly sustainable, precision-engineered vortex technology for preventing watercourse flooding.

Hydro-Brake® Flood flow controls have been installed at the heart of low-maintenance, self-activating flood defences since the 1990s, and now protect more than 6,000 properties from an estimated £200m of flood damage in pioneering schemes across the UK.



Watercourse
flood prevention

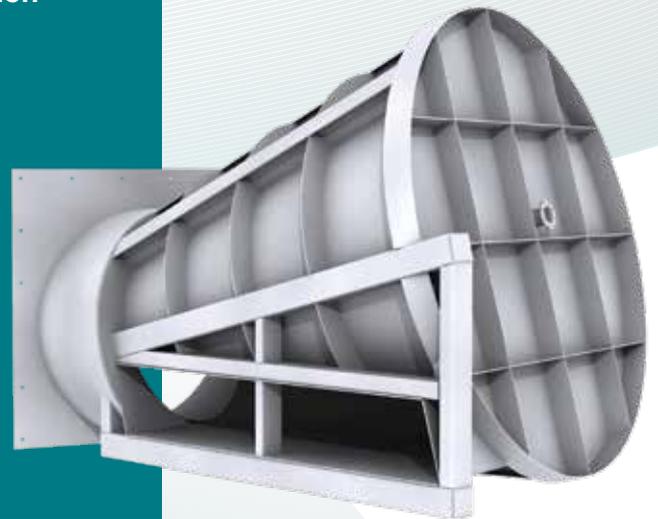

- ✓ No external power.
- ✓ No moving parts.
- ✓ Upstream flood storage minimised.
- ✓ Minimal maintenance.

Bespoke, Precision Engineering

Each Hydro-Brake® Flood is a bespoke solution that precisely manages watercourse flows, right up to major dams with pass forward flow rates of 30 m³/s. The same technology is used just as successfully in smaller, dispersed schemes.

Each Hydro-Brake® Flood scheme is purpose-designed to optimise flow control performance characteristics and precisely calculate the amount of upstream storage required. Using Hydro-Brake® Flood vortex technology can reduce the volume of floodwater to be stored by up to 30% compared to fixed orifice controls.

A Simple, Elegant Solution

The internal geometry of Hydro-Brake® Flood is designed so that water can flow through it without restriction for as long as possible, minimising the upstream storage required. A self-activating vortex is created when the water reaches the pre-determined hydraulic head, holding back excess water, and releasing it at a controlled rate.

Expert Design and Manufacture

Designing fluvial interventions, whether on a large or small scale, requires expert engineering and hydraulic modelling in line with the flood risk management strategy. Hydro International can support with detailed design using Computational Fluid Dynamics and structural design using Finite Element Analysis, scale testing and production of detailed design drawings and specifications.

Hydro-Brake® Flood vortex flow controls are manufactured in high-grade stainless steel to be structurally fit-for-purpose, using modern production and control methods to ensure the design and performance objectives are delivered.

Low Impact, Minimal Maintenance

The Hydro-Brake® Flood has a large open area at all flow rates, resulting in a low risk of blockages. With no power or moving parts, the flow controls require minimal operational attention and maintenance.

Future-Proofed

Hydro-Brake® Flood schemes can be designed to allow for future variances in fluvial flows. A facility for future adjustment to allow for climate change can be incorporated without necessitating new engineering or construction works.

Monitoring

Flood alleviation at the fluvial level can be demonstrated to deliver a level of protection that is worth far more than the project costs. We can offer support and advice on post-installation monitoring of the value of the intervention.

Case Studies



Flood Prevention Scheme Protects 1,750 Properties in Glasgow

Glasgow City Council's £53 m White Cart Water Flood Prevention scheme protects 1,750 properties in the south of the city. Normally a shallow river, White Cart Water is prone to flash flooding. As little as twelve hours of rain can cause water levels to rise by six metres.

New manufacturing and installation techniques were developed as part of the project that saw the world's five largest-ever Hydro-Brake® Flood vortex flow controls installed in 3 dams in the highlands above the city. The final scheme controls flow rates and velocities up to a 1 in 200 year flood event, with a 45% maximum reduction in peak flows, holding back more than 2.5 billion litres of floodwater in upstream storage areas that make best use of the natural environment.



Vortex Technology Protects Northallerton Homes and Businesses

In the North Yorkshire town of Northallerton, a £3.1 million flood alleviation scheme is using Hydro-Brake® Flood technology to protect 170 homes and businesses. Two large Hydro-Brake® Flood vortex flow controls were installed in refurbished culverts on town's outskirts.

They enable excess water to be held back in specially-built flood storage basins. Before the scheme was built, excess floodwaters could overtop the watercourse in the agricultural land on its approach to the culverts sending flows to cause flooding in the east of the town. Hydro International carefully-sized the flow controls to minimise upstream storage requirements.

Hydro-Brake® Flood Selection Criteria

Suitability:	For rivers & watercourses; Flood storage reservoirs		
Flow Range (l/s)	Head Range (m)	Ability to match greenfield discharge rate	On-site water storage requirement
550 – 12,000 *	1.5 – 10 *	n/a	Low
Moving Parts?	External Power?	Risk of blockage?	
No	No	Very low	

* higher flows and heads may be possible (contact Hydro International to discuss)

Hydro-Brake® Optimum

The Hydro-Brake® Optimum is Hydro International's flagship passive flow control device and the most advanced vortex flow control available.

Hydro-Brake® Optimum is the only vortex flow control for which the head and discharge relationship can be fine-tuned to optimise your design. Designers can size a Hydro-Brake® Optimum to achieve the perfect hydraulic performance curve and engineer the best possible passive flow control performance.



Surface water management and SuDS



Combined drainage systems and CSOs



Watercourse flood prevention



Sewer network optimisation



Wastewater treatment plants



- ✓ No external energy source.
- ✓ No moving parts.
- ✓ Future-proof.
- ✓ Large outlet clearances prevent blockages.

There is No Equivalent

Hydro-Brake® Optimum dispenses with the need to choose from a range of sizes and types and instead offers built-in flexibility to size each unit for absolute fit. Each Hydro-Brake® Optimum is individually-sized, so you achieve performance without compromise for every project.

Maximise Storage Savings

The increased hydraulic efficiency of the Hydro-Brake® Optimum means you can reduce on-site storage by up to 15% than if an alternative vortex control is used. With reduced storage, you can lower construction and excavation costs as well as saving project time and overall land-use.

Best Value for Every Project

Selecting the superior performance of Hydro-Brake® Optimum does not mean a higher cost for your project. On the contrary, because your upstream storage can be fine-tuned to achieve the smallest volumes, construction, excavation and material costs are reduced.

Easy to Install

Hydro-Brake® Optimum comes with a range of installation options and accessories to make construction and installation as simple as possible.

Setting the Standard

The Hydro-Brake® Optimum is the culmination of more than 40 years of research and development by Hydro International, and the company continues to take an international lead in vortex technology and expertise. Hydro-Brake® Optimum is the only vortex flow control to be independently certified by BBA and WRc for the control of stormwater or combined flows.



Minimal Maintenance

With up to 20% larger outlet clearances compared to other vortex devices, there is significantly less risk of blockage with a Hydro-Brake® Optimum. With no power source or moving parts, it offers minimal, predictable maintenance.

Future-Proofed

Standard, Hydraulically Efficient, Hydro-Brake® Optimum units are supplied with an adjustable inlet, allowing post-installation flow adjustments without the need to replace the whole device.

Flow Control Chamber

A Hydro-Brake® Optimum flow control can be supplied prefitted in a precast reinforced concrete chamber. Custom options including high level emergency bypass, rodding pipe and removable units are also available.

Case Studies



Tight Fit for New Homes

Engineers challenged to solve a “tight fit” surface water management challenge on a West Yorkshire housing development used the Hydro-Brake® Optimum Design Tool to calculate a solution that optimised the limited pipe storage area. Using conventional flow control devices would have required more back up storage than would fit in the space available, but by using Hydro-Brake® Optimum flood protection measures, challenging discharge limits were met for a 1 in 100 year storm.



‘Optimum’ Savings for Developer with 21st Century Drainage

The first phase of Edinburgh City Council's 21st Century Homes project, the Gracemount development showcases sustainable construction. A major feature of the drainage solution is Hydro International's high performance Hydro-Brake Optimum® to control surface water which saved the developers over 30% in storage construction costs.

Photo courtesy of Edinburgh City Council

Hydro-Brake® Optimum Selection Criteria

Suitability:	Most sites, from very low to very high flow rates		
Flow Range (l/s)	Head Range (m)	Ability to match greenfield discharge rate	On-site water storage requirement
0.7 – 550 *	0.4 – 4.0	Very good	Low
Moving Parts?	External Power?	Risk of blockage?	
No	No	Very low	

* lower flows may be possible (contact Hydro International to discuss)



Explore the Options with our Online Design Tool

Our online design tool is a sizing engine that gives you the flexibility to compare flow control design options, output detailed design drawings and hydraulic data and import the results into commercially-available hydraulic modelling software.

The tool also has the option to design and customise our latest stormwater treatment separator, the Downstream Defender® Select.

hydro-int.design

Hydro-Brake® Agile

The Hydro-Brake® Agile flow control delivers precision engineering with best value for even the most constrained sites.

The Hydro-Brake® Agile flow control is a float-activated flow control that maintains a constant discharge to deliver precise performance over a wide range of heads. It is ideally suited to applications with constrained discharge requirements or where the flood storage area available through attenuation is very limited.



Surface water
management
and SuDS



Watercourse
flood
prevention



- ✓ No external energy source.
- ✓ Rapid drain-down provides resilience to subsequent rainfall events.
- ✓ Future-proof – simple adjustments possible for future changes in operating conditions.
- ✓ Repeatable, predictable maintenance regime.

Meet Stringent Discharge Consents

Designing flood storage, whether above or below ground, is dependent on the rate at which excess water can be controlled and discharged. The Hydro-Brake® Agile flow control is the only flow control design that achieves a constant rate of discharge and therefore the minimum possible upstream storage.

Whether controlling surface water on a housing development, or regulating flows in a wastewater treatment works, investment in a precision-engineered device can result in considerable savings in total project costs.

Sustainable Solution

The Hydro-Brake® Agile flow control provides sustainable control of flood storage without the need for external power sources or control circuits. Simple adjustments can be made to future-proof the device to allow for climate change.

Quality Manufacture

The Hydro-Brake® Agile flow control is precision-engineered using high-grade stainless steel with long-life, durable components and CE marked in accordance with the EU Machinery Directive (2006/42/EC). Manufactured in the UK, the flow control can be transported quickly to site to meet project timescales.

Easy to Install and Maintain

During dry weather periods, and especially during the first flush of a storm, the outlet area is at its largest, reducing the risk of blockages.

In the event of a blockage, an integrated release mechanism can be operated from surface level, enabling the gate to be fully opened and returned to its operating position.

Hydro-Brake® Agile Flow Control Chamber

The Hydro-Brake® Agile flow control can be supplied pre-fitted in a precast reinforced concrete chamber for quick and easy installation on site.

A range of outlet pipe sizes is also available to suit site requirements. Once lifted into position, the connecting pipework can be connected and a cover slab installed. To suit the location and invert required, the chamber depth can be easily varied with concrete rings.

Example Solutions

Constrained Space

For an urban in-fill housing project in a heavily-developed inner city area, the design team were keen to deliver an effective drainage strategy. However, there was limited space available, conflicting demands from new and existing services, and an existing drainage infrastructure with very limited capacity to accept additional flows.

Using a flow control that provided a near-constant discharge rate within the parameters of the available downstream capacity, the surface water was moved off-site as quickly and effectively as possible, enabling the on-site storage to be reduced to a level that could be accommodated in the heavily constrained space available.

Constant Discharge

Providing temporary flood storage through attenuation was the solution to a known surface water flooding problem. A flow control was needed to limit flow to the existing drainage network, with the excess rainwater overflowing into an off-line attenuation tank. Implementation costs had to be kept to an absolute minimum or the project may not have been feasible. In addition, any surcharge to the upstream drainage network would have moved flooding to a different part of the catchment.

A constant discharge flow control was therefore used to pass forward an appropriate amount of flow at all times, minimising pressure on the upstream network and only putting floodwater into the attenuation structure when absolutely necessary.

Hydro-Brake® Agile Selection Criteria

Suitability:	Constrained sites with stringent discharge consents		
Flow Range (l/s)	Head Range (m)	Ability to match greenfield discharge rate	On-site water storage requirement
4.5 – 100	0.4 – 2.4	Good	Very low
Moving Parts?	External Power?	Risk of blockage?	
Yes	No	Not suited to all sites	

Hydro-Brake® Orifice

The Hydro-Brake® Orifice delivers cost-effective, precise, repeatable flow control and is suitable for unconstrained sites with generous discharge consents

The Hydro-Brake® Orifice is a precision-cut orifice plate flow control, available in a broad range of configurations. A low-cost, low-complexity flow control, it is the ideal choice where there is minimal limitation on space available for on-site flood storage and attenuation, or where there are generous discharge consents.




Surface water management and SuDS



Watercourse flood prevention



Sewer network optimisation

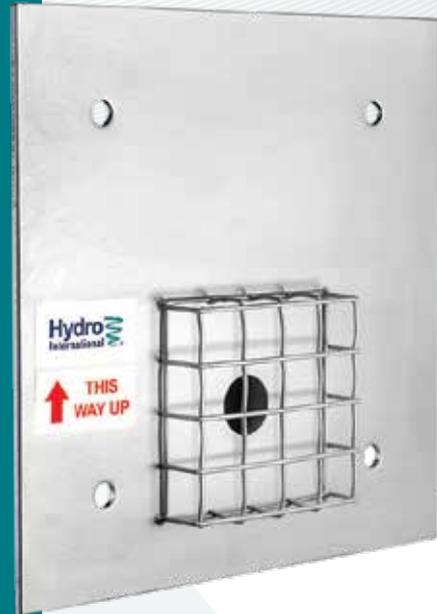

Flexible and Versatile

Already trusted as part of Hydro International's family of precision-engineered flow control devices, the Hydro-Brake® Orifice can be designed and manufactured to meet a wide variety of configurations. With the Hydro-Brake® Orifice there is no need to compromise on your project needs.

Configured for Each Site

Each Hydro-Brake® Orifice is manufactured to suit the precise hydraulic requirements specified for the application. Our experienced professional engineering team will work with you to understand the needs of your site and recommend the best solution.

A wide variety of configurations and mounting options is available, for example integrated mesh guards, curve mount, pipe inserts and slide- or pivot-mounts. Hydro International can advise on sizing and flow rates and recommend the best solution for your site.

Quality Manufacture

The Hydro-Brake® Orifice is manufactured from high-grade stainless steel under strict Quality Assurance to the exacting methods and tolerances set out in the international standard BS EN ISO 5167-2: 2003.

Simple to Install

The Hydro-Brake® Orifice is simple to install. It can also be supplied pre-fitted in a precast reinforced concrete chamber for 'plug-and-play' installation on site.

Resilience by Design

The Hydro-Brake® Orifice can be supplied with integrated protection against the risk of blockages. Alternatively, the Hydro-Brake® Orifice can be mounted on moveable or removable structures to allow for manual intervention to drain the control chamber from surface level and clear any blockages that do occur.

Hydro-Brake® Orifice Selection Criteria

Suitability:	Unconstrained sites with generous discharge consents		
Flow Range (l/s)	Head Range (m)	Ability to match greenfield discharge rate	On-site water storage requirement
2.5 – 100 *	0.25 – 2.0 *	Not suited to all sites	Unconstrained
Moving Parts?	External Power?	Risk of blockage?	
No	No	Not suited to all sites	

* flows and heads may be possible outside of these ranges (contact Hydro International to discuss)

Hydro-Brake® Flow Control Series Selection Guide

The Hydro-Brake® Flow Control Series is a versatile toolbox for surface water, fluvial, foul water, and sewer network flow control. No matter what the site and budget, every flow control offers the same precision-engineered performance.

Features	Hydro-Brake® Flood	Hydro-Brake® Optimum	Hydro-Brake® Agile	Hydro-Brake® Orifice
Suitability	For watercourses; Flood storage reservoirs	Most sites, from very low to very high flow rates	Constrained sites with stringent discharge consents	Unconstrained sites with generous discharge consents
Flow Range (l/s) *	550 – 12,000	0.7 – 550	4.5 – 100	2.5 – 100
Head Range (m) *	1.5 – 10	0.4 – 4.0	0.4 – 2.4	0.25 – 2.0
Ability to Match Greenfield Discharge Rate	n/a	Very good	Good	Not suited to all sites
Moving Parts	No	No	Yes	No
Future Proof	Option that can be designed in	Adjustable inlet fitted as standard on Hydraulically Efficient units	No	No
External Power Requirement	No	No	No	No
Constant Discharge	No	No	Yes	No
On-site Storage	Low	Low	Very low	Unconstrained
Risk of Blockage	Very low	Very low	Not suited to all sites	Not suited to all sites

* flows and heads outside of these ranges may be possible (contact Hydro International to discuss)

Expert Design Support

No matter how big or small the project, Hydro International's professional engineers are on hand to provide free support to designers and specifiers to aid with the correct selection and configuration of Hydro flow controls for each project design.

Our dedicated design support team advises on best-practice sizing, flow and storage calculations for the Hydro-Brake® Flow Control Series within your surface water, fluvial, sewer or wastewater plant design.

Data, Insight and Analysis Services

Our Hydro-Logic® smart monitoring equipment provides a remote data collection capability that delivers real-world climate, water level, water flow and water quality data in near real time.

Documentation

Our dedicated design support team can assist with the output of hydraulic data to support your system design and dimensioned installation drawings, as well as advising on successful integration with other Hydro International water treatment and storage products.

Call the Hydro-Brake® Hotline 01275 337937 or email stormwater@hydro-int.com.

For Flow Control
Product and Design Advice:

Tel: 01275 337937

Email: stormwater@hydro-int.com

Hydro-Brake[®] Flow Control Series

Unit 2
Rivermead Court
Kenn Business Park
Windmill Road
Kenn
Clevedon
BS21 6FT

Tel: **01275 878371**

hydro-int.com

Turning Water Around...[®]

APPENDIX C
Carlow Concrete Details

Drawn By: G.JACOB	Rev.	Date.	Comments.
Chkd By: E.B	0		
Date: 22-11-2024			
Drg No.: STS4219			



DRAWING TITLE: YEW TREE ROAD, BIRCHENCLIFFE
2.1m Dp. MODULAR WATER
RETAINING TANK
PROPOSAL DRAWING

KEY TO PRECAST WALL TYPES					
TYPE	DESCRIPTION	QUANTITY	HEIGHT	WIDTH	WEIGHT
E1	Standard External Wall	22	2.600m	2.100m	2.91T
E2	Corner Wall	4	2.600m	1.775m	2.46T
IN1	Standard Internal Wall	8	2.100m	2.90m	1.74T
D1	Precast Dry Flow Channel	9	N/A	2.50m	0.43T

ESTIMATED INSITU CONCRETE VOLUMES	
In situ Concrete Blinding	17.7m ³
Base Slab	45.4m ³
Roof Screed	23.7m ³
In situ Wall Joints	5.4m ³


KEY TO PRECAST SLABS			
DESCRIPTION	QUANTITY	HEIGHT	TOTAL AREA
Precast Wide Slab	22	0.125m	180.3m ²

ESTIMATED VOLUMES INCLUDE A 5% ALLOWANCE FOR SITE DEVIATION

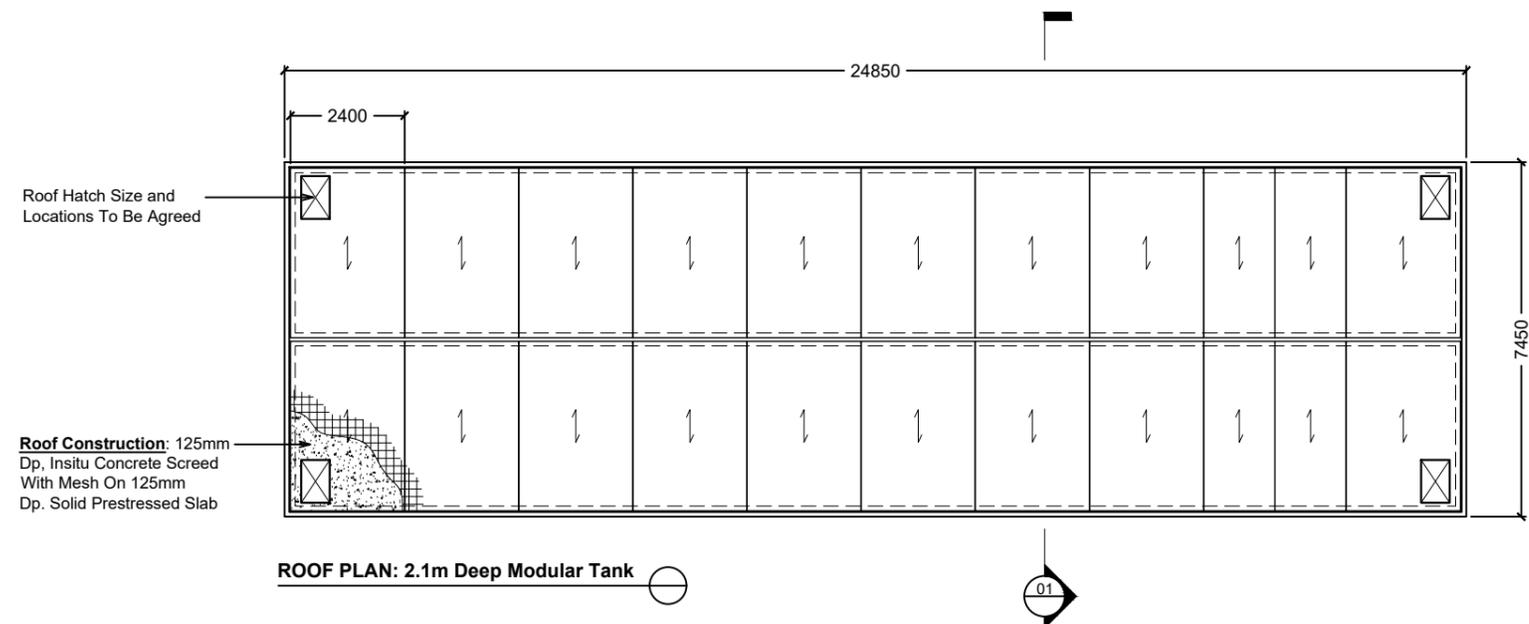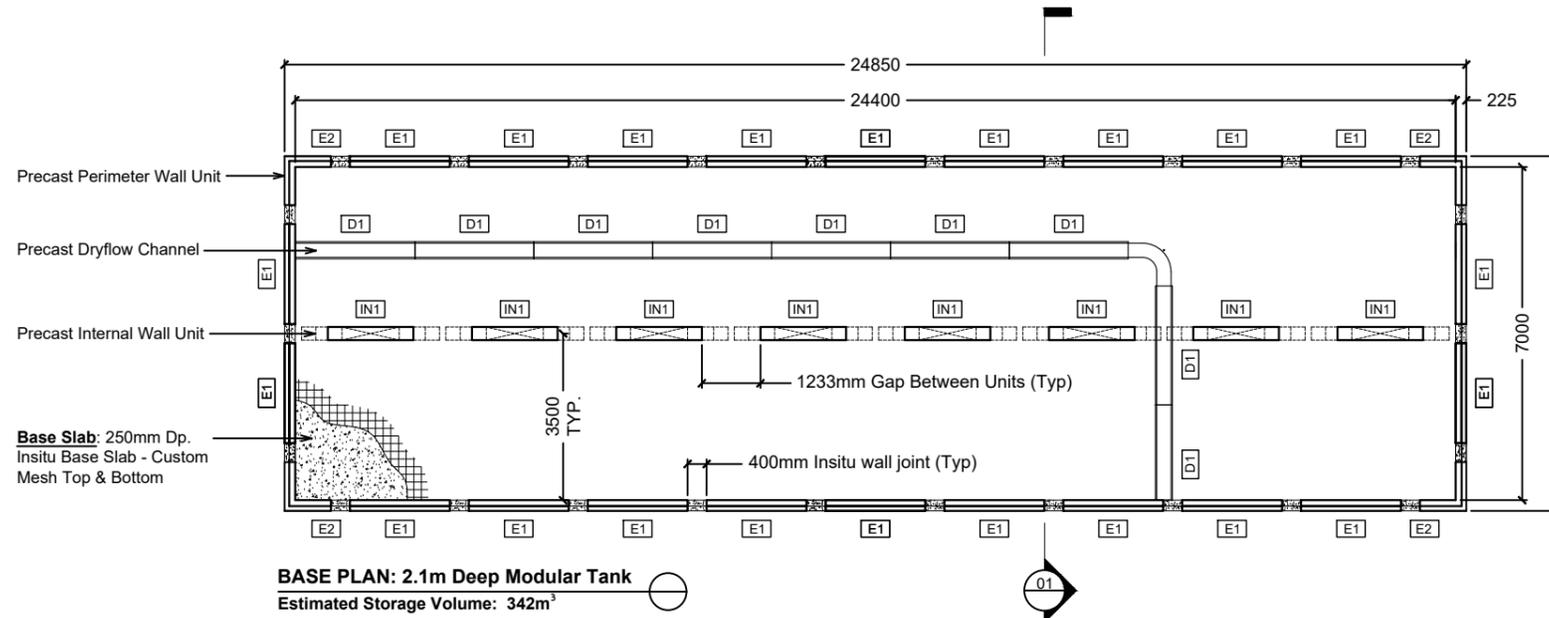


Drawn By:	Rev.	Date.	Comments.
G.JACOB	0		
Chkd By: E.B			
Date: 22-11-2024			
Drg No.: STS4219			


DRAWING TITLE: YEW TREE ROAD, BIRCHENCLIFFE
2.1m Dp. MODULAR WATER
RETAINING TANK
PROPOSAL DRAWING

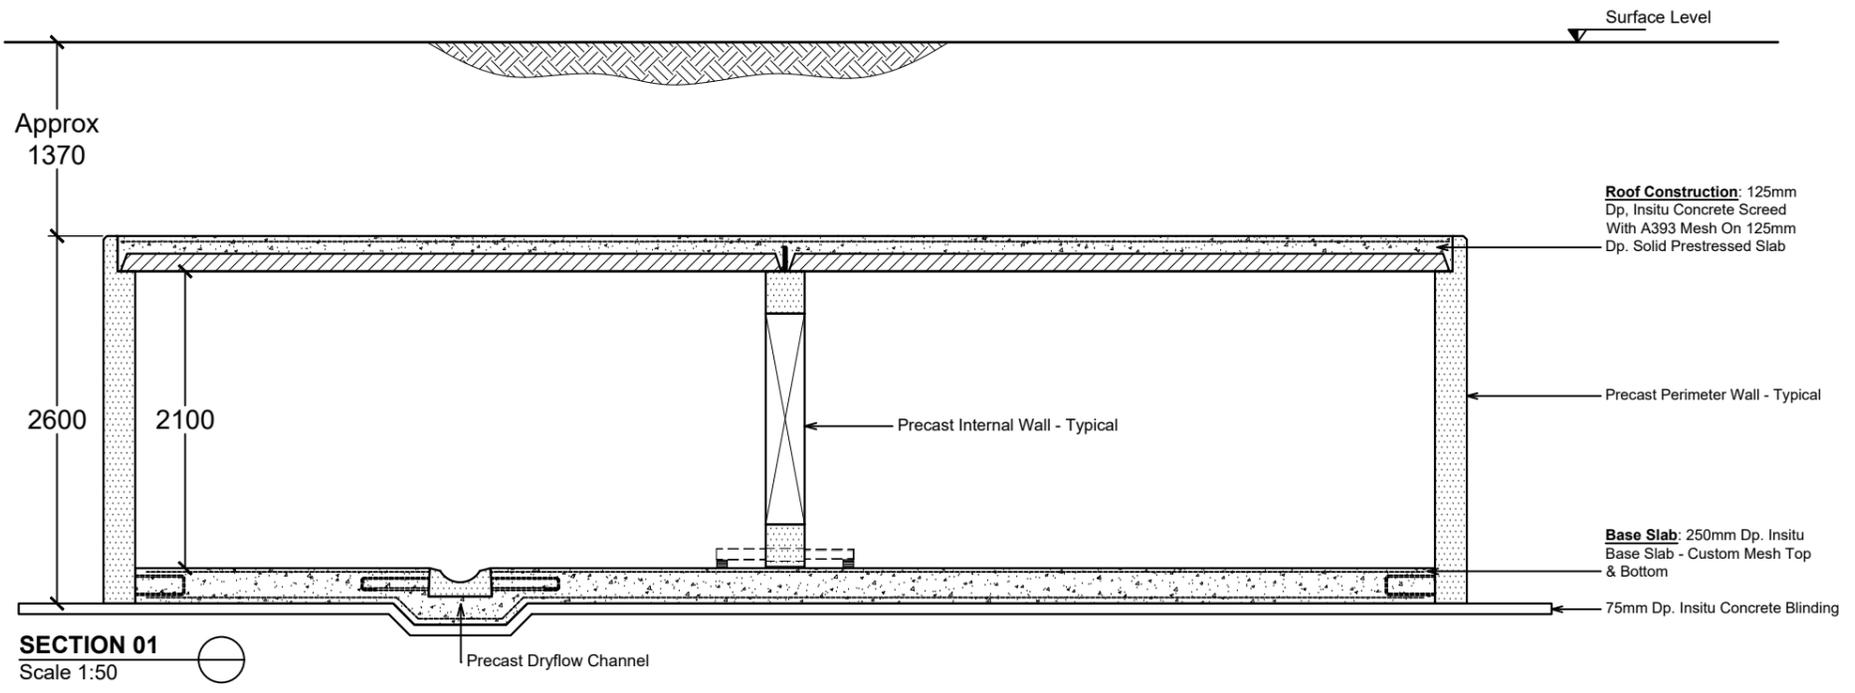


SECTION 01
Scale 1:50

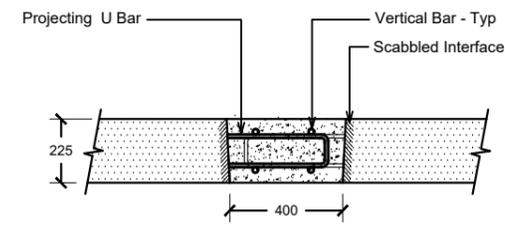

1 PLAN VIEW: Typical Wall Joint Detail
Scale: 1:25

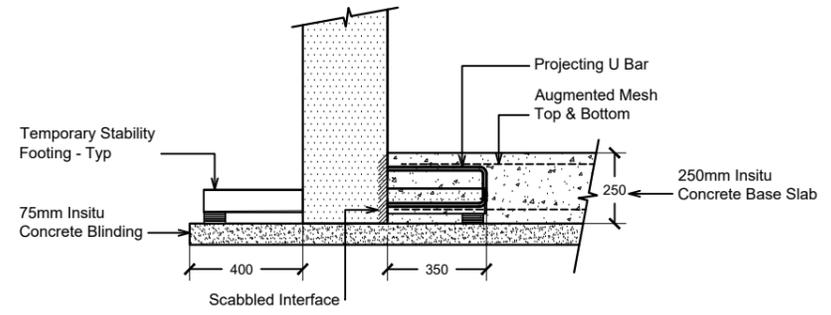

2 PERIMETER WALL DETAIL: Base Level
SCALE: 1:25

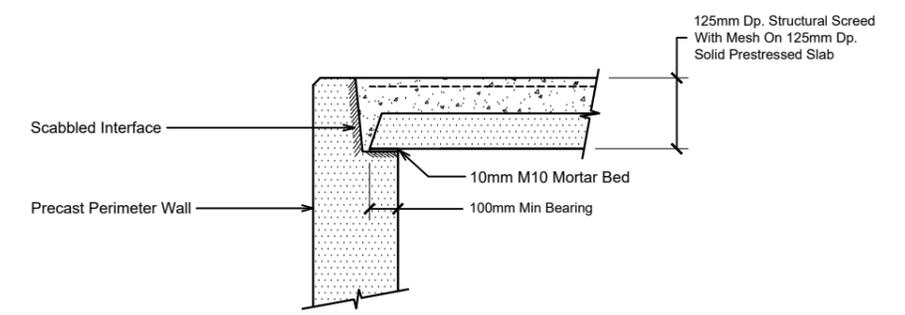

3 PERIMETER WALL DETAIL: Top Of Wall Level
SCALE: 1:25



SIMILAR INSTALLATION:



CARLOW CONCRETE

THE CARLOW TANK

FLOOD ALLEVIATION TANKS STORMWATER ATTENUATION TANKS

RESIDENTIAL DEVELOPMENTS | CAPITAL DELIVERY SCHEMES



MARKET LEADER IN FLOOD ALLEVIATION
& STORMWATER ATTENUATION TANKS
IN BOTH THE UK & IRELAND

Innovative Design • **Quality** Production • **Rapid** Installation


LONDON

Tel: 0207 1646706

IRELAND

Tel: +353 5997 27620

www.carlowconcrete.com

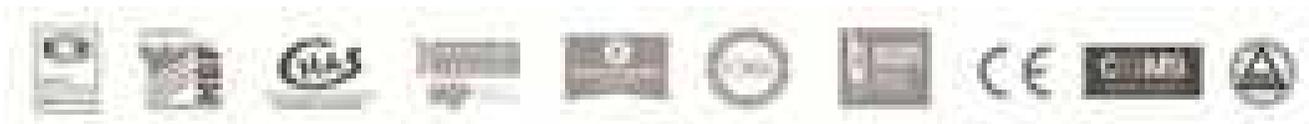

ATTENUATION & ALLEVIATION THE CARLOW TANK



The Carlow Tank is recognised by Water Companies, Local Authorities, Developers and Designers.



Carlow Concrete's Carlow Tank is a modular precast stormwater attenuation tank which is supplied to primarily satisfy clients mandatory Sustainable Urban Drainage (SUDS) requirements. To combat flooding both Irish & UK building authorities stipulate a restriction on the rate of stormwater discharge from the developed site to that of the original 'greenfield' condition. The most economical means of achieving this is to place a flow control device on the site outlet and detain excess run off in a subsurface attenuation tank.

The most cost effective means of providing such storage is a Carlow Concrete Stormwater Attenuation Tank, which can be configured to exactly suit client requirements.

The Carlow Tank is available in depths from 0.6m to 7.0m in 100mm increments.

FEATURES & BENEFITS

- Watertight to BS8007 or Eurocode 2
- 60 -120 year + Design Life
- Manufacturers all risk insurance & collateral warranty
- Professional indemnity insurance
- Multifunctional applications
- Simply backfill with "as dug" material, no imported fill
- Rapid installation duration
- Deep burial & heavy duty loading applications
- Superior quality finish
- Reduced labour & plant requirements during install
- Highly trained & experienced installation crews
- Technical supervision & sign off for customer based installations



Email: info@carlowconcrete.com



INNOVATIVE DESIGN



Our in-house design team prepare site specific design calculations, drawings and specifications in compliance with Eurocode or British Standard requirements, all of which is protected by our extensive professional indemnity insurance cover.

The design and layout of each tank is engineered in line with the constraints of any development site or parcel of land. Our tanks provide designers and developers the opportunity to maximise the development potential of any site with all necessary planning and discharge requirements.

Our attenuation tanks are the most robust on the market and may be located in highly trafficked areas such as roads and car parks.

Carlow Concrete prides itself on continuous design innovation and improvement. Our Carlow Tank offers clients the most efficiently and economically designed solution in its class. All structural design & detailing is carried out in house by our engineering team. The following elements are core to the Carlow Tank:

- Complete menu of standard components
- Configure your structure as desired
- Freestanding wall units (zero propping system)
- Scabbled surface to all precast/insitu concrete interfaces
- Factory bonded hydrophilic strip at all joint locations
- Projecting reinforcement to engage all insitu concrete pours
- 95% voids ratio for maximum storage

Typical design submissions for our clients include:

- 3D BIM Model
- Finite Element Analysis Output Results
- Design calculation in accordance with Euro or British Standards
- Full set of 2D general arrangement drawings
- Reinforcement schedules
- Penetration schedules



FULLY SECTION 104 ADOPTABLE

QUALITY PRODUCTION



Production at our state-of-the-art manufacturing facility is carried out using the most modern methods and equipment available.

Our quality production processes are set to the highest standards ensuring we meet client specification and compliance requirements accurately every time.

- Controlled factory environment
- Mould design & fabrication carried out in-house
- Highly automated production techniques
- Self-compacting and semi self-compacting concrete
- Hydraulic demoulding process ensures zero damage to products with early age concrete strength
- Rainwater harvesting for all concrete manufacture



A key ingredient of quality production is our technicians and in-house concrete testing laboratory. A unique quality inspection and traceability system is implemented to ensure each component is rigorously inspected at every stage of production.

An ID tag provides a unique reference number for each product and indicates its exact final location within the overall assembly. Quality folders are cloud based, enabling remote client access.

The innovative design and quality production of The Carlow Tank provide the following savings;

- 75% reduction in working at height
- 75% reduction in labour
- 50% reduction in plant requirement
- 50% reduction in site time
- 30% reduction in embodied carbon



Email: info@carlowconcrete.com



RAPID INSTALLATION

Carlow Concrete taking the Construction Industry by *Storm*

Our highly trained & experienced installation crews construct each tank to pre-determined programs and highly developed health and safety documentation. Our construction managers supervise each installation and sign off the structure once complete. Tanks typically require a smaller installation crew, less plant, less materials and are completed in half the time required for a conventional build.



STAGE
1

Place 75mm Concrete Blinding to formation level, Blinding Recessed to accommodate DWF Channel



STAGE
2

Placing Of External Wall Unit, to perimeter



STAGE
3

Place all External Wall & Corner Units



STAGE
4

Precast Elements Free stand - Fixed Internal & Detachable External Stabiliser



STAGE
5

Install Custom or Standard Mesh Reinforcement to Base Slab, Install Pipe Penetrations & Pour Base Slab



STAGE
6

Place Internal Beam-Column Units



STAGE
7

Fix Vertical Rebar to Wall Joints & Install Formwork



STAGE
8

Place Solid Prestressed Cover Slabs, Install Mesh Reinforcement & Pour



STAGE
9

Project Complete

THE CARLOW TANK

IRREGULAR LAYOUT



FULLY SECTION 104 ADOPTABLE

The Carlow Tank is recognized and approved by all UK Water Companies, Local Authorities, Developers and Designers.

Carlow Concrete's modular components are the most versatile on the market and offer easy assembly. We offer the most comprehensive size range in the market place with depths from 0.6m to 7.0m, in 100mm increments and almost any conceivable configuration possible.

The underground tank system is professionally designed and structurally engineered to achieve the most optimum and cost effective solution for every site.



The Carlow Concrete Attenuation Tank may be configured to exactly suit client requirements. The design and layout of each tank is engineered in line with the constraints of any development site or parcel of land.

Our tanks provide designers and developers the opportunity to maximise the development potential of any site whilst meeting all necessary planning and discharge requirements.

Our attenuation tanks are the most robust on the market and maybe located in highly trafficked areas such as roads and carparks.



Email: info@carlowconcrete.com



FRAMEWORK AGREEMENT



DESIGN, MANUFACTURE, DELIVER & INSTALL YOUR TURNKEY SOLUTION

Why use a Carlow Concrete Framework Agreement?

Carlow Concrete offer a range of flexible procurement models to our clients. Our most popular model being that of a Procurement Framework Agreement. Many of our clients have taken full advantage of this approach, when ordering the same type of service over an extended period of time, on multiple projects and across multiple regions.

The Framework offers clients:

- Early Contractor Involvement (ECI)
Ensuring the correct, site specific solution is determined at the earliest possible stage
- Streamlined Procurement Process
Avoid repetitious & time-consuming tasks on every order
- Fast Track Procurement Options
Ensuring programme milestones are achieved every time, through predetermined client parameters
- Preferential Rates
Clients may avail of an annual rebate using our discount matrix when multiple orders fall within the calendar year
- Continuous Product Development
Products & systems evolve in line with customer feedback to ensure long-term relationships

Strategic Partnering

The Carlow Concrete Supply Framework is an ideal platform where the client has a real focus on developing a strategic relationship with us over a long period and ultimately leads to a sustainable, best value supply chain for precast concrete attenuation / flood alleviation products.

Framework agreements are long-term relationships between clients and suppliers. They create a commercial environment that is more conducive to sustainable relationships & employment while cutting waste from processes and physical resources.



Let us do the Work

A common problem, for most clients, is having big construction programmes but gaps in specialist expertise. Let Carlow Concrete be your concrete expert and fill these critical, difficult to recruit vacancies without taking on direct employees.

As part of the framework we undertake full design responsibility from initial proposal stage drawings to detailed design submissions including Section 104 Design, structural analysis packages, AIP design package, construction drawings and Building Information Modelling (BIM). We also take care of liaisons with third party consultants, highway authorities and water company interactions.



TALK TO
US TODAY

CALL
0207 1646706

EMAIL
info@carlowconcrete.com

ONLINE
carlowconcrete.com



Innovative Design • **Quality** Production • **Rapid** Installation

LONDON

Carlow Concrete
The Clubhouse
20 St Andrews Street,
London, EC4A 3AG
Tel: 0207 1646706

LEEDS

Carlow Concrete
No. 2 Wellington Place
Leeds,
LS1 4AP
Tel: 0113 3235772

CARDIFF


Carlow Concrete
Malthouse Avenue,
Cardiff Gate Business Park
Cardiff, CF23 8RU
Tel: 0292 1032025

IRELAND

Carlow Concrete
Milltown, Garyhill
Co. Carlow,
R21KP44
Tel: +353 5997 27620

www.carlowconcrete.com



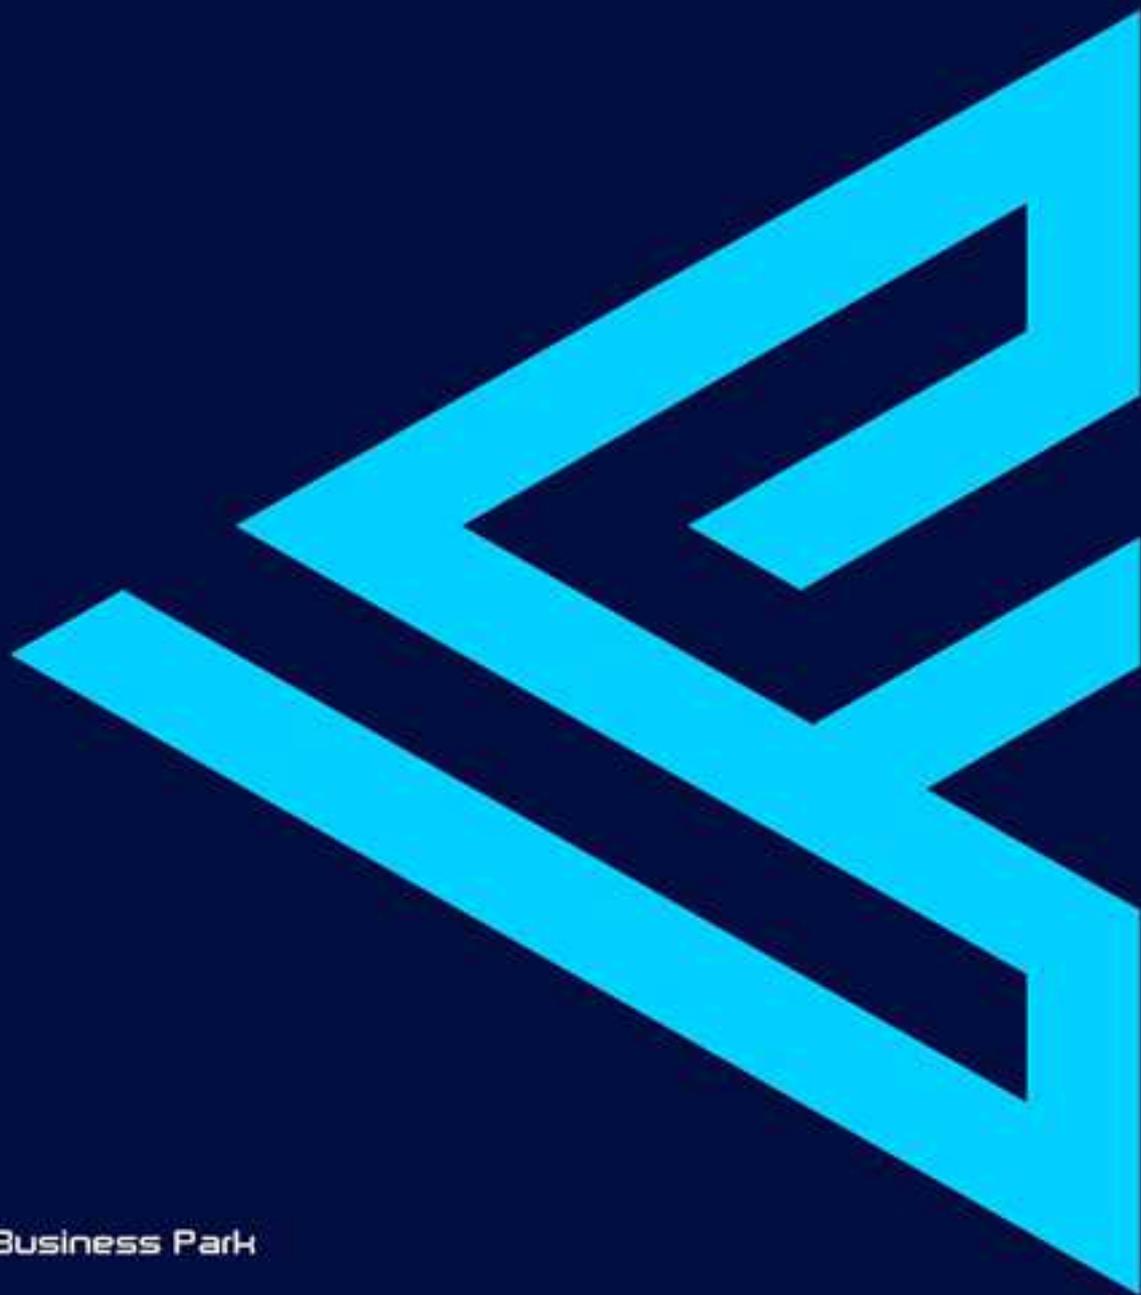

Building 3
Leeds City West Business Park
Geldard Road
Leeds
LS12 6LN

0113 8730607
mail@advantengineers.co.uk
www.advantengineers.co.uk