


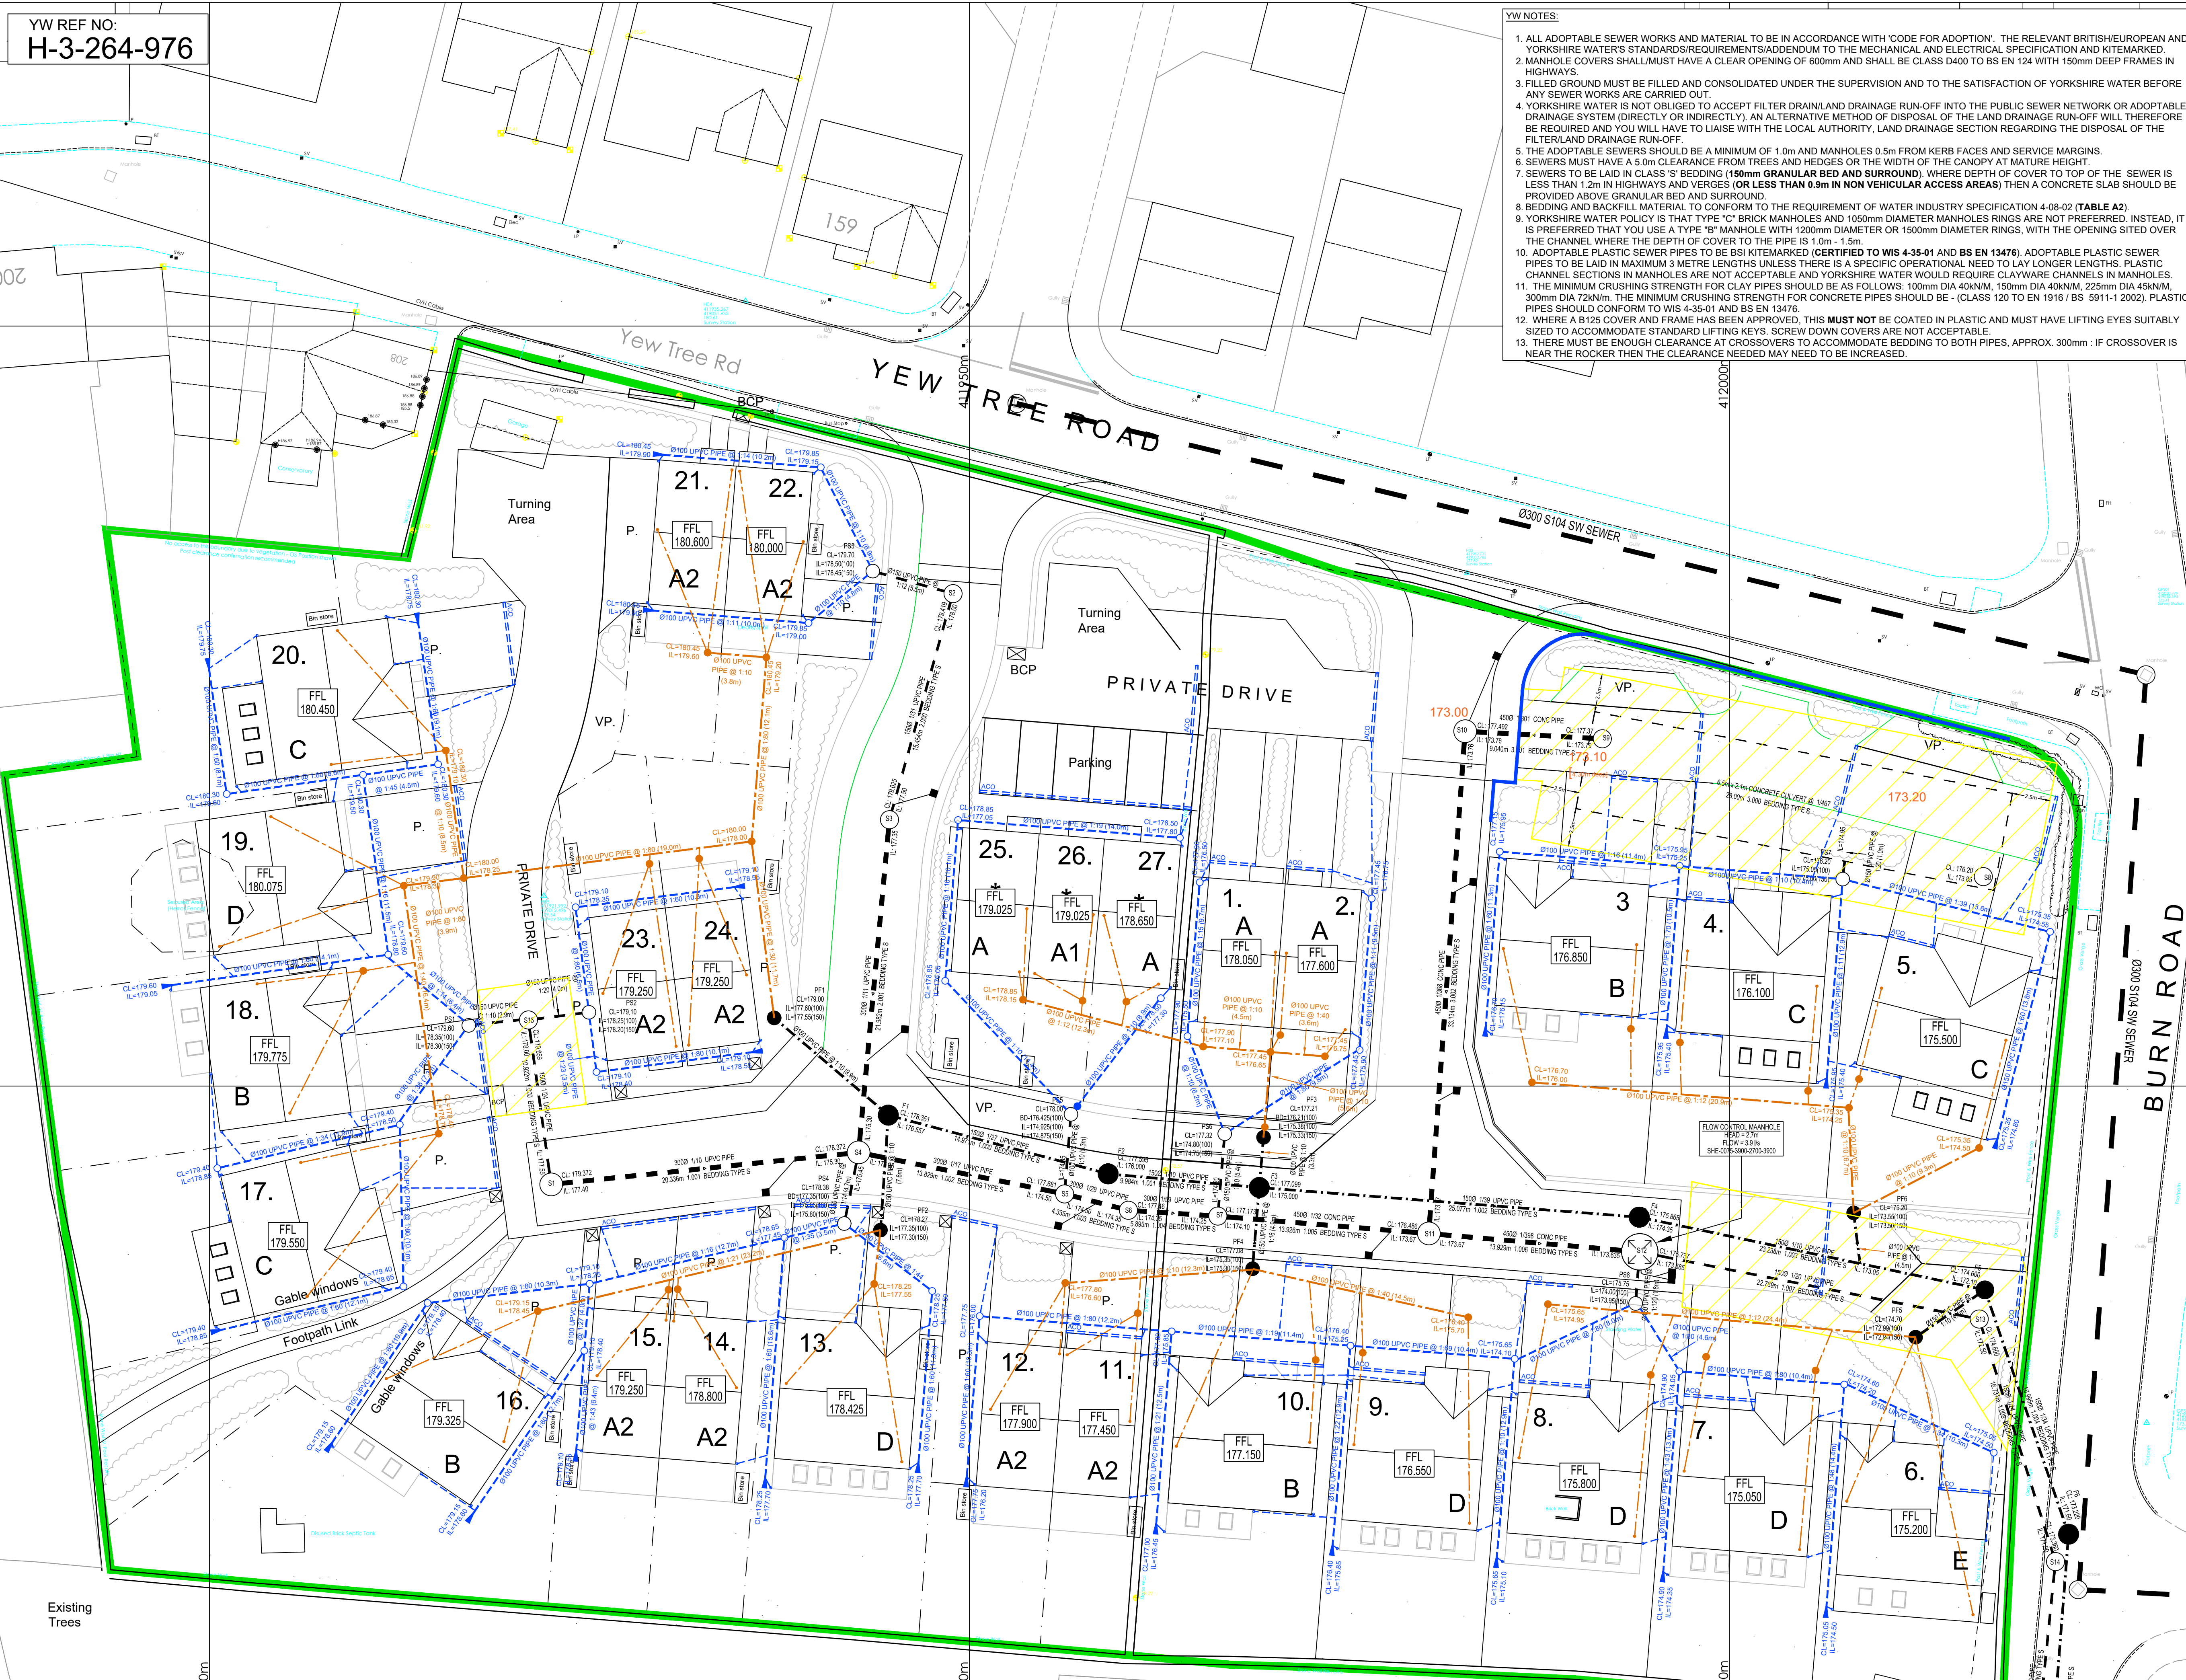

YW REF NO:  
**H-3-264-976**

- YW NOTES:**
1. ALL ADAPTABLE SEWER WORKS AND MATERIAL TO BE IN ACCORDANCE WITH 'CODE FOR ADOPTION'. THE RELEVANT BRITISH/EUROPEAN AND YORKSHIRE WATER'S STANDARDS/REQUIREMENTS/ADDENDUM TO THE MECHANICAL AND ELECTRICAL SPECIFICATION AND KITEMARKED.
  2. MANHOLE COVERS SHALL HAVE A CLEAR OPENING OF 600mm AND SHALL BE CLASS D400 TO BS EN 124 WITH 150mm DEEP FRAMES IN HIGHWAYS.
  3. FILLED GROUND MUST BE FILLED AND CONSOLIDATED UNDER THE SUPERVISION AND TO THE SATISFACTION OF YORKSHIRE WATER BEFORE ANY SEWER WORKS ARE CARRIED OUT.
  4. YORKSHIRE WATER IS NOT OBLIGED TO ACCEPT FILTER DRAIN/LAND DRAINAGE RUN-OFF INTO THE PUBLIC SEWER NETWORK OR ADAPTABLE DRAINAGE SYSTEM (DIRECTLY OR INDIRECTLY). AN ALTERNATIVE METHOD OF DISPOSAL OF THE LAND DRAINAGE RUN-OFF WILL THEREFORE BE REQUIRED AND YOU WILL HAVE TO LAISE WITH THE LOCAL AUTHORITY, LAND DRAINAGE SECTION REGARDING THE DISPOSAL OF THE FILTER/LAND DRAINAGE RUN-OFF.
  5. THE ADAPTABLE SEWERS SHOULD BE A MINIMUM OF 1.0m AND MANHOLES 0.5m FROM KERB FACES AND SERVICE MARGINS.
  6. SEWERS MUST HAVE A 5.0m CLEARANCE FROM TREES AND HEDGES OR THE WIDTH OF THE CANOPY AT MATURE HEIGHT.
  7. SEWERS TO BE LAID IN CLASS 'S' BEDDING (150mm GRANULAR BED AND SURROUND). WHERE DEPTH OF COVER TO TOP OF THE SEWER IS LESS THAN 1.2m IN HIGHWAYS AND VERGES (OR LESS THAN 0.9m IN NON VEHICULAR ACCESS AREAS) THEN A CONCRETE SLAB SHOULD BE PROVIDED ABOVE GRANULAR BED AND SURROUND.
  8. BEDDING AND BACKFILL MATERIAL TO CONFORM TO THE REQUIREMENT OF WATER INDUSTRY SPECIFICATION 4-08-02 (TABLE A2).
  9. YORKSHIRE WATER POLICY IS THAT TYPE 'C' BRICK MANHOLES AND 1050mm DIAMETER MANHOLES RINGS ARE NOT PREFERRED. INSTEAD, IT IS PREFERRED THAT YOU USE A TYPE 'B' MANHOLE WITH 1200mm DIAMETER OR 1500mm DIAMETER RINGS, WITH THE OPENING SITED OVER THE CHANNEL WHERE THE DEPTH OF COVER TO THE PIPE IS 1.0m - 1.5m.
  10. ADAPTABLE PLASTIC SEWER PIPES TO BE BSI KITEMARKED (CERTIFIED TO WIS 4-35-01 AND BS EN 13476). ADAPTABLE PLASTIC SEWER PIPES TO BE LAID IN MAXIMUM 3 METRE LENGTHS UNLESS THERE IS A SPECIFIC OPERATIONAL NEED TO LAY LONGER LENGTHS. PLASTIC CHANNEL SECTIONS IN MANHOLES ARE NOT ACCEPTABLE AND YORKSHIRE WATER WOULD REQUIRE CLAYWARE CHANNELS IN MANHOLES.
  11. THE MINIMUM CRUSHING STRENGTH FOR CLAY PIPES SHOULD BE AS FOLLOWS: 100mm DIA 40kN/m, 150mm DIA 40kN/m, 225mm DIA 45kN/m, 300mm DIA 72kN/m. THE MINIMUM CRUSHING STRENGTH FOR CONCRETE PIPES SHOULD BE - (CLASS 120 TO EN 1916 / BS 5911-1 2002). PLASTIC PIPES SHOULD CONFORM TO WIS 4-35-01 AND BS EN 13476.
  12. WHERE A B125 COVER AND FRAME HAS BEEN APPROVED, THIS MUST NOT BE COATED IN PLASTIC AND MUST HAVE LIFTING EYES SUITABLY SIZED TO ACCOMMODATE STANDARD LIFTING KEYS. SCREW DOWN COVERS ARE NOT ACCEPTABLE.
  13. THERE MUST BE ENOUGH CLEARANCE AT CROSSOVERS TO ACCOMMODATE BEDDING TO BOTH PIPES, APPROX. 300mm : IF CROSSOVER IS NEAR THE ROCKER THEN THE CLEARANCE NEEDED MAY NEED TO BE INCREASED.

- NOTES:**
1. THIS DRAWING IS PRODUCED FOR USE IN THIS PROJECT ONLY AND MAY NOT BE USED FOR ANY OTHER PURPOSE. THE CONSULTING ENGINEERS ACCEPT NO LIABILITY FOR THE USE OF THIS DRAWING OTHER THAN THE PURPOSE FOR WHICH IT WAS INTENDED IN CONNECTION WITH THIS PROJECT AS RECORDED ON THE TITLE BLOCK FIELDS 'PURPOSE FOR ISSUE' AND 'FILE STATUS CODE'.
  2. THIS DRAWING MAY NOT BE REPRODUCED IN ANY FORM WITHOUT PRIOR WRITTEN AGREEMENT FROM ADVANT ENGINEERS.
  3. DO NOT SCALE FROM THE DRAWING. USE WRITTEN DIMENSIONS ONLY.
  4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED.
  5. DISCREPANCIES MUST BE REPORTED BACK TO THE ENGINEER PRIOR TO CONSTRUCTION.
  6. THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL RELEVANT ADVANT ENGINEERS DRAWINGS AND SPECIFICATIONS.

**KEY**

|     |                        |     |          |
|-----|------------------------|-----|----------|
| F   | UPDATED TO YW COMMENTS | MJM | 23.11.24 |
| E   | UPDATED TO YW COMMENTS | MJM | 08.11.24 |
| D   | UPDATED TO YW COMMENTS | MJM | 19.10.24 |
| C   | UPDATED TO YW COMMENTS | MJM | 30.09.24 |
| B   | UPDATED TO YW COMMENTS | MJM | 12.09.24 |
| A   | INITIAL ISSUE          | MJM | 10.07.24 |
| REV | AMENDMENTS             | BY  | DATE     |

**FOR APPROVAL**

|                  |  |       |
|------------------|--|-------|
| STATUS           |  | CHK'D |
| PRELIMINARY      |  | MJM   |
| FOR COMMENT      |  | MJM   |
| FOR APPROVAL     |  | MJM   |
| FOR CONSTRUCTION |  |       |
| AS BUILT         |  |       |



**advant**  
ENGINEERS

Building 3 Leeds City West Business Park,  
Geldard Road, Leeds, LS12 6LN  
0113 873 0607  
leeds@advantengineers.co.uk

|                                                 |            |       |          |
|-------------------------------------------------|------------|-------|----------|
| CLIENT                                          |            |       |          |
| NORTH PARK<br>HOMES LTD                         |            |       |          |
| CONTRACT                                        |            |       |          |
| YEW TREE ROAD<br>BIRCHENCLIFFE<br>HUDDERSFIELD  |            |       |          |
| TITLE                                           |            |       |          |
| OVERALL SITE<br>PRIVATE DRAINAGE<br>LAYOUT PLAN |            |       |          |
| DRAWN                                           | MJM        | CHK'D | MJM      |
| SCALE                                           | 1:200 @ A1 | DATE  | 10.07.24 |
| JOB No                                          | DRG No     | REV   |          |
| 22046                                           | 118        | F     |          |