



WINDOW 18 & 19: BASEMENT
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Casement
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level.



WINDOW 08: FIRST FLOOR BEDROOM
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Box Sash
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.




WINDOW 09: FIRST FLOOR BEDROOM
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Box Sash
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.

SIDE ELEVATION 01


First Floor

BASEMENT



WINDOW 06: GROUND FLOOR WC/SHOWER
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Casement, top hung
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A


Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.



WINDOW 07: GROUND FLOOR LOUNGE
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: No / Fixed
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: Stained glass glazing re-used


Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.

Ground Floor




WINDOW 14: FIRST FLOOR BEDROOM
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Box Sash
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.

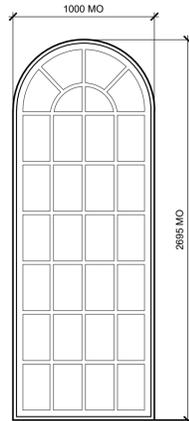

WINDOW 15: LANDING
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: No / Fixed
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.




WINDOW 17: FIRST FLOOR BEDROOM
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Box Sash
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.


SIDE ELEVATION 02

First Floor




WINDOW 13: GROUND FLOOR KITCHEN
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: Box Sash
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.



DOOR TYPE 03
 MATERIAL: Hard Wood
 LOCATION: Lobby
 FIRE RATING: None
 GLAZING UNIT: Double glazed, clear
 OPENABLE: Door
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: N/A



WINDOW 16: GROUND FLOOR SITTING
 MATERIAL: Hard Wood
 FIRE RATING: None
 GLAZING UNIT: 16mm Double glazed, clear
 OPENABLE: No / Fixed
 ACOUSTIC PERFORMANCE: N/A
 FINISHES: Factory applied paint finish
 IRONMONGERY SET: As supplied by manufacturer, brushed chrome
 NOTE: Stained glass glazing re-used

Toughened glazing to windows if below 800mm from the finished floor level. External windows to achieve minimum u-value of 1.7w/m²K.

Ground Floor

Where glazing is below 800mm at first floor level this must be containment type such as toughlam or similar.

This schedule should be read in conjunction with drawing number 2466-D-20-001, 2466-D-20-002 and the the photographic window reference document for context.

Window manufacturer to calculate background ventilation requirements under Approved document F and incorporate contrailable background ventilators into head of window.

The security standards for external doors and windows should achieve a minimum of either: LPS1175 (All external doors and windows) OR PAS24-1 (All external pedestrian doorsets falling within the scope of PAS24-1) AND BS7950 (All windows falling within the scope of BS7950).

Max U-value to be as noted on the drawings - Glazing build up to be determined by manufacturer. (not to exceed 16mm)

3 no. keys per window lock. 1 key to be left in each lock; the remaining keys to be handed to the client on completion.

All glazing is to have a robustness specification to meet of approved document.

THE APPOINTED WINDOW SUPPLIER SHOULD UNDERTAKE THEIR OWN SITE SURVEY TO OBTAIN THE REQUIRED MEASUREMENTS FOR MANUFACTURE OF THE WINDOWS AND PROVIDE A DETAILED SCHEDULE FOR APPROVAL.

Rev A : 23.07.24 : Note added regarding the colored and cained windows

Issue Purpose: PLANNING APPLICATION

AHJ architects
 The Courtyard
 12a Commercial Road
 Skelmethorpe
 Huddersfield
 HD8 9AA
 www.ahjarchitects.co.uk



| | | | |
|---------|--|-------------|------------|
| Client | Richard Chambury | Issued From | |
| Project | 2466 - 15 Edgerton Road - Window Replacement | Date | March 2024 |
| Title | Proposed Window and Door Schedule | Scale | 1:25 @ A1 |
| Drawn | BH | Auth | BH |

Drawing Number: 2466 - D - 20 - 002 - A
 Revision: A
 Do not scale from this drawing. Work to figure dimensions, and any discrepancy to be reported to the Architect.
 Refer to larger scale drawings where available.

PROPOSED WINDOW AND DOOR SCHEDULE 1:25 @ A1

Drawn Scale 1:25



*For the purposes of Planning Consent the following applies to any copy of this drawing made by the Local Authority.

This copy has been made by and with the authority of the person required to make the plan and drawing open to public inspection pursuant to Section 47 of the Copyright, Designs and Patents Act 1988. Unless that Act provides a relevant exception to copyright, the copy must not be copied without the prior permission of the copyright owner. If any copy is made under the authority only the whole drawing including the copyright holder's name and this notice, is to be copied.