


Mini Stonewold

A flat concrete slate that can be laid at pitches as low as 17.5° in both new build and reroofing projects.

KEY ADVANTAGES

- Low pitch capability
- Quick, simple installation reduces laid costs
- Range of seven natural colours

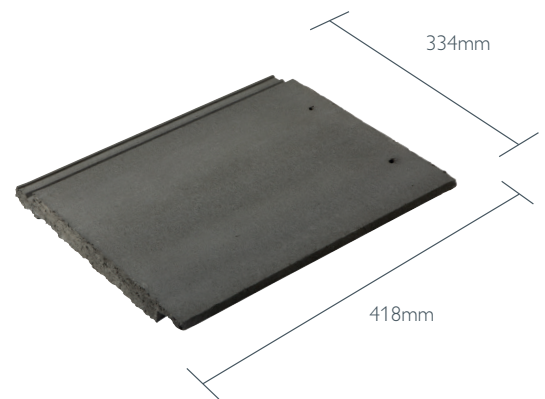

PRODUCT DETAILS

Size (overall)	418 x 334mm
Minimum Pitch and Headlap	17.5° at 100mm headlap / 22.5° at 75mm headlap (The minimum pitch is based on a maximum rafter length of 10 metres. For rafter lengths greater than this, please contact the Technical Solutions Hotline on 03708 702595)
Maximum Pitch (subject to fixing specification)	90°
Minimum Headlap	75mm
Maximum Headlap	125mm
Minimum Gauge/Batten Spacing	293mm
Maximum Gauge/Batten Spacing	below 22.5° 318mm / 22.5° and over 343mm
Hanging Length (approx.)	397mm
Cover (all figures are net and do not allow for wastage)	
Linear cover of 1 slate	294mm
Covering capacity	10.7 slates/m ² at 318mm gauge / 9.9 slates m ² at 343mm gauge
Weight	55kg/m ² at 318mm gauge / 51kg/m ² at 343mm gauge
per pallet, including pallet (approx.)	1.16 tonnes
per 1000	5.11 tonnes
Battens Required (at max. gauge)	2.92m/m ²
Batten Size	
Rafter centres up to 450mm	38 x 25mm
Rafter centres up to 600mm	50 x 25mm
Fixing Clips	Eaves, Verge, Valley & Slate Clips
Nail Size for Slates**	50 x 3.35mm (A/A)
Pallet Quantities	Slates per pallet 216 / Slates per pack 36 / Packs per pallet 6

*All weights nominal ** (A/A) Aluminium Alloy

FITTINGS & ACCESSORIES

VERGE

Ambi-Dry Verge
Rapid Verge

HIP PRODUCTS

Universal Angle Hip
Dry Hip
Rapid Hip

VALLEY PRODUCTS


GRP 125 Valley
Dry Valley

RIDGE PRODUCTS

Universal Angle Ridge
Universal Angle Monoridge

VENTILATION SYSTEMS

RedVent EavesVent
RedVent 25 Over-Fascia Vent
Rapid EavesVent
Top Edge Abutment Ventilation
DryVent Ridge
Rapid Vented Ridge
Uni-Vent Rapid Ridge/Hip
DryVent Monoridge
RedLine Ventilation Tile
Rapid Roof Vent
8.8k ThruVent Tile

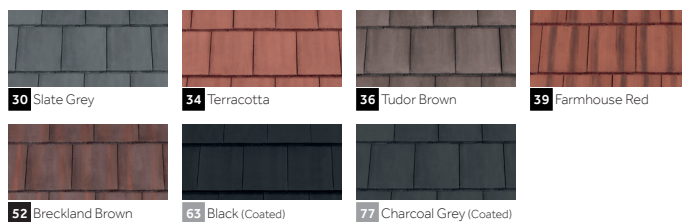

Mini Stonewold Product Codes

TILES

Standard Slate	4261
Half Slate Pair	4263

UNDERLAYS

Spirtech 400 2S underlay	9202
Divoroll Elite 2S	9157
Divoroll Universal 2S	9156

EAVES PRODUCTS

RedVent EavesVent 350-450mm (6m)	9189
RedVent EavesVent 450-600mm (6m)	9190
Extension Trays 350-450mm (6m)	9498
Extension Trays 450-600mm (6m)	9499
Rapid EavesVent 2-in-1 Tray	9988
Rapid EavesVent Rafter Roll (6m)	9984
RedVent 25 Over-Fascia Vent (6m)	9593
Underlay Support Tray (1.5m)	9076

VERGE PRODUCTS

DryVerge (Pack of 18 LH & 18 RH)	9390
DryVerge Gable End Pack	9880
Rapid DryVerge (Pack of 18 LH & 18 RH)	9391
Rapid DryVerge Gable End Pack	9881

HIP PRODUCTS

Dry Hip (2.7m)	9046
Continuous Hip (5m)	9028
Uni-Vent Rapid Ridge/Hip (10m)	9313
Uni-Vent Rapid Hip Support Tray (1.2m)	9069
Universal Angle Hip/Ridge Junction	9520
Universal Angle Hip (without nail holes)	7777
Universal Angle Hip (with nail holes)	7778
Hip Iron	9258
Universal Angle Block-End Hip	7779
Mortar Bedded Fixing Kit	9314

VALLEY PRODUCTS

GRP 125 Valley (3m)	9595
Dry Valley (Low Profile) (3m)	9575
Universal Valley Trough Tile	7175

ABUTMENT PRODUCTS

Wakaflex Rapid Flashing	
Top Edge Abutment Ventilation Pack (3m)	9548
Abutment GRP Secret Gutter (3m)	9596
Bonding Gutter (Low Profile) (3m)	9580
Bonding Gutter (High Profile) (3m)	9578

RIDGE PRODUCTS


DryVent Ridge (2.7m)	9059
Uni-Vent Rapid Ridge/Hip (10m)	9313
Continuous Ridge (5m)	9308
Ridge Vent Terminal	7254
Terminal Adaptor	9175
Flexible Pipe (100 to 100mm)	9172
Gas Flue Ridge Terminal	7242
Gas Flue Extension Adaptor	9143
Gas Flue Blanking Plates	9099
Universal Angle Ridge	7146
Hi-Pitch Universal Angle Ridge	7151
Universal Angle Block-End Ridge	7518
DryVent Monoridge (2.7m)	9084
Universal Angle Monoridge	7148
Universal Angle Block-End Monoridge LH	7297
Universal Angle Block-End Monoridge RH	7298
Universal Angle Monoridge End Cap LH	9778
Universal Angle Monoridge End Cap RH	9779
Mortar Bedded Fixing Kit	9314
Universal Angle Ridge End Cap	9773

VENTILATION TILES

RedLine Vent Tile	9118
8.8k ThruVent Tile	7935
Rapid Roof Vent Tile	9124
Rapid Roof Vent Adaptor	9791
Flexible Pipe (100 to 100mm)	9172

FIXING

Slate Clip	9185
Storm Clip and nails (100)	9530
Verge Clip (25)	9529
Eaves Clip	9186
Slate and Eaves Clip Nails (812)	9338
Kro-Clip (50)	9142
Innofix Clip (500)	9824

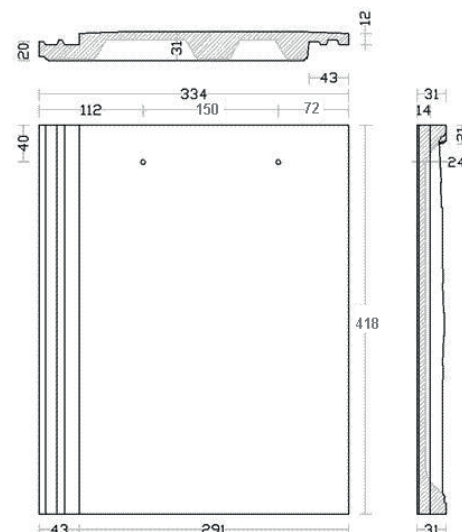

BMI UK & Ireland
BMI House,
2 Pitfield, Kiln Farm,
Milton Keynes, MK11 3LW
+44 (0) 3705 601000

www.bmigroup.com/uk

We are committed to continuously enhancing and improving our product range. We reserve the right to change our product specifications. We reserve the right to correct any typographical or clerical error or omission. For the latest information contact customer service.