


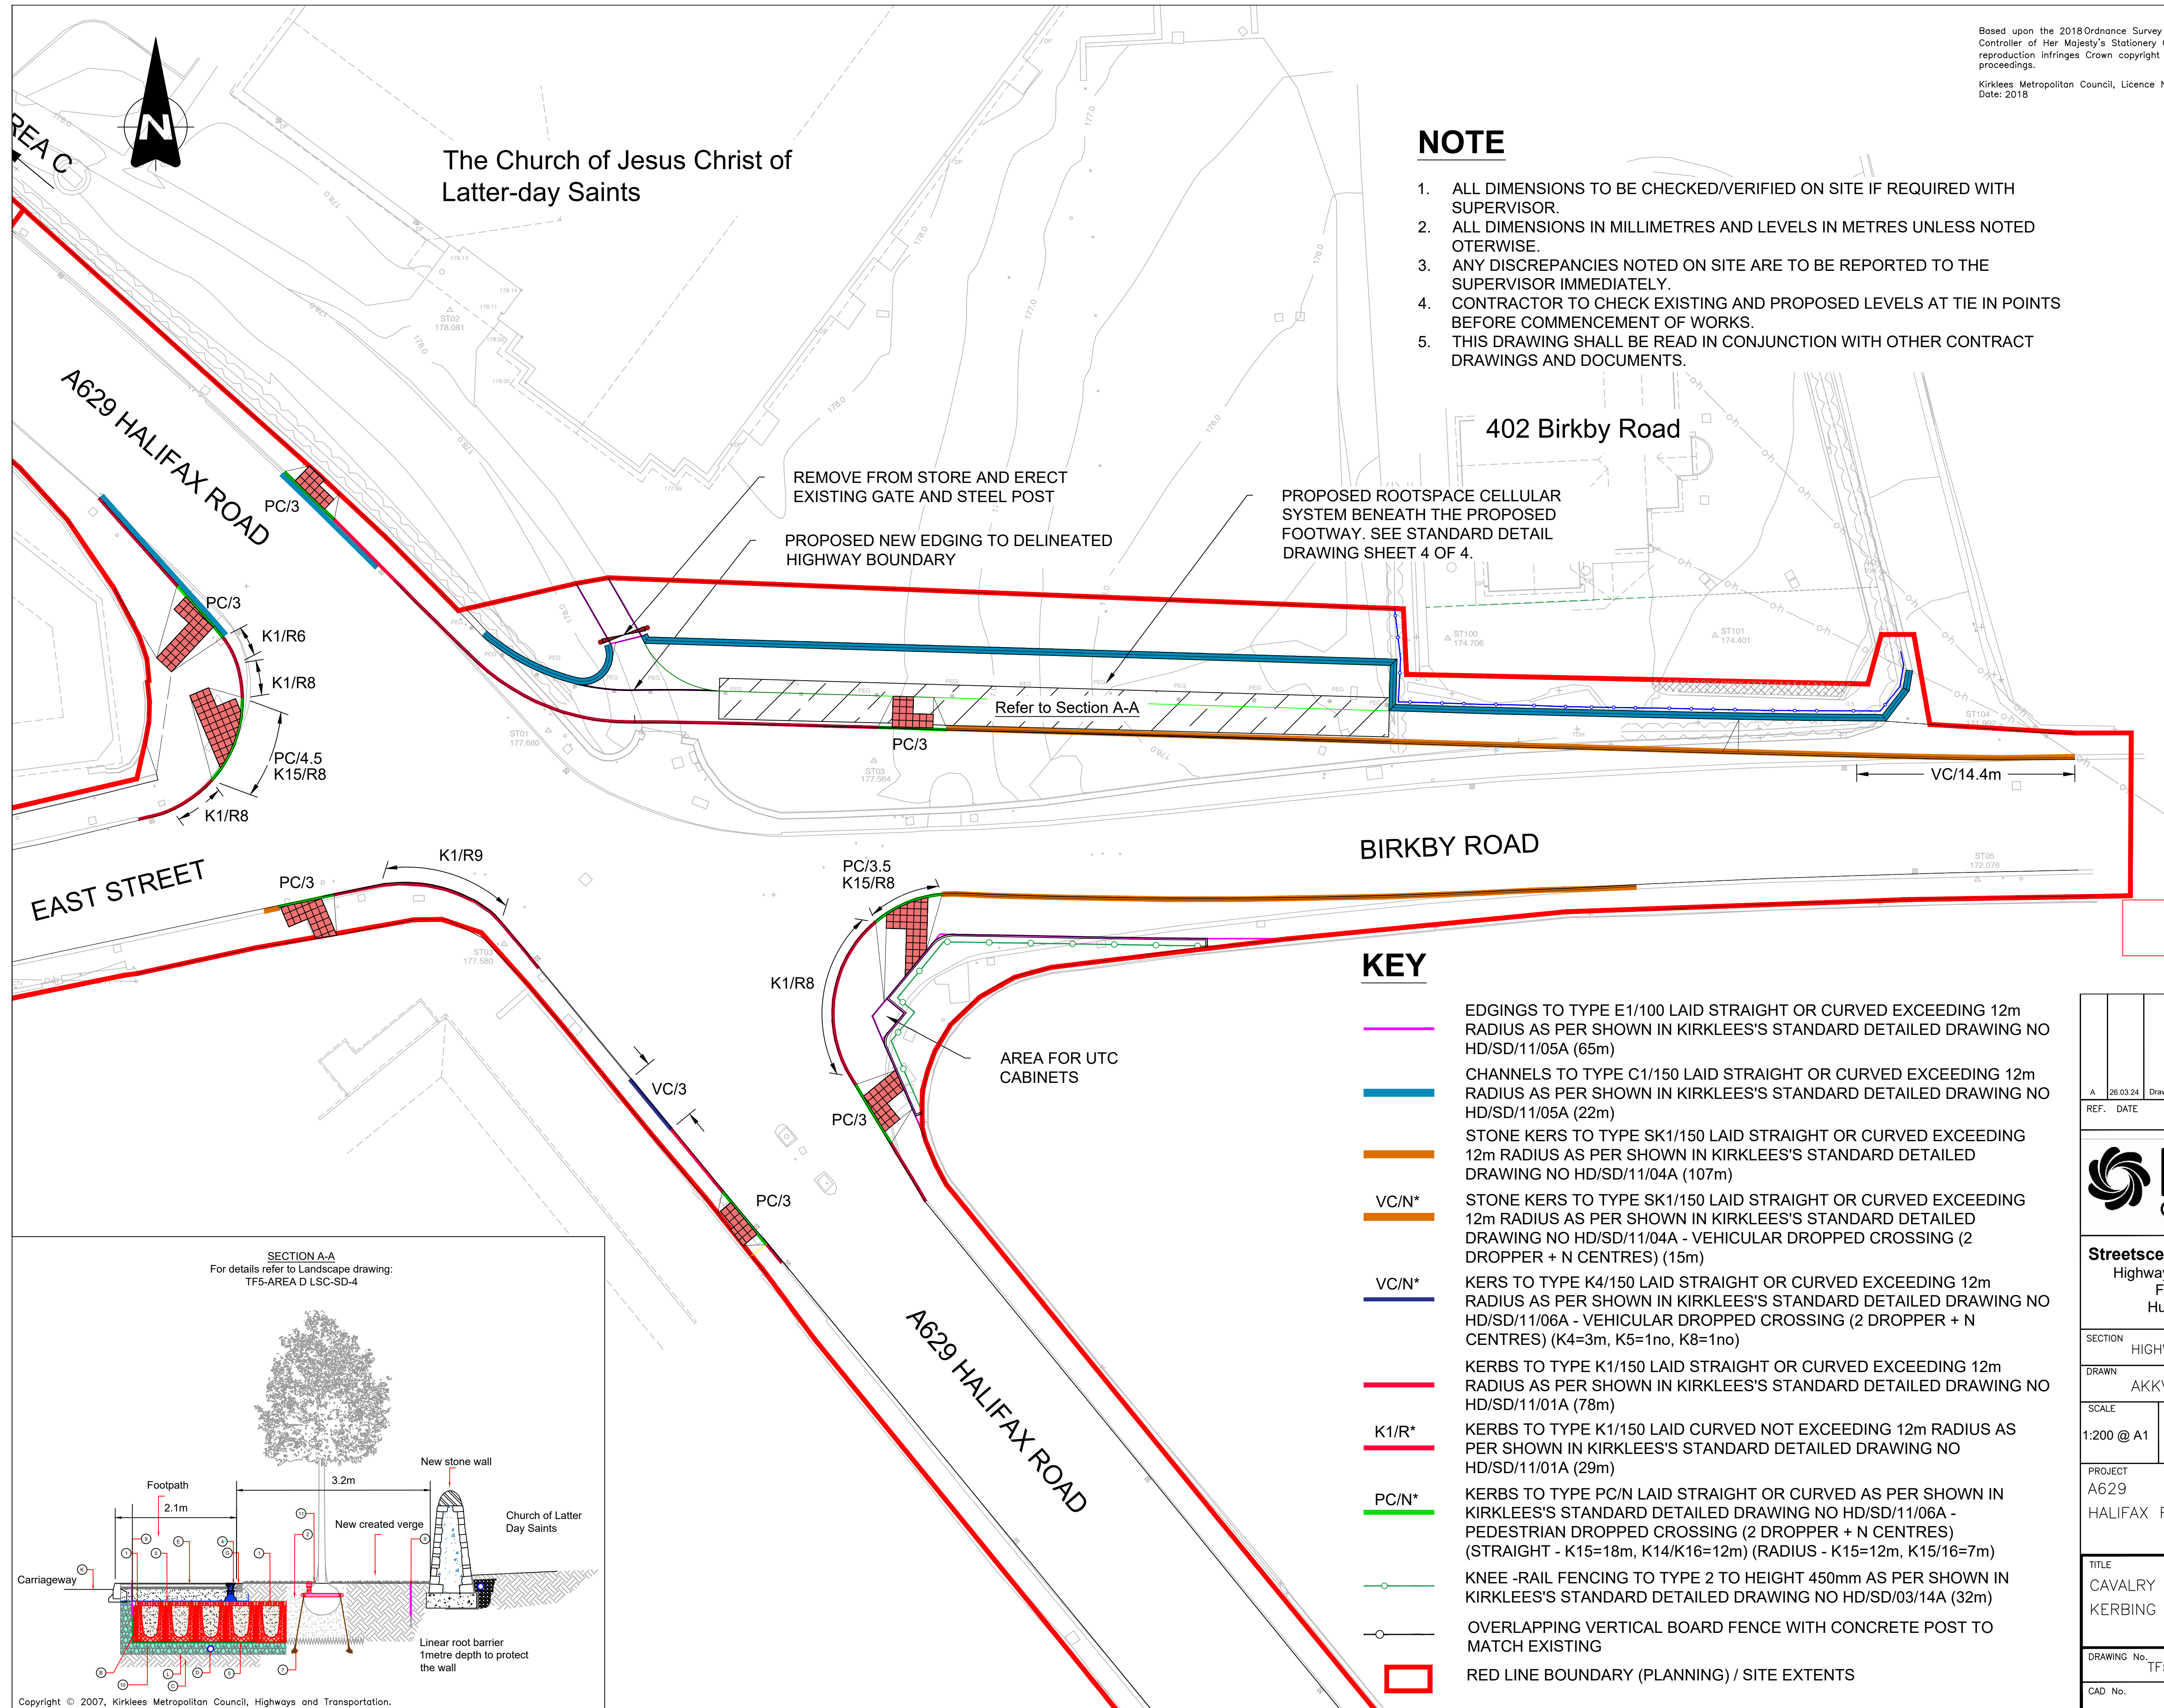

NOTE

1. ALL DIMENSIONS TO BE CHECKED/VERIFIED ON SITE IF REQUIRED WITH SUPERVISOR.
2. ALL DIMENSIONS IN MILLIMETRES AND LEVELS IN METRES UNLESS NOTED OTHERWISE.
3. ANY DISCREPANCIES NOTED ON SITE ARE TO BE REPORTED TO THE SUPERVISOR IMMEDIATELY.
4. CONTRACTOR TO CHECK EXISTING AND PROPOSED LEVELS AT TIE IN POINTS BEFORE COMMENCEMENT OF WORKS.
5. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER CONTRACT DRAWINGS AND DOCUMENTS.

KEY

- EDGINGS TO TYPE E1/100 LAID STRAIGHT OR CURVED EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/05A (65m)
- CHANNELS TO TYPE C1/150 LAID STRAIGHT OR CURVED EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/05A (22m)
- STONE KERS TO TYPE SK1/150 LAID STRAIGHT OR CURVED EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/04A (107m)
- VC/N* STONE KERS TO TYPE SK1/150 LAID STRAIGHT OR CURVED EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/04A - VEHICULAR DROPPED CROSSING (2 DROPPER + N CENTRES) (15m)
- VC/N* KERS TO TYPE K4/150 LAID STRAIGHT OR CURVED EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/06A - VEHICULAR DROPPED CROSSING (2 DROPPER + N CENTRES) (K4=3m, K5=1no, K8=1no)
- K1/R* KERBS TO TYPE K1/150 LAID STRAIGHT OR CURVED EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/01A (78m)
- K1/R* KERBS TO TYPE K1/150 LAID CURVED NOT EXCEEDING 12m RADIUS AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/01A (29m)
- PC/N* KERBS TO TYPE PC/N LAID STRAIGHT OR CURVED AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/11/06A - PEDESTRIAN DROPPED CROSSING (2 DROPPER + N CENTRES) (STRAIGHT - K15=18m, K14/K16=12m) (RADIUS - K15=12m, K15/16=7m)
- KNEE - RAIL FENCING TO TYPE 2 TO HEIGHT 450mm AS PER SHOWN IN KIRKLEES'S STANDARD DETAILED DRAWING NO HD/SD/03/14A (32m)
- OVERLAPPING VERTICAL BOARD FENCE WITH CONCRETE POST TO MATCH EXISTING
- RED LINE BOUNDARY (PLANNING) / SITE EXTENTS

SECTION A-A
For details refer to Landscape drawing:
TF5-AREA D LSC-SD-4

