


Plot 162 Rear Elevation

FOR GROUND FLOOR CONSTRUCTION  
CONSULT SITE SPECIFIC SPECIFICATION AND  
STRUCTURAL ENGINEERS DETAILS

WORKING DRAWINGS TO BE READ IN CONJUNCTION WITH  
STRUCTURAL ENGINEERS DETAILS

WORKING DRAWINGS TO BE READ IN CONJUNCTION WITH  
HARRON HOMES SITE SPECIFIC CONSTRUCTION  
SPECIFICATION

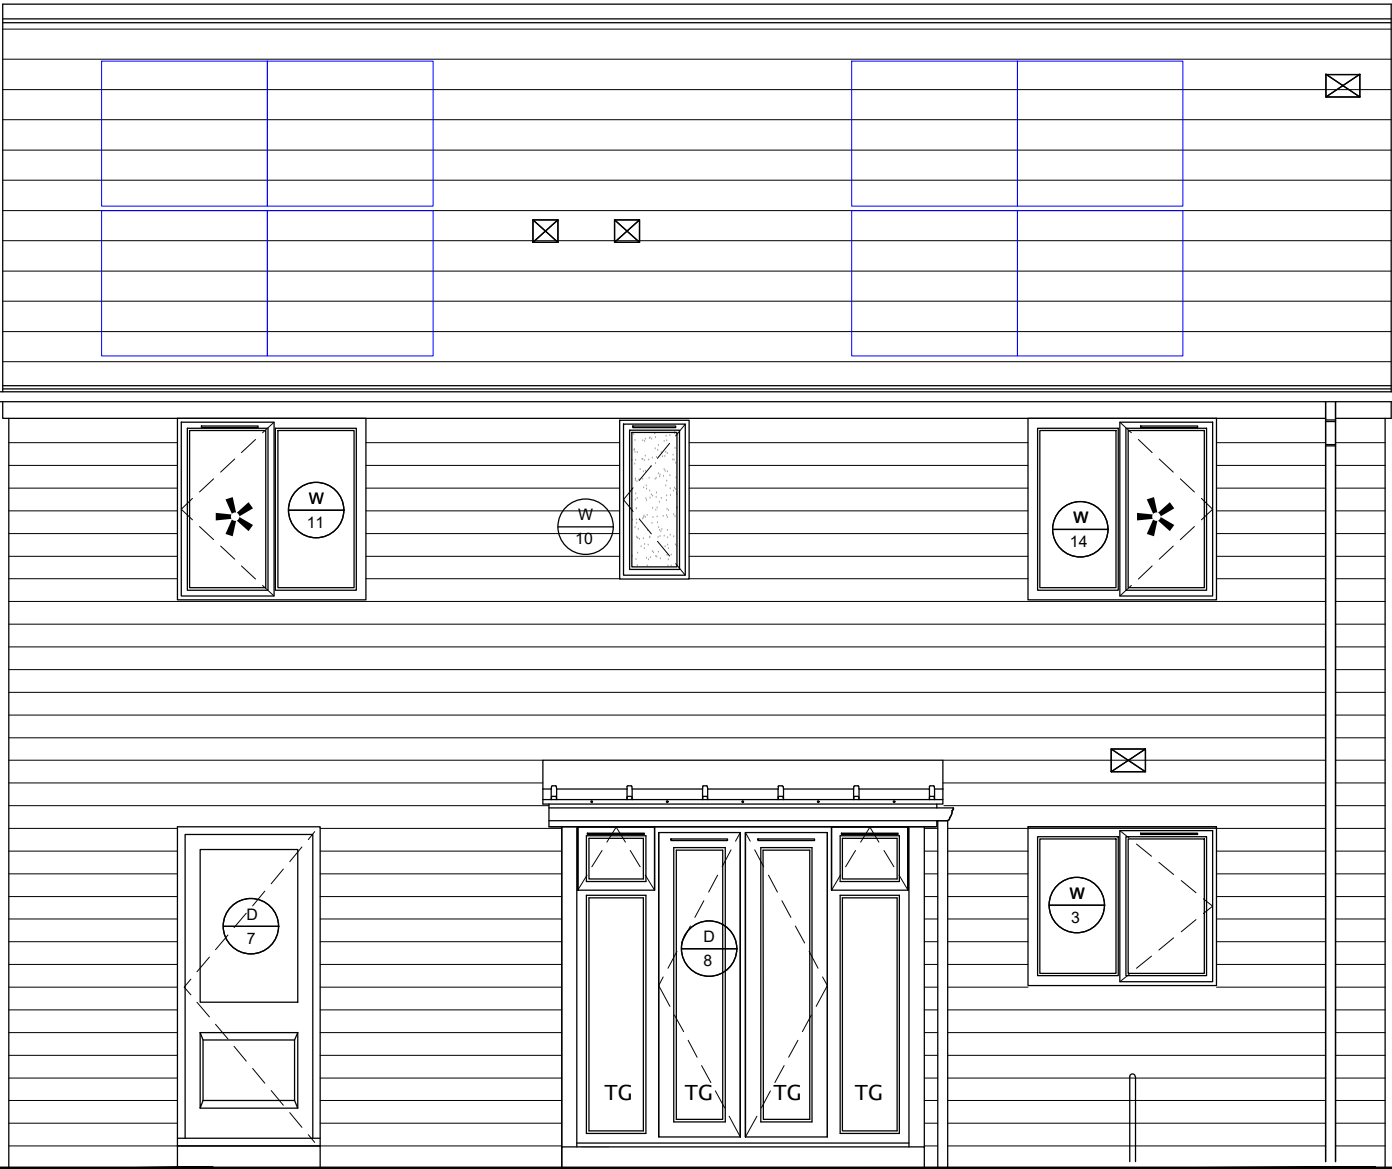

Settle V0 Stone  
REAR ELEVATION

| LEGEND |                                     |  |                                                                      |
|--------|-------------------------------------|--|----------------------------------------------------------------------|
| OG     | Denotes obscure glazing             |  | Falls                                                                |
| *      | Denotes escape window               |  | Man Handling Steel and Lintel                                        |
| MJ     | Denotes movement joint in brickwork |  | Collapse of Gable                                                    |
|        |                                     |  | Follow site fall prevention plan                                     |
|        |                                     |  | Use mechanical equipment, two man lift and train in kinetic handling |
|        |                                     |  | Temporary propping                                                   |



**Harron Homes Limited**  
Colton House  
Temple Point  
Bullerthorpe Lane  
Leeds  
LS15 9JL

Tel: 0113 204 4670  
Fax: 0113 204 4677  
Web: [www.harronhomes.co.uk](http://www.harronhomes.co.uk)

status: WORKING DRAWING

project: SETTLE V0 HOUSE TYPE (STONE)  
FIXBY PHASE 2, CONTEMPORARY  
BUILDING REGULATIONS 2022

title: REAR ELEVATION

drawn: JFE date: JUNE 2023

checked: / scale @ A3:1:50

job no: 429 drg no: SEV0SC.01.07