


Notes:

1. All dimensions are in millimeters unless stated otherwise
  2. This drawing should always be accompanied with an appropriate location plan to be supplied by the Design Engineer.
  3. The full extent of the highway retaining wall to be reconstructed will be marked out on site by the design engineer prior to the start of the works.
  4. The Contractor shall note the requirement for informing the adjoining landowner at least 1 week prior to the start of works.
- The Contractor shall be responsible for implementing the most appropriate form of traffic management in order to undertake the works safely.
5. The Contractor shall note the requirement for installing adequate steel safety barriers/ heras fencing around the perimeter of works including the base of the highway wall in order to safeguard highway users and adjoining members of the public.
  6. The Contractor shall be responsible for the erection of suitable access scaffold platform in order to execute the walling works safely.
  7. The Contractor shall be expected to excavate hand dug trial trenches across the full width of the proposed excavation (800mm min deep) in order to confirm the presence of any statutory undertaker's apparatus prior to undertaking any mechanical excavation. Extreme care must be taken when excavating in close proximity to utility services. Unless specified otherwise, any services located within the excavation outline shall be securely supported over the excavation bay using strongbacks and incorporated back to the works prior to backfilling (i.e. sleeved with a split duct prior to concreting).
  8. The Contractor shall be expected to utilise as much of the masonry from the existing wall as practicable in the construction of the new highway retaining wall including the parapet.
  9. The Contractor shall ensure that the site is left in a clean and tidy state and free of any debris arising due to the works (such as masonry, dry concrete etc) prior to leaving the site.
  12. The Contractor shall make sure that any damage to the adjoining private property is made good and reinstated to its original condition.

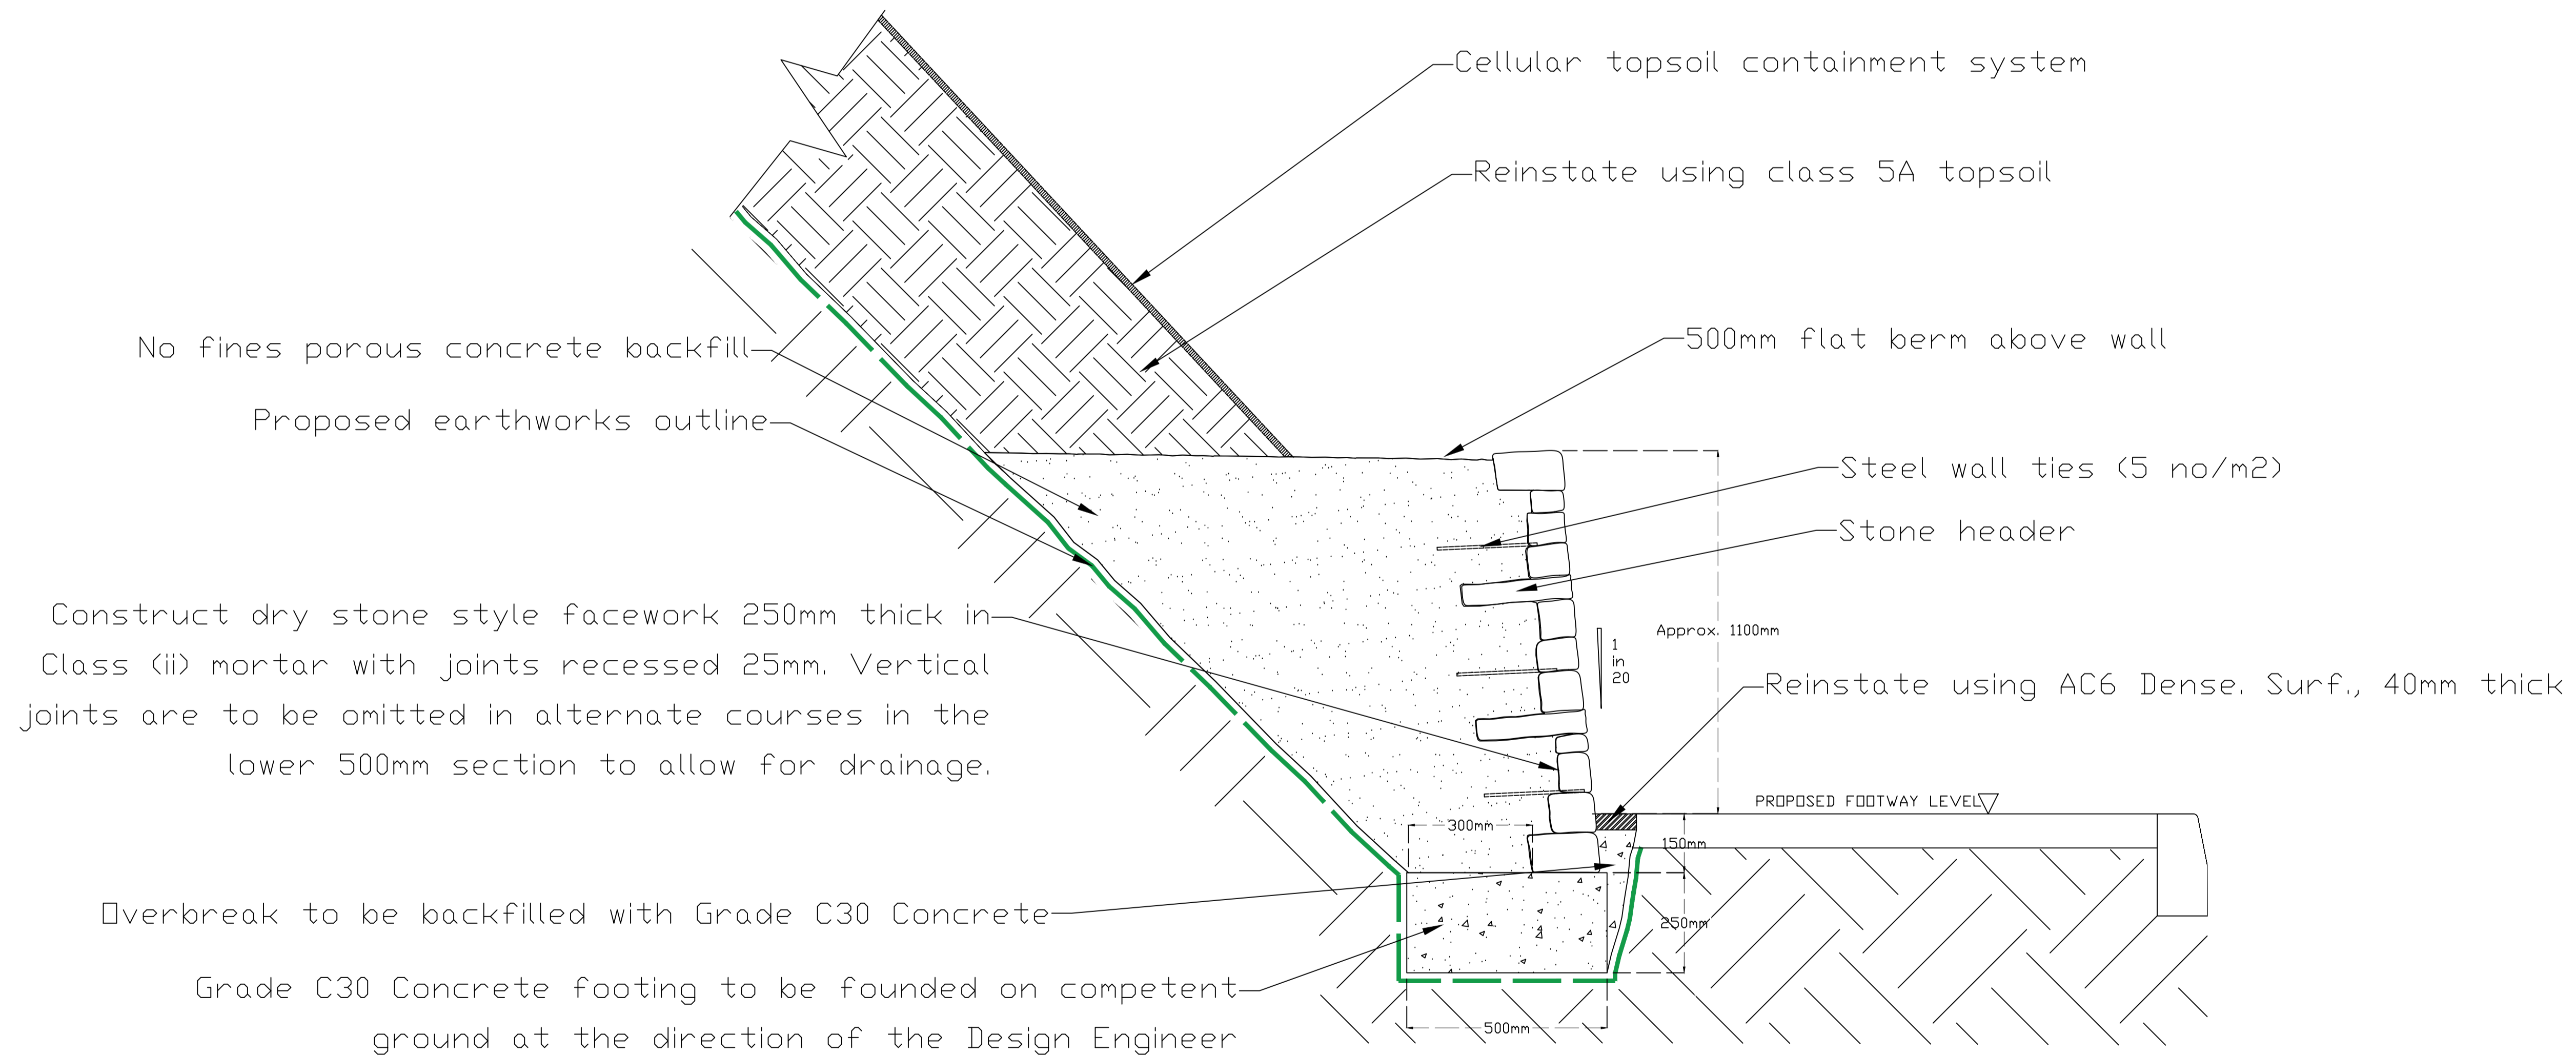

Dry Stone Retaining Wall typical section  
Scale 1 : 10

REF.	DATE	REVISIONS
 <b>Kirklees COUNCIL</b> <b>HIGHWAY DESIGN &amp; S278</b> Highways Service Kirklees Council PO Box 1720 Huddersfield HD1 9EL		
SECTION ASSET MAINTENANCE		
DRAWN	LE	CHECKED RB
SCALE	PROJECT NO.	DATE
A1	25/66083	SEP 2024
PROJECT BRADLEY MILLS ROAD, HUDDERSFIELD		
TITLE PRoW RETAINING WALL DETAIL		
DRAWING No. 66083/KMC/PROW/XX/DR/C		
CAD No.		

Based upon the 2018 Ordnance Survey Mapping with the permission of the Controller of Her Majesty's Stationary Office © Crown copyright. Unauthorized reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

Kirklees Metropolitan Council, Licence Number: 100019241.  
 Date: 2018