

Herchenbach Industrial Buildings GmbH, Löhestraße 6, D-53773 Hennef

## QUOTATION

Document No.: 1053607  
Date: Apr 22, 2024


### Your offer for a Herchenbach semi-permanent building

thank you very much for your enquiry. Our provisional offer for a HEBA-FIX® structure engineered and manufactured by Herchenbach is as follows:

#### A. Project overview

Width (clear span):.....	10.14 m	Length:.....	25.10 m
Eave height (eave):.....	5.40 m	Ridge height:.....	7.03 m
Clear height (inside):.....	5.20 m	Frame distance:.....	5.02 m
Usable area:.....	254.51 m <sup>2</sup>	Usable space:.....	1,323.47 m <sup>3</sup>
Structure:.....	Aluminium	Roof design:.....	Saddle roof (18°)
Wind load:.....	null kN/m <sup>2</sup>	Snow load on roof:.....	0.93 kN/m <sup>2</sup>
Static plan:.....	BS EN 1991		
Roof material:.....	Roof made of PVC-tarpaulin (industrial grade), with translucent inner tarpaulin to avoid condensation water		
Wall material:.....	Steel trapezoidal sheet metal (coil coated) wall panel cladding (single wall)		

#### Image of a similar HEBA-FIX® building

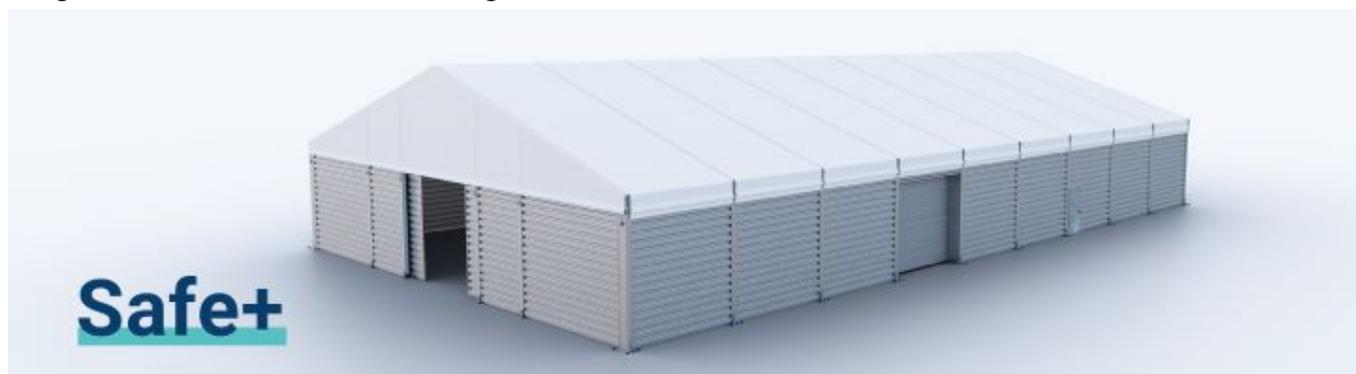

We have prepared a proposal for your HEBA-FIX® structure and summarised it on the following pages. It contains the price of the building as well as for options, accessories, transport, installation and detailed technical specifications. Please feel free to call us should you have any queries regarding this offer, so that we are able to deliver this project in the time scale you require.