

A Facilitation Pruning Specification required to Tree Work recommendations from Kirklees Planning when granting Planning Permission 2023/62/92346/E @ The Willows, Hallas Road, Kirkburton, Huddersfield .HD8 0QG.

22nd October 2024

Please find some additional information to understand the proposed works.

Page 2 – Location Plan

Page 3 – Site Plan


Page 4 – Front view of Tree no 2 pruning

Page 5 - Rear View – Intended pruning of Tree no 4

Page 6 - Side view showing out line of pruning to Tree no 5

Page 7 – Description of works by registered tree surgeon.



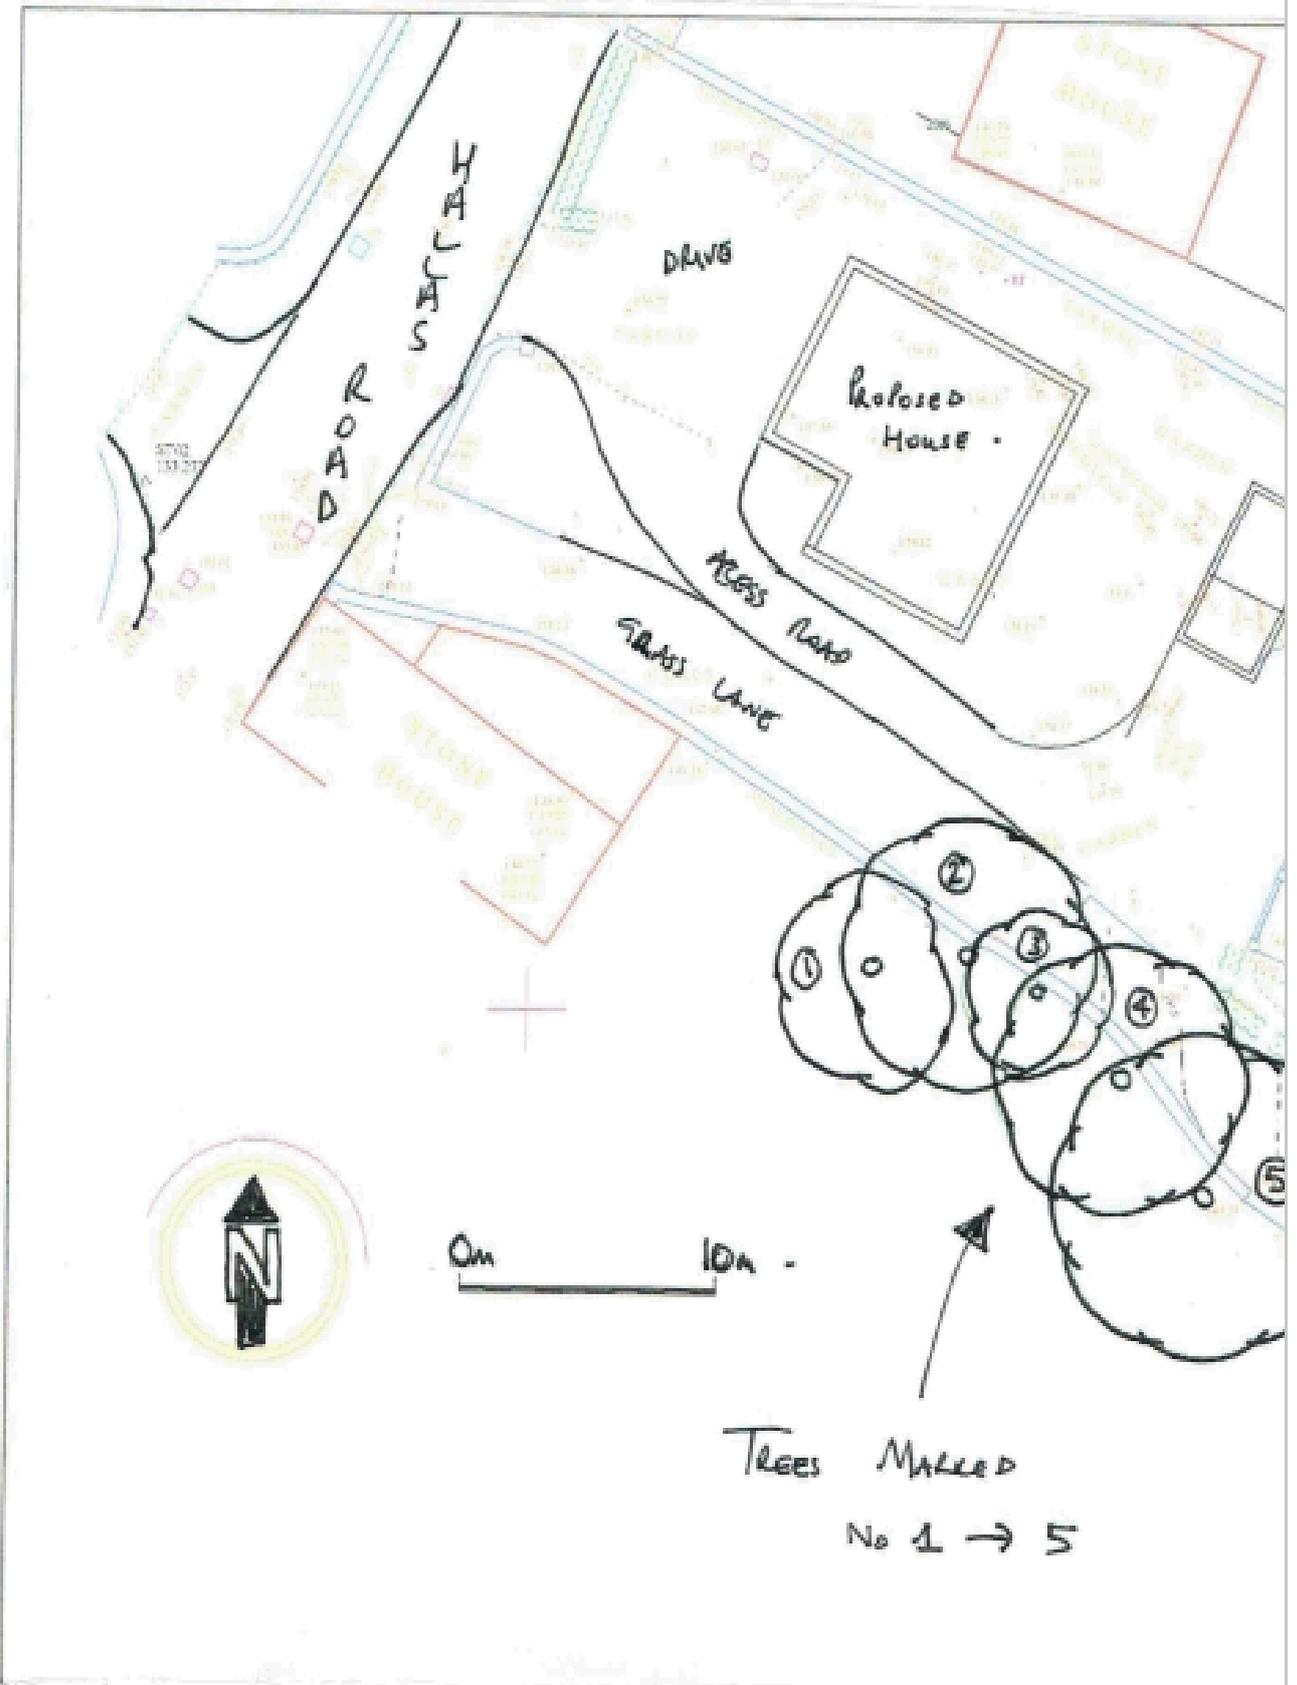

0m 10m

TREES MARKED
No 1 → 5



Front view of Tree no 2 intended pruning



Rear View – Intended pruning of Tree no 4



Side view showing out line of pruning to Tree no 5

Description of works by registered tree surgeon. Email below.

A Cut Above Tree Surgery LTD.
10 Drummer Lane.
Bolster Moor.
Huddersfield.
HD7 4JT.
Liam Robinson Director.

Morning Shaun

Further to our site meeting I recommend we remove full stem of nearest stem adjacent to your property on multi stemmed sycamore (tree no2)

Reduce back overhanging branches to secondary branches on sycamore (tree No 4)

And repeat the same procedure on sycamore (tree No 5)

This worked is required to eliminate issues (leaf debris, ,improve light.) damage to existing property and remove issues for future problems with the new build.

The work recommended should be carried out in winter when the trees are dormant.

Please don't hesitate in contacting me if you require any further assistance.

Thanks Liam.

.....