




A  
B  
C  
D  
E  
F  
G  
H

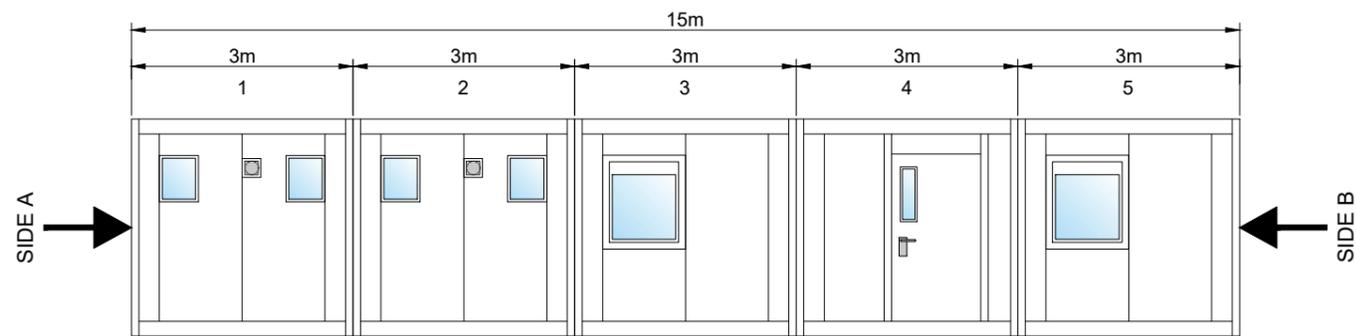


FRONT ELEVATION

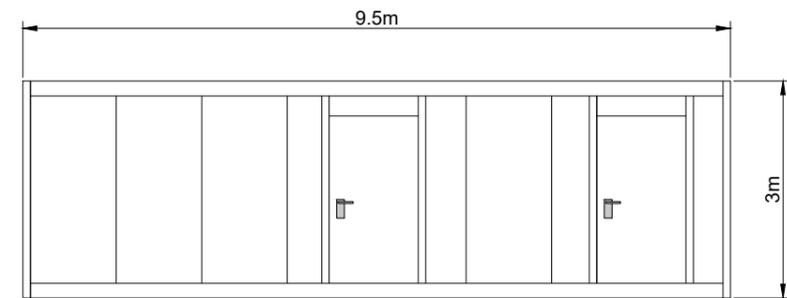

SIDE ELEVATION 'A'

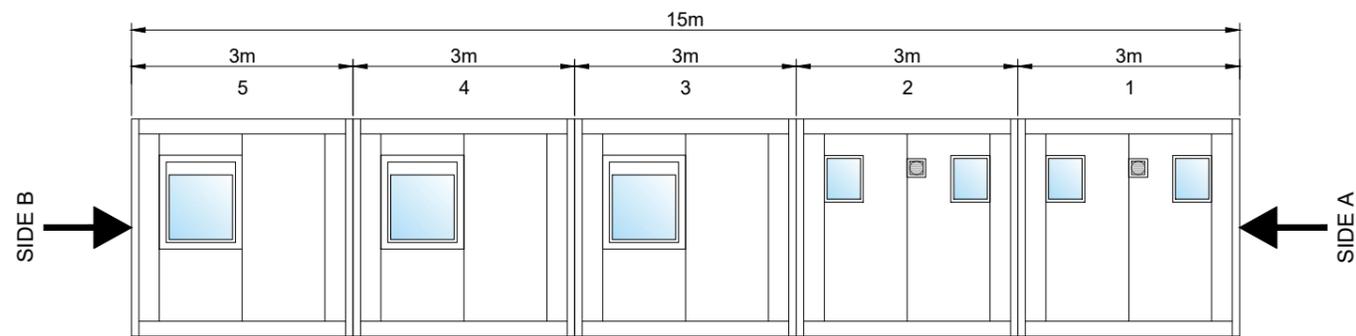

REAR ELEVATION

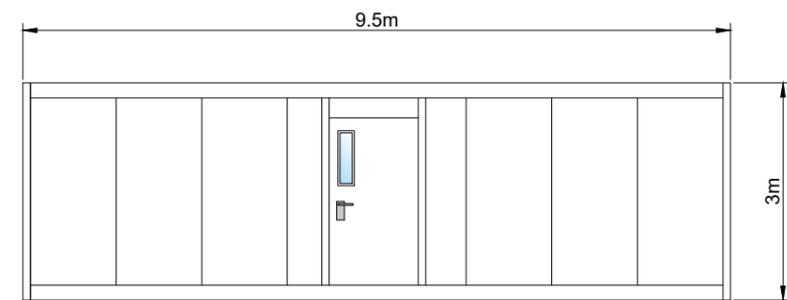

SIDE ELEVATION 'B'

MODULAR ACCOMODATION SPECIFICATION

No Units:	5
No Storeys :	1
Region:	N
I/E/JV:	E
No Ops:	-
No Staff:	6

Notes:

All furniture shown for information only. Do not scale from drawing.

Standard stair pod footprint is 2.5x4.8m  
Stair pod roof sizes vary from partial (2.5x1.2m\*) to full coverage (2.5x4.8m\*).  
\*approximate dimensions

All standard fitted floor covering is vinyl. Carpet can be quoted on request on a m<sup>2</sup> basis.

All units require structural mid-support posts, where in open plan, it shall be either on the centreline or 4020mm from outside face

Fire skirt must be fitted when install is above ground, RE JCOP10.1

Manufactured units to include the requirements of the following technical bulletins,

- WINTIN-003 HSG 168 Compliance
- WINTIN-004 JCOP 9 & 10.1 Compliance
- WINTIN-005 Weld Checks All frames

P1	PRELIMINARY ISSUE FOR DISCUSSION ONLY:	06/11/24
RZ		
Rev. By. Chkd.	Comments.	Date. Authorised.



Select Plant Hire Company Ltd.,  
Wincham Industrial Estate,  
19 Wincham Lane,  
Wincham,  
Cheshire,  
CW9 6DE.  
Telephone: +44 (0)845 873 5936  
Fax: +44 (0)1777 353026

Client: TRU

Project: NURSERY

Drawing: Elevation

Reference	Scale	Drawing Sheet Size
xx	NTS	A3

UNDER NO CIRCUMSTANCES SHOULD DIMENSIONS BE SCALED FROM THIS DRAWING "IF IN DOUBT ASK".

Sheet Number	Rev.
1 of 1	P1

Drawing Number: TRU-NUR-EL1-01-01