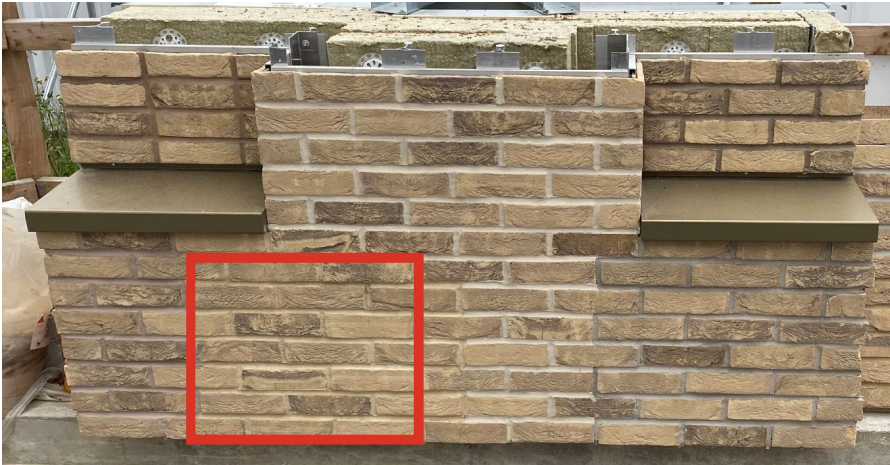
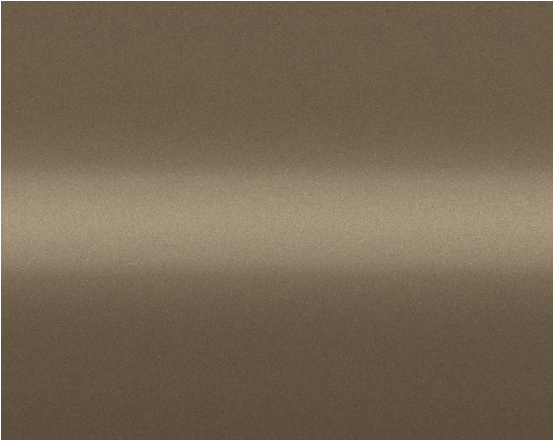
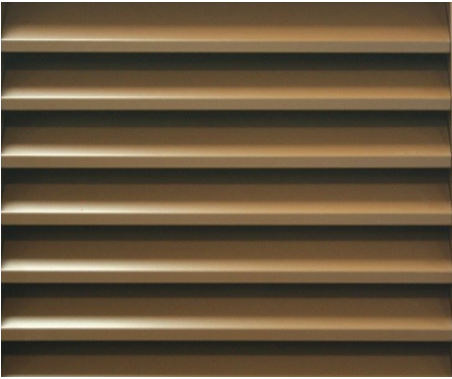
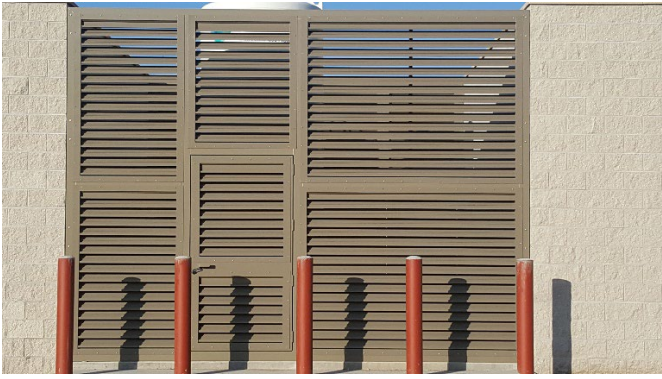
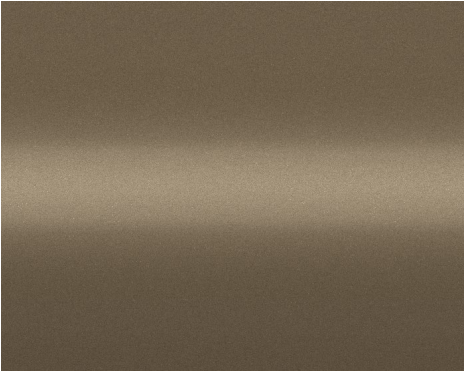
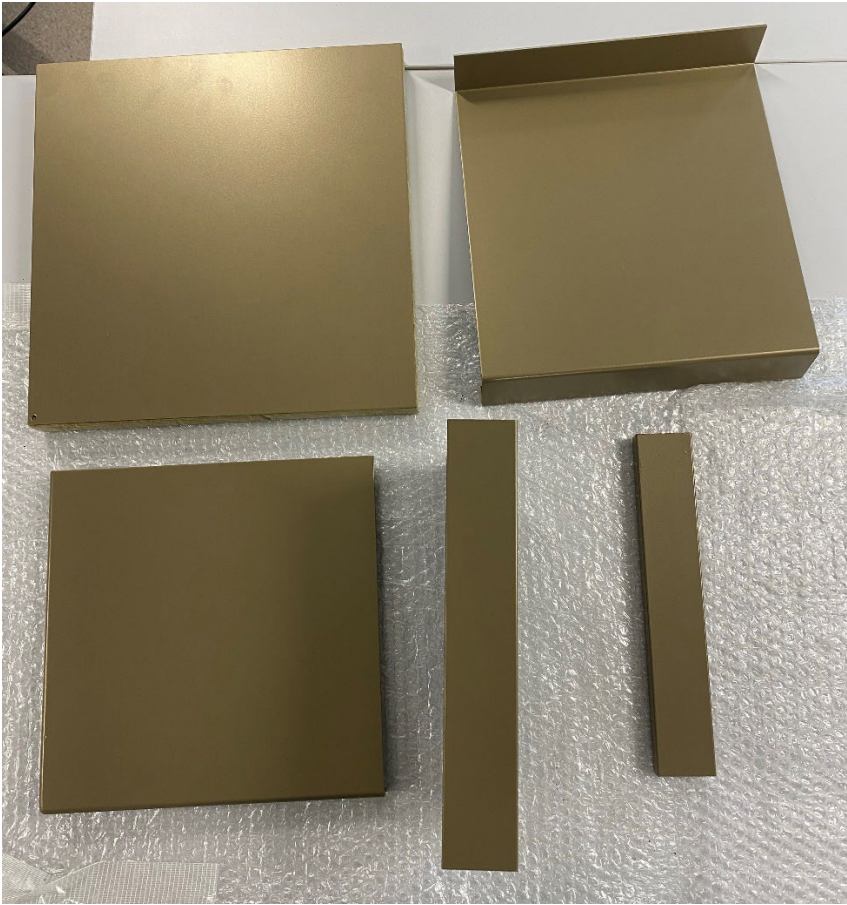
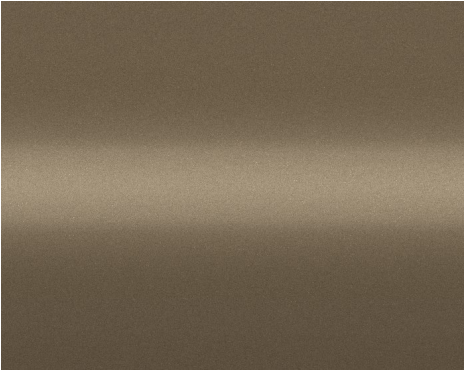
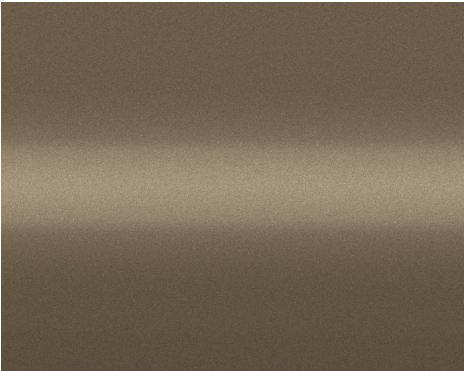
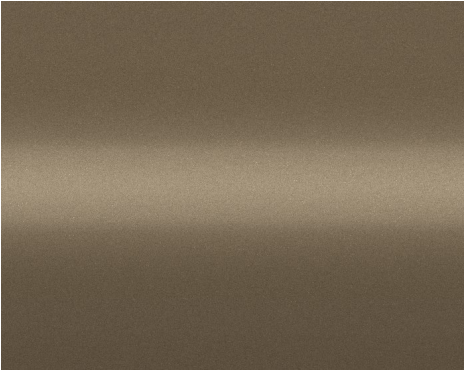

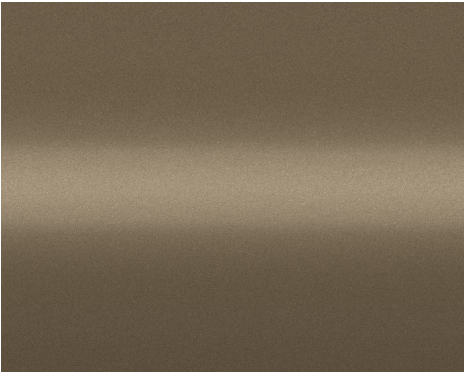
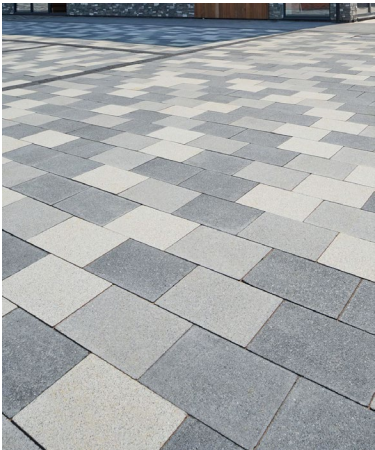



Southgate 2 External Materials Schedule			SG2-AHR-B2-XX-SH-A-40001	P06	Plant room noted	27.05.25
Architectural Items						
Façade Material	Additional Information	Sample Image	Example Image (Built) / Samples		Image source and comments	
Corum Brick Brick Layer 1 Brick Layer 2	Mortar: Parex Historic KL 50% Portland 50% Sandstone Concave joint				Sample panel with mix of mortar colours Highlighted area indicated chosen mortar colour.	
Corum Brick Brick Layer 2	Stack Bond Mortar: Parex Historic KL 50% Portland 50% Sandstone Concave joint				As built example: Greenhead College	
Corum Brick Brick Layer 2	Soldier Course Mortar: Parex Historic KL 50% Portland 50% Sandstone Concave joint					


Corum Brick (Plant Room)	Solider course Mortar: CPI Euromix Darker Buff			Sample image
Glass spandrel panels	6mm RAL 7008 Khaki Grey HST			Sample image
PPC aluminium panel	Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Example image: Daphne Steele Building

Aluminium Louvres	To roof parapet & external plant Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Example image from Astro Metal Craft https://astrometalcraft.com/louvered-panels-divide-protect/ (Not proposed colour)
Aluminium Doors	Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Sample images
Curtain wall	Curtain Wall frames with matching flashings. Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Sample images

Copings	Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Sample panel
PPC Aluminium Soffit	Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Soffit to Ground Floor canopy Setting out as per drawing SG2-AHR-B2-XX-DR-A-35401
Rockspan Cladding Panel	Roof level plant cladding Colour: Anthracite Grey			Example: Daphne Steele Building
External Steel Doors	Roof level external doors Colour: Grey			

Louvred Doors	Colour to match louvre screen			
Louvred Screen	Containing door into service yard Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			https://www.solinear.co.uk/product-range/louvre-doors/
MEP Items				
Building Mounted CCTV	TBC by MEP specialist			
Building Mounted Lighting	TBC by MEP specialist			
Landscape Items				
Block Paving Type 1	Braemar Paving Mix - Alto Silver (60%) and Jura Grey (40%), textured			Please refer to Landscape architects information

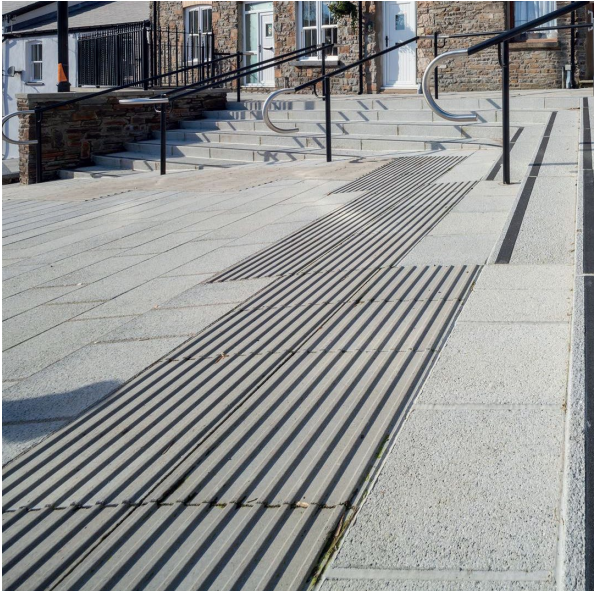Block Paving Type 2	Mayfair flags, silver			Please refer to Landscape architects information
Tactile Hazard Paving	Concrete Paving Flags			Please refer to Landscape architects information
Kerb	145mm wide Conservation kerb			Please refer to Landscape architects information
Handrails to Steps	Free standing brushed stainless steel handrail			Please refer to Landscape architects information

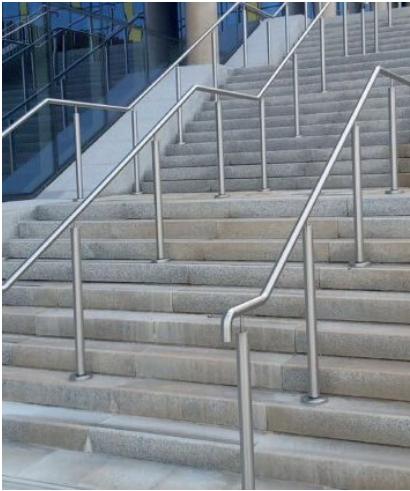Railings	Free standing brushed stainless steel railing			Please refer to Landscape architects information
Louvered Fence	Italia 100 Louvered fence by Langfulton or similar approved Colour: Interpon D2525 Y2206F Steel Bronze 1 Matt			Please refer to Landscape architects information
Wall mounted seating	Bexley Wall Mounted Planter Bench			Please refer to Landscape architects information