


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	4.000	20.500
Flush-Flo™	0.693	15.973
Kick-Flo®	1.427	12.546
Mean Flow		15.766

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 8 mm Grade 304L stainless steel
 - Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
 - Media blasted for corrosion resistance
 - Variable flow rate post installation via adjustable inlet (if necessary)
 - Indicative Weight: 130 kg
 - Product Carbon Footprint: 577.42 kgCO2e
- Based on a 3rd party verified EPD: hydro-int.com/epd

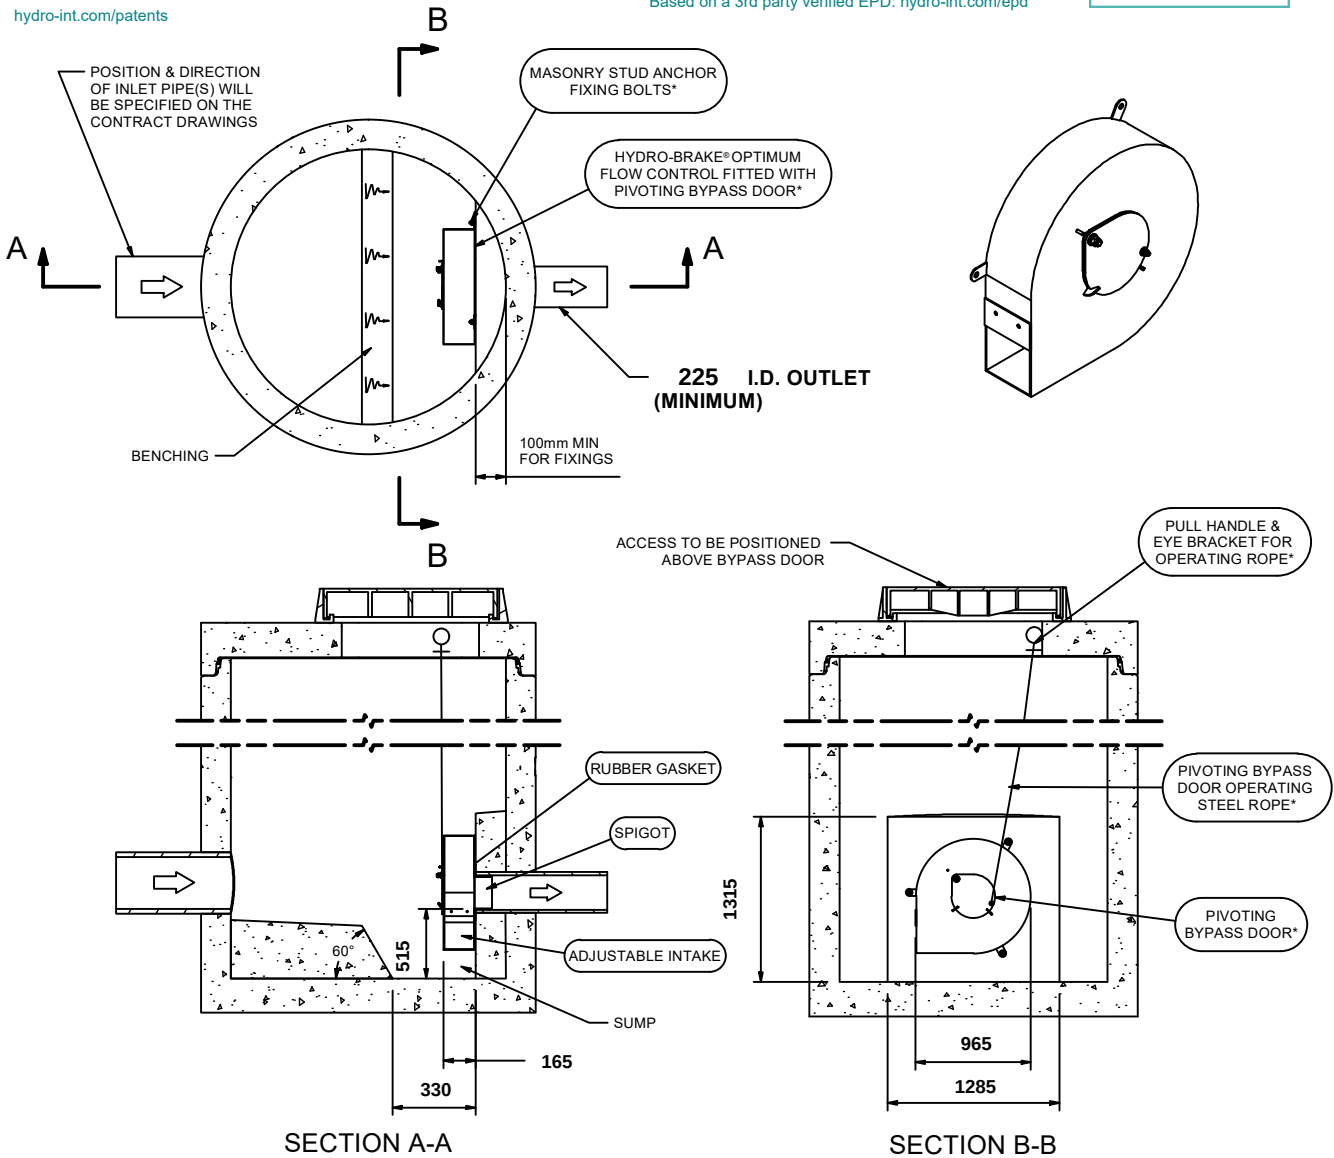

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE 	The head/flow characteristics of this SHE-0160-2050-4000-2050 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve. The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.		 SHE-0160-2050-4000-2050 Hydro-Brake® Optimum
	DATE	11/08/2025 09:41	
	SITE	CLAYTON MANOR	
	DESIGNER	Tim Conroy	
	REF	MHS14	