


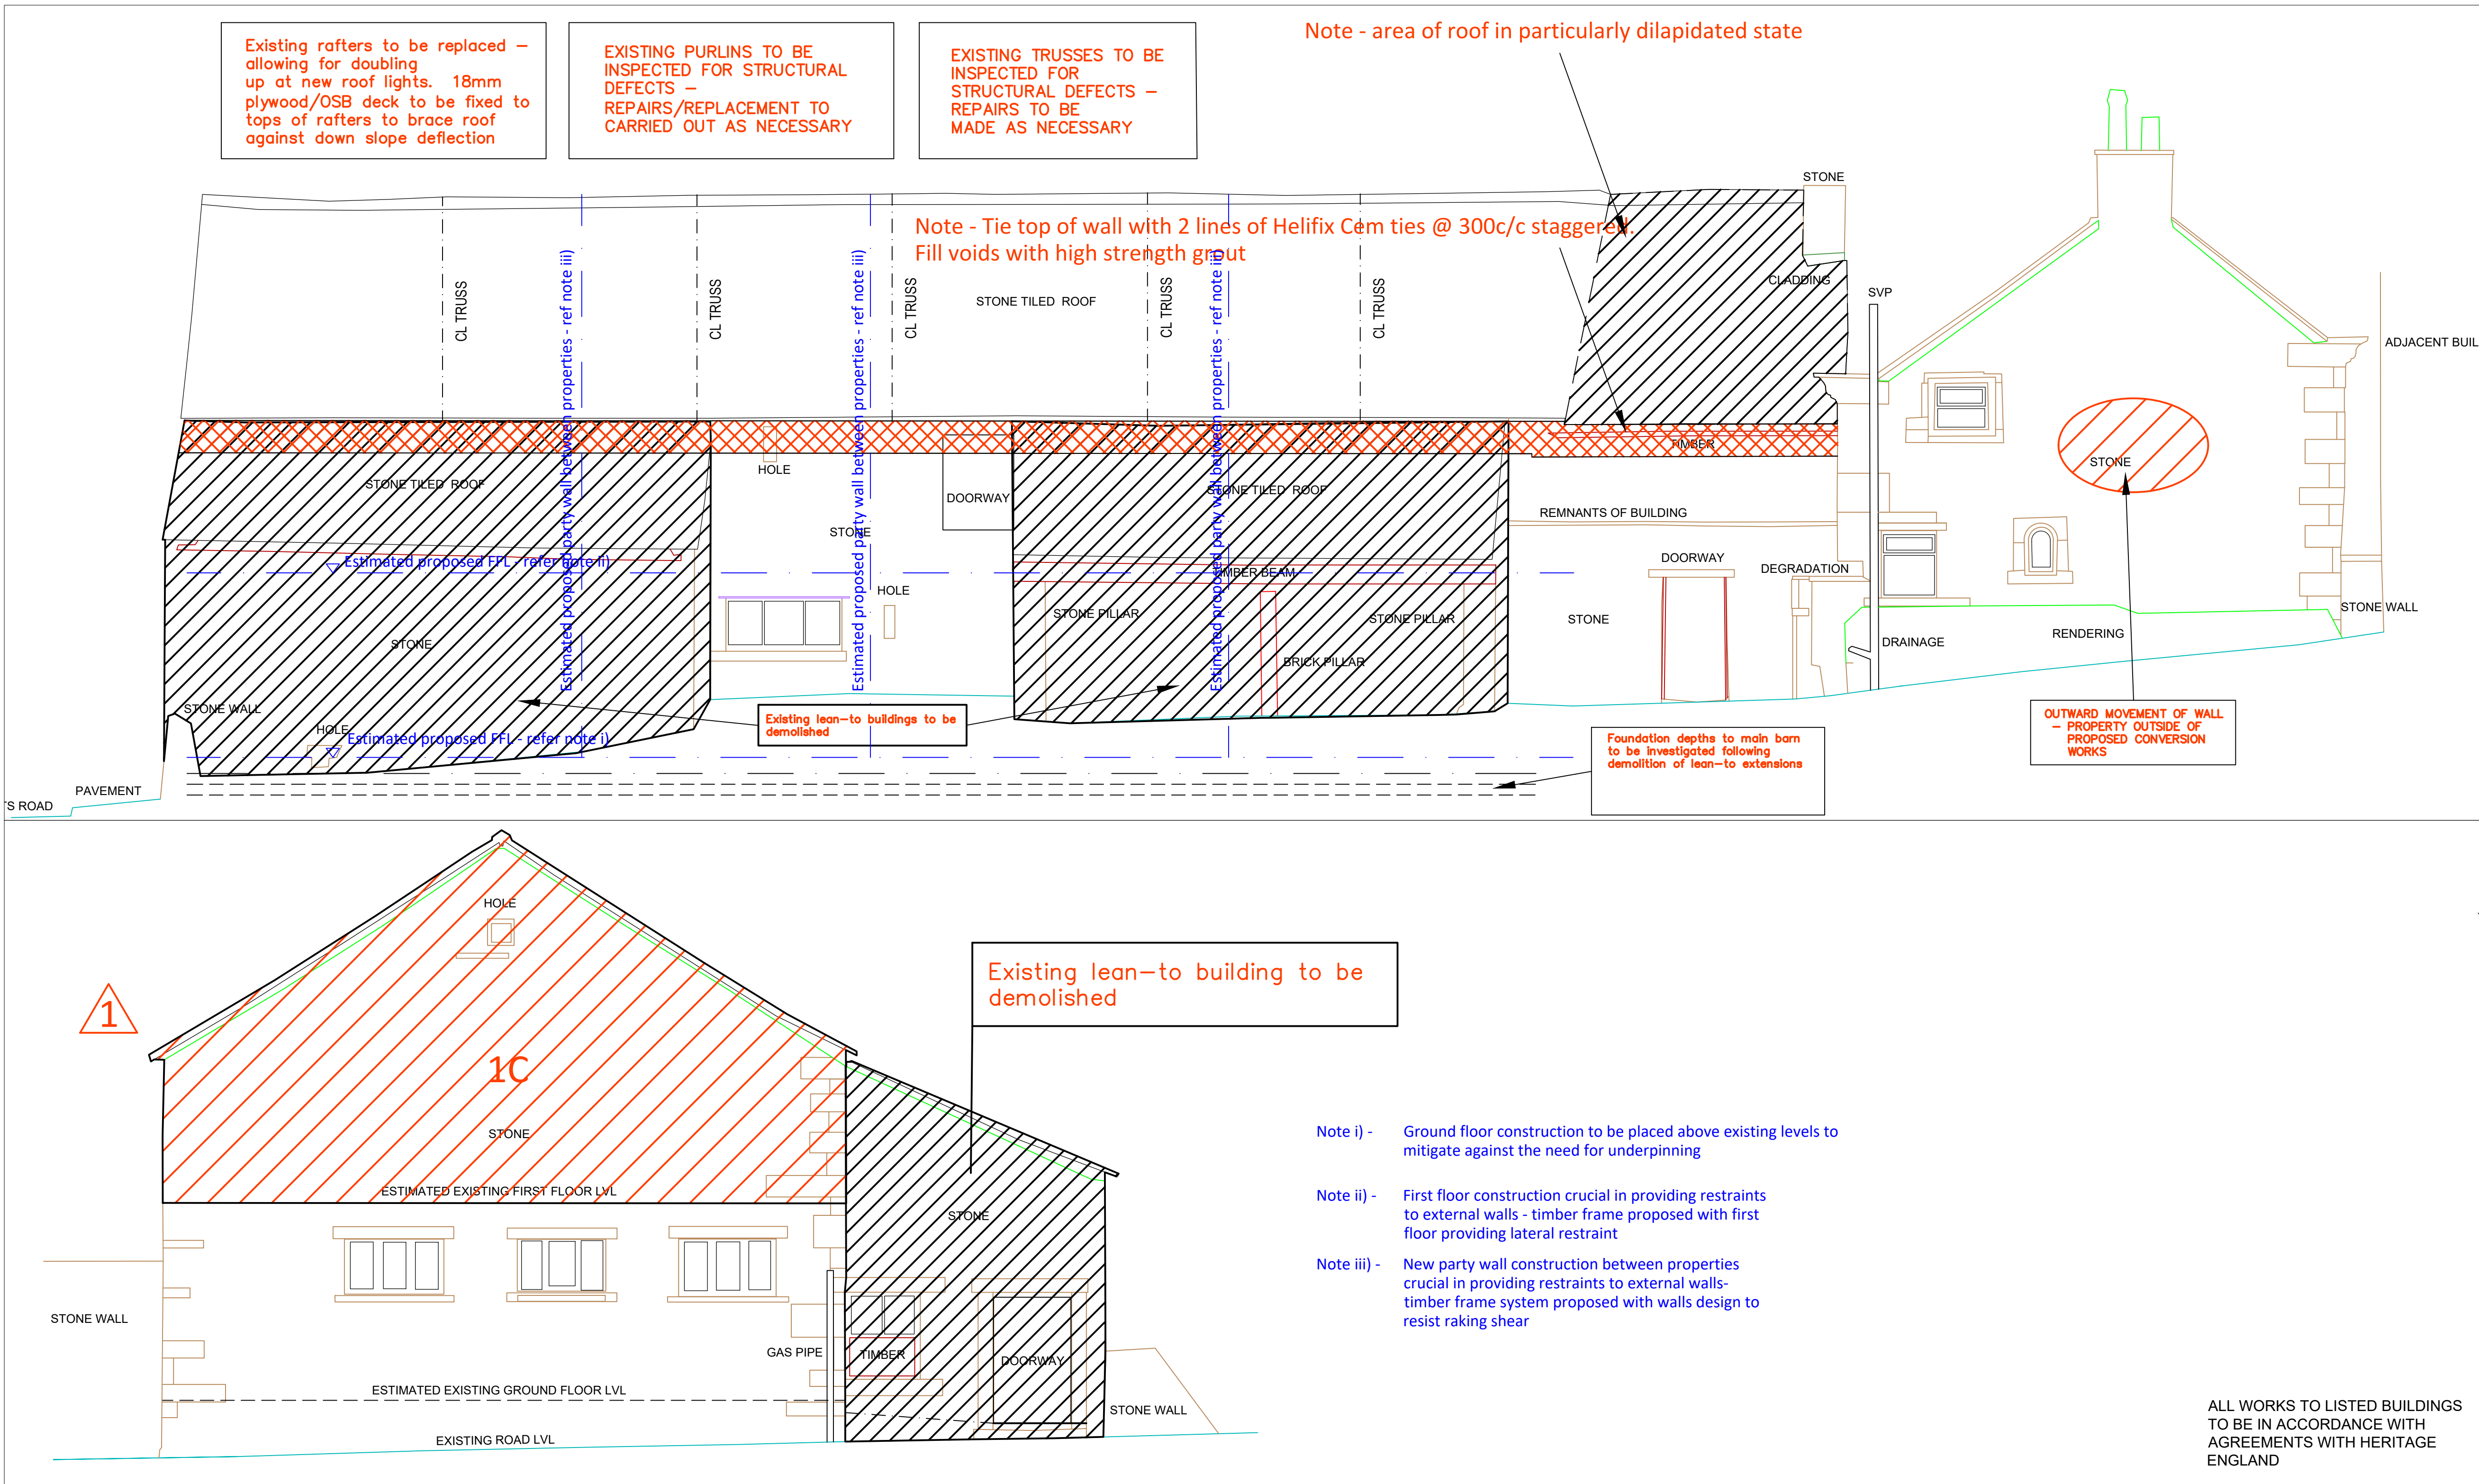

NOTES

- STRUCTURAL REQUIREMENTS ONLY ARE INDICATED.
- ARCHITECT'S DRAWINGS MUST BE USED FOR SETTING OUT.
- TO BE READ IN CONJUNCTION WITH ARCHITECT'S DRAWINGS & SPECIFICATIONS FOR DPMs, DPCs, INSULATION DETAILS ETC.
- TO BE READ IN CONJUNCTION WITH LITHOS REPORTS IN RELATION GEENVIRONMENTAL ISSUES INCLUDING REQUIREMENTS FOR REMEDIATION WORKS (INCLUDING CLEAN COVER TO LANDSCAPED AREAS) AND LANDGAS PROTECTION MEASURES.
- TO BE READ IN CONJUNCTION WITH BRICK-TIE PRESERVATIONS REPORTS FOR TIMBER, DAMP AND STRUCTURAL REPAIR ISSUES
- WORKS INDICATED ARE BASED ON GROUND LEVEL CURSORY INSPECTIONS ONLY AND WILL NEED TO BE REVIEWED ONCE BUILDINGS ARE SCAFFOLDED AND AVAILABLE FOR HIGH LEVEL INSPECTIONS. ALLOW FOR OPENING UP WORKS DURING THE COURSE OF THE WORKS AS DIRECTED BY THE ARCHITECT AND ENGINEER AND CONTINGENCIES FOR ADDITIONAL STRUCTURAL RESTORATION WORKS.
- ALLOW FOR APPROPRIATE MEASURES INCLUDING APPROPRIATE TIME FOR DRYING OUT OF THE BUILDING FABRIC FOLLOWING SEALING OF THE BUILDING ENVELOPE.
- STRUCTURAL MASONRY WORK TO BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF EUROCODE 6 (BS EN 1996).
- STRUCTURAL STEELWORK TO BE DESIGNED, FABRICATED AND INSTALLED STRICTLY IN ACCORDANCE WITH THE ENGINEER'S PROJECT SPECIFICATION & THE GENERAL REQUIREMENTS OF EUROCODE 3 (BS EN 1993). SITE WELDING WILL NOT BE PERMITTED.
- IN SITU CONCRETE WORKS TO BE CARRIED OUT IN ACCORDANCE WITH THE ENGINEER'S CONCRETE SPECIFICATION AND THE GENERAL REQUIREMENTS OF EUROCODE 2 (BS EN 1992)
- ENGINEERED FLOOR JOISTS TO BE DESIGNED, MANUFACTURED AND INSTALLED IN SUBJECT TO THE FOLLOWING APPLIED LOADS:
 - IMPOSED FLOOR LOADS = 1.50 kN/sq.m
 - TOTAL DEAD LOAD ALLOWANCE = 0.75 kN/sq.m
- ALL EXPOSED FEATURE STRUCTURAL TIMBERS INCLUDING ROOF TRUSSES, PURLINS AND RAFTERS ARE TO BE SUBJECT TO A DETAILED CONDITION INSPECTION. ALLOWANCE SHOULD BE MADE FOR REPLACEMENT OR RESTORATION AS NECESSARY.
- ALL EXISTING LOAD-BEARING WALLS ARE OF SOLID CONSTRUCTION WITH RUBBLE FILL - ALLOW FOR OPENING UP WALLS LOCALLY FOR INSPECTION AND MAKE AN ALLOWANCE FOR THE INTRODUCTION OF CONSOLIDATION TIES AS NECESSARY.
- ALLOW FOR THE REPLACEMENT OF DEFECTIVE STONE LINTELS. ALLOW FOR THE INTRODUCTION OF NEW STEEL AND PRECAST CONCRETE LINTELS AS NECESSARY.
- ALLOW FOR REPLACEMENT OF DEFECTIVE, DISPLACED AND POROUS EXPOSED STONWORK.
- ALL REPLACEMENT MORTAR TO BE LIME BASED STRICTLY IN ACCORDANCE WITH HERITAGE ENGLAND SPECIFICATION REQUIREMENTS

	3	ISSUED FOR APPROVAL	14/04/25
	2	ISSUED FOR INFORMATION	02/08/21
	1	ISSUED FOR INFORMATION	28/07/21
Checked	Rev #	Description	Date

JOHN RADCLIFFE & SONS

Job Title

**YEW TREE FARM
FARNLEY TYAS**

**BRIGHT
YOUNG**

Consulting
Limited

The Media Centre, 7 Northumberland
Street, Huddersfield, HD1 1RL

Email: info@brightyoung.co.uk

Web: www.brightyoung.co.uk

Tel: 01484 487950

Fax: 01484 603519

Drawing Title

PLOT 1 - 4 - LISTED BARN

**PRELIMINARY STRUCTURAL
REMEDIAL WORKS
PROPOSALS**

Scale AS SHOWN	Date	Drawn	Checked
-------------------	------	-------	---------

Drg No.

4011/202

Rev

3

PRELIMINARY HAZARD ASSESSMENT				
HAZARD REF	DESCRIPTION	ANTICIPATED CAUSE	POTENTIAL SOLUTIONS	SEQUENCING AND TEMPORARY WORKS REQUIREMENTS
1	Structural movement in external walls and boundary retaining wall with rotation of gable wall towards road and significant local bulging of external wall - as illustrated above	Foundation settlement, loss of lateral support from roof and first floor with deterioration of timbers, potential water pressure on retaining wall and water penetration into rubble filled external walls	The following remedial works will be essential as a minimum to ensure the satisfactory future structural integrity of the works - rebuilding of areas 1A (drg 201), & 1C (drg 202) including new foundation to area 1A, replacement of first floor structure with new restraint system between first floor and external wall, replacement/insitu strengthening of roof structure with new restraint system between roof and external wall and restraint of boundary retaining wall by tying to new concrete ground slab construction. Allow for sock anchors to stabilise areas 1B (DRG 201)	Careful consideration of the sequencing of works will be needed to ensure the structural integrity of the building during the course of the works. This will include the installation and sequenced removal of specialist designed propping systems along with a temporary footpath closure and traffic management.