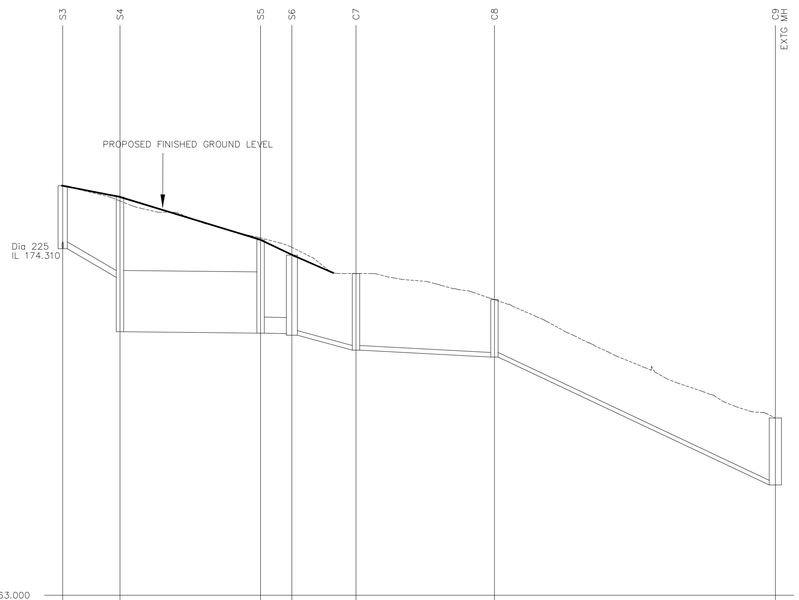

S3–C9

GROUND LEVEL	176.369	175.818	175.381	174.769	174.096	173.500	173.500	173.500	172.497	172.255	172.029	171.760		
STORMWATER COVER LEVEL	176.364	176.000		174.600	174.100	173.500		172.649					168.786	
STORMWATER INVERT	174.310	173.375	171.600	171.554	171.554	171.537	171.487	171.000	171.000	170.774	170.774		166.600	
STORMWATER DETAILS		Dia 225 Circular CLAY 1 in 10 CLASS S B&S	8500x2000 Concrete Tank 1 in 500		Dia 525 CONC 1 in 300	Dia 150 CLAY 1 in 21 CLASS S B&S		Dia 150 Circular CLAY 1 in 100 CLASS S B&S		Dia 150 Circular CLAY 1 in 11 CLASS S B&S				
STORMWATER LENGTHS		9.354	23.000		5.106	10.468		22.605		45.858				

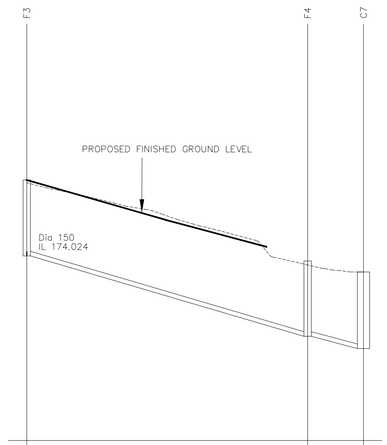

F3–C7

GROUND LEVEL	176.411	175.957	175.520	174.921	173.996	173.720		
FOULWATER COVER LEVEL	176.503				173.858	173.500		
FOULWATER INVERT		174.024			171.400	171.400	171.000	
FOULWATER DETAILS			Dia 150 Circular CLAY 1 in 17 CLASS S B&S			Dia 150 Circular CLAY 1 in 23 CLASS S B&S		
FOULWATER LENGTHS		45.845				9.121		

CODE For Adoption Under a Section 104 Agreement

1.All adoptable sewer works and material to be in accordance with "Code for Adoption" , The Relevant British/European and Yorkshire Waters Standards/requirements/Addendum to the Mechanical and Electrical Specification and Kitemarked.

2.Manhole covers must have a clear opening of 600mm and shall be Class D400 to BS EN 124 with 150mm deep frames in highways.

3.Filled ground must be filled and consolidated under the supervision and to the satisfaction of Yorkshire Water before any sewer works are carried out.

4. Yorkshire Water are not obliged to accept filter drain/land drainage runoff into the public sewer network or adoptable drainage system (directly or indirectly.) An alternative method of disposal of land drainage runoff will therefore be required. Please consult with the Local Authority/Land drainage Section.

5. The adoptable sewers should be a minimum of 1m and manholes 0.5m from kerb faces and service margins.

6. Sewers must have 5 metres clearance from trees and hedges or the width of canopy at mature height.

7. Sewers to be laid in Class "S" bedding (150mm granular bed & surround.) Where depth of cover to the top of the sewer is less than 1.2m in Highway and verges (or less than 900mm in non vehicular areas) then a concrete slab should be provided above the granular bed and surround.

8. Bedding and backfill material to conform to the requirements of Water Industry Specification 4-08-02 (Table A2)

9. Yorkshire Water policy is that Type "C" brick manholes and 1050mm dia manhole rings are not preferred. Instead it is preferred that you use a Type "B" manhole with 1200mm dia or 1500mm dia rings with the opening sited over the channel where depth of cover to pipe soffit is 1.0-1.5m

10. Adoptable plastic sewer pipes to be BSI Kitemarked (certified to WIS 4-35-01 and BS/EN13476). Adoptable plastic sewer pipes to be laid in maximum 3 metre lengths unless there is a specific operational need to lay longer lengths. Plastic channel sections in manholes are not acceptable. Yorkshire Water require clay channels in manholes.

11. The minimum crushing strength for clay pipes should be as follows: 100mm dia. 40KN/m, 150mm dia. 40KN/m, 225mm dia. 45KN/m, 300mm dia. 72KN/m. The minimum crushing strength for concrete pipes should be - (Class 120 to EN 1916/BS5911-1 2002).
Plastic pipes should conform to WIS 4-35-01 and BS EN13476

12. Where a B125 cover and frame has been approved, this must not be coated in plastic and must have lifting eyes suitably sized to accommodate standard lifting keys. Screw down covers are not acceptable.

13. There must be enough clearance at crossovers to accommodate bedding to both pipes (approx 300mm): If crossover is near the rocker then the clearance needed may need to be increased.

Rev	Details	Date	Drwn.	Chk.

Newett Homes

Yew Tree Road
Birchencliffe, Huddersfield

Longitudinal Sections
Sheet 2

Dwg No. : STE/25/03/11/02

Date : 20-3-25

Scale : H-1:500, V-1:100

Copyright © Shaun Tonge Engineering

SHAUN TONGE
ENGINEERING
11 Broomhead Road. Wombwell. Barnsley. S73 0SA.
Mobile 07528 278070 . Email Shauntongeengineering@yahoo.co.uk

A1