

200mm SHALLOW TERRA JUPITER BOLLARD 50mph

NEW FOR 2019



SHALLOW TERRA JUPITER BOLLARD

Introducing the latest Static Terra Jupiter Bollard which has been successfully impact tested to the International IWA-14 specification, stopping a 7.2t vehicle travelling at 80kph (50mph).

The technology built into the Biscuit Bollards core allows a shallow foundation depth of only 200mm which is a fraction of the depth of typical impact tested products. The Shallow Terra Jupiter Bollards provide a high level of protection against large Hostile Vehicles travelling at high speeds within inner city areas where limited foundation depths are available.

Shallow foundation technology has proved invaluable within city centres, outside airports, skyscrapers and other applications where underground services such as utilities, car parks and basements prevent standard depth equipment being installed. Not only are installation costs greatly reduced, disruption is also greatly minimised when excavating.

**FRONTIER
PITTS**

PROTECTING YOUR WORLD

THE BRITISH MANUFACTURER OF HOSTILE VEHICLE MITIGATION

FP26JS.19

tel +44 (0)1293 422800
web www.frontierpitts.com

200mm SHALLOW TERRA JUPITER BOLLARD 50mph

INSTALLATION



OPTIONS

Height above Ground	1000mm
Diameter	273 Ø
Foundation Depth	200mm
Security Rating	IWA 14-I 7.2t @ 80kph

Finish: Painted as standard, decorative sleeves available to match the Rising Terra Universal Bollard & Static Terra Jupiter Bollard


CLASSIFICATION CODE

IWA14V/7200/80/90:8.7

BENEFITS & FEATURES

- Shallow Foundations of only 200mm - ideal for inner city sites where there are limited foundation depths due to underground services and utilities
- Quick & easy to install - less disruption to site & business
- More environmentally friendly - 25% less concrete used than a standard static bollard installation
- Stackable and Easy to Transport

SHALLOW TERRA JUPITER BOLLARD

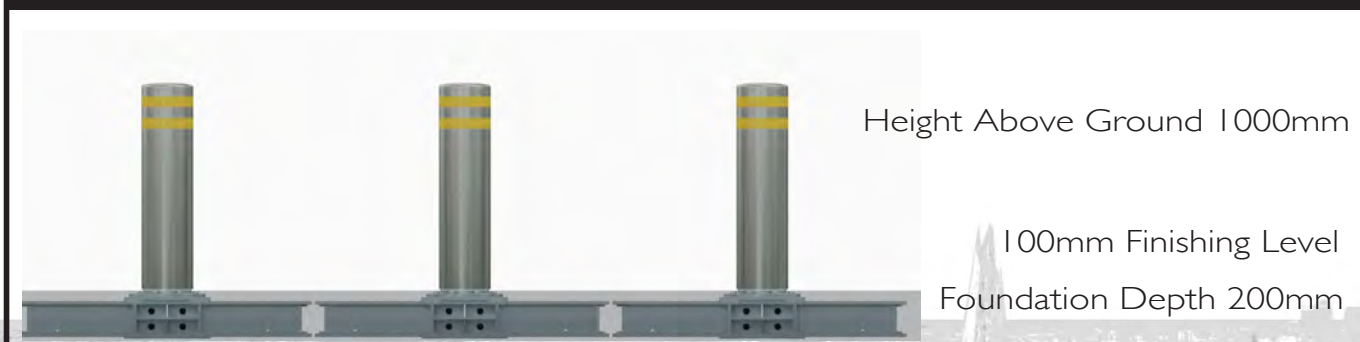

**FRONTIER
PITTS**

PROTECTING YOUR WORLD

THE BRITISH MANUFACTURER OF HOSTILE VEHICLE MITIGATION

tel +44 (0)1293 422800

web www.frontierpitts.com

Specification correct at time of print. In accordance with Frontier Pitts policy of continual development, we reserve the right to make changes, improvements or amendments to any product at any time without prior notice. All items are offered subject to availability.