

& HELIOS™
LARGE ROLLER SYSTEM





LARGE ROLLER BLIND

When you need a roller blind system that covers large windows effortlessly and is built to last, Helios really delivers.

OVERVIEW

- Strong and durable system
- 12 year warranty
- Sizes up to 4m wide, 6m drop, 16m²
- Available with fascia



SYSTEM DETAILS

Helios roller blinds are built for large windows and demanding applications.

Helios shades can be operated manually via chain or crank handle, or motorised with many control options available. Multiple blinds can be coupled together to work from a single drive.

Aesthetically, the system can be enhanced with fascia, which can be powder coated to any RAL colour.

USES & APPLICATIONS

The Helios system is engineered to be secure, safe and smooth to operate, providing a great user experience and feeling of quality. With so many options to enhance the design and to integrate the controls, you can configure Helios to suit virtually any application or budget.

Large sizes and the ability to couple systems together mean that windows can be shaded in the most economical and aesthetically pleasing way possible.




SHADE & LIGHT





ROBUST BRACKETS

- 3mm Steel Construction
- Securely supports large or heavy blinds
- Colour coordinated bracket covers




EXTRUDED ALUMINIUM ROLLER

- Strong roller tubes to minimise deflection
- Wide range from 38mm-75mm dia
- Appropriate size selected for blind size/weight




ADJUSTABLE END BEARING

- Enables levelling of roller
- Removes need for packing brackets
- Easy to adjust after installation

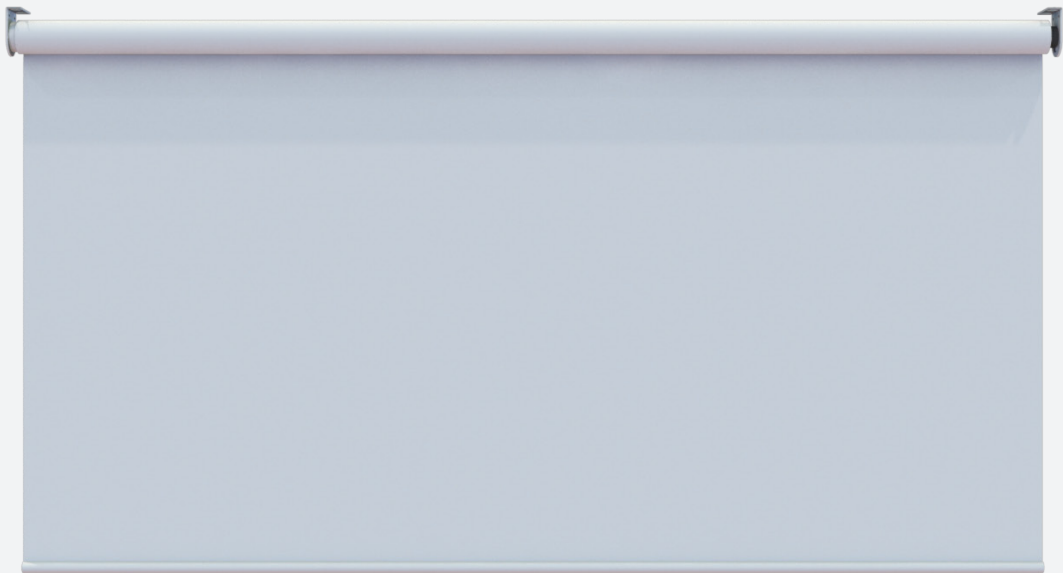


CONTROL OPTIONS

- Metal Chain
- Crank handle with reduction gear
- 240V motorised
- Low Voltage or battery motorised



HEMBAR OPTIONS

- Type 1 - 20mm round aluminium
- Type 2 - Teardrop shape aluminium
- PK-S - Sealed Fabric Pocket
- Custom Options



FABRIC OPTIONS

- Sunscreen fabric for glare control with views out
- Dimout fabrics for light filtering and privacy
- Blackout fabrics for room darkening
- Reflective and film fabric for specialist applications




MOTORISATION CONTROLS

- Hardwired Switch
- Radio remote control
- Digital and IP communication
- Integration and control systems




GUIDEWIRES

- Optional addition of side guidewires
- Guides the blind hem bar
- Prevents the blind swinging with air movement
- Can be used on shallow slopes



BLIND CONCEALMENT

- Flat fascia section available
- Range of recess profiles for built-in blinds
- Can be finished in any RAL colour



SELECT YOUR SYSTEM


See Systems Overview brochure for more information

ROOFLIGHT SYSTEMS

BLACKOUT SYSTEMS

SQUARE AREA

18m²




®KUROLOK™
TWIN RL

9m²



®KUROLOK™
RL

4m²



®HELIOS™
RL

24m²



®KUROLOK™

BLACKOUT SYSTEMS

ROLLER SHADES

14m²



®KURO™

LARGE

16m²



®HELIOS™

MEDIUM

6m²



®SIRIOS™


SMALL

3m²



®ORBIS™

SELECT YOUR FABRIC



VIEW OUR RANGE
OF FABRICS ONLINE

www.umbrashading.co.uk/products-services/blind-fabrics

FIND OUT MORE

FOR MORE SYSTEM INFO AND AUTOMATION
OPTIONS VISIT

www.umbrashading.co.uk/tools/product-selector-guide