



ARBORICULTURAL REPORT & Impact Assessment to BS 5837:2012 at:

***Land at Wellands Lane,
Scholes,
Cleckheaton,
BD19 6EY***

Prepared for: *Barnes Homes Yorkshire Limited*

Report Date: *January 2026*

Reference: *AWA7205*

0114 272 1124 / 0776 631 0880
info@awatrees.com
awatrees.com

Union Forge, 27 Mowbray Street, Sheffield S3 8EN
AWA Tree Consultants Limited. Company No. 85201
Registered in England & Wales.



TMP006 – B
Revision 04
Auth By: APW
Date: 12/01/2026

Executive Summary

This report provides independent arboricultural advice in accordance with BS 5837:2012, regarding trees at the site in the context of a proposed residential development.

A total of 6 items of woody vegetation were surveyed, comprising 6 individual trees. Of these: 5 are low value (Category C), and 1 is unsuitable for retention (Category U).

The proposed development will not require the removal or pruning of any trees.

The layout of the development has been designed to minimise encroachment into Root Protection Areas (RPAs). Mitigation measures, including protective fencing and 'no-dig' construction methods, are recommended where necessary.

The scheme presents an opportunity for new tree planting as part of a landscape strategy, offering mitigation for the removals and long-term enhancement of the site's tree cover.

Contents

1. Introduction.....	4
1.1 Instructions and Brief	4
1.2 Survey Details	4
2. The Site.....	5
2.1 Location and Description	5
3. The Trees.....	6
3.1 Legal.....	6
3.2 Tree Survey Results	7
3.3 Photographs	9
4. Arboricultural Impact Assessment	10
4.1 Proposed New Development.....	10
4.2 Direct Impacts.....	10
4.3 Indirect Impacts	10
4.4 Protection of the Retained Trees.....	10
5. Summary of Tree Impacts	11
6. Signature.....	12
Appendix 1: Authors Qualifications & Experience.....	14
Appendix 2: Survey Methodology and Limitations	15
Appendix 3: Explanation of Tree Descriptions	16
Appendix 4: Tree Data	17
Appendix 5: Tree Constraints Plan.....	18
Appendix 6: Tree Impacts Plan	19

1. Introduction

1.1 Instructions and Brief

- 1.1.1 We have been instructed by Barnes Homes Yorkshire Limited to visit the site and prepare our findings in a report.
- 1.1.2 The report is required in accordance with BS 5837:2012 *Trees in relation to design, demolition and construction – Recommendations*, to provide detailed, independent, arboricultural advice on the trees present, in the context of potential development.

1.2 Survey Details

- 1.2.1 The survey took place during January 2026.
- 1.2.2 The trees were surveyed visually from the ground using “Visual Tree Assessment” techniques and in accordance with the guiding principles of British Standard 5837:2012.
- 1.2.3 Any additional off-site trees that could impact a new development design have been included in the tree survey parameters.
- 1.2.4 The tree positions were plotted on an Ordnance Survey map base-layer using enhanced GPS technology (1-2m accuracy) and laser distance measurer.
- 1.2.5 This report has been prepared by Adam Winson, Chartered Arboriculturist, MSc, BSc (Hons), MICFor, MArborA, Principal and Director of AWA Tree Consultants Ltd.
- 1.2.6 The tree survey data collection was carried out by Lucy Garbutt, MSc, BSc (Hons) Biology, TechArborA, Arboriculturist at AWA Tree Consultants Ltd.
- 1.2.7 Full qualifications and experience are included within **Appendix 1**. Explanatory details regarding the survey methodology are included within **Appendix 2**. A full explanation of the tree data can be found at **Appendix 3**. Full details of all the trees surveyed are found in **Appendix 4**. For tree locations please refer to the Tree Constraints Plan at **Appendix 5** and for detail of the impacts of the new development refer to the Tree Impacts Plan at **Appendix 6**.

2. The Site

2.1 Location and Description

- 2.1.1 The site is located on Wellands Lane in Scholes, Cleckheaton.
- 2.1.2 The site comprises a parcel of disused agricultural land. To the north and east are further parcels of land. To the south are residential properties and to the east lies Wellands Lane.
- 2.1.3 The approximate area of the survey is highlighted in the (2025 Google Earth) image below:



3. The Trees

3.1 Legal

- 3.1.1 The following advice is for guidance purposes only. Some trees are protected by legislation, and it is essential that the legal status of trees is established prior to carrying out works to them. Unauthorised work to protected trees could lead to prosecution, resulting in enforcement action such as fines or a criminal record. Tree Preservation Orders, Conservation Areas, Planning Conditions, Felling Licences or Restrictive Covenants legally protect many trees in the UK.
- 3.1.2 An online search was undertaken with Kirklees Council on 19/01/26 to check whether any trees at the site are protected by a Tree Preservation Order or are located within a Conservation Area. As of this date **no trees at the site are protected** by a Tree Preservation Order or are within a Conservation Area.
- 3.1.3 Due to the large potential penalties for illegally carrying out work to protected trees, before authorising any tree works a further check should be made with the Local Planning Authority to confirm if any trees are covered by a Tree Preservation Order or are within a Conservation Area. If either applies, then statutory permission is required before any works can take place (unless such work is approved as part of full planning permission).
- 3.1.4 The Multi-Agency Geographical Information for the Countryside (MAGIC) website was used to search for areas of ancient woodlands listed on the Ancient Woodland (DEFRA 2021), and a check for catalogued Ancient and Veteran trees using the woodland trust ancient tree inventory (ATI) (Woodland Trust 2021).
- 3.1.5 It was confirmed that there are no designated ancient woodlands or veteran or ancient trees within the survey area.
- 3.1.6 Trees provide a wide range of habitats for many species, some of which are legally protected such as bats, nesting birds, badgers and dormice. It is essential that appropriate care is taken to ensure that this legislation is not contravened.
- 3.1.7 When appointing a tree surgeon, only properly qualified and experienced companies should be used, who have adequate Public Liability and Employer's Liability Insurance.
- 3.1.8 All tree work should be carried out according to British Standard 3998:2010 Tree Work – Recommendations.

3.2 Tree Survey Results

- 3.2.1 The tree survey revealed 6 items of woody vegetation, comprised of 6 individual trees.
- 3.2.2 Of the surveyed trees: 1 tree is retention category 'U', and 5 trees are retention category 'C' (explanatory details regarding the retention categories are included at Appendix 3).
- 3.2.3 Full details of the surveyed trees are provided in the attached tree data schedule at Appendix 4. General comments are provided below:
- 3.2.4 Tree cover at the site is limited and consists primarily of individual trees situated along or just beyond the site boundary. Several trees are located within adjacent properties and are positioned close to existing infrastructure, including telephone lines and boundary walls.
- 3.2.5 Species diversity is relatively low. The recorded species include Cherry, Rowan, Sycamore and Poplar, with no single dominant species across the site.
- 3.2.6 Most of the trees are semi-mature in age, with one mature Poplar (T5) present. No young or newly planted trees were recorded.
- 3.2.7 Access to the base of a number of trees was restricted due to boundary walls or third-party ownership. As a result, certain measurements and condition assessments should be regarded as indicative only.
- 3.2.8 Trees T1 and T2 (both Cherry) have been subject to historic pruning and topping to provide clearance from overhead telephone lines. Whilst of limited arboricultural quality, they provide a degree of local screening value.
- 3.2.9 Tree T5 (Poplar) is the largest and most prominent specimen on site. Although mature and visually significant, it displays minor to moderate historical snap-outs and a slight lean. Its overall condition is assessed as fair, and it is categorised as Category C.
- 3.2.10 Tree T6 (Sycamore) is the only tree assessed as Category U. This tree exhibits significant structural defects including major basal cavities, historic stem failures and hanging branches. Its remaining life expectancy is assessed as less than 10 years and it is considered unsuitable for retention irrespective of any development proposals.
- 3.2.11 The remaining trees within the site are of particularly low value and should not pose any significant constraint on the development potential of the site.
- 3.2.12 Some trees were covered in dense Ivy or were inaccessible (as detailed in

Appendix 4). In such cases measurements were estimated and the condition values are indicative only.

- 3.2.13 The tree Root Protection Area (RPA) for each tree has been plotted as a polygon centred on the base of the stem. Due to the presence of roads, structures, topography (and past tree management) the RPA is likely to be a simplified representation of the tree roots actual morphology and disposition. However, detailed modifications to the shape of the RPA would largely be based on conjecture and so have been avoided.
- 3.2.14 Some lower value tree, hedge and shrub groups do not have RPAs detailed on tree plans. The detailed extent and spread of these low value groups, in conjunction with the tree schedule, is sufficient to assess the associated potential constraints.

3.3 Photographs



Photo 1: T1 from south.



Photo 2: T1 and T2 from southeast.



Photo 3: T4 from south.



Photo 4: The site from west.



Photo 5: T5 from east.



Photo 6: T6 from west.

4. Arboricultural Impact Assessment

4.1 Proposed New Development

- 4.1.1 It is proposed to build a new residential development with associated access, parking, landscaping and facilities. The development proposals have been provided by my client and inform this arboricultural impact assessment and the Tree Impacts Plan at Appendix 6.

4.2 Direct Impacts

- 4.2.1 From assessing the new development proposals, no trees or tree groups will require removal to facilitate the development.
- 4.2.2 T5 (Poplar) is able to be retained during construction, however, its proximity to the dwelling is likely to result in increasing pressure for future pruning or removal. Consequently, the long-term retention of this tree is not considered appropriate and its removal is advised.
- 4.2.3 T6 (Sycamore) is recommended for removal regardless of the development due to its poor condition and significantly limited long-term prospects.

4.3 Indirect Impacts

- 4.3.1 The tree Root Protection Area (RPA) detailed on the Tree Plans at Appendices 5 and 6, has been used as a layout design tool, to inform on the area around a tree where the protection of the roots and soil structure is treated as a priority. As such, no significant negative indirect impacts have been identified.
- 4.3.2 All the retained trees have been assessed as suitable for retention in terms of BS5837 (2012) section 5 "Proximity of structures to trees." The retained trees will not cause unreasonable inconvenience or nuisance issues to future occupiers, leading to associated pressures for felling or excessive pruning. The layout allows sufficient space to enable the retained trees to grow to maturity without significantly adversely affecting the amenity of the dwelling or amenity space.
- 4.3.3 The buildability of the proposed development has been assessed in terms of access, adequate working space and provision for the storage of materials, including topsoil, in relation to the trees.

4.4 Protection of the Retained Trees

- 4.4.1 To ensure the successful retention of trees during the development process, all trees identified for retention must be physically protected from the outset of site preparation through to final landscaping. This protection should be

in accordance with section 6.1 of BS:5837:2012 – Trees in Relation to Design, Demolition and Construction – Recommendations.

- 4.4.2 The primary method of protection will be the installation of tree protection fencing, constructed in line with the specification shown in BS 5837:2012.
- 4.4.3 This fencing must be installed prior to the commencement of any site clearance, demolition, or construction activity and remain in place for the duration of all potentially damaging operations.
- 4.4.4 The protected areas must be treated as construction exclusion zones. No materials, spoil, or equipment should be stored within these zones, and no access should be permitted.
- 4.4.5 Ground levels within the RPAs should be left unaltered, and care must be taken to avoid compaction of the soil structure, which could have long-term impacts on tree health.
- 4.4.6 If conditioned by the Local Planning Authority, an associated Arboricultural Method Statement (AMS) and Tree Protection Plan (TPP) detailing protective fencing locations and specifications, construction methods close to the retained trees, and any required site monitoring, can be provided.
- 4.4.7 The AMS and TPP explain how and when the protection measures will be installed and maintained throughout the development. They are designed to be referenced for practical guidance on how to protect the retained trees at the site to ensure contractors do not accidentally damage trees during construction.

5. Summary of Tree Impacts

<i>Tree/ Group Ref</i>	<i>Value</i>	<i>Impact Type</i>	<i>Description of Impact</i>	<i>Impact Level</i>	<i>Mitigation / Solution</i>
T6	U (Unsuitable)	Direct - Removal	Unsuitable to retain regardless of development	Not applicable	Work to British Standard 3998:2010

6. Signature

I trust this report provides all the required information.

Signed

.....

Adam Winson, *Chartered Arboriculturist, MSc, BSc (Hons), MICFor, ACIEEM*

30th January 2026

**AWA Tree Consultants Limited
Union Forge
27 Mowbray Street
Sheffield
S3 8EN**

www.awatrees.com



Our Charity Partner: Kids Plant Trees

At AWA Tree Consultants, we are proud to partner with the local charity, Kids Plant Trees. This collaboration allows us to support a cause that reflects our commitment to trees and the environment while making a positive impact on local communities.

Kids Plant Trees is a grassroots charity dedicated to improving tree equity by planting trees in underserved areas with limited green spaces, often in communities facing higher levels of deprivation.

We are proud to support their mission to create greener, healthier environments for future generations.



Appendices

Appendix 1: Authors Qualifications and Experience

Appendix 2: Survey Methodology and Limitations

Appendix 3: Explanation of Tree Descriptions

Appendix 4: Tree Data

Appendix 5: Tree Constraints Plan

Appendix 6: Tree Impacts Plan

Appendix 1: Authors Qualifications & Experience

Adam Winson: Chartered Arboriculturist, MSc, BSc (Hons), MICFor, MARborA, QTRA + VALID Registered

Adam is the company Director and Principal Consultant. He has a mix of the highest-level academic qualifications and relevant work experience. He has worked within the tree care profession for over 25 years and was awarded an MSc in Arboriculture and Urban Forestry, with distinction. Adam is a Chartered Arboriculturist and a Registered Consultant with the Institute of Chartered Foresters, a Professional Member of the Arboricultural Association and he has original research published by the UK Forestry Commission. His work ranges from individual expert tree inspections to managing trees on major infrastructure projects. His work often involves trees with preservation orders or litigation, and he has appeared as a tree expert, at planning appeal hearings up to the crown court. Adam also regularly undertakes locum Tree Officer work for several Local Planning Authorities.

James Brown: Chartered Arboriculturist, BSc (Hons) Arboriculture, MICFor, MARborA, PTI (Lantra), QTRA Registered

James is a highly experienced and qualified Arboricultural Consultant. He is a Chartered Arboriculturist and a Professional Member of the Arboricultural Association, and he has a BSc (Hons) in Arboriculture, attaining first class honours, as well as being awarded the Institute of Chartered Foresters student award. James joined AWA in 2016, he has many years' experience as an Arboricultural Consultant, he previously worked in Europe's largest container tree nursery and he has experience of local authority Tree Officer work.

James Godfrey: BA (Hons), FdSc Arboriculture and Tree Management, TechArborA, PTI (Lantra), QTRA Registered

James has had extensive arboricultural experience working as an arborist within the public and private sector. While working at AWA, James completed his FdSc in Arboriculture and Tree Management, graduating with a distinction and was also awarded for achieving the highest overall mark in his year. James has used his arboricultural knowledge to inform and carry out accurate tree surveys and produce detailed reports that aim to balance appropriate tree retention with the requirements of landowners.

Joe Thomas: MSci Biology, L4 Dip Arboriculture, TechArborA, PTI (Lantra), QTRA Registered

Joe achieved a first class degree in Biology with an integrated Masters (MSci) from the University of Sheffield. Additionally, he has a Level 4 Diploma in Arboriculture. Joe joined AWA in 2022 after an Urban Forestry role with the Sheffield and Rotherham Wildlife Trust and Sheffield City Council, where he gained a variety of experience in different aspects of the arboriculture sector.

Lucy Garbutt: MSc, PGCert, BSc (Hons) Biology, PTI (Lantra), TechArborA, QTRA Registered

Lucy graduated with a masters degree in Animal Behaviour from the UK's highest rated university, St Andrews of Scotland, immediately following the completion of her BSc degree in Biology from Lancaster University. Lucy has experience in botany and plant science and moved into arboriculture after previous experience of protected species and botanical surveys with a large environmental consulting company.

Sophie Beckerman: BA (Hons), Dip Arboriculture Level 4, PTI (Lantra), TechArborA, QTRA + VALID Registered

Sophie has more than 10 years' experience as an arborist, working for a variety of private companies as well as undertaking tree management with Sheffield City Council Ranger Service and The Wildlife Trust. Her expertise in arboriculture is demonstrated in the practical NPTC qualifications gained, and her excellent knowledge is reflected in the L4 diploma in Arboriculture, which she completed while working. Her roles as a climbing arborist and team leader included estimating for jobs and project management, supervising tree contracting teams - ensuring that work is carried out safely and efficiently and that health and safety standards are adhered to, and risk assessments are carried out.

Ross Lane: FdSc Environmental Conservation, Diploma Arboriculture, TechArborA, PTI (Lantra), QTRA + VALID Registered

Ross has a diverse background spanning horticulture, arboriculture, and ecology. Ross has extensive experience conducting surveys throughout the UK and has worked on projects of all sizes, including major infrastructure projects such as HS2. In his previous role as a Tree Inspector at Derbyshire County Council, projects involved managing the county wide tree stock in relation to the ash dieback response and contributing to ambitious County Council targets of planting a million trees. Possessing technician-level membership with the Arboricultural Association, coupled with a comprehensive range of qualifications from tree risk assessment to habitat management, underscores Ross' dedication in professional arboriculture.

Brandon Townsend: BSc (Hons) Biology, L4 (Arb) Apprentice, QTRA Registered

Brandon is an Arboricultural Technician at AWA, currently completing the Level 4 Arboriculture Apprenticeship at Myerscough College. He holds a BSc (Hons) in Biology from Bangor University, where he developed a strong interest in woodland ecology. Before joining AWA in April 2024, he gained practical arboricultural experience and completed his NPTC chainsaw qualification. Brandon supports a range of consultancy work including tree surveys, risk assessments, and technical reporting, and is developing skills in specialist inspection methods such as PiCUS tomography.

Appendix 2: Survey Methodology and Limitations

The survey was undertaken in accordance with British Standard 5837:2012 *Trees in relation to design, demolition and construction – Recommendations*. The trees were assessed objectively and without reference to any proposed site layout. The trees were surveyed from the ground using 'Visual Tree Assessment' (VTA) methodology. VTA is appropriate and is endorsed by industry guidance. It is used by arboriculturists to evaluate the structural integrity of a tree, relying on observation of trees biomechanical and physiological features. Measurements are obtained using a diameter tape, clinometer, laser distometer and loggers tape. Where this is not practical measurements are estimated. Tree groups have been identified in instances as defined in BS 5837:2012. Shrubs and insignificant trees may have been omitted from the survey.

This report represents a BS 5837:2012 tree survey and should not be accepted as a detailed tree safety inspection report; however, tree related hazards are recorded and commented upon where observed, yet no guarantee can be given as to the absolute safety or otherwise of any individual tree. All recommended tree work must be to BS 3998:2010 - '*Tree Work: Recommendations*'.

The findings and recommendations contained within this report are valid for a period of twelve months from the date of survey. The author shall not be responsible for events which happen after this time due to factors which were not apparent at the time, and the acceptance of this report constitutes an agreement with these guidelines and terms.

Appendix 3: Explanation of Tree Descriptions

HEIGHT of the tree is measured from the stem base in metres. Where the ground has a significant slope the higher ground is selected.

CROWN HEIGHT is an indication of the average height at which the crown begins.

STEM DIAMETER is measured at 1.5 metres above (higher) ground level. Where the tree is multi-stemmed at this point; the diameter is measured close to ground level or else a combined stem diameter is calculated.

CROWN SPREAD is measured from the centre of the stem base to the tips of the branches in all four cardinal points.

AGE CLASS of the tree is described as young, semi-mature, early-mature, mature, or over-mature.

PHYSIOLOGICAL CONDITION is classed as good, fair, poor, or dead. This is an indication of the health of the tree and takes into account vigour, presence of disease and dieback.

STRUCTURAL CONDITION is classed as good, fair or poor. This is an indication of the structural integrity of the tree and takes into account significant wounds, decay and quality of branch junctions.

LIFE EXPECTANCY is classed as; less than 10 years, 10-20 years, 20-40 years, or more than 40 years. This is an indication of the number of years before removal of the tree is likely to be required.

Retention Categories

A (marked in green on Appendix 5) = retention most desirable. These trees are of very high quality and value with a good life expectancy.


B (marked in blue on Appendix 5) = retention desirable. These trees are of good quality and value with a significant life expectancy.

C (marked in grey on Appendix 5) = trees which could be retained. These trees are of low or average quality and value, and are in adequate condition to remain until new planting could be established.

U (marked in red on Appendix 5) = trees unsuitable for retention. These trees are in such a condition that any existing value would be lost within 10 years.

Tree Species				Measurements			Crown (m)				Tree Condition							Value		Management		
Tree ID	Common Name	Latin Name	Maturity	Height (m)	Stems	Stem Diameter (mm)	Estimated	Crown height	N	E	S	W	Tree Condition				Physiological	Structural	Life Expectancy	Amenity	Category	Works
													Roots	Stem	Crown	Comments						
T1	Cherry	Prunus avium	Semi-mature	9	1	450	No	2	4	5	6	6	Limited access around base	Single stemmed. Vertical. Epicormic growths. Old pruning wounds. Stubs. Ivy covered	Old pruning wounds. Minor deadwood. Minor dieback	Within adjacent property beyond boundary wall and has been pruned and topped away from telephone lines. Ivy covered stem.	Fair	Good	20 to 40 yrs	Moderate	C	No works required to facilitate the development.
T2	Cherry	Prunus avium	Semi-mature	11	1	400	Yes	2	5	6	6	6	Limited access around base	Single stemmed. Vertical. Epicormic growths. Old pruning wounds. Stubs. Ivy covered	Old pruning wounds. Minor deadwood. Minor dieback	Very heavily ivy covered. Has been pruned away from phone lines	Fair	Fair	10 to 20 yrs	Moderate	C	No works required to facilitate the development.
T3	Rowan	Sorbus aucuparia	Semi-mature	7	2	70, 200	Yes	3	2	4	4	2	Limited access around base	Multiple stemmed at base. Vertical. Epicormic growths. Old pruning wounds. Stubs. Ivy covered	Old pruning wounds. Minor deadwood. Minor dieback		Fair	Fair	10 to 20 yrs	Low	C	No works required to facilitate the development.
T4	Rowan	Sorbus aucuparia	Semi-mature	8	6	70	Yes	1	3	3	2	2	No visual defects	Multiple stemmed at base. Vertical. Epicormic growths. Old pruning wounds. Stubs	Old pruning wounds. Minor deadwood. Minor dieback		Fair	Fair	10 to 20 yrs	Low	C	No works required to facilitate the development.

Tree Species				Measurements			Crown (m)				Tree Condition							Value		Management		
Tree ID	Common Name	Latin Name	Maturity	Height (m)	Stems	Stem Diameter (mm)	Estimated	Crown height	N	E	S	W	Roots	Stem	Crown	Comments	Physiological	Structural	Life Expectancy	Amenity	Category	Works
T5	Poplar	Populus sp.	Mature	18	1	740	No	2	4	3.5	4.5	4	No visual defects	Single stemmed. Slight lean. Epicormic growths. Old pruning wounds. Stubs	Old pruning wounds. Minor deadwood. Minor dieback	Lots of epicormics growths on stem where stem has previously been crown lifted. Slightly leaning east. Minor to moderate historical snapout in the eastern crown.	Fair	Fair	20 to 40 yrs	Moderate	C	No works required to facilitate the development - however long-term retention is not considered appropriate for this location and removal would be advisable in the long-term.
T6	Sycamore	Acer pseudoplatanus	Semi-mature	15	3	150, 250, 250	Yes	2	4.5	3	3.5	3	No visual defects	Multiple stemmed at base. Vertical. Epicormic growths. Old pruning wounds. Stubs. Bark damage. Major cavities. Ivy covered	Old pruning wounds. Minor deadwood. Minor dieback. Snapped /hanging branches	Several stems at the base have historically failed leaving large remaining stubs. Heavily Ivy covered northern stem. Several branches in the crown have also snapped and failed previously.	Fair	Poor	< 10 yrs	Low	U	Removal recommended regardless of the development.

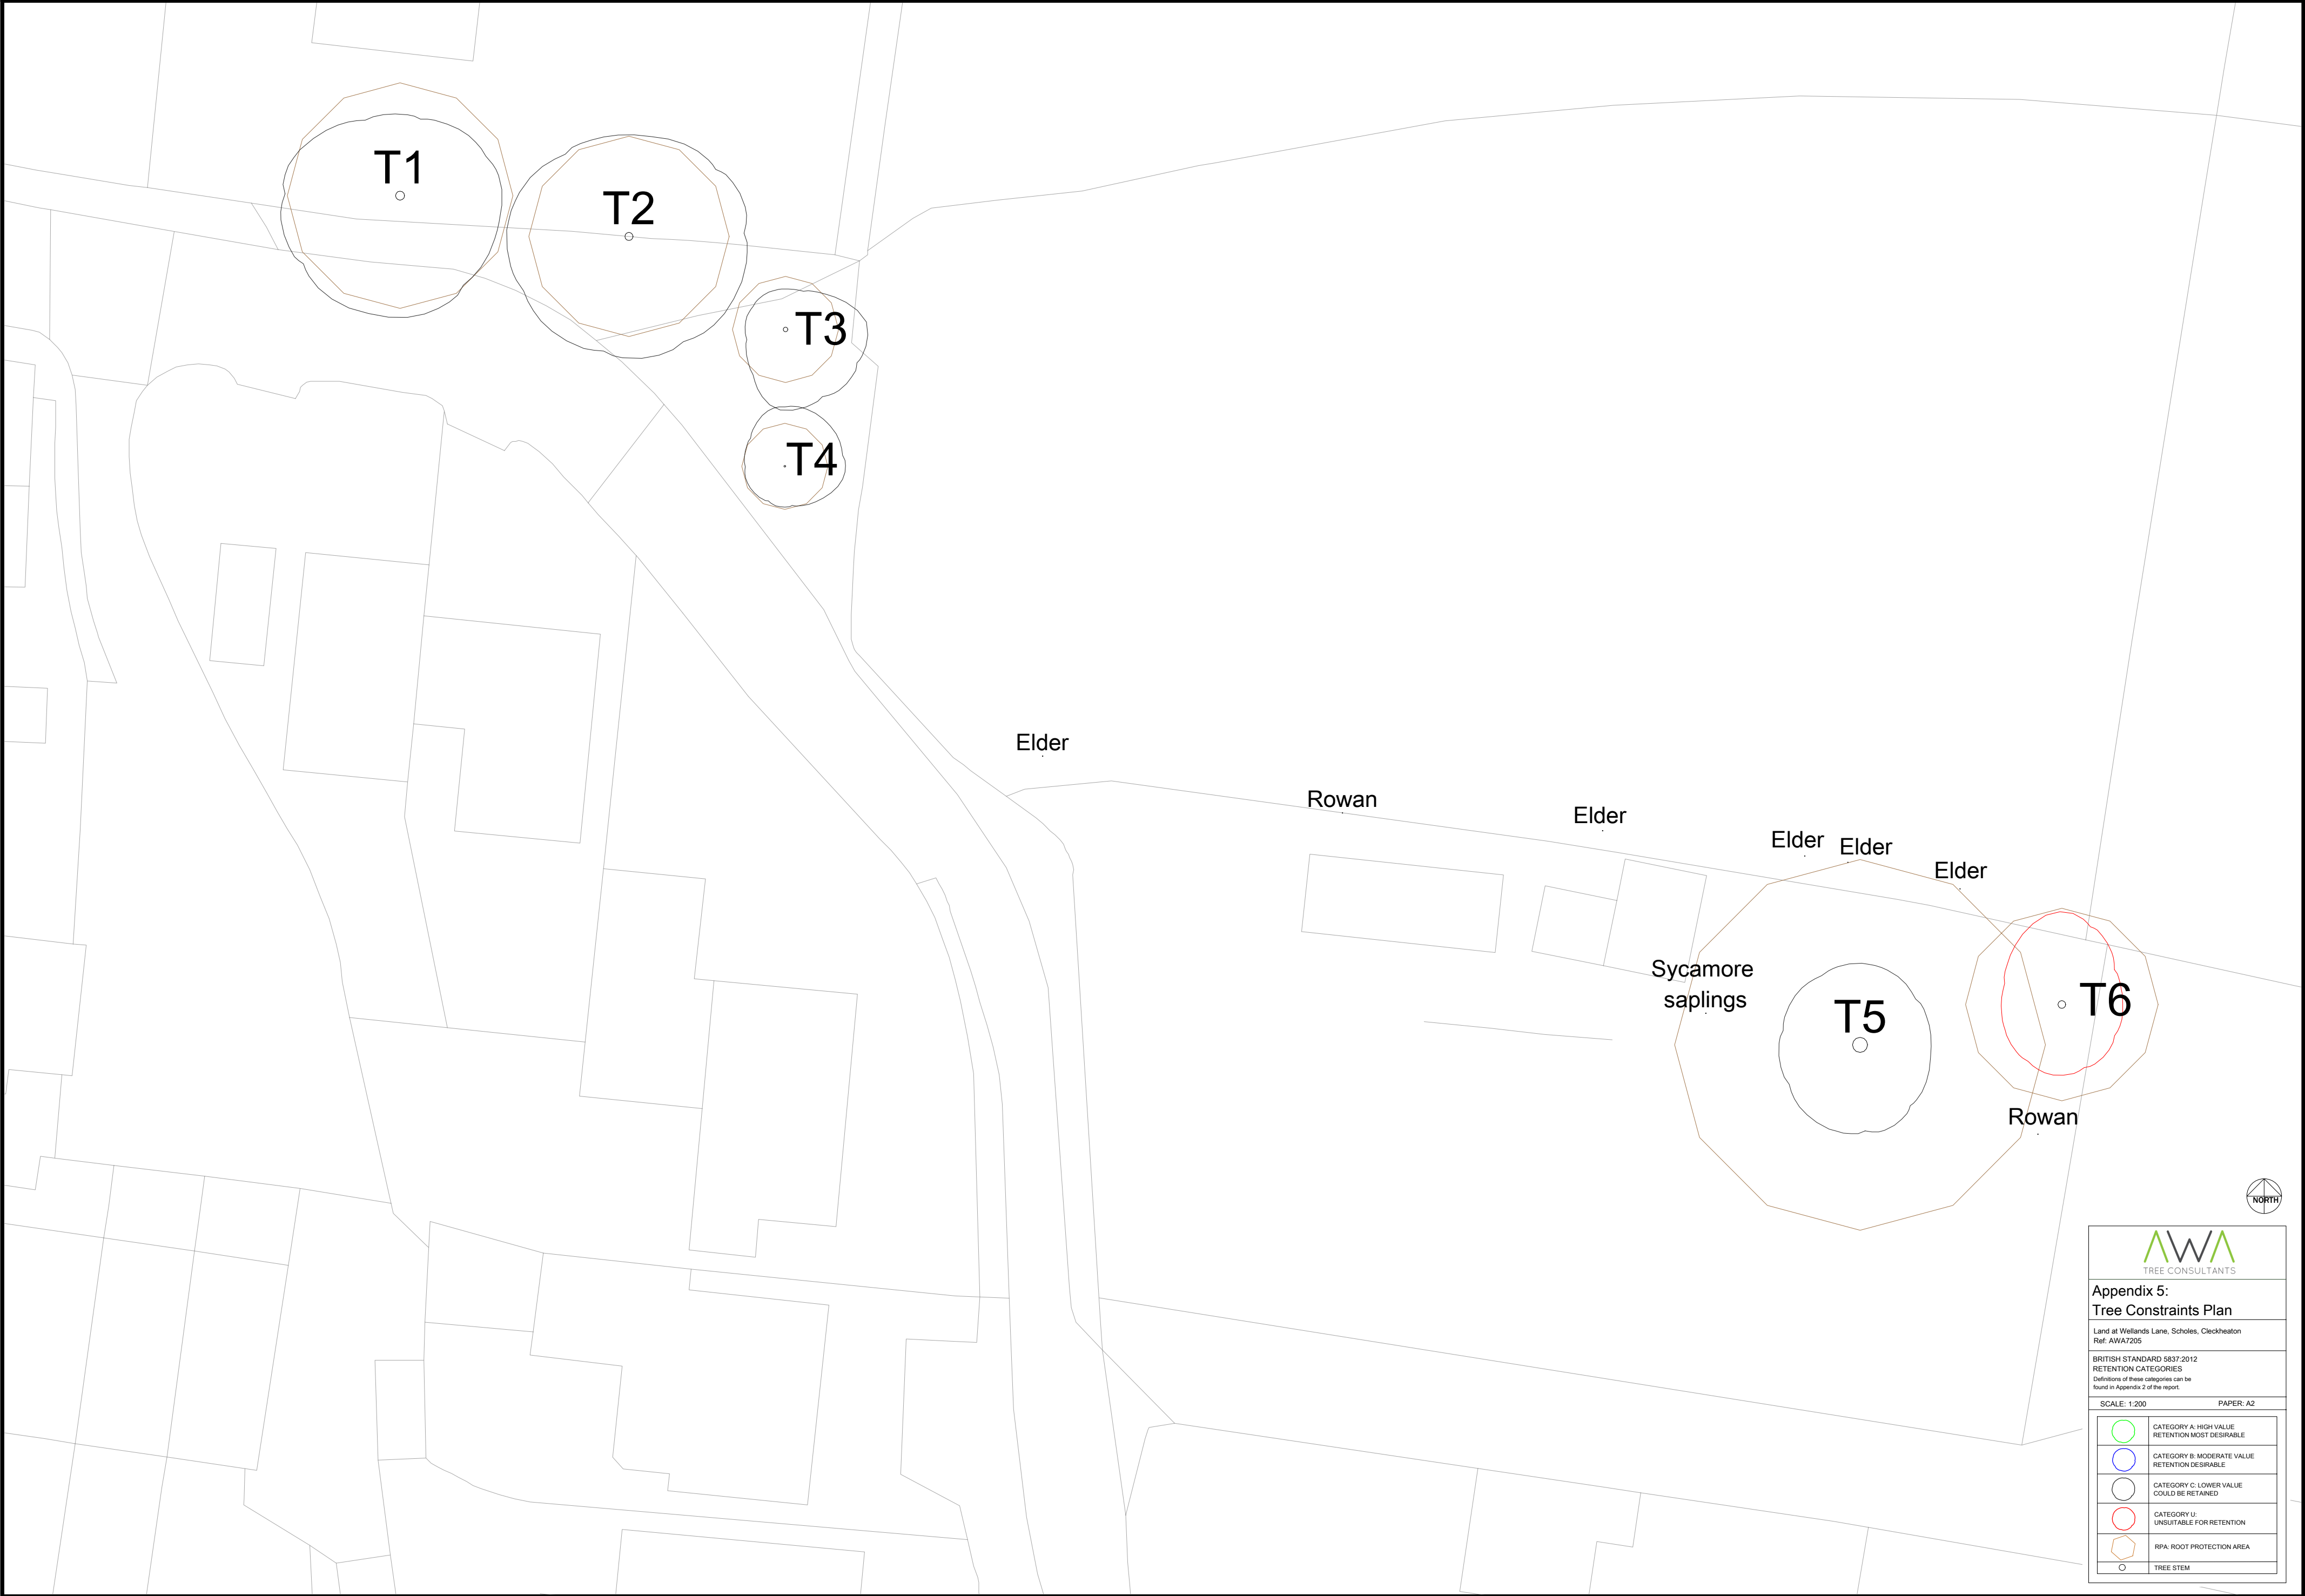


**Appendix 5:
Tree Constraints Plan**

Land at Wellands Lane, Scholes, Cleckheaton
Ref: AWAT205

BRITISH STANDARD BS37:2012
RETENTION CATEGORIES
Definitions of these categories can be
found in Appendix 2 of the report.

SCALE: 1:200 PAPER: A2

	CATEGORY A: HIGH VALUE RETENTION MOST DESIRABLE
	CATEGORY B: MODERATE VALUE RETENTION DESIRABLE
	CATEGORY C: LOWER VALUE COULD BE RETAINED
	CATEGORY U: UNSUITABLE FOR RETENTION
	RPA: ROOT PROTECTION AREA
	TREE STEM

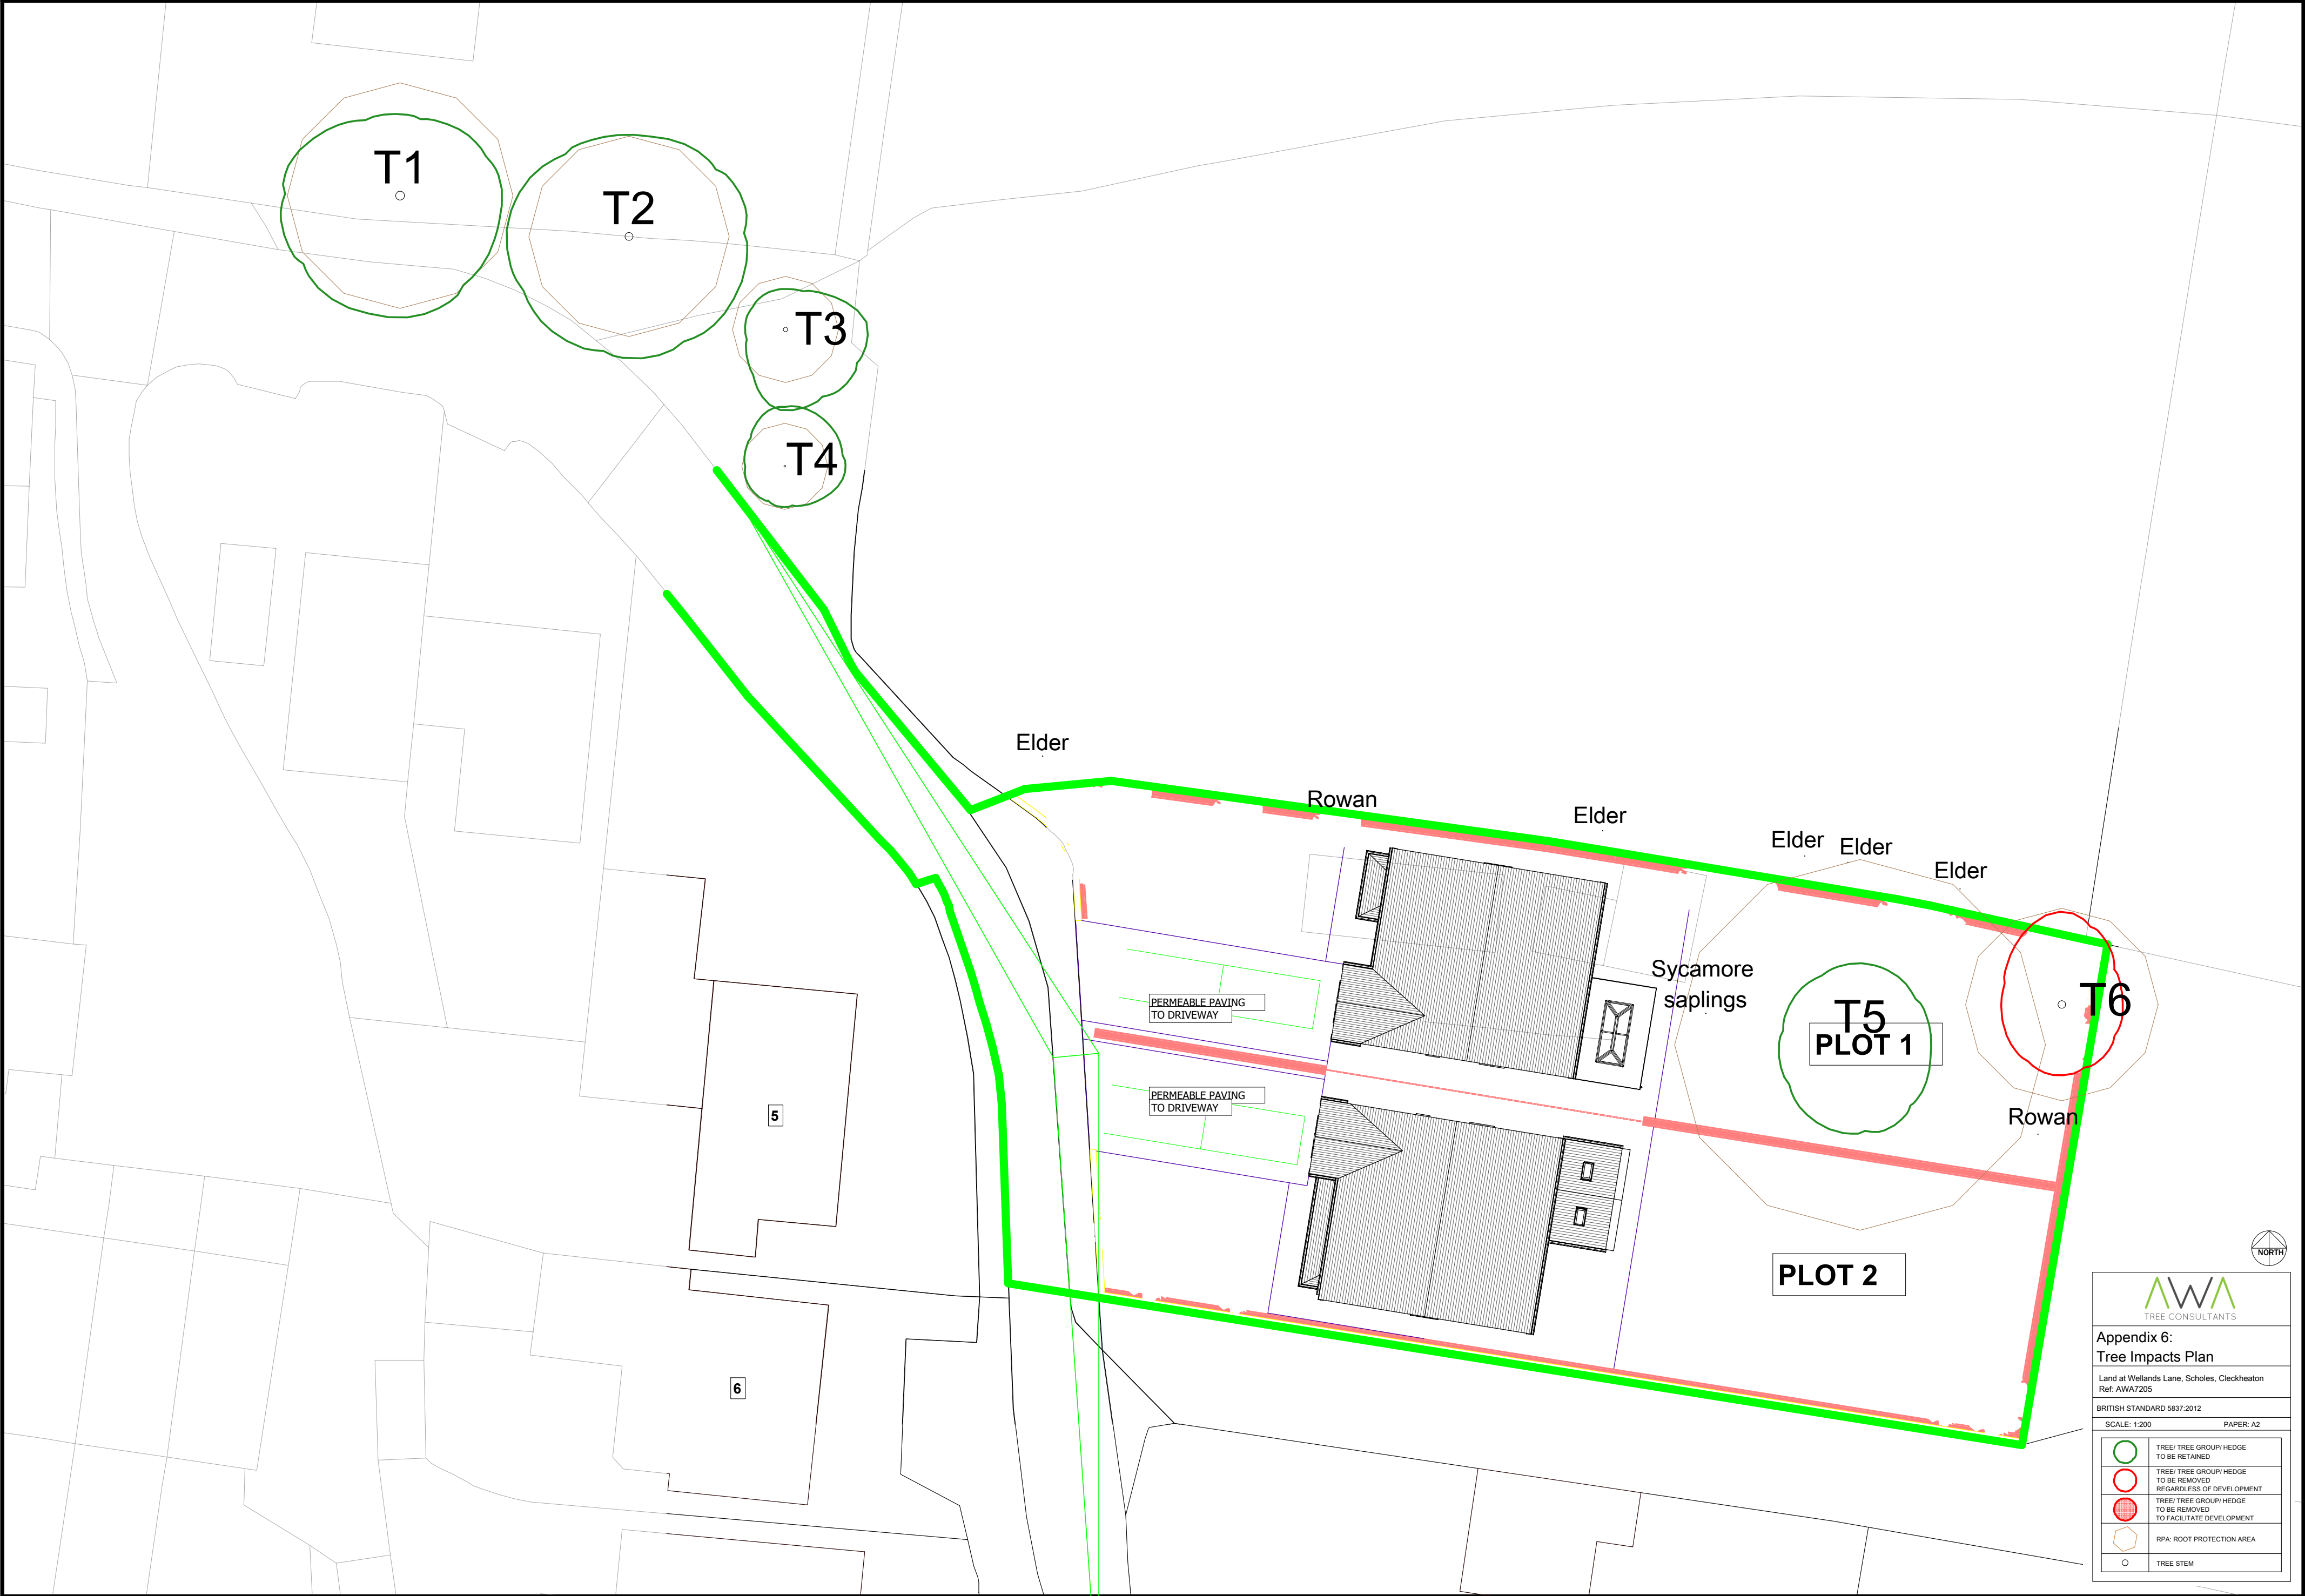



Tree Consultants

Appendix 6:
Tree Impacts Plan

Land at Wellands Lane, Scholes, Cleckheaton
Ref: AWA7205

BRITISH STANDARD 5837:2012

SCALE: 1:200 PAPER: A2

	TREE/ TREE GROUP/ HEDGE TO BE RETAINED
	TREE/ TREE GROUP/ HEDGE TO BE REMOVED REGARDLESS OF DEVELOPMENT
	TREE/ TREE GROUP/ HEDGE TO BE REMOVED TO FACILITATE DEVELOPMENT
	RPA: ROOT PROTECTION AREA
	TREE STEM