

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	3.150	13.200
Flush-Flo™	0.587	10.656
Kick-Flo®	1.208	8.395
Mean Flow		10.306

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 5 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 60 kg
- Product Carbon Footprint: 258.65 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

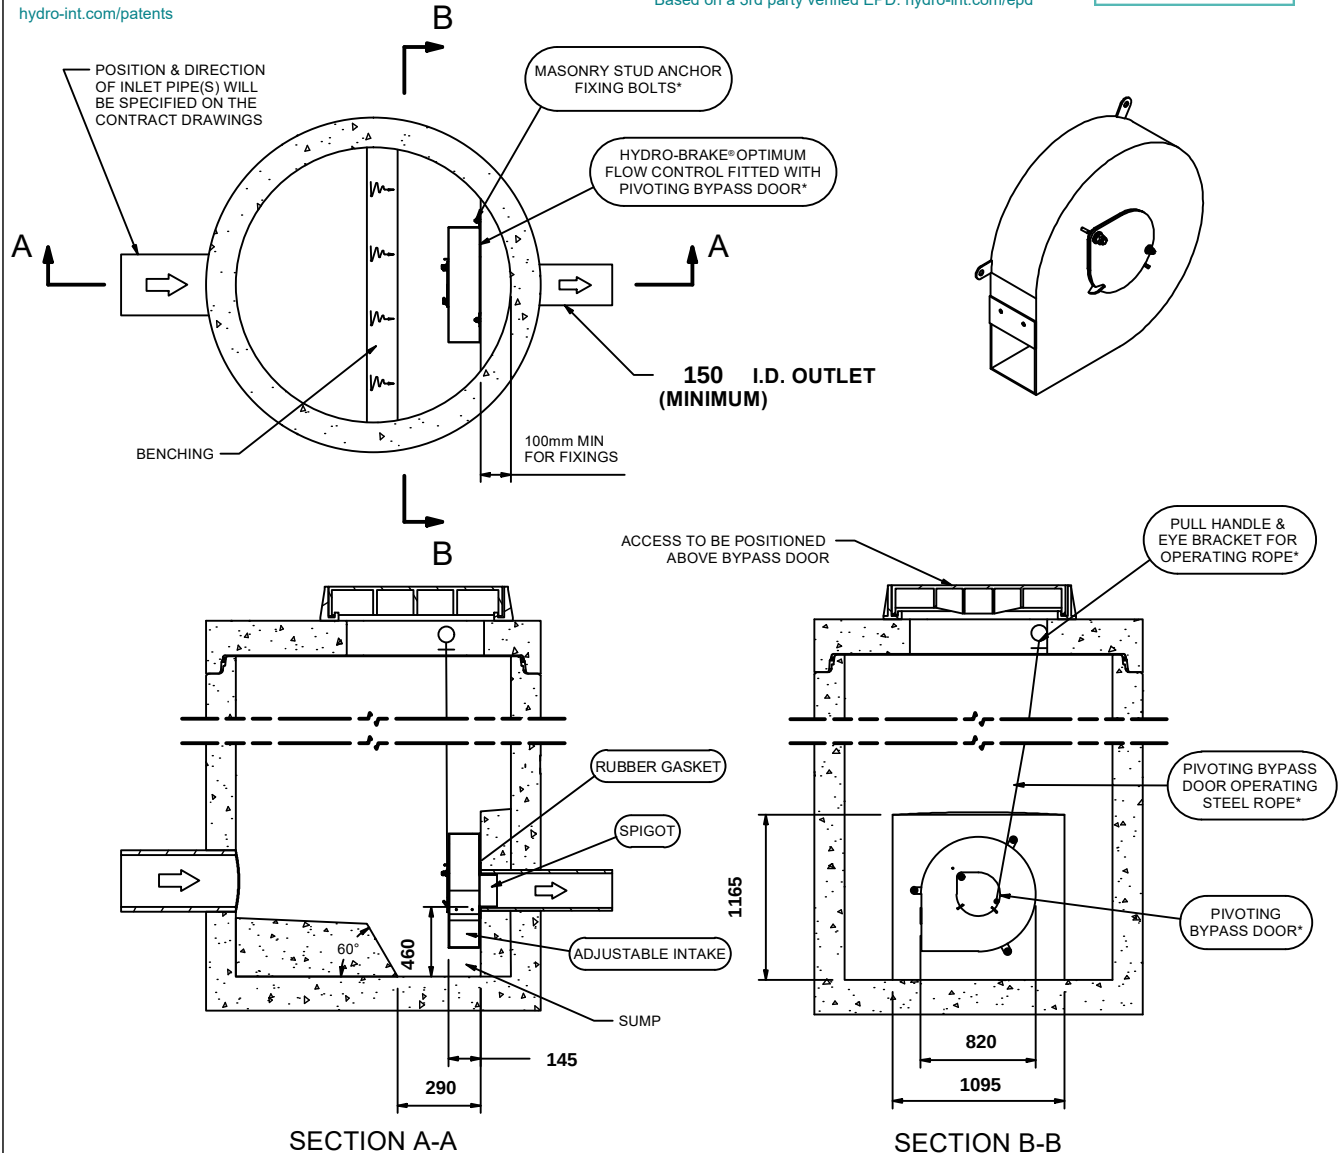

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
 HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0135-1320-3150-1320 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

**Hydro
International**
 A CRH COMPANY

DATE	01/04/2026 10:15	SHE-0135-1320-3150-1320 Hydro-Brake® Optimum
SITE	Blackmoorfoot Road	
DESIGNER	Martin Ingram	
REF	425/92 Network 1	

© 2026 Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • Website: hydro-int.com • Email: enquiries@hydro-int.com

martiningram@arpassociates.co.uk