

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	3.050	47.800
Flush-Flo™	0.879	47.706
Kick-Flo®	1.850	37.571
Mean Flow		41.629

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 8 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 270 kg
- Product Carbon Footprint: 1194.79 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

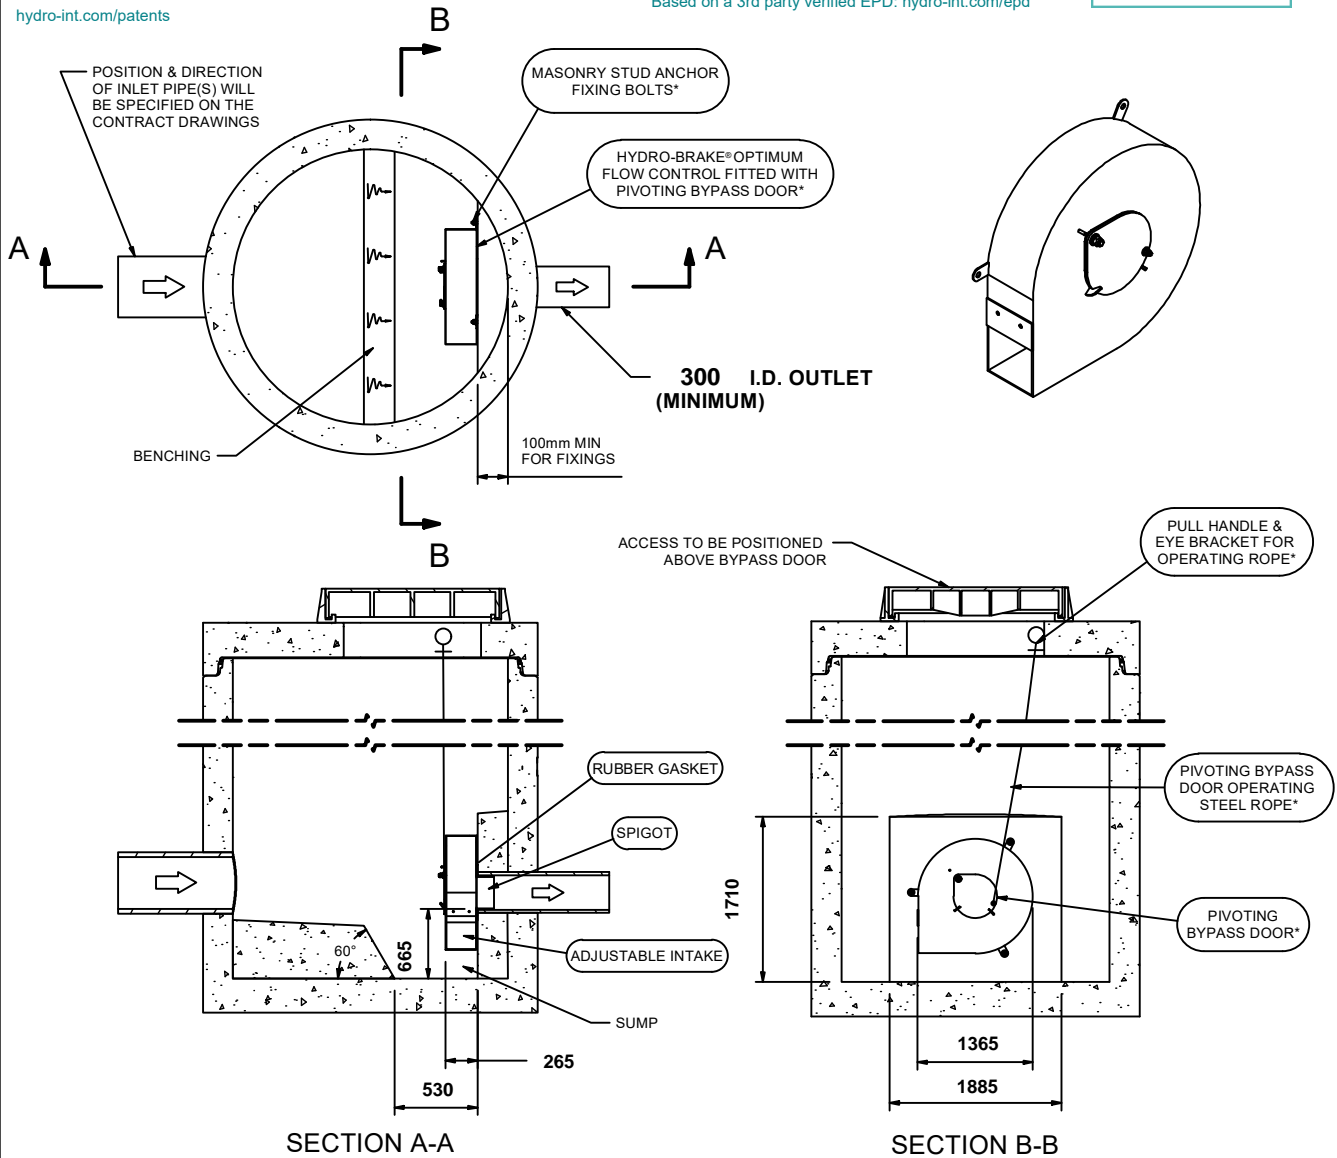

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
 HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0260-4780-3050-4780 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International
 A CRH COMPANY

DATE 20/02/2026 16:42

SITE BMF

DESIGNER Aaron Topping

REF 08.24007

SHE-0260-4780-3050-4780

Hydro-Brake® Optimum