This drawing along with the design is property and copyright of Hill Rise Architecture Ltd. and shall not be reproduced without express written consent.


This drawing should be read in conjunction with associated drawings, specifications and other consultant information.

Only figured dimensions should be used, any dimensions should be site checked prior to construction.

Any discrepancies shall be reported to the architect. If in doubt - ask.

0 1 2 3 4 5 10

GRAPHIC SCALE: 1:100

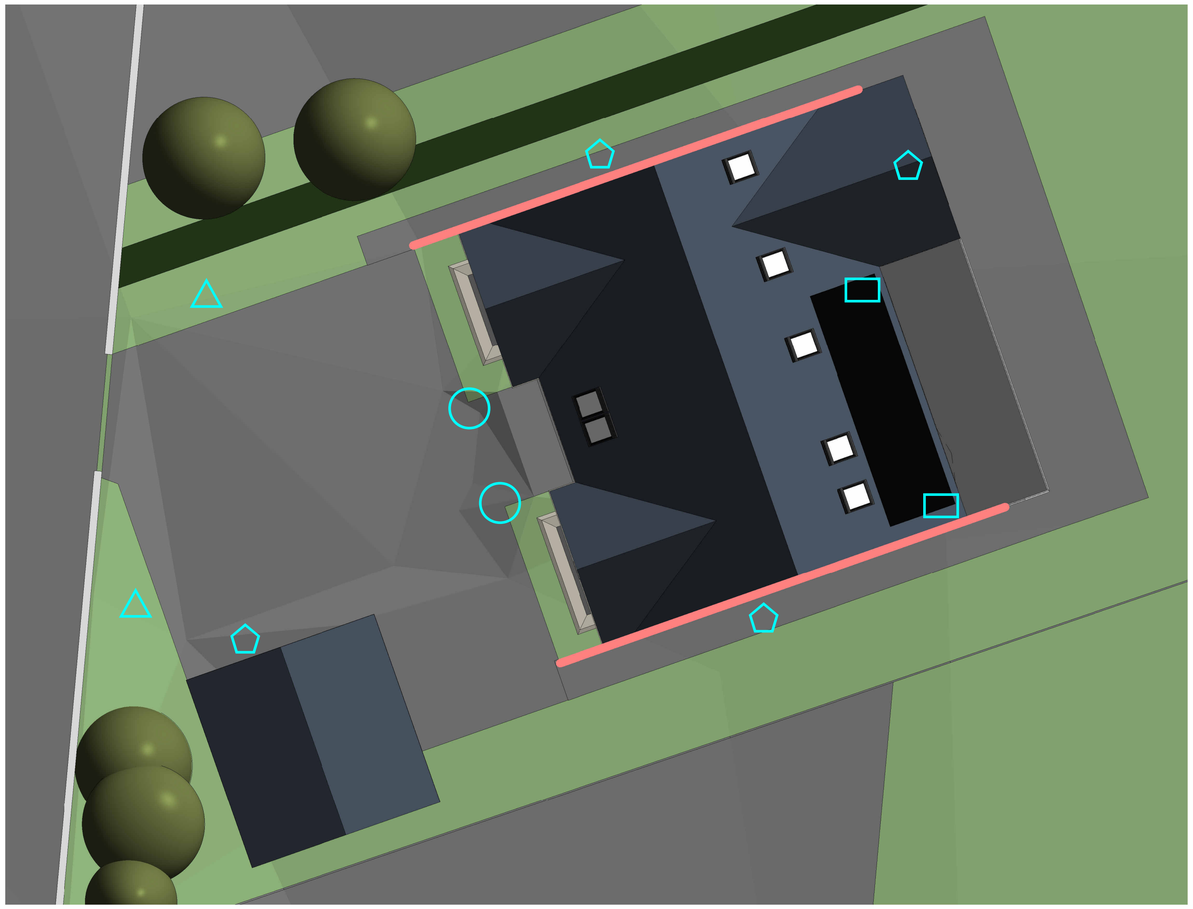

Proposed lighting layout 1:100

Denotes ecologically sensitive elevation with nesting features.

Fixture 1 - Reeded PIR Wall light lantern

Lindby Peldar outdoor wall lamp, sensor, ribbed, IP44



- Detection range of sensor: up to 6 m
- Detection angle of sensor: 105°
- Lighting duration adjustable from 8 seconds to 5 minutes
- To be fitted with LED bulb using the warm white (or amber) spectrum, with peak wavelengths >550nm (2700 or 3000°K) and lumen not exceeding 700 lumen output

Fixture 2 - PIR downlight

Lucande LED outdoor wall lamp Silvan, black, sensor, IP54



- Detection range of sensor: up to 7 m
- Detection angle of sensor: 120°
- Lighting duration adjustable from 8 seconds to 5 minutes
- Fitted with Warm white LED with 700 Lumen output
- Mounted at 2.1m from finished ground level.
- No upward light spread

Fixture 3 - Switched downlight

Lucande LED outdoor wall lamp Silvan, black, sensor, IP54



- Fitted with Warm white LED with 700 Lumen output
- Mounted at 2.1m from finished floor level.
- No upward light spread

Fixture 4 - PIR Bollard Downlight

Lucande LED bollard light Silvan, 65 cm, sensor, Black



- Detection range of sensor: up to 7 m
- Detection angle of sensor: 120°
- Lighting duration adjustable from 8 seconds to 5 minutes
- Fitted with Warm white LED with 700 Lumen output
- No upward light spread

Rev No.	Description	Drawn:	Date
P1	Drawing revised following LPA comment.	JF	28.04.2026
P0	Drawing issued for planning purposes.	JF	10.12.2025

HILL RISE ARCHITECTURE

Client
Mr M Hobbs

Project
Land Adjacent 28 Stringer House Lane, Emley

Drawing Title
Proposed Lighting Plan

Drawing No			Rev No
2025158/106			P1
Scale		Date Drawn	Drawn By
1 : 100	@ A1	Dec'25	JF

Purpose of issue
Planning

hello@hillrisearchitecture.co.uk hillrisearchitecture.co.uk
+44(0)7356 048 202 Hill Rise, 1-3 Chapel Lane, HD8 9SP

RIBA Chartered Practice

arb Architects Registration Board