


- BOUNDARY TREATMENTS KEY:**
- 1800mm TIMBER FENCE - (REF: BT01)
 - 2000mm ACOUSTIC FENCE - (REF: BT02)
 - 1500mm RAILING WITH HEDGE - (REF: BT04)
 - 1200mm RAIL TOP RAILING - (REF: BT05)
 - 1200mm BOW TOP RAILING (REF: BT08)
 - 150mm KNEE HIGH RAIL - (REF: BT07)
 - 600mm KNEE HIGH RAIL - (REF: BT06)
 - 1200mm POST & RAIL - (REF: BT03)
 - 1000mm POST & WIRE PROTECTIVE FENCE (TEMPORARY FOR 3 YEARS DURING HEDGE ESTABLISHMENT)
 - EXISTING STONE WALL
 - HEDGE/HOG HIGHWAYS
- NOTES:**
- THE COLLAPSED DRY STONE WALL ALONG THE APPLICATION SITE'S BOUNDARY WITH 'LEPTON GREAT WOOD' WILL NOT BE REMOVED OR RESET.
- BARBED WIRE AND WOODED FENCE POSTS ALONG THIS BOUNDARY SHALL BE CAREFULLY REMOVED. BARBED WIRE THAT HAS BEEN SWALLOWED BY TREE TRUNKS SHALL NOT BE PULLED OUT - IT SHALL BE SNIPPED OFF (LEAVING THE WIRE WITHIN THE TRUNK) AND MADE SAFE.
- REFER TO '81176-05-BOUNDARY TREATMENTS' FOR FURTHER DETAILS.



R	Plotting added to rear of plot 42 for full protection.	JW	03.08.26
Q	Updated in line with latest planning layout	JW	28.05.26
P	Updated in line with latest planning layout	JW	05.05.26
O	Updated in line with latest planning layout	JW	20.04.26
N	Updated in line with latest planning layout	JW	08.04.26
M	Plot and parcel wall added. Updated in line with latest planning layout	JW	18.03.26
L	Updated in line with latest planning layout	JW	08.01.26

miller homes
 Miller Homes Ltd - Yorkshire
 Lapwing House
 Peel Avenue, Calder Park
 Wakefield
 West Yorkshire, WF2 7UA
 Telephone 0870 336 4600
 Fax 0870 336 4602
 www.millerhomes.co.uk

Project Title Woodsome View, Lepton			
Drawing Title Boundary Treatments Plan			
Scale	Drawn By	Checked By	Authorised By
1:500	JW		
Job No.	Date	Drawn No.	Revision
811176	04		R

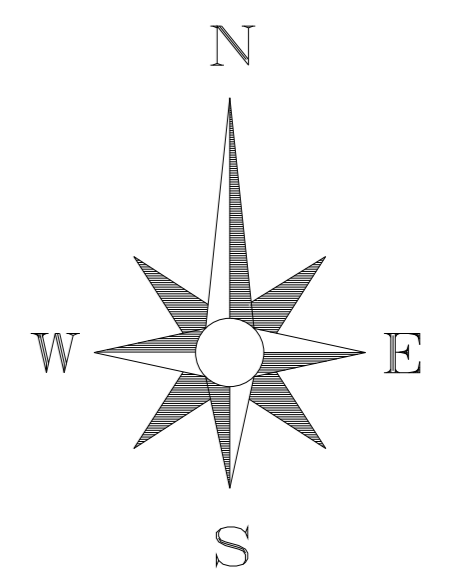

Scaled @ 1:500
 0 10m 20m 50m