


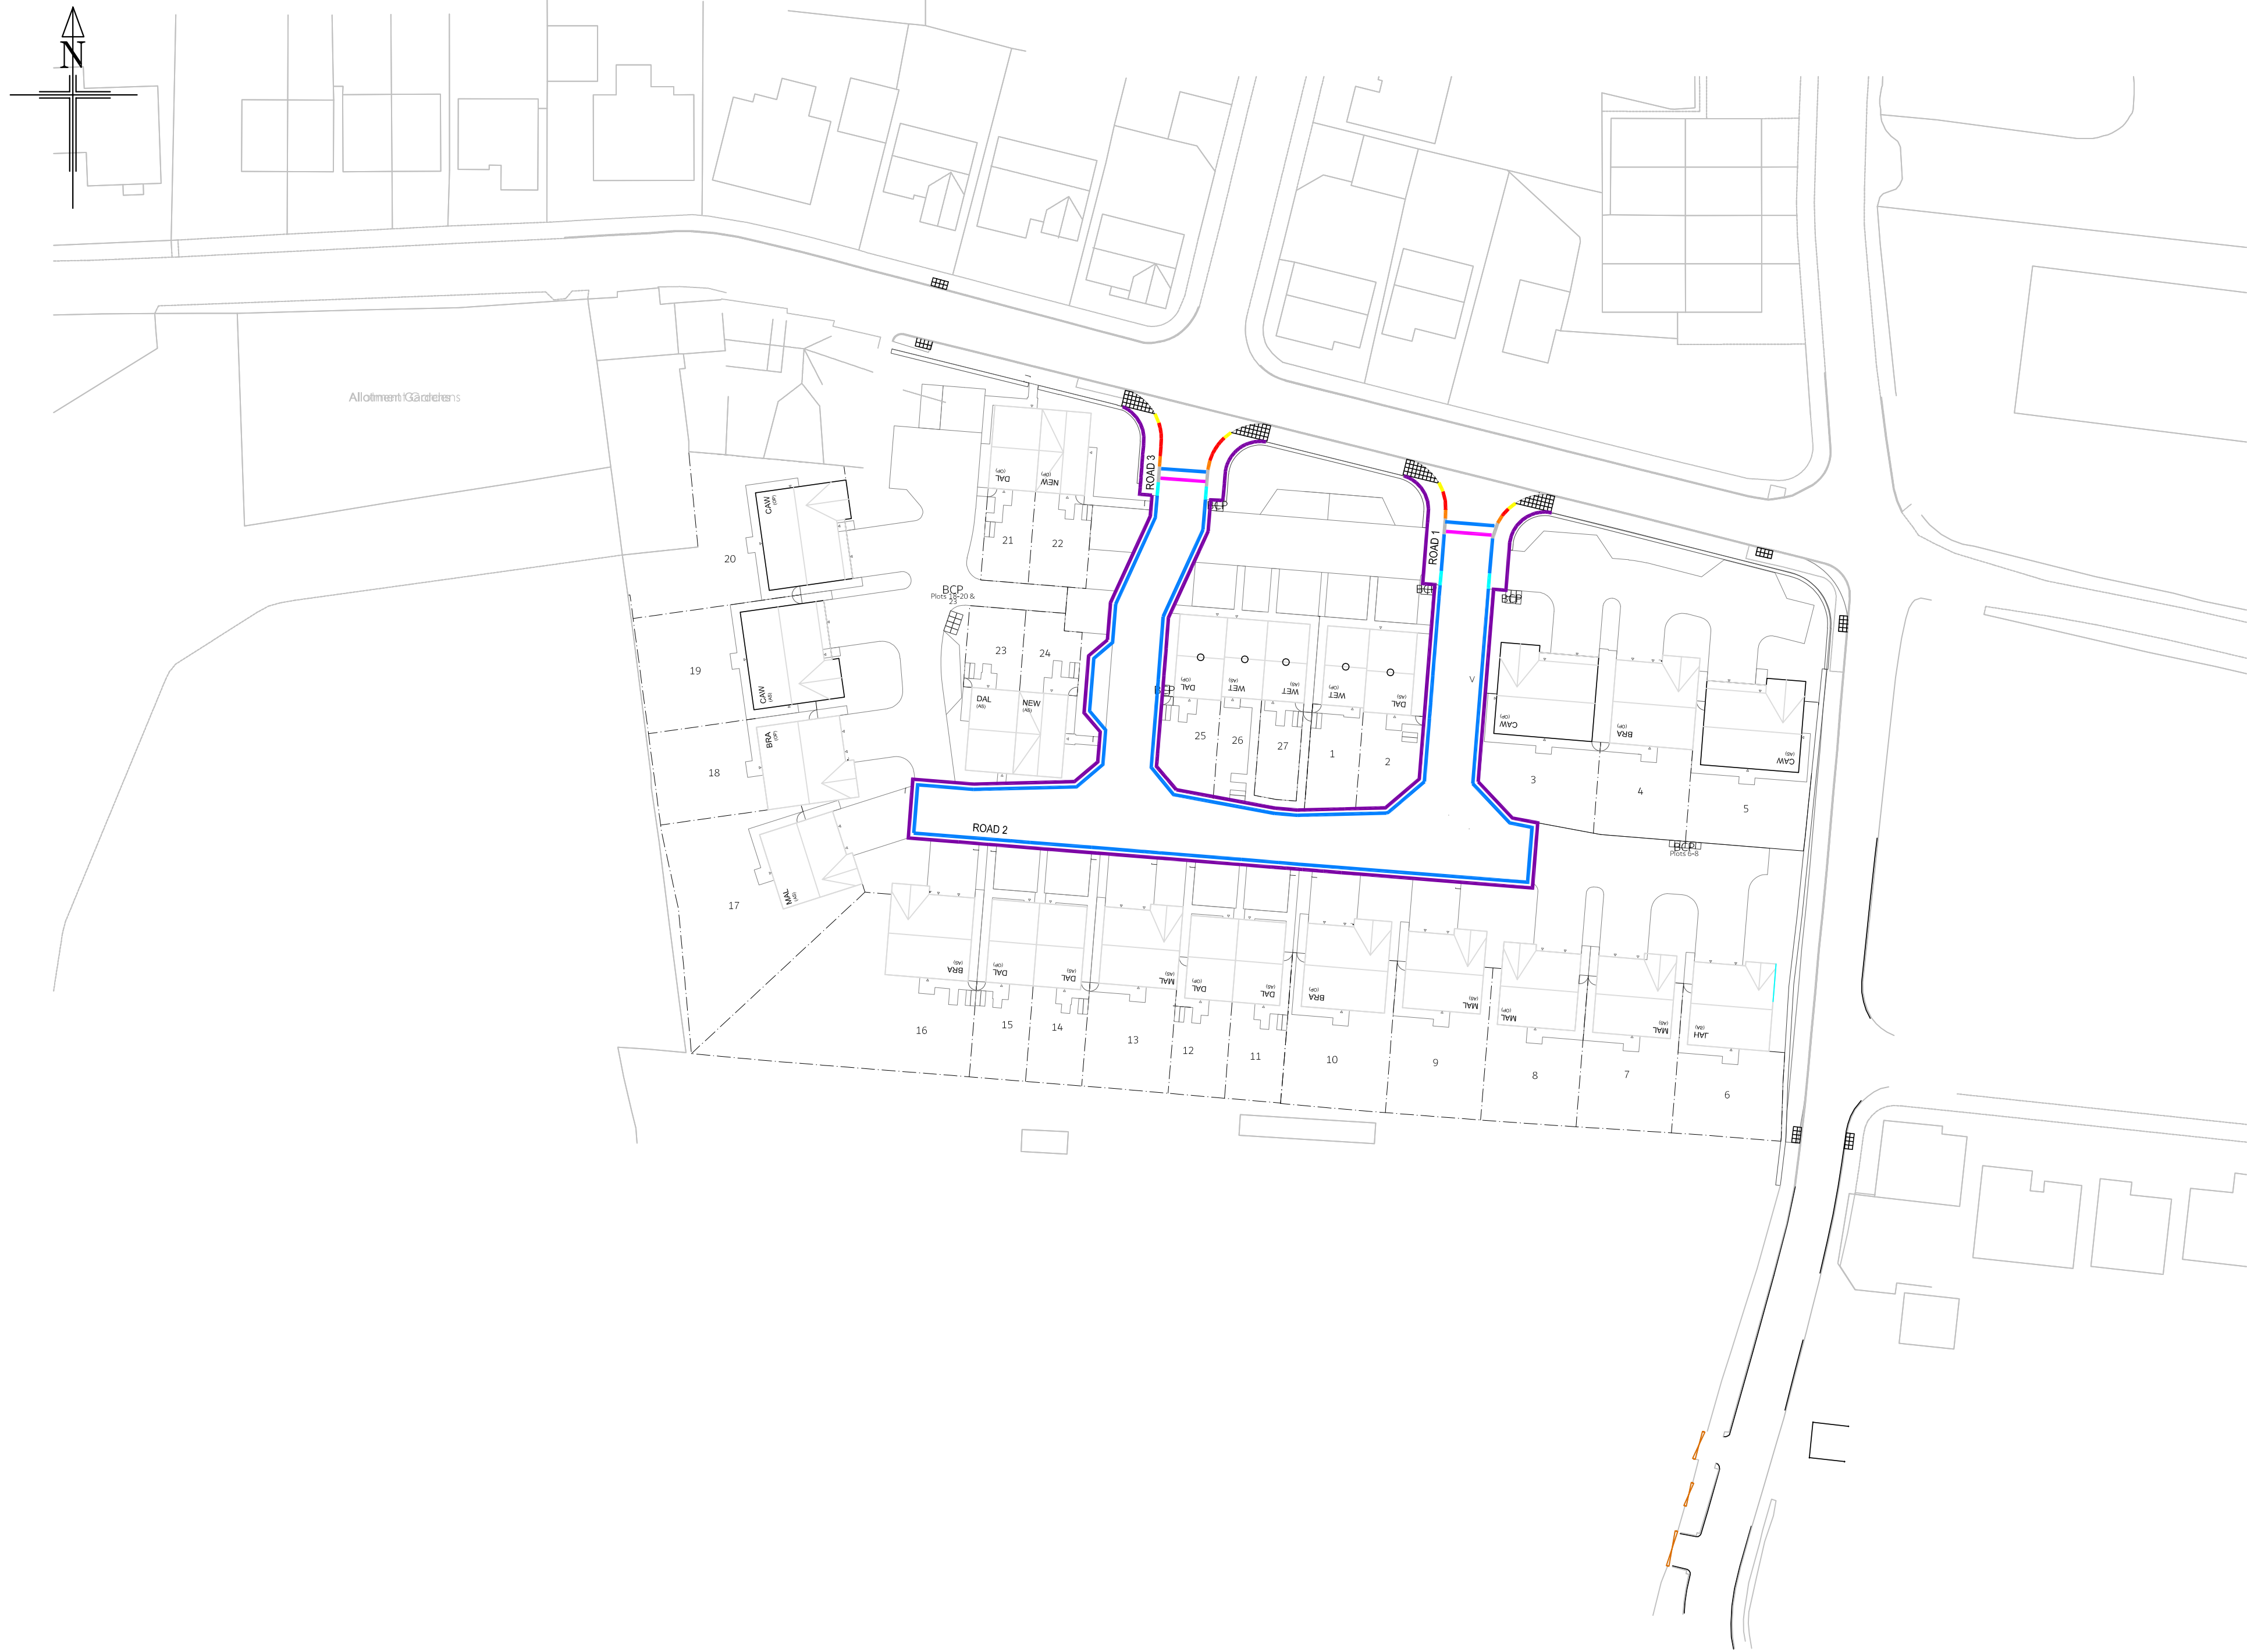

KEY

- 50x150 Edging
- 125x255 HB 100mm face
- Drop kerb
- 125x150 BN 0-6mm face
- 125x150 BN 30mm face
- 150x150 Channel block laid flush
- 125x255 HB-BN Transition kerb
- 125x255 BN Kerb

Please refer to Road construction details for full specifications

RISK ASSESSMENT: SIGNIFICANT RISKS THAT CANNOT BE DESIGNED OUT		SUGGESTED ACTION
RISK	LEVEL OF RISK (H/M/L)	
DEEP EXCAVATIONS ASSOCIATED WITH DEEP DRAINAGE WORKS	HIGH	ENSURE ALL EXCAVATIONS HAVE ADEQUATE TRENCH SUPPORTS AND ARE FENCED OFF TO PROTECT FROM FALLS.
HANDLING LARGE DIAMETER MANHOLE AND SOAKAWAY RINGS	HIGH	USE CORRECT LIFTING EQUIPMENT AND ENSURE OPERATIVES WEAR THE CORRECT PERSONAL PROTECTIVE EQUIPMENT.
CONTACT WITH SEWAGE/WORKING IN CONFINED SPACES	MEDIUM	USE GAS DETECTORS/BREATHING EQUIPMENT AND ENSURE OPERATIVES WEAR THE CORRECT PERSONAL PROTECTIVE EQUIPMENT.
NOISE FROM MACHINERY	MEDIUM	OPERATIVES TO WEAR THE CORRECT EAR PROTECTION.
EXCAVATIONS NEAR TO UTILITIES	HIGH	UTILITY MAPS TO BE INSPECTED AND APPARATUS LOCATED USING APPROPRIATE EQUIPMENT PRIOR TO EXCAVATION.
EXCAVATIONS IN PUBLIC HIGHWAY	HIGH	ENSURE ALL EXCAVATIONS HAVE ADEQUATE TRENCH SUPPORTS AND ARE FENCED OFF TO PROTECT FROM FALLS. ENSURE THE CORRECT SIGNAGE/TRAFFIC CONTROL IS USED.
IT IS ASSUMED THAT WORKS ASSOCIATED WITH THIS DESIGN WILL BE UNDERTAKEN BY A PERSON(S) WHO ARE COMPETENT AND HAVE THE REQUIRED LEVEL OF EXPERIENCE AND EXPERTISE.		

B	Layout updated.	4-11-25	AST
A	Layout updated.	22-7-25	AST
Rev	Details	Date	Drwn/ Chk.

Newett Homes

Yew Tree Road
Birchcliffe, Huddersfield

Section 38 Kerbing plan

Dwg No. : STE/25/03/04 B

Date : 7-3-25

Scale : 1:500

Copyright © Shaun Tonge Engineering

SHAUN TONGE
ENGINEERING



11 Broomhead Road, Wombwell, Barnsley, S73 0SA.
Mobile 07528 278070 . Email shauntongeengineering@yahoo.co.uk