


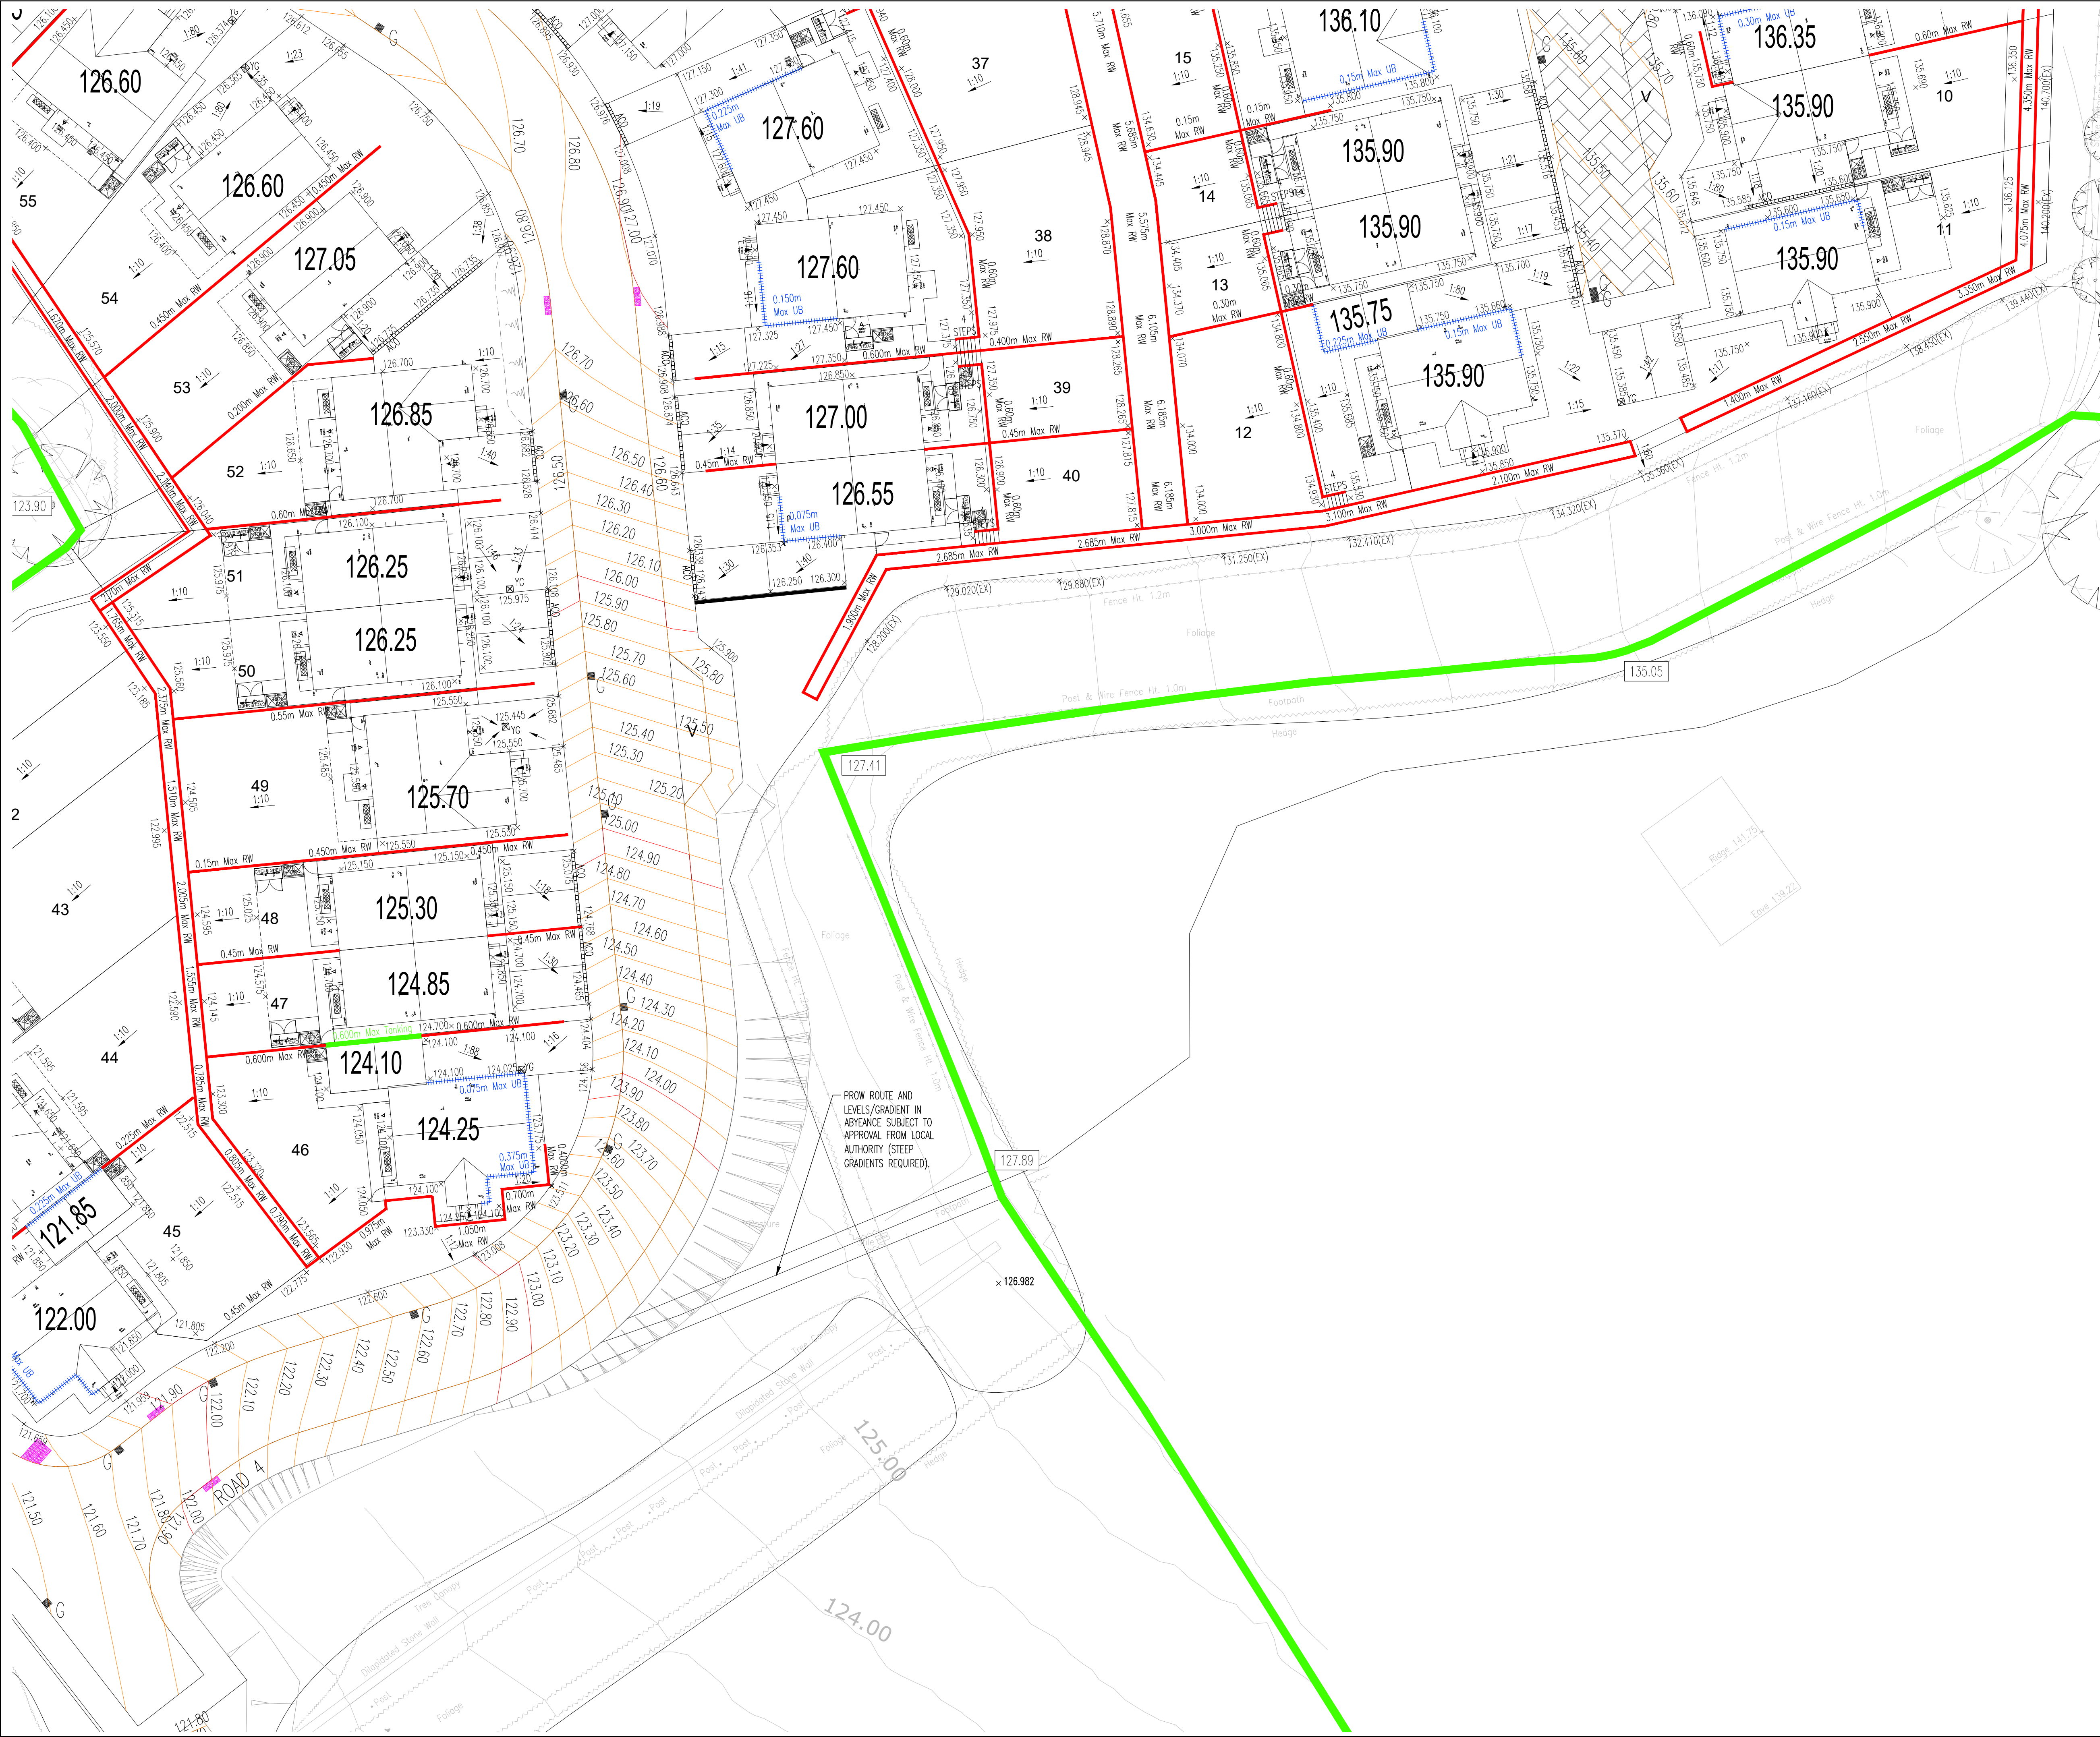

N O T E S


ATTENTION IS DRAWN TO THE REQUIREMENTS OF THE CONSTRUCTION DESIGN AND MANAGEMENT REGULATIONS 2015 AND THE DUTIES AND RESPONSIBILITIES CONTAINED THEREIN

K E Y

- 4.45 Finished floor level
- ×4.25m Proposed ground level
- FGE Flag on edge
- RW Retaining wall
- UB Extra facing brickwork – underbuild
- ×4.25m Approx existing boundary level
- Tanking
- 3.Steps Proposed steps
- Max 1 in 3 batter (unless noted otherwise)
- Channel Drain (min B125 grade cover) (D400 grade cover for shared driveways)
- YG Yard gully

- Levels/Gradients/Heights may vary to suit working conditions
- Where levels to doors are not provided, a level threshold should be provided.
- DDPC to be provided where external levels exceed 150mm step to finished floor levels. DDPC to wrap around Part M access thresholds where applicable.
- As per NHBC – Drive, Paths & Landscaping – 10.2.5 Guarding and Steps – The guarding should be a minimum of 1100mm high.

SUBJECT TO THE APPROVAL OF ALL RELEVANT AUTHORITIES

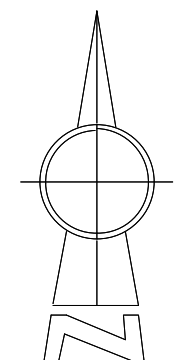

C	PJW	05.06.26	Updated to suit road and FFL updates.	MI
B	IC	14.04.26	Updated to suit client comments.	MI
A	IC	26.02.26	Updated to suit planning layout 1187-EA-A-C301D	MI
/	IC	24.10.25	Issued for approval	MI
Rev	By	Date	Revision	Apvd.

ARP ARP ASSOCIATES
Chartered Consulting Engineers

Northwest House • 5 & 6 Northwest Business Park • Servia Hill, Leeds • L56 2QH
0113 245 8498 0113 244 3864 leeds@arpassociates.co.uk www.arpassociates.co.uk

ARP Associates is a trading division of ARP Geotechnical Ltd, a company registered in England and Wales with company number 3773833, whose registered office is at 5/6 Northwest Business Park, Servia Hill, Leeds LS6 2QH

TITLE		
EXTERNAL WORKS LAYOUT SHEET 4 OF 7		
PROJECT		
COCKLEY HILL, KIRKHEATON		
CLIENT		
GLEESON HOMES		
DRAWING STATUS		
PRELIMINARY		
Scale	Date	Drawn
1:200 @ A1	OCT 25	IC
	Chk.	MI
Drg. No.	2298/03/8.04	
	Rev	C