




SECURED BY DESIGN TWO TIER CYCLE RACK

Sold Secure Silver Certified and Police Preferred Specification Approved

The Secured by Design Two Tier Cycle Rack is the specification-ready choice for projects where independently accredited, high-capacity cycle parking is a planning requirement or client brief. Built on a robust steel framework with reinforced locking hoops and a 3mm plate cover to the inner and outer gap, it carries Sold Secure Silver accreditation and Police Preferred Specification status under the official Secured by Design initiative. Independently tested against defined tool attack, it provides a clear, auditable compliance route for architects and specifiers working to SBD guidelines or local planning conditions. Two locking hoops welded together to create a 10mm thick plate, increased material thickness to end caps, a 5mm rear end cap and security fixings with armour rings to all fixing points deliver layered attack resistance across every installation.

- › **Sold Secure Silver Accreditation:** Independently tested and certified against defined tool attack, providing documented evidence of attack resistance and a clear compliance route for SBD
- › **10mm Plate Additional Locking Hoop:** Two locking hoops welded together to create a 10mm thick plate, significantly increasing resistance to lever and forced-separation attack at the most vulnerable point of the rack
- › **3mm Gap Cover Plate:** A 3mm plate covers the gap between the outer and inner rail, eliminating an attack vector and preventing tool insertion between components
- › **Security Fixings with Armour Ring Caps:** Applied to all fixing points to prevent bolt removal and resist ground-level displacement across every installation
- › **Made-in-Britain:** Backed by a 10-year warranty



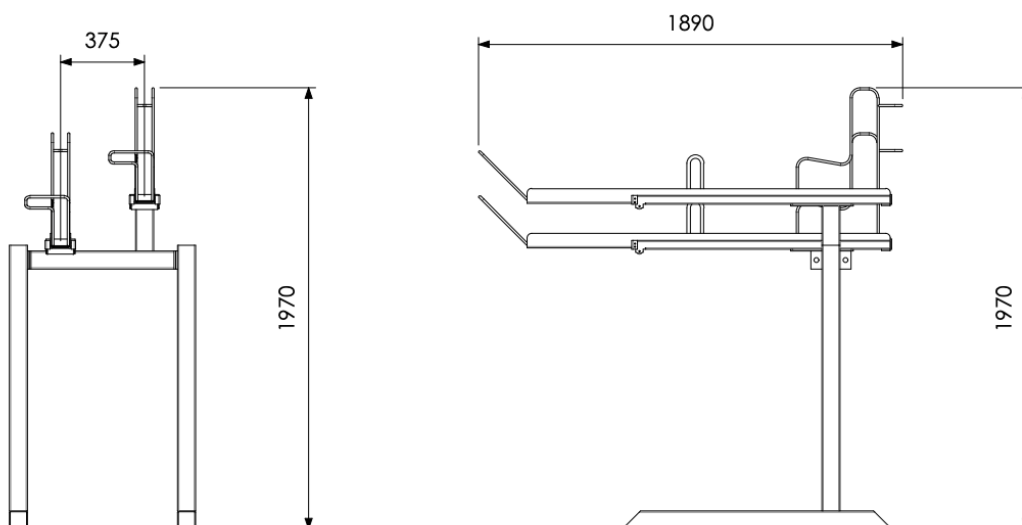

Standard dimensions - contact us for bespoke dimensions

SECURED BY DESIGN TWO TIER CYCLE STAND

A security-certified two tier cycle rack for projects where independently accredited, space-efficient cycle parking is required. Sold Secure Silver rated and Police Preferred Specification approved under Secured by Design, with reinforced 10mm plate locking hoops, a 3mm gap cover plate and security fixings with armour ring caps throughout.

Customisation that Works for You

Every site is different which is why this stand is built to adapt:

- › 375mm depth per tier; 1890mm width; 1970mm height
- › Galvanised mild steel framework, hot-dipped to BS EN ISO 1461:2022
- › 2 No. locking hoops welded to 10mm thick plate for reinforced attack resistance
- › 3mm plate covering the gap between outer and inner rail
- › 5mm rear end cap with increased material thickness to all end caps and locking hoops



Lead Times

2 - 3 Weeks

**For updated and expedited lead times, please contact us*

Need help with installation?

We offer a full installation service

hello@thebikestoragecompany.co.uk

DOWNLOADS LIBRARY

For more information on our product specifications, colours and finishes view our product downloads library online.

ACHIEVE BREEAM
ACCREDITATION
BRITISH MADE
PRODUCTS



0800 246 1723

www.thebikestoragecompany.co.uk

hello@thebikestoragecompany.co.uk

107 - 108 Harbour Yard, London, SW10 0XD