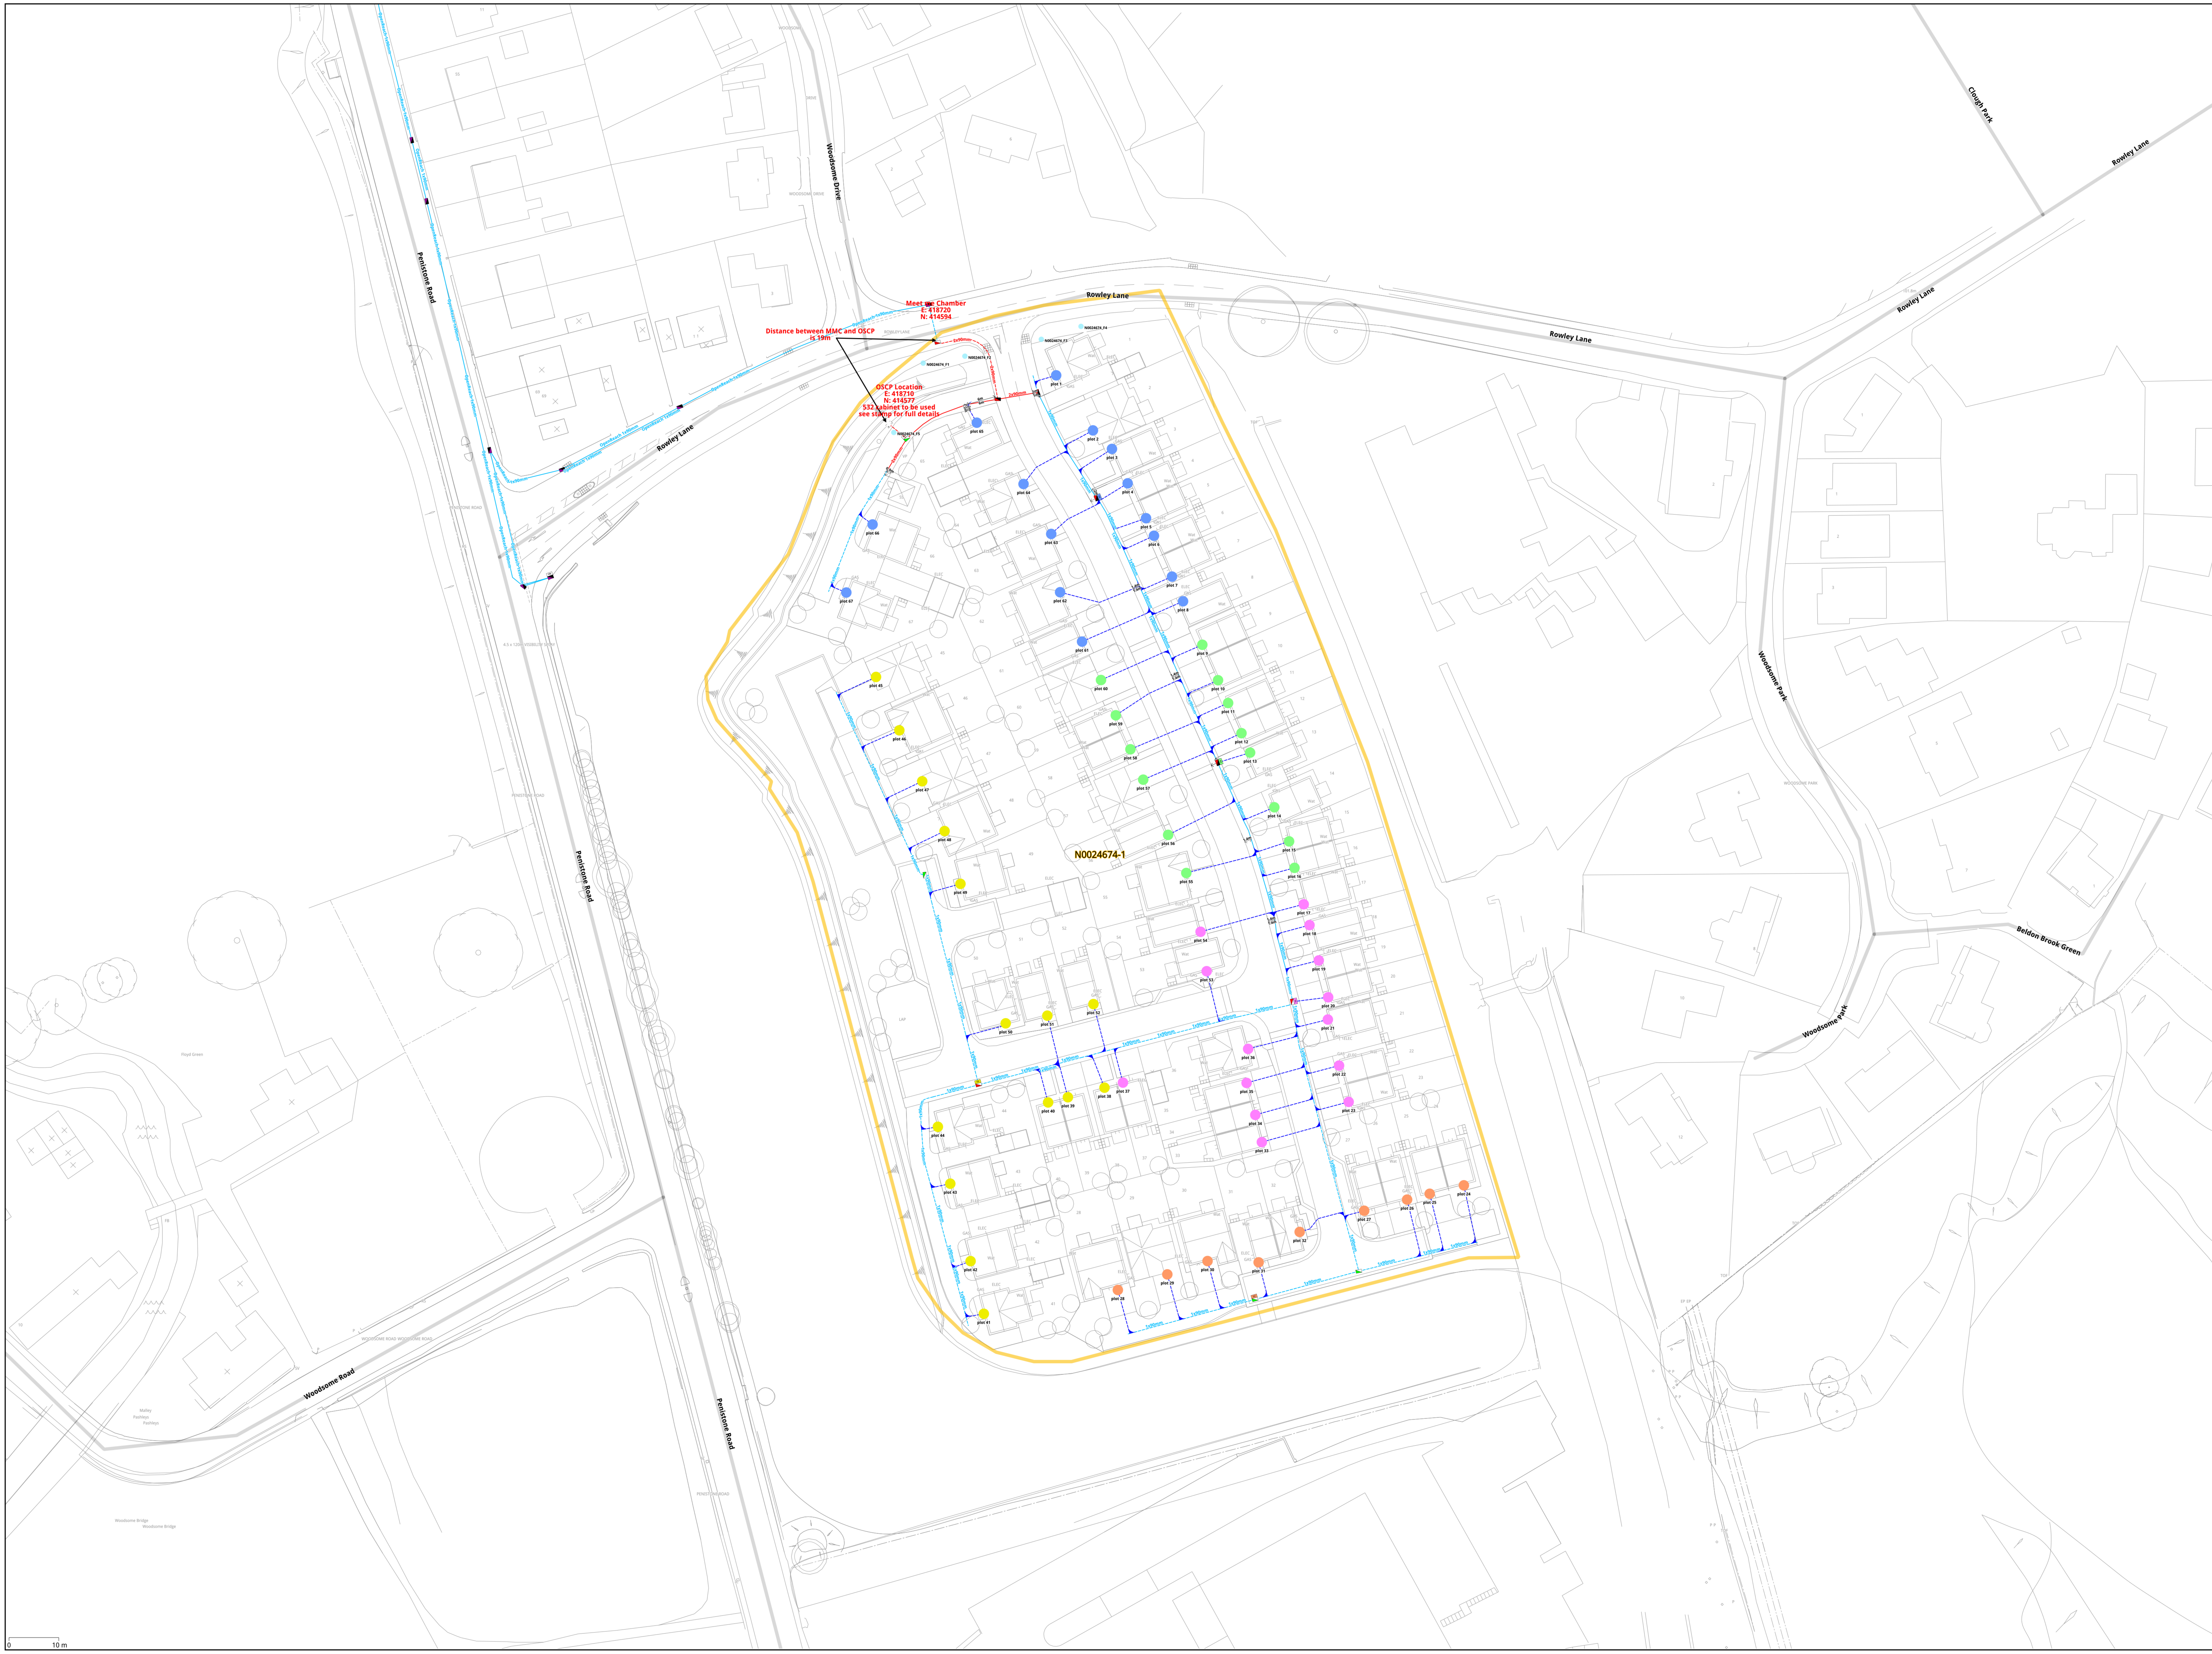

ALEX FRIEND 08-01-2026

This design is across multiple drawings for details please refer to all drawings.

Excavation Carried Out by BUUK

The trenches highlighted in blue will be excavated and reinstated by BUUK contractors, the excavation and reinstatement of the other trenches will be the responsibility of the customer.

Proposed | Laid

Fibre Ducts (Inside Diameter)
- 4x 90mm
- 3x 90mm
- 2x 90mm
- 1x 90mm
- 3x 55mm
- 2x 55mm
- 1x 55mm
- Cable tray
- 50mm Lead in duct
- Swept T

Directly Buried Fibre Cables
- 24 Cable
- 12 Cable

Fibre Method	Standard Depth
Traditional	350mm
Fully Ducted Direct Lay Method	600mm
Direct Lay Method	600mm
Lead in Duct	min. 350mm

General
- Backhaul Ducting
- Excavated by BUUK
- Asset Boundary
- Project Boundary
- Project Asset Overlap

Chambers (Internal Dimensions)
- FW-2 Chamber - 725mm x 225mm
- FW-4 Chamber - 915mm x 445mm
- FW-6 Chamber - 1310mm x 610mm
- FW-10 Chamber - 2320mm x 740mm
- CW12 Reinforced Chamber 1220mm x 675mm
- Backhaul FW-4 Chamber - 915mm x 445mm
- Backhaul FW-6 Chamber - 1310mm x 610mm

OSCP Types (Not to Scale)
- Brick Built
- Brick Built Combined
- Onsite 224 Cabinet with FIRS
- Onsite 224 Cabinet
- OSCP Awaiting Position

Fibres

1	2	3
Blue I	Orange I	Green I
4	5	6
Red I	Grey I	Yellow I
7	8	9
Brown I	Violet I	Black I
10	11	12
White I	Pink I	Turquoise I
13	14	15
Blue II	Orange II	Green II

Plan Notes

This plan shows apparatus owned by the BUUK Group. Any third party apparatus indicated on these drawings is shown for indicative purposes only. The information shown on this plan is given without warranty, the accuracy cannot be guaranteed. No liability of any kind whatsoever is accepted by the company. Safe digging practices, in accordance with HS(G)47, must be used to verify and establish the actual position of apparatus. This plan is reproduced by the permission of Ordnance Survey on behalf of HMSO. © Crown copyright and database right 2007. All rights reserved Ordnance Survey Licence number 0100021063.

Developers Responsibility

When apparatus have been laid it becomes the responsibility of the developer to ensure it is suitably protected, therefore backfilling should be carried out as soon as possible. Replacement and repair of damaged apparatus, including administrative costs will be fully recharged to the developer. It will be the developer's responsibility to recover the costs from the third parties.

Revision Notes

For a revision history of this network design please see seperate revision history document.

Open Fibre Networks

Last Edit By:	
Last Approved By:	CRAIG CLAYDON 08012026

Approved

OS Ref: 418755,414496

Location: Rowley Lane, Fenay Bridge, HUDDERFIELD, West Yorkshire, HD8 0JN

Developer/Client: Homes By Honey

Drawing Number/Title: FN0024674-1_1_of_19_Entire_site_0_appendix

Network Number:	Project Number:
N0024674	N0024674-1

Scale:	Sheet Size:	Revision:
1:400	A0	6.0