






Location plan (1:1250)

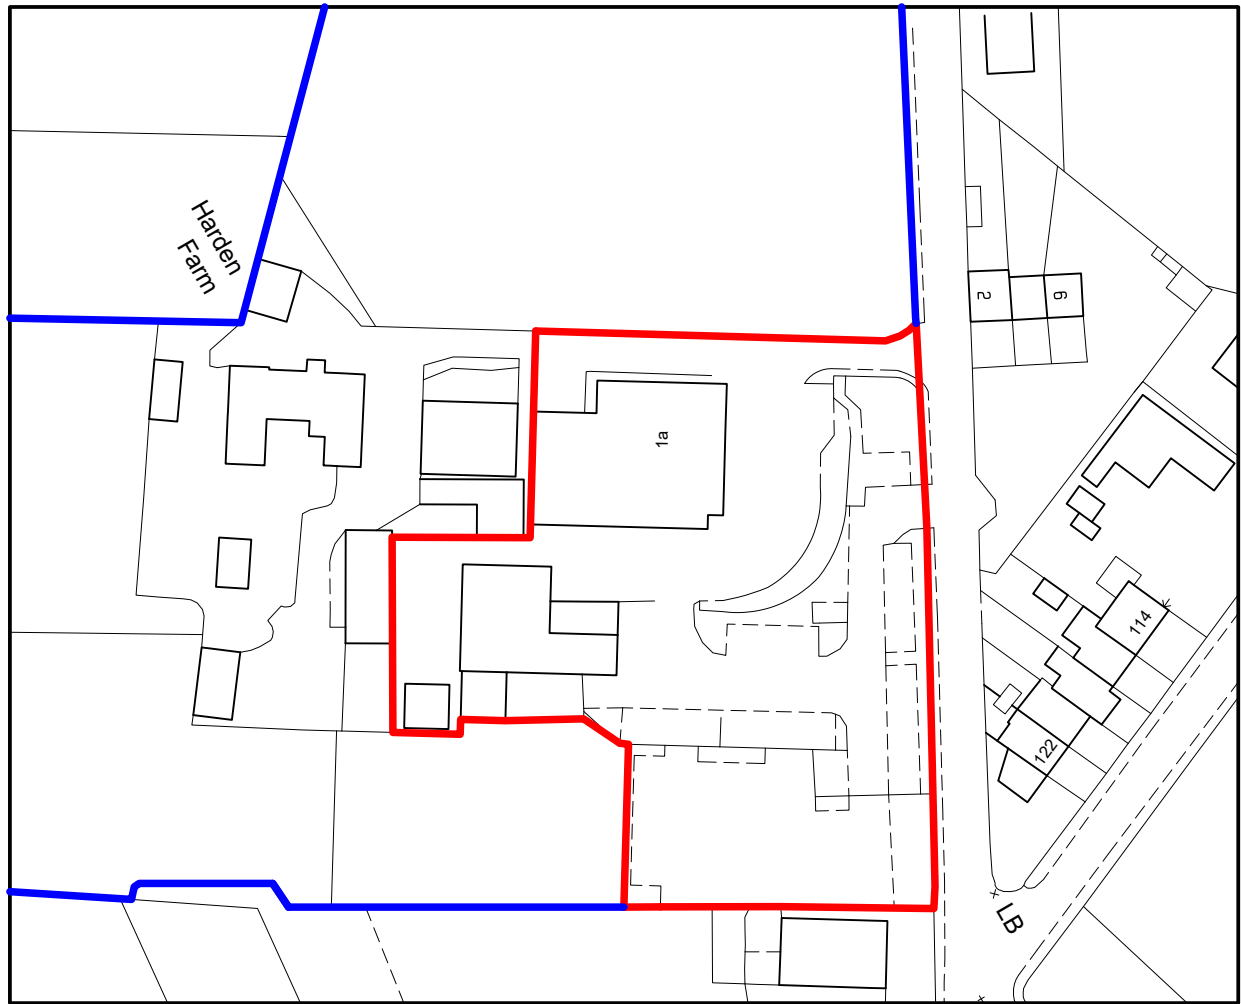

Proposed site plan (1:500)

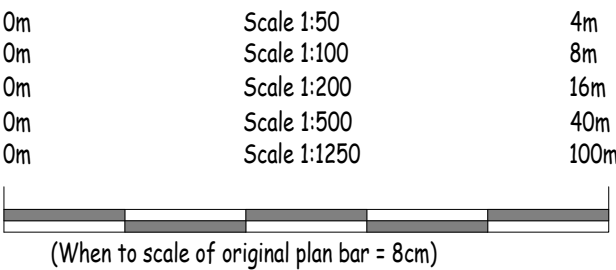

-  New permeable tarmac
-  New planting/hedges

PLANTING
New soft landscaping to hve a mix of the following:
Crataegus monogyna (Hawthorn)
Carpinus betulus (Hornbeam)
Ilex aquifolium (English holly)
Alnus glutinosa (Alder)
Rosa canina (Dog rose)
Corylus avellana (Hazel).
Whips to be planted in a staggered double row with
5 No plants per meter and should include 3 No plants of
the same species per meter with one of each of the other
two.
The species have been chosen to suit the varied climate
and soil conditions to ensure they are durable.
The hedging will provide a haven for wildlife offering food,
shelter and safe passage for birds and insects.

SOIL PREPARATION
Any weeds or overgrowth to be removed.
Soil to be cultivated to a minimum depth of 300mm.
After planting a weed suppressant and moisture
retentive to be applied.

Rev E	03/06/2026	Final update prior to submission.
Rev D	29/05/2026	Updated for new planning submission.
Rev C	18/11/2024	Additional parking area plotted.Red and blue lines amended.
Rev B	18/10/2023	Parking area shown hatched.
Rev A	21/08/2023	Location plan added.



Colne Valley Design
8 Meadow Lane
Slaithwaite
Huddersfield HD7 5EX

Tel/Fax: 01484 842097
Mobile: 07867 803312
E-mail: mitchell@cvdesign.freemove.co.uk

Proprietor: S.A. Mitchell (A/CIOB)

Project		
Use of land for parking.		
For		
Bolster Moor Farm Shop.		
Address		
Harden Road farm Bolster Moor Golcar.		
Title		
Site and location plans.		
Job No.	Drawing number	Date
22 J 53.	CP 01 E.	Aug 2021.